



General catalogue  
2024

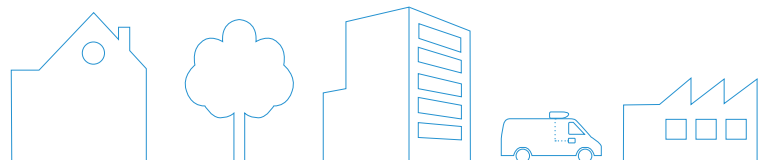

# Daikin world

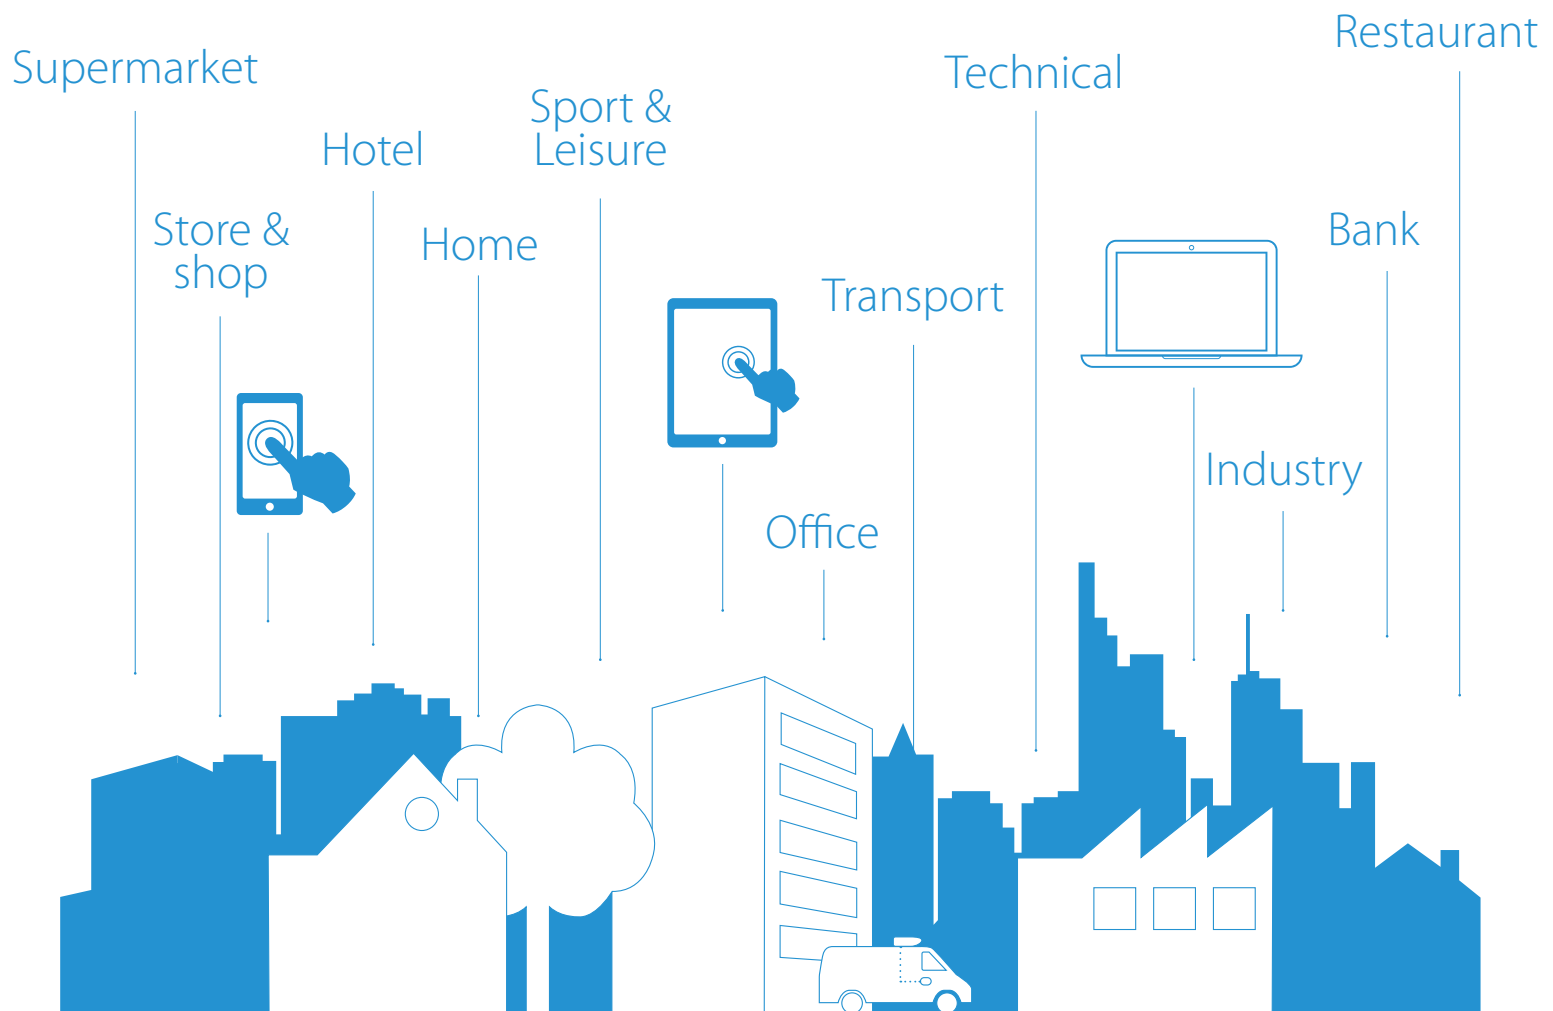

Daikin Europe N.V. is a leading manufacturer and supplier of heating, ventilation, air conditioning, refrigeration and control systems for the residential, commercial and industrial markets.

With almost 100 years of experience, Daikin has been an integral part of the history of sustainable climate solutions, creating the environment that allows customers to fully enjoy the intended use of their space.

Daikin is committed to continuing its work at meeting any climate demand, whether it's in a home, office, factory or any other indoor environment.

Our high-quality products are built to deliver peace of mind by providing solutions for any indoor space.

Each unit also includes smart control, allowing you to access and control your unit anytime, from anywhere and using any device.

We also offer a reliable network of technical and on-site support services through our online portal. Through online and offline tools, we help you monitor and manage your system to keep it running seamlessly.

As a leading brand, Daikin creates an innovative environment that enables customers to fully enjoy the potential of their space.

For more information, please visit [daikin.eu](https://daikin.eu) or explore our Business Portal at [my.daikin.eu](https://my.daikin.eu)

---

# Building a sustainable legacy together

Air surrounds us all the time, and in fact our very existence depends on it. At Daikin, the future of the world's indoor air is our greatest concern.

Daikin envisions a world with healthier indoor air while reducing our environmental impact. Driven by a dedication to achieve net-zero CO<sub>2</sub> emissions by 2050, we provide healthy and comfortable spaces throughout the building life cycle using world-leading technology.

---

## Supporting decarbonization

We must act now to ensure we create a long-lasting legacy. As a company that values sustainability, we want to help decarbonize buildings and create a healthy environment for generations to come.

Taking on sustainable transformation, our solutions reduce the carbon footprint of buildings, whether they are new builds or renovations:

- Reusing existing refrigerant through L $\infty$ P by Daikin: we utilize resources already available in the market, fully supporting the EU circular economy with a low carbon footprint
- If needed, we introduce virgin refrigerant through lower GWP refrigerants such as R-32, reducing the direct CO<sub>2</sub>eq impact
- Maximizing sustainability over the entire life cycle, thanks to market-leading real-life seasonal efficiencies
- Ensuring systems run efficiently 24/7 through smart controls

---

## Building for the future

As a Brand, Daikin exemplifies the personality of a Caring Leader, guided by its main principles of comfort, reliability, and sustainability.

Daikin's primary mission is to protect and nurture. Through its products, innovations and relationships, it aims to improve internal, external and personal environments, directly impacting people's lives.

Being a caring leader, Daikin takes pride in how its efforts to improve lives have influenced others in the industry. Daikin is constantly adapting and reinventing while simultaneously using its knowledge and experience to educate and guide others.

Reliability, support and precision are characteristics of our future-proof products and services.

We offer:

- A wide range of next-generation heat pumps to meet complex demands, including easy upgrading extending the lifetime of our equipment
- Expert indoor air quality solutions through our ventilation and filtration systems to eliminate pollutants and balance humidity levels

---

## A journey we take together

Together, we embark on the sustainability journey. We provide expert support throughout the building life cycle and offer peace of mind by ensuring what we do is future-proof and contributes to building a better future.

- Our team of experts goes beyond product support. Together, we help you reach your green objectives.
- We are there for you all the time: through our local customer support teams and e-commerce solutions.
- We're in it for the long term. We deliver what we commit to, providing clear and trustworthy data.



# THE DAIKIN PROMISE

Providing the right environment to live, work and relax in has always been central to what we do at Daikin. We are proud of the way we research, design and manufacture cutting-edge, innovative products that fit seamlessly into our everyday lives. Our equipment operates for the benefit of all: silently, invisibly and unobtrusively making our homes, offices, factories, shopping centres, entertainment and leisure facilities places where we can feel happy, comfortable and at ease.

Daikin excels in providing the ideal solution for every home, every space, and everyone since the company was first founded in 1924.


For a century, we have never wavered in our mission to innovate: recognising and overcoming the ever-changing challenges posed by the quality of the air we breathe and the overall environment around us.

Creating sustainable indoor climate solutions that prioritize the ultimate in customer comfort is what we do best. We are experts in heating, cooling, and purifying, but our craft lies in creating a climate without distractions. This is our relentless pursuit - empowering people to focus on the moments that matter and, in turn, share the best of themselves with the world.

This is the Daikin Promise.

# Table of content

## General Catalogue 2024



For latest data, please consult [my.daikin.eu](https://my.daikin.eu) or check our Virtual Daikin Experience Center via [Virtual Experience Centre | Daikin](#)



# What's new in 2024

## The new Daikin Air Purifiers with Wi-Fi Connection

The new Daikin Air Purifiers come with Daikin Onecta app integration so that you control, monitor & schedule the air you breathe. The new air purifiers offer an elegant minimalistic design, so that it suits every home and décor.



### MCK70ZW/ZBFW and MCK70ZH/ZBFH

p. 26

#### NEW

- › Intelligent Purification with Onecta app integration
- › Available in 2 colors: White & Grey
- › Air purification for large spaces up to 96 m<sup>2</sup>
- › Comes with humidification feature
- › Daikin's Catch and Clean approach
- › Whisper quiet operation (18dBA)
- › High performance electrostatic HEPA filter with market-leading 10 years lifetime
- › Intuitive display design

### MC80Z/ZB

p. 27

#### NEW

- › Intelligent Purification with Onecta app integration
- › Color: Front-White, Top/Side- Grey
- › Air purification for large spaces up to 124 m<sup>2</sup>
- › Daikin's Catch and Clean approach
- › Whisper quiet operation (19dBA)
- › High performance electrostatic HEPA filter with market-leading 10 years lifetime
- › Intuitive display design





## DucoBox Energy Comfort Plus

(D350/D450/D550)

p. 42

### NEW

Our new DucoBox Energy Comfort Plus is the ideal first choice for every building project. This smart centralized heat recovery ventilation unit (CHRV) now comes with even more silent ventilation unit, with air flow possible up to 550 m<sup>3</sup>/h.

#### Features:

- › **Interchangeable:** left/right installation through an on-site switch to perfectly integrate the unit in any possible scenario, thanks to patented principle of double by-pass
- › **Metallic casing** to ensure optimal sound levels.
- › **Energy efficiency:** demand control based on modulary coupled sensors around the house
- › **Easy to service:** all components accessible from the front, practical advantage (e.g. dynamic air filters can be easily replaced after their life-time usage)
- › **Future proof:** connection to home automation via Modbus or Ethernet



## Daikin Altherma 3 R MT

ERRA08-12EV3 and ERRA08-12EW1

p. 170

### NEW

- › **Refrigerant split version** for medium temperature air-to-water heat pump
- › Suitable choice for refurbishments and **optimized for boiler replacement**
- › Fits large new builds as well
- › Best seasonal efficiencies providing the **highest savings on running costs**
- › Sound pressure of **38 dBA at 3 metres**
- › Available in **3 classes: 8-10-12 kW**
- › Can be combined with three different indoor units offering specific features to **ensure heating, cooling and domestic hot water in your home**





## Several updates on Stylish range

Stylish

p. 381

### UPDATE

- › Available in 3 colours: white, silver and black
- › Centered Daikin logo on the indoor unit, to further align the Daikin design
- › DCS ready: latest software to connect to DCS residential



## New Perfera wall-mounted unit

Perfera FTXM-A

p. 356

### NEW

- › Pair: Highest SEER/SCOP
- › Multi: Up to A+++ in cooling **and heating** for combinations with 15,20,25,35 class and 3MXM52A9
- › Comfort+: thanks to the dual flap, the air is directed via the ceiling in cooling mode and the wall in heating mode
- › DCS ready: latest software to connect to DCS residential



## Comfora combinable with 4 and 5 port Multi

Comfora FTXP-N9

p. 357

### UPDATE

› 20-35 class Comfora combinable with 4 and 5 port multi



## Enjoy ultimate comfort inside, whatever the weather outside

Nepura

p. 378

### NEW

- › Guaranteed capacity down to -30°C
- › Widest range of indoor units: Daikin Emura, Stylish, Perfera wall-mounted and floor-standing, Comfora
- › Weather dependent feature (available on FTXTM-A)






## UV Streamer kit

BAEF125AWB

p. 402

### NEW

- › Purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy and hygienic indoor environment
- › Removes 99.9% of viruses in 30 minutes thanks to the Catch and Clean approach
  - Highly efficient ISO ePM1 60% filter (F7)
  - UV light and Streamer technology for cleaning and decomposition of pollutants
- › Can be retrofitted into existing installations
- › Can be used with BYCQ140E and BYCQ140EW decoration panels

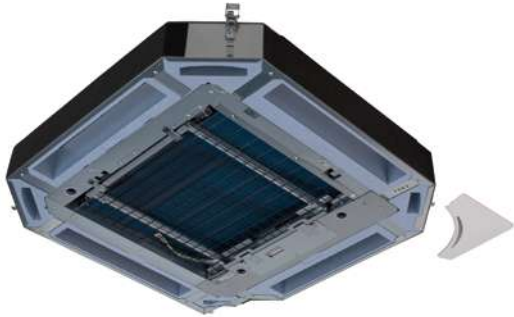

## New Sky Air Active-series combinations

**SkyAir** Active-series  
BLUEVOLUTION

p. 431

p. 437

### NEW

- › AZAS outdoor units now also combine with FHA71~140A9 and FVA100~140A
- › Ideal solution for busy environments and small shops
- › Maximum piping length up to 30m



# Decarbonisation of buildings made easy: launching VRV 5 Heat Pumps

RXYA-A / RXYSA-AY1

p. 488  
p. 490

## NEW

- › New maxi VRV 5 heat pump
- › New 8-10-12 VRV 5 S-series
- › Top sustainability over the entire lifecycle thanks to
  - lower GWP R-32 refrigerant
  - market-leading real life seasonal efficiency
- › Maximum design flexibility allowing installation in any room, thanks to Shīrudo technology
- › Market-leading portfolio:
  - wide range of dedicated R-32 indoor units
  - integration of ventilation units



# Most complete range of specially designed indoor units for R-32 refrigerant

p. 492

## NEW

- › FXKA-A, 1-way blow cassette
  - Completely new outlook
  - New 20 and 50 class model
- › CYA, Biddle air curtains
  - Unified model for R-32 and R-410A
  - Connectable to ERQ and VRV
- › 3 models: F: Free-hanging; C: Cassette; R: Recessed concealed ceiling



# Expansion valve kit and control box for easy connection between DX outdoor unit and air handling unit



Expansion valve set (EKEXVA\*)



Control box (EKEACB)



p. 589

## NEW

- › New Expansion valve kits
  - 3 new capacities (300,350,400) offer a complete range of expansion valve kits from 5 to 69.3kW
  - Improved flexibility thanks to combination ratio from 65% up to 110%
  - Unified range connectable both to R-32 and R-410A systems
  - Can be used in the most extreme outdoor conditions, down to -20°C
- › New control box
  - Complete offer of 5 control possibilities
    - Daikin integrated or third-party controller
    - Control of return air or fresh air supply temperature
  - All control methods unified in one box
  - Hinged door for easy servicing



## Modular Water to Water Chiller and Heat Pump

EW(W)(H)(L)T~Q-A

p. 696

### NEW

Infinite combinations for maximum flexibility for both cooling and heating applications

- > R32 refrigerant
- > Real modular design
- > Heat pump with inversion on water side
- > Heat pump with inversion on refrigerant side
- > Condenserless



## LMS-Inverter Monoblock

p. 804

### NEW

- > LMS-Inverter Monoblock is a propane monoblock unit, specially designed for small and medium-sized cold rooms, suitable for a very wide range of applications like HoReCa, supermarkets, food industry, logistics, hospitals, data centers, etc.



## CO<sub>2</sub> ZEAS condensing unit

p. 834

### NEW

- > CO<sub>2</sub> ZEAS condensing unit is the perfect solution for all cooling and freezing applications with variable load conditions and high energy efficiency requirements. Particularly for use in supermarkets, cold storage, blast coolers and freezers, process etc.

# Daikin HomeHub

p. 920

**NEW**

Daikin HomeHub (reference EKRHH) is a centralised controller for Residential applications.

FOCUS 2023:

### Energy management

- › Centralised controller for Residential applications
- › Offers PV self consumption
- › Has a smart meter connectivity
- › Grid demand response

### Special projects

- › Local connectivity to 3rd Parties




# Daikin Cloud Plus

Remote monitoring, control and service for commercial DX systems

p. 944

**NEW**

- › Monitor and control your building no matter where you are via the Daikin Cloud Plus
- › Manage multiple sites. Modular concept allows your cloud to grow with your business
- › Visualize energy consumption and benchmark between different sites to reduce energy costs
- › Remote diagnostic support to increase your system lifetime
- › Predictive maintenance to prevent breakdowns
- › Installer or technical manager can remotely login to the site in case of malfunctions for first troubleshooting
- › Minimise the risk of an unexpected breakdown by 24/7 alarm monitoring and emailing

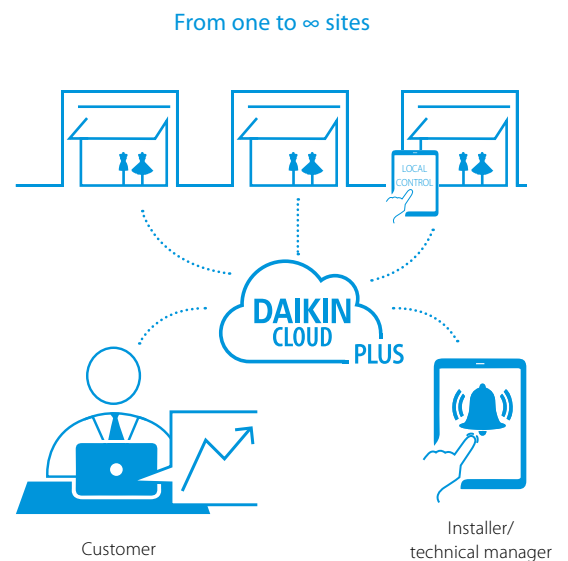

# Daikin Modbus Adaptor Simple

EKMBPP1

p. 959

**NEW**

Allow Sky Air, VRV, and ventilation units to communicate with Building Management System (BMS) via Modbus.

- › **Offers functions such as:** Control and monitoring of basic HVAC functions, and monitoring of basic unit parameters.
- › **Compatibility:** Sky Air, VRV, Daikin Centralized controllers.



# Tools and platforms

We're here to help you!

## Customer Portal


My.daikin is your central entry point



- › Quick links to all existing and new Daikin applications
- › Easy access to documents
- › Real-time information

If your profile allows:

- › Check your quotes and orders
- › Track and trace your deliveries
- › Look into your invoices
- › Self-services

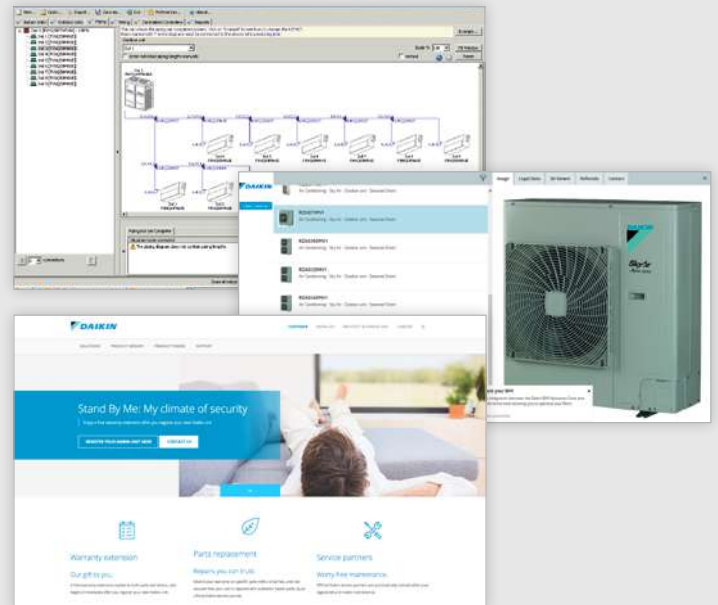

## Sales supporting apps

We offer a variety of building modelling, selection, simulation and quotation software tools to support your sales.

An overview of all tools available can be found here



[my.daikin.eu/denv/en\\_US/home/applications/select-software-finder](https://my.daikin.eu/denv/en_US/home/applications/select-software-finder)

## Webinar platform

Online seminars are a new way of sharing information with you. As this is not restricted in time or place, it is convenient for you to watch it whenever you want.

Check out our webinars now!







## Online support

### Daikin library

- › Experience our Business Portal that thinks with you at [my.daikin.eu](http://my.daikin.eu)
- › Find information in seconds via a powerful search
- › Customise the options so you see only info relevant for you
- › Access via mobile device or desktop


### B2B Virtual experience center

An online showroom where Daikin's product portfolio can be discovered. View the products and learn more about their functionalities in a virtual way.



## Internet

Find our solution for different applications:

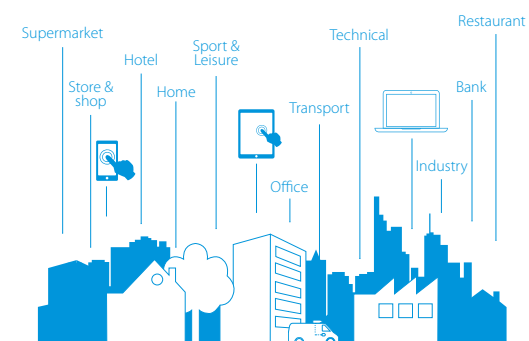

[www.daikin.eu](http://www.daikin.eu)

### › As Customer:

Experience your perfect climate with Daikin.



### › As Installer:

Build your business with Daikin.



### › As Architect & Consultant:

Create the perfect climate with Daikin.




Why

# Indoor Air Quality?

- Indoor Air Quality (IAQ) is a measure of the air quality indoors, as breathed in by the building's occupants.
- **Indoor air quality is often neglected** by residential buildings, schools, offices or light commercial buildings.
- The **indoor air quality can be 2 to 5 times worse than outdoors** because of pollutants such as pollen, bacteria and others.
- Since **90% of our lives is spent indoors**, it is crucial to invest in good air quality.

## 5 components

for ensuring good Indoor Air Quality

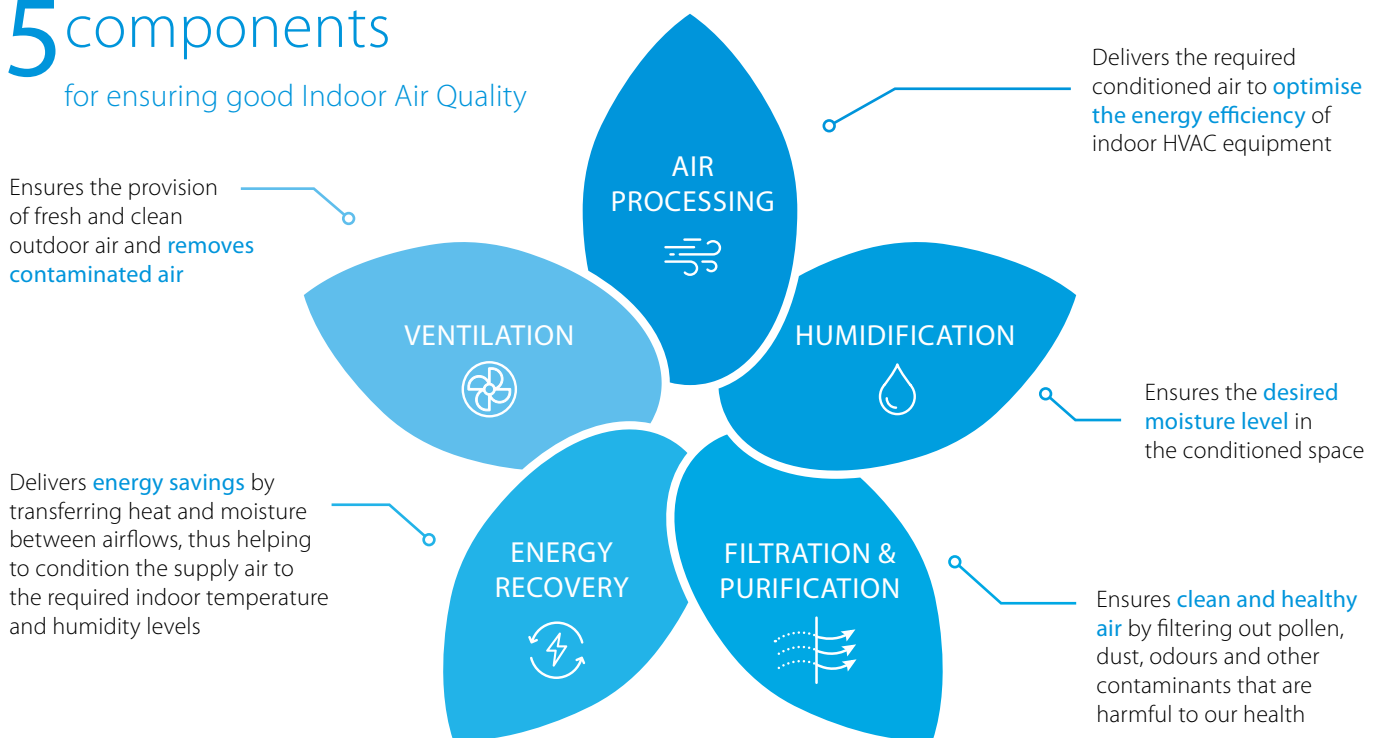

## Ventilation



## Filtration & air purification



A combination of ventilation & air purification processes help you in achieving a better indoor living condition for a healthier living.

# Indoor air quality for residential and light commercial applications

## Residential & light commercial


### air purification 18

Air Purifier Portfolio	18
Certification & Testing	20
<b>NEW</b> Onecta App Integration	22
Our Technology	24
<b>NEW</b> MCK70ZW/BFW & MCK70ZH/BFH	26
<b>NEW</b> MC80Z/ZB	27
MC30YV/YB	28
MC55W/VB	29
MCK55W	30
MCK70YV/YB	31

### Residential ventilation 32

Why DUCO	33
DUCO Portfolio at Daikin	34
On-demand Ventilation	35
DucoBox Energy Comfort	36
Technical specifications	38
Dimensions	40
<b>NEW</b> DucoBox Energy Comfort Plus	42
Technical specifications	44
Dimensions	46
DucoBox Energy Premium	48
Technical specifications	50
Dimensions	52
Total Ventilation Package	53
Material list	56



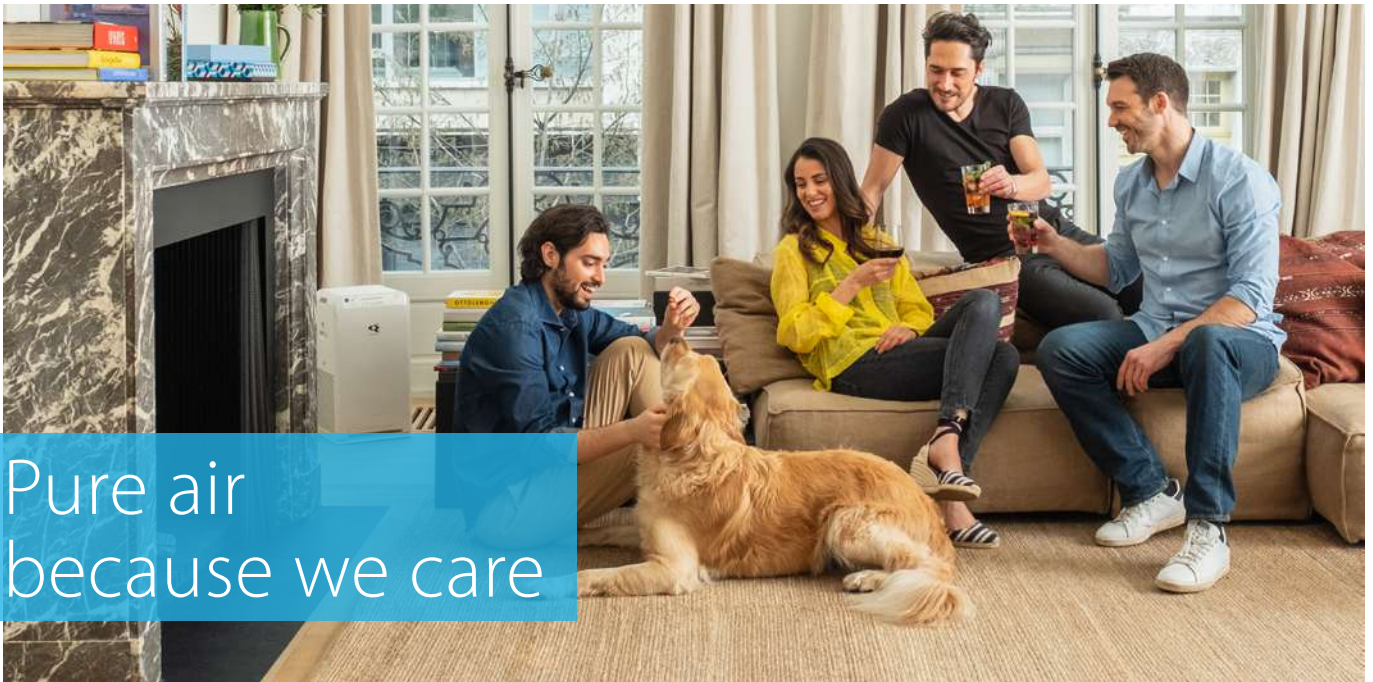

Pure air  
because we care

## Breathe healthy and humidified air with Daikin Air Purifier

We offer a wide range of air purifiers with and without humidifiers, in all sorts of different sizes and applications. Whether you need a small air purifier for a single room or a larger one to cover a larger surface area, we have the perfect solution for you.

### MC80Z



- Air flow up to **480 m<sup>3</sup>/h**
- Air purification up to **124 m<sup>2</sup>**
- Intelligent** air purification
- Absorbs odour via **deodorising filter**
- High Performing Electrostatic **HEPA filter**

### MC55W



- Air flow up to **330 m<sup>3</sup>/h**
- Air purification up to **82 m<sup>2</sup>**
- Absorbs odour via **deodorising filter**
- High Performing Electrostatic **HEPA filter**

### MC30YV



- Air flow up to **180 m<sup>3</sup>/h**
- Air purification up to **46 m<sup>2</sup>**
- Absorbs odour via **deodorising filter**
- High Performing Electrostatic **HEPA filter**

## Air Purifier with humidifier

These units come with humidification function to increase the moisture in the air so that owners will be able to prevent dry air in winter or it can help the ones who easily suffer from soar throat.

### MCK70Z



- Air flow up to **420 m<sup>3</sup>/h**
- Air purification up to **96 m<sup>2</sup>**
- 650 ml/h** humidifying capacity
- Intelligent** air purification
- Absorbs odour via **deodorising filter**
- High Performing Electrostatic **HEPA filter**

### MCK55W



- Air flow up to **330 m<sup>3</sup>/h**
- Air purification up to **82 m<sup>2</sup>**
- 500 ml/h** humidifying capacity
- Absorbs odour via **deodorising filter**
- High Performing Electrostatic **HEPA filter**

### MCK70Y



- Air flow up to **420 m<sup>3</sup>/h**
- Air purification up to **96 m<sup>2</sup>**
- 650 ml/h** humidifying capacity
- Absorbs odour via **deodorising filter**
- High Performing Electrostatic **HEPA filter**

# What makes Daikin Air Purifier unique?

## Supreme Technology

Our air purifiers are designed with minimalistic style in mind, so they won't detract from the aesthetics of your home. The sleek, modern design is sure to complement any décor, while the lightweight construction makes them easy to move around.



Featuring clear indication lights that show you the current PM2.5 indication and there is also an easy-to-use control panel with all the settings you need.

Our air purifiers are also designed to be quiet, with low noise levels and minimal disruption.

## There when you need it

Our air purifiers are designed to keep your air clean and comfortable all year round.



## Daikin Streamer Technology

Our Daikin Air Purifiers are all equipped with our patented Daikin Streamer technology to decompose, by oxidation, harmful substances caught on the filter and ensuring it's market leading filter lifetime of ten years



## Peace of mind thanks to filter lifetime

A USP that makes our Daikin Air Purifiers unique.

The filters of our air purifiers lasts much longer than market standard, and ensures you of 10 years without renewing the filter.

This saves you costs and ensures you peace of mind for a 10 years period.

# Our Tested Efficiency\*\*

\*\* for a complete overview on which units have been tested, please refer to respective product pages. Please also refer to our online website for up to date information.

## Efficient against allergens as recognized by BAF (British Allergy Foundation)

The Allergy UK Seal of Approval reassures that the product is efficient at reducing small particulates which may include allergens, bacteria and viruses.



## Approved allergy-friendly quality of this product/service is certified by the European Centre for Allergy Research Foundation

An independent advisory panel of 15 leading international scientists and technicians has developed the criteria ECARF used to evaluate different product groups. They include threshold values and exclusion criteria that make an allergic reaction very unlikely. The criteria are regularly updated to reflect the latest scientific findings.

A product receives the Seal when it can be proved through audits or studies that the criteria have been fulfilled. The Daikin Air Purifiers passed these tests and can be considered as allergy-friendly. Not applicable on Air Purifiers with Humidifying function.



## Proven effectiveness against respiratory viruses (among others human coronavirus HCoV-229E) evaluated by Institut Pasteur de Lille\*

The units have also been evaluated as effective against the H1N1 virus. H1N1 is the virus causing common flu. This means Daikin's air purifiers are an additional measure in the fight against respiratory diseases. Our compact plug-and-play purifiers, whose effectiveness is achieved through a combination of the high performance electrostatic HEPA filter, which traps the virus, followed by an intense exposure to Daikin's patented Flash Streamer technology, which removes the virus, can strongly contribute to reducing the risk of respiratory virus transmission.




# 99.98%

of **coronavirus** removed in **2.5 minutes**

According to tests performed in the laboratories of the Institut Pasteur de Lille, Daikin's air purifiers remove more than 99.98% the human coronavirus HCoV-229E in 2.5 minutes\*. This virus is of the same family as SARS-CoV-2, the coronavirus behind the COVID-19 pandemic.

Discover more



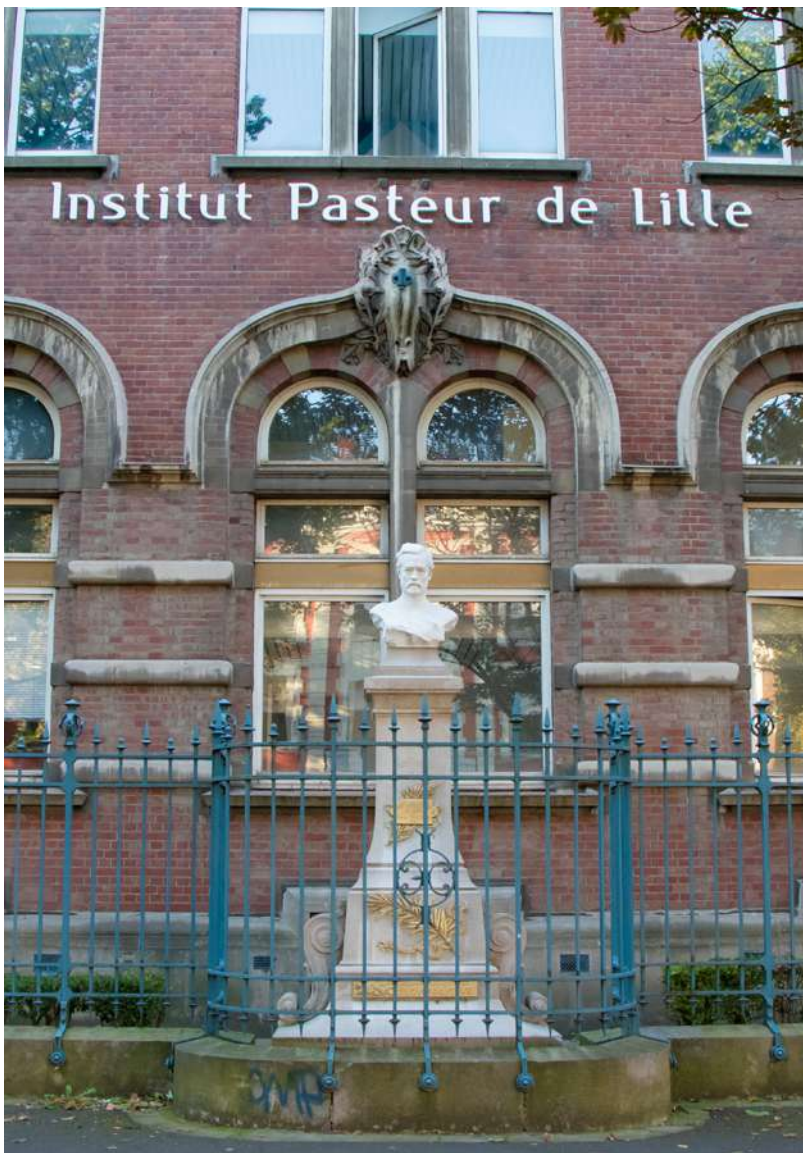

# Our Partnership with Institut Pasteur de Lille




## What is Institut Pasteur de Lille?

- › The Institut Pasteur de Lille is a research foundation, which was founded in 1894. Created to respond to the epidemics of the 19th century, the Institut Pasteur de Lille has been fighting diseases for more than 120 years through research on pathogens, the development of vaccines and drugs and the promotion of preventive measures and good hygiene practices. The Institut Pasteur de Lille is a member of the international network of institutes Pasteur. Present in 25 countries on all continents, the Network brings together 32 institutions united by common missions and values for the benefit of populations. The mission is to put science at the service of health. Today, the Pasteur Institute of Lille has 33 research teams, more than 800 persons, working every day to understand and fight against diseases, to slow down their development and to imagine the treatments of tomorrow.

## What does this mean for our Air Purifiers?

- › As a specialist in air quality management, Daikin sees it as its mission to provide innovative solutions and has been selling air purifiers for over 45 years. Its air purifiers and patented air purifying technology, which is applied in other Daikin equipment, have long since proven their effectiveness against air pollution, as well as seasonal pollen and viruses. To reinforce the claim of the effectiveness of its technology, Daikin Europe N.V. entrusted the Institut Pasteur de Lille with the testing of its range of air purifiers. It has now been formally proven that the Daikin models remove more than 99.98% of the human coronavirus HCoV-229E in 2.5 minutes. This is an important achievement.

\*Daikin device MCK55WWM (commercial name MCK55W), tested by Institut Pasteur de Lille, removes 99.996 % of Human Coronavirus HCoV-229E in 2.5 minutes running time at 'turbo' speed in laboratory conditions (air-tight chamber with inner volume 0.47 m<sup>3</sup>, no air renewal). Human Coronavirus HCoV-229E is different from the virus responsible for COVID-19, SARS-CoV-2, but belongs to the same family of coronaviruses. | Daikin device MC55WWM (commercial names MC55W/VB), tested by Institut Pasteur de Lille, removes 99.98 % of Human Coronavirus HCoV-229E in 2.5 minutes running time at 'turbo' speed in laboratory conditions (air-tight chamber with inner volume 1.4 m<sup>3</sup>, no air renewal). Human Coronavirus HCoV-229E is different from the virus responsible for COVID-19, SARS-CoV-2, but belongs to the same family of coronaviruses. | Daikin device MCK55WWM (commercial name MCK55W), tested by Institut Pasteur de Lille, removes 99.986 % of Influenza A virus subtype H1N1 in 2.5 minutes running time at 'turbo' speed in laboratory conditions (air-tight chamber with inner volume 0.47 m<sup>3</sup>, no air renewal). | Daikin device MC55WWM (commercial names MC55W/VB), tested by Institut Pasteur de Lille, removes 99.93 % of Influenza A virus subtype H1N1 in 2.5 minutes running time at 'turbo' speed in laboratory conditions (air-tight chamber with inner volume 0.47 m<sup>3</sup>, no air renewal). | Daikin device MCK70YVM (commercial names MCK70YV/YB), tested by Institut Pasteur de Lille, removes 99.98 % of Human Coronavirus HCoV-229E in 1.5 minutes running time at 'turbo' speed in laboratory conditions (air-tight chamber with inner volume 1.3 m<sup>3</sup>, no air renewal). Human Coronavirus HCoV-229E is different from the virus responsible for COVID-19, SARS-CoV-2, but belongs to the same family of coronaviruses. | Daikin device MCK70YVM (commercial names MCK70YV/YB), tested by Institut Pasteur de Lille, removes 99.65 % of Influenza A virus subtype H1N1 in 1.5 minutes running time at 'turbo' speed in laboratory conditions (air-tight chamber with inner volume 1.3 m<sup>3</sup>, no air renewal).

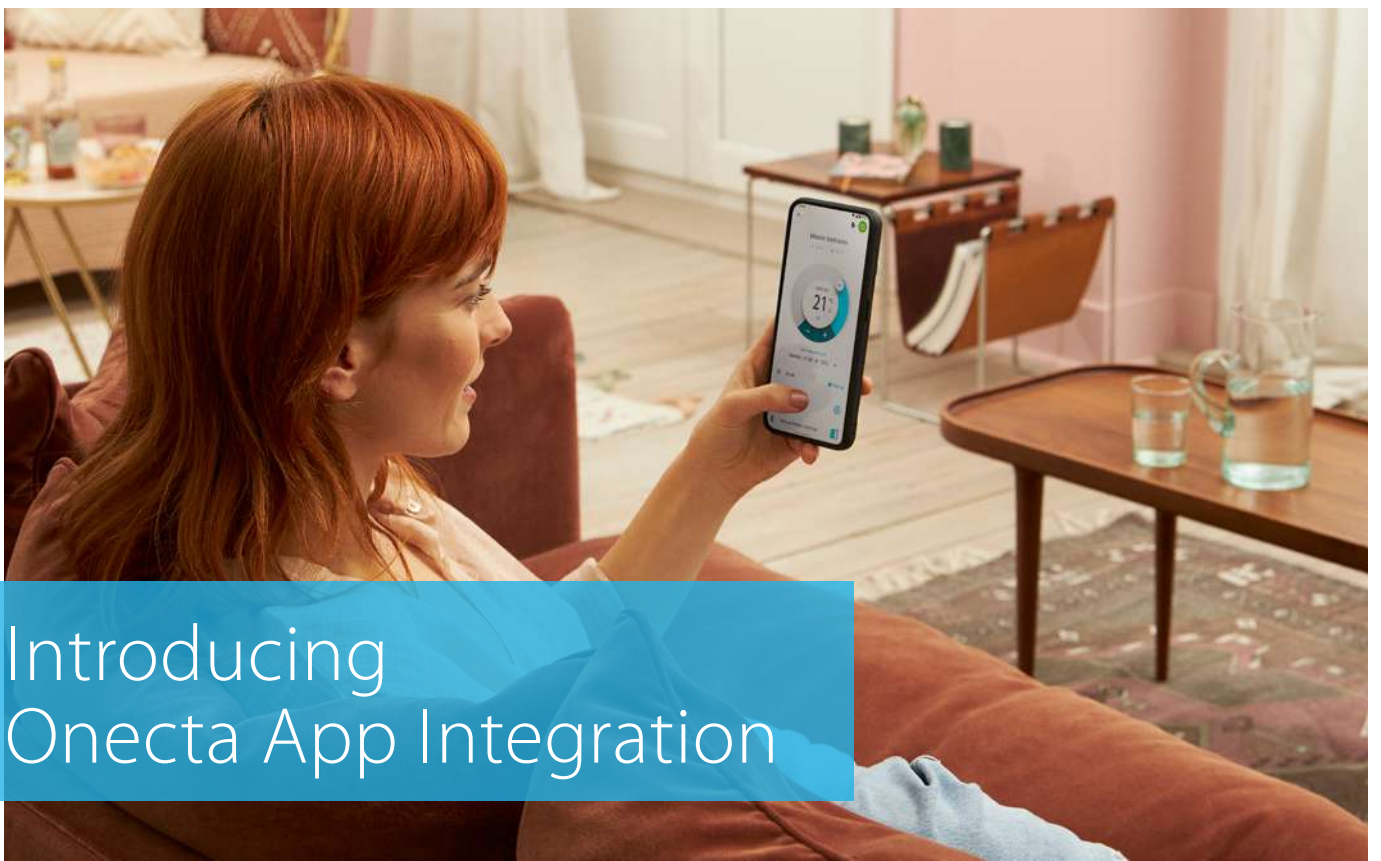


# Introducing Onecta App Integration

## Take control of your indoor air quality

The Onecta App is for those who live their life on the go and who want to manage their Daikin system from their smartphone.


The new models, MC80Z and MCK70Z come with Onecta App integration. For more information please refer to the product pages.



## Control

Customise the system to fit your lifestyle and year-round comfort levels.

- Adapt settings such as operation mode, fan speed, functions,...
- Take control of your indoor air quality by taking control of your Air purifier



## Monitor

Receive a thorough overview of how the system is performing and how much energy it consumes.

- Check the status of the Air Purifying system
- Access the PM2.5 graphs to evaluate your indoor air quality



## Schedule

Set up a programme outlining when the system should operate, and create up to six actions per day.

- Schedule operation mode depending on your personal needs
- Enable holiday mode to save costs



# Don't let bad outdoor air quality affect your indoor air quality

Indoor air can be **2-5 times worse** than outdoor air



At Daikin, we are constantly developing partnerships to bring in tools that keep you informed of your outdoor air quality to 'make the invisible visible' such that you don't let dirt accumulate inside your home and keep the air clean with our Daikin solution.

## Making the indoor-outdoor connection actionable




As ambassadors of Indoor Air Quality, Daikin provides reliable outdoor air information relevant to the environment of the user, so that the user can take action to minimize exposure to harmful air outdoors while they are inside. Currently we have two API integrations: Air quality & Pollen.


Our Daikin B2C website currently has PM2.5 map.

Our Onecta App currently gives all information related to Outdoor Air quality. Consumers can monitor information directly on their app.

Please stay tuned on our online websites for all on going updates.

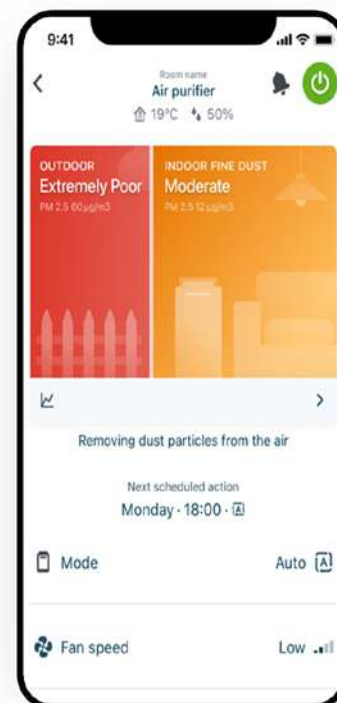

# What makes our technology unique?

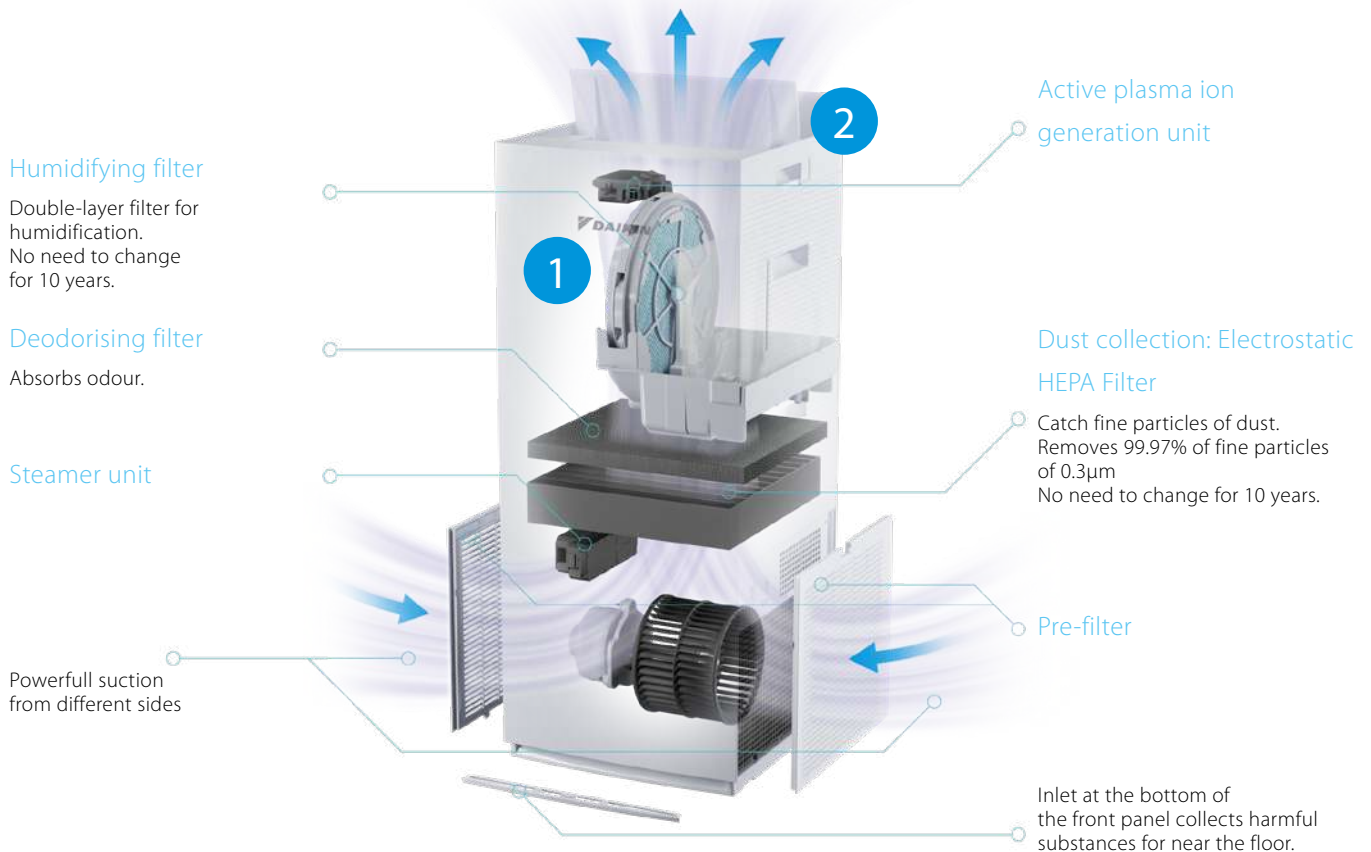

## Technology

### 1 INSIDE - Streamer decomposes hazardous elements

Streamer, a type of plasma discharge, decomposes hazardous chemical substances. The decomposition power is comparable to thermal energy of about 100,000°C.

### 2 OUTSIDE - Active plasma ion discharge\*

Plasma ion technology releases ions into the air by plasma discharge and combines them with components in the air to generate active components such as OH radicals with strong oxidising power. They attach to the surface of fungi and allergens and decompose proteins in the air by oxidation.

## The Streamer Symbol consists of three C's

### CATCH


The dust collection filter catches the floating substances with the attached harmful gases and Streamer decomposes the gases by oxidation.

### CYCLE

The deodorising filter absorbs and decomposes odour. Thanks to the regeneration of the adsorbing capacity, the deodorising capacity is maintained. No need to change the deodorising filter.

### CLEAN

Removes bacteria from dust collection filter, humidifying filter and humidifying water tray.

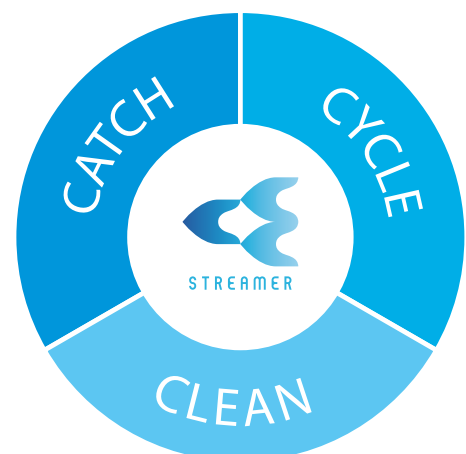

### Mechanism of decomposition by Streamer



Streamer emits high-speed electrons.



The electrons collide and combine with nitrogen and oxygen in the air to form four kinds of elements.



These elements provide decomposition power.



No hassle with periodic filter replacements



No maintenance costs for at least **10 years**



One of the **most silent** Air Purifier range on the European market

# Filter Lifetime

Our air purifiers feature a complete filtration system, with four stages of filtration to ensure your air is as clean as possible.

With our air purifiers, you can enjoy the benefits of clean, fresh air with minimal maintenance.



## 1. Pre filter

Our air purifiers feature an advanced pre-filter that helps to reduce the amount of pollutants that reach the main filter, which helps to extend the life of the air purifier and improve performance.

## 2. Filter HEPA Daikin

**High Performance Electrostatic HEPA Filter** is a high-efficiency particulate air filter system that is designed to catch fine particles of dust. Research shows they remove 99% of particles between 0.1µm and 2.5µm in size.

## 3. Deodorizing filter

Our air purifiers feature a powerful deodorizing filter that helps to reduce odours from cooking, smoking, pets, and other sources in the air.

## 3. Humidifying filter


Our air purifiers feature a built-in humidifying filter that helps to add moisture to the air.

This filter helps to keep the air from becoming too dry, which can cause problems such as static electricity and respiratory issues.


Please refer to product pages to check which units offer humidification.

## What makes Electrostatic HEPA better than Non-Electrostatic HEPA filter

- Removes 99.97% of fine particles of 0.3µm.
- Filter fiber itself is charged with static electricity, and collects particles efficiently.
- Doesn't clog easily, hence causes low pressure loss.

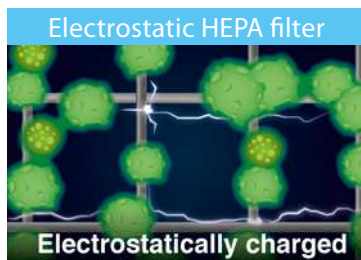

VERSUS

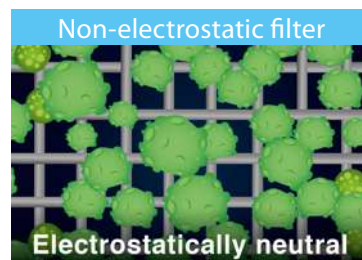

Because it catches particles relying only on mesh size, it is necessary to make mesh finer, making it easy to be clogged and cause high pressure loss.

### \*Mechanism of reduction by active plasma ions. (Concentration 25,000 ions/cm<sup>3</sup>.)

- Daikin's plasma ions have been proved safe, in relation to the effect on skin, eyes and respiratory organs.
- Testing organization: Life Science Laboratories, Ltd.
- Name of test: repeated-dose toxicity test.
- Test number: I2-II A2-0401 Mechanism of reduction by active plasma ions.

### About the dust collection and deodorizing capacity of an air purifier:

- Not all harmful substances in cigarette smoke (carbon monoxide, etc.) can be removed.
  - Not all odour components that emanate continuously (from building materials and pets, etc.) can be removed.
- The Daikin air purifier is not a medical device and is not meant to be used as a substitute to any medical or pharmaceutical treatment.

### HEPA filtration effect claims:

- Removes 99% of particles between 0.1µm and 2.5µm in size: test method: Japan Electrical Manufacturers' Association Standard JEM1467. Criterion: Remove 99% of fine particulate matters of 0.1 to 2.5µm in a closed space of 32m<sup>3</sup> within 90 minutes. (Converted to a value in a test space of 32m<sup>3</sup>).

### Deodorization/gas removal effect claims:

- Reduction of gases by oxidation: testing organization: Life Science Research Laboratory. Test method: After operating a gasoline engine for 10 minutes (when particulate concentration reached 60mg/m<sup>3</sup>), operated the air purifier for 80 minutes to absorb polluting particles emitted from the engine. Operated this air purifier for 24 hours in a closed space of 200L and measured the effect to decompose gases. Test result: Compared with a test without Streamer irradiation, gas components were reduced by 63% in 9 hours. Test number: LSR-L-83023-702. Test unit: Tested with MCK70N (Japanese model).
- Adsorption and decomposition of odours: placed the air purifier and an odour component, acetaldehyde, in a box of 21 m<sup>3</sup> and operated the air purifier. Examined increase of concentration of product (CO<sub>2</sub>) generated by decomposition of acetaldehyde by Streamer (evaluation by Daikin). Test unit: Tested with MCK555 (Japanese model), a model equivalent to MCK555 series.
- Formaldehyde decomposition: test method: constant generation method. Test room: 22 to 24 m<sup>3</sup>, temperature: 23 ± 3°C, humidity: 50 ± 20%. Ventilation condition: When concentration of 0.2 ppm is continually emanated, a removal capacity of 0.08 ppm is maintained at 36 m<sup>3</sup>/h, which is within the guideline of the Ministry of Health, Labour and Welfare in Japan. (This equates to the ventilation capacity of an approximately 65 m<sup>3</sup> room.)

### Substance decomposition effect claims:

- Removal of bacteria from dust collection filter: testing organization: Japan Food Research Laboratories. Test number: IS044988001-0201. Test method: Attached a test piece inoculated with bacteria liquid on the upstream side of a dust collection filter installed in an air purifier, and operated it in a test area of 25 m<sup>3</sup>. Counted the number of live bacteria after five hours. Test result: Reduced by more than 99% in five hours. Test unit: Tested with MCK555 (Japanese model), a model equivalent to MCK555 series (turbo operation).
- Removal of bacteria from humidifying filter: testing organization: Japan Food Research Laboratories. Test number: IS044989001-0101. Test method: Attached a test piece inoculated with bacteria liquid on the upstream side of a humidifying filter installed in an air purifier, and operated it in a test area of 25 m<sup>3</sup>. Counted the number of live bacteria after five hours. Object part: Humidifying filter. Test result: Reduced by more than 99% in five hours. Test unit: Tested with MCK555 (Japanese model), a model equivalent to MCK555 series (turbo operation).
- Allergen decomposition and removal: various allergens were irradiated by streamer discharge and the breakdown of protein in the allergens was verified using the ELISA method, cataphoresis, or an electron microscope (Joint research with Wakayama Medical University). Test example: Japanese cedar pollen Cryj-1. Test result: 99.6% or more decomposed and removed in 2 hours (ELISA method); 96.9% decomposed and removed in 4 hours (other measurement method). Note: test performed on the flash streamer module.
- Virus removal ref. 1: testing organization: Kitasato Research Center for Environmental Science. Test result certificate 2L\_0026 (issued by same organization). Result of experiment: 99.9% removal of A-H1N1 virus after 1 hour. Note: test performed on the flash streamer module.
- Virus removal ref. 2: testing organization: Vietnamese Institute of Hygiene and Epidemiology. Result of experiment: over 99.9% removal of A-H5N1 virus in 3 hours. Note: test performed on the flash streamer module.
- Virus removal ref. 3: testing organization: Graduate School of Kobe University. Result of experiment: over 96% removal of Norovirus in 24 hours. Note: test performed on the flash streamer module.



## Intelligent Air Purification, minimalistic design & Humidification MCK70Z

- › Onecta App Integration: control indoor with an app, via local network or internet
- › Humidification and air purification in one; covers large spaces up to 96m<sup>2</sup>
- › Intuitive display design with coloured Daikin Eye, visual way of informing users about indoor air quality
- › Pure air thanks to Daikin's 'catch and clean' approach in decomposing harmful substances
- › High performance HEPA filter with no need to change for 10 years
- › Whisper Quiet operation (down to 18dB(A))

### Sensors

Dust (PM2.5/dust) sensor	•
Odour sensor	•
Temperature sensor	•
Humidity sensor	•

### Mode

Auto fan mode	•
Anti-pollen mode	•
Turbo mode	•
Quiet mode	•
Econo mode	•
Circulation mode	•
Moist mode	•

### Functions

Catch & clean	•
Deodorizing filter	•
Onecta app	•
Child proof lock	•
Brightness adjustment	•
Auto restart after power failure	•

NEW



- Air flow up to **420 m<sup>3</sup>/h**
- Air purification up to **96 m<sup>2</sup>**
- Intelligent** air purification
- Absorbs odour via **deodorising filter**
- High Performing Electrostatic **HEPA filter**




## Specifications



Indoor Unit				70ZW/70ZBFW	70ZH/70ZBFH
Applicable room area			m <sup>2</sup>	48(1)/96(2)	
CADR			m <sup>2</sup>	375	
Weight	Unit		kg	12.5	
Dimensions	Unit	HeightxWidthxDepth	mm	760x315x315	
Colour				White	Gray
Air flow rate		Air purifying operation	Silent/Low/Medium/Turbo	m <sup>3</sup> /h	84/132/210/420
		Humidifying operation	Silent/Low/Medium/Turbo	m <sup>3</sup> /h	84/132/210/420
Sound pressure level	Air purifying operation	Silent/Low/Medium/Turbo		dBA	18/27/37/54
	Humidifying operation	Silent/Low/Medium/Turbo		dBA	18/27/37/54
Humidifying operation	Power input	Silent/L/M/Turbo		kW	0.010/0.012/0.023/0.084
	Humidification	Turbo		ml/h	700
	Water tank capacity			l	3.4
Air purifying operation	Power input	Silent/L/M/Turbo		kW	0.010/0.011/0.020/0.082
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220-230

(1)The coverage area is appropriate for operating the unit of maximum fan speed(HH). Coverage area indicates the space where a certain amount of dust particles can be removed in 30 minutes. | (2)Converted to NRCC standards from test values in accordance with JEM1467. | Converted to CADR standards from test values in accordance with JEM1467. | Humidification amount changes in accordance with indoor and outdoor temperature and humidity. Measurement condition: 20°C in temperature, 30% in humidity. | Operating sound levels are the average of values measured at 1m away from the front, left, right and top of the unit. (These are equal to the values in an anechoic chamber) | Electrostatic HEPA filter and humidifying filters are attached in the unit. | Requirements according to JEM1467. | "HI" is displayed when the PM2.5 concentration exceeds 99µg/m<sup>3</sup>.

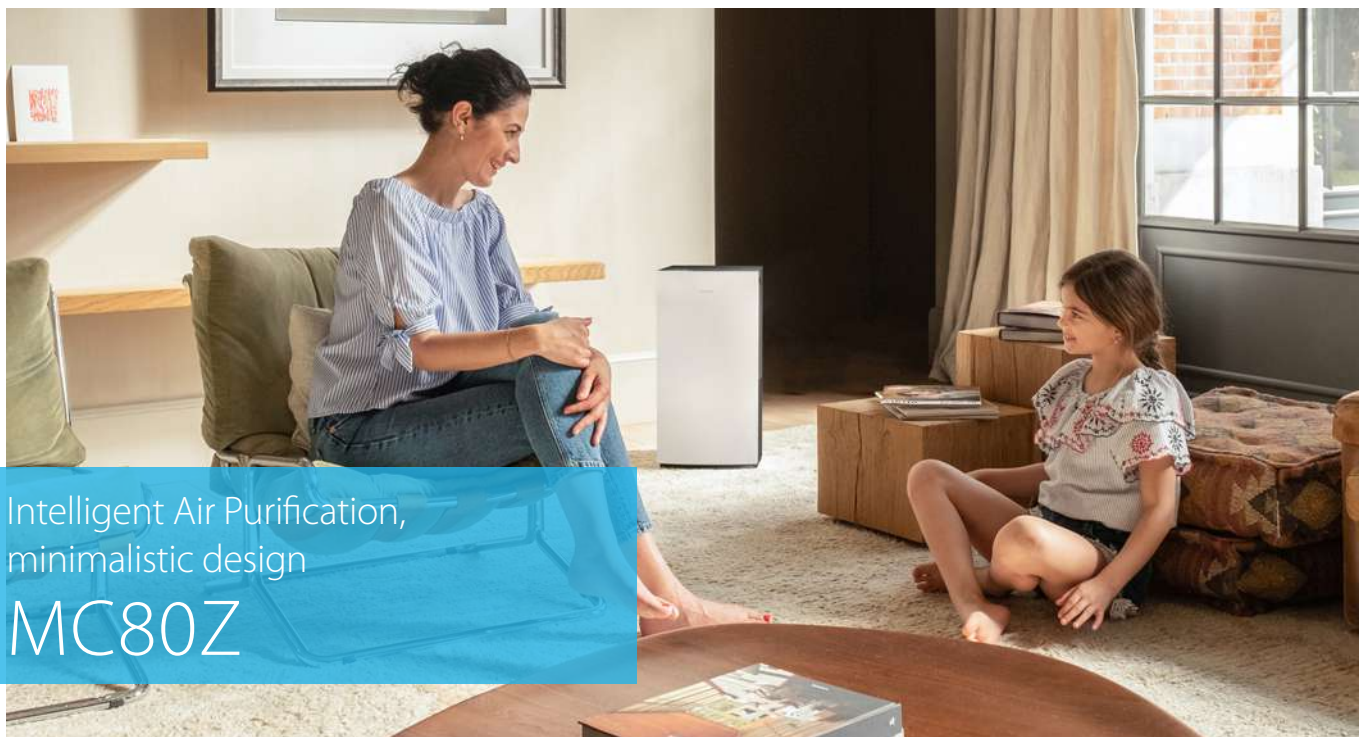

Intelligent Air Purification,  
minimalistic design

MC80Z

- › Onecta App Integration: control indoor with an app, via local network or internet
- › Air purification of large spaces up to 124m<sup>2</sup>
- › Intuitive display design with coloured Daikin Eye, visual way of informing users about indoor air quality
- › Pure air thanks to Daikin's 'catch and clean' approach in decomposing harmful substances
- › High performance HEPA filter with no need to change for 10 years
- › Whisper Quiet operation (down to 19dB(A))

### Sensors

Dust (PM2.5/dust) sensor	•
Odour sensor	•
Temperature sensor	•

### Mode

Auto fan mode	•
Anti-pollen mode	•
Turbo mode	•
Quiet mode	•
Econo mode	•
Circulation mode	•

### Functions

Catch & clean	•
Deodorizing filter	•
Onecta app	•
Child proof lock	•
Brightness adjustment	•
Auto restart after power failure	•

NEW



- Air flow up to **480 m<sup>3</sup>/h**
- Air purification up to **124 m<sup>2</sup>**
- Intelligent** air purification
- Absorbs odour via **deodorising filter**
- High Performing Electrostatic **HEPA filter**



## Specifications



Indoor Unit				80ZB	80Z
Applicable room area			m <sup>2</sup>	62(1)/124(2)	
CADR			m <sup>2</sup>	480	
Weight	Unit		kg	9.8	
Dimensions	Unit	HeightxWidthxDepth	mm	630x315x315	
Colour				Front: White, Top/Side: Dark Grey	
Air flow rate		Air purifying operation	Silent/Low/Medium/Turbo	m <sup>3</sup> /h	84/132/210/480
Sound pressure level	Air purifying operation	Silent/Low/Medium/Turbo		dB(A)	19/25/34/55
Air purifying operation	Power input	Silent/L/M/Turbo		kW	0.010/0.011/0.020/0.082
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220-230

(1)The coverage area is appropriate for operating the unit of maximum fan speed(HH). Coverage area indicates the space where a certain amount of dust particles can be removed in 30 minutes. | (2)Converted to NRCC standards from test values in accordance with JEM1467. | Converted to CADR standards from test values in accordance with JEM1467. | Operating sound levels are the average of values measured at 1m away from the front, left, right and top of the unit. (These are equal to the values in an anechoic chamber) | Electrostatic HEPA filter is attached in the unit. | Other function: Active plasma ion function. Autorestartfunction. | Requirements according to JEM1467. | \*HI\* is displayed when the PM2.5 concentration exceeds 99µg/m3.



## Powerful Air Purification MC30Y

- › Air treatment up to 46m<sup>2</sup>
- › Pure air thanks to 'Catch and Clean' approach
- › No need to change filter for 10 years thanks to high performance electrostatic HEPA filter
- › Whisper quiet operation (19 dB(A))



- Air flow up to **180 m<sup>3</sup>/h**
- Air purification up to **46 m<sup>2</sup>**
- Absorbs odour via **deodorising filter**
- High Performing Electrostatic **HEPA filter**

### Mode

Turbo mode	•
Quiet mode/sleep mode	•

### Functions

Catch & clean	•
Deodorizing filter	•
Child proof lock	•
Brightness adjustment	•
Auto restart after power failure	•



## Specifications



MC30YV



MC30YB


Technical specifications		MC	MC30YV/YB
Applicable room area			23(1)/46(2)
CADR		m <sup>3</sup> /h	180
Weight	Unit	kg	5.8
Dimensions		mm	565/350/345
Colour			White
Air flow rate	Air purifying operation	Silent/Medium/Turbo	m <sup>3</sup> /h
			60/120/180
Sound pressure level	Air purifying operation	Silent/Medium/Turbo	dB(A)
			19/27/37
Air purifying operation	Power input	Silent/Medium/Turbo	kW
			0.008/0.015/0.025
Power supply	Phase/Frequency/Voltage		1~/50/60/220-240/220-30

Standard accessories: Electrostatic HEPA filter; Quantity: 1;

Standard accessories: Deodorising filter; Quantity: 1;

Standard accessories: Operation manual; Quantity: 1;

(1) The applicable room area is appropriate for operating the unit of maximum fan speed (HH). Applicable room area indicates the space where a certain amount of dust particles can be removed in 30 minutes. (JEM 1467) | (2) The applicable room area is appropriate for operating the unit of maximum fan speed (HH). Applicable room area was calculated in accordance with NRCC-54013 standard using cigarette smoke CADR that was tested according to JEM1467. | Converted to CADR standards from test values in accordance with JEM1467. | Operating sound levels are the average of values measured at 1m away from the front, left, right and top of the unit. (These are equal to the values in an anechoic chamber) | Electrostatic HEPA filter is attached in the unit. | Other function: Auto-restart function.

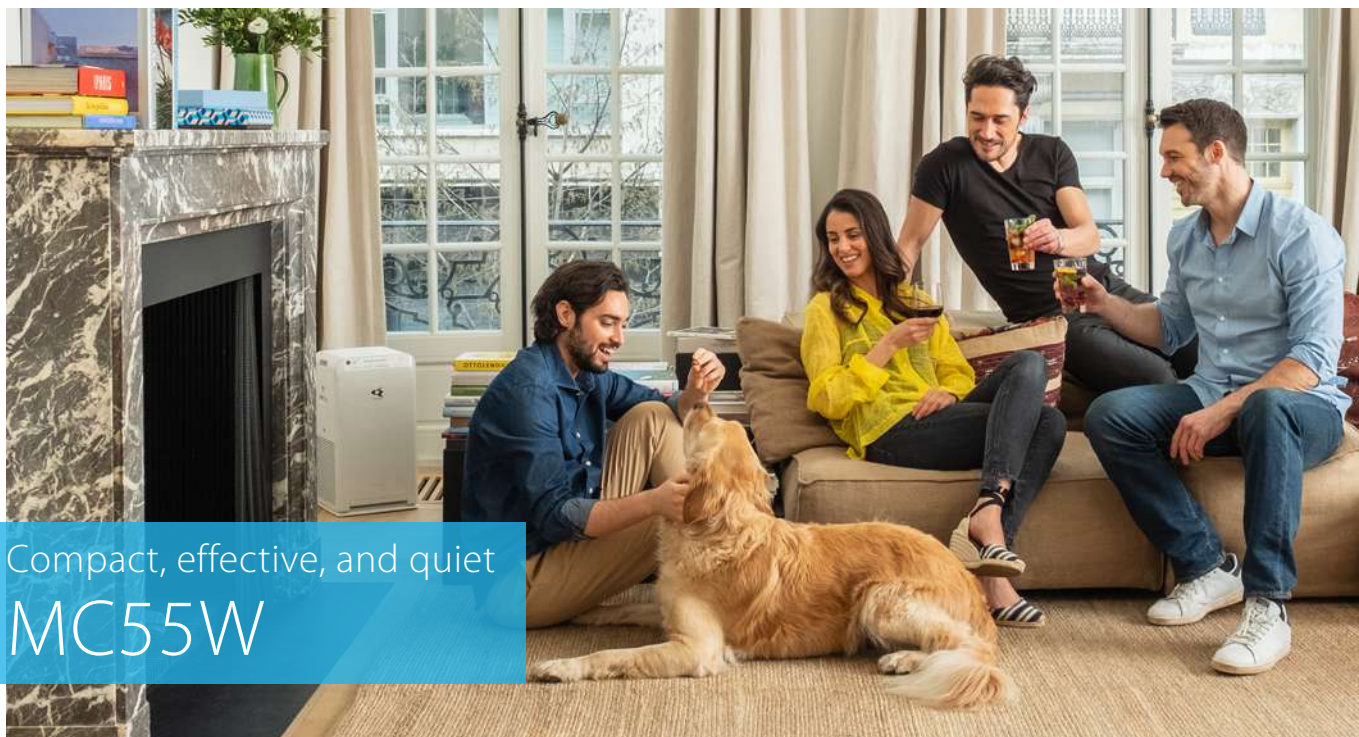

## Compact, effective, and quiet MC55W

- › Effectiveness against respiratory viruses evaluated by Institut Pasteur de Lille
- › Pure air thanks to Daikin 'Catch and Clean' approach in decomposing harmful substances
- › High performance HEPA filter with no need to change for 10 years
- › Whisper quiet
- › Colour LEDs to provide info about indoor air quality



- Air flow up to **330 m³/h**
- Air purification up to **82 m²**
- Absorbs odour via **deodorising filter**
- High Performing Electrostatic **HEPA filter**

### Sensors

Dust (PM2.5/dust) sensor	•
Odour sensor	•

### Mode

Auto fan mode	•
Anti-pollen mode	•
Turbo mode	•
Quiet mode	•
Econo mode	•

### Functions

Catch & clean	•
Deodorizing filter	•
Remote Controller	•
Child proof lock	•
Brightness adjustment	•
Auto restart after power failure	•



MC55W



MC55VB


## Specifications

Single Unit				MC55W / MC55VB	
Applicable room area			m <sup>2</sup>	41(1)/82(2)	
Dimensions	Unit	HeightxWidthxDpeth	mm	500x270x270	
Weight	Unit		kg	6.8	
Colour				White	
Air flow rate		Air purifying operation	Silent/Low/Medium/Turbo	m <sup>3</sup> /h	66/120/192/330
Sound pressure level	Air purifying operation		Silent/Low/Medium/Turbo	dBA	19/29/39/53
Air purifying operation	Power input		Silent/Low/Medium/Turbo	kW	0.008/0.010/0.015/0.037
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220-230
Power plug					W: C type/VB: G type (UK)

The applicable room area is appropriate for operating the unit of maximum fan speed (HH). Applicable room area indicates the space where a certain amount of dust particles can be removed in 30 minutes. (1) in accordance with JEM (2) in accordance with CADR (JEM) & NRCC-54013-2011 standard | Operating sound levels are the average of values measured at 1m away from the front, left, right and top of the unit. (These are equal to the values in an anechoic chamber) | Electrostatic HEPA filter is attached in the unit. | Other function: Active plasmation function, Auto-restart function, About the dust collection and deodorizing capacity of an air purifier:

- › Not all harmful substances in cigarette smoke (carbon monoxide, etc.) can be removed.
  - › Not all odour components that emanate continuously (from building materials and pets, etc.) can be removed.
- The Daikin air purifier is not a medical device and is not meant to be used as a substitute to any medical or pharmaceutical treatment.

Refer to notes on page 21 for detailed claims on Institut Pasteur de Lille test.

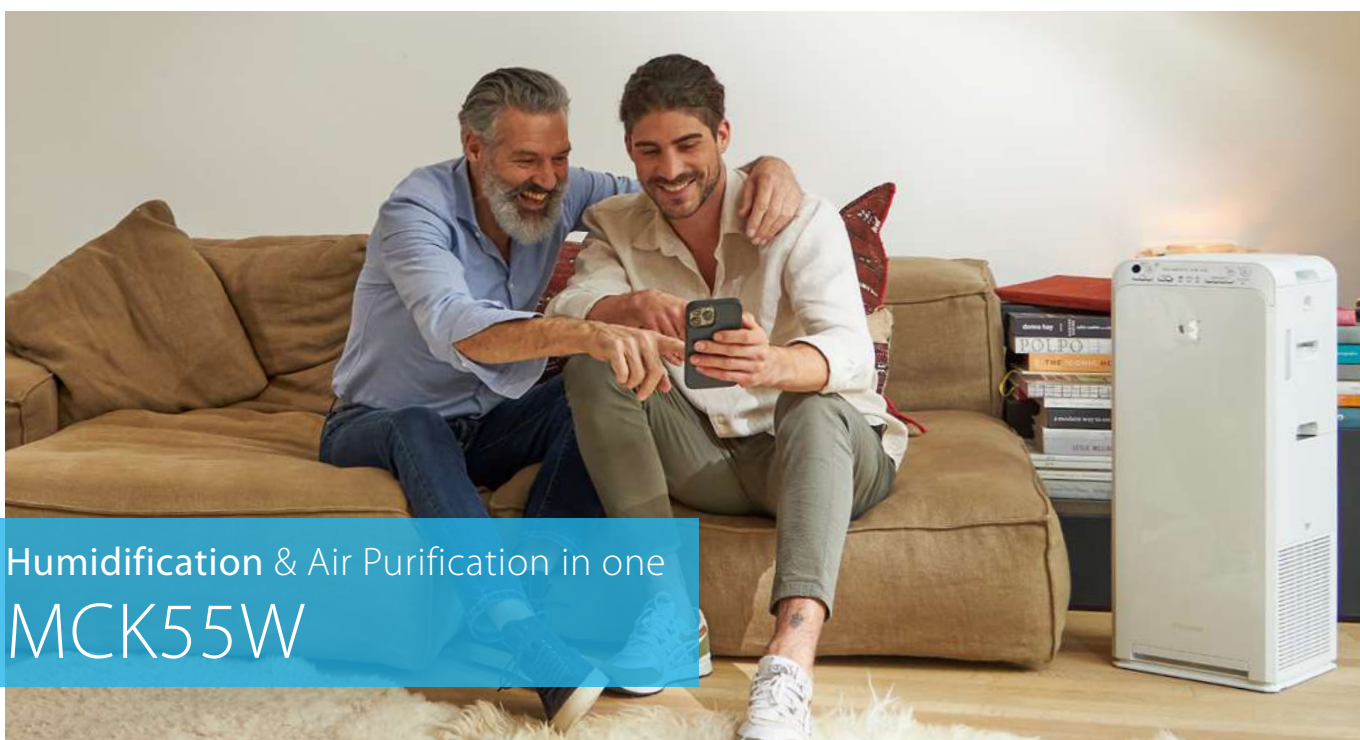

## Humidification & Air Purification in one MCK55W

- › Effectiveness against respiratory viruses evaluated by Institut Pasteur de Lille
- › Humidification and purification in one
- › Pure air thanks to Daikin 'Catch and Clean' approach in decomposing harmful substances
- › High performance HEPA filter with no need to change for 10 years
- › Whisper quiet
- › Colour LEDs to provide info about indoor air quality

### Sensors

Dust (PM2.5/dust) sensor	•
Odour sensor	•
Humidity sensor	•

### Mode

Auto fan mode	•
Anti-pollen mode	•
Turbo mode	•
Quiet mode	•
Econo mode	•
Moist mode	•

### Functions

Catch & clean	•
Deodorizing filter	•
Remote Controller	•
Child proof lock	•
Brightness adjustment	•
Auto restart after power failure	•



- Air flow up to **330 m<sup>3</sup>/h**
- Air purification up to **82 m<sup>2</sup>**
- 500 ml/h** humidifying capacity
- Absorbs odour via **deodorising filter**
- High Performing Electrostatic **HEPA filter**



## Specifications



Single Unit				MCK55W	
Applicable room area			m <sup>2</sup>	41(1)/82(2)	
Dimensions	Unit	HeightxWidthxDepth		700x270x270	
Weight	Unit		kg	9.5	
Colour				White	
Air flow rate		Air purifying operation	Silent/Low/Medium/Turbo	m <sup>3</sup> /h	54/120/192/330
		Humidifying operation	Silent/Low/Medium/Turbo	m <sup>3</sup> /h	102/144/192/330
Sound pressure level	Air purifying operation	Silent/Low/Medium/Turbo		dB(A)	19.0/29.0/39.0/53.0
	Humidifying operation	Silent/Low/Medium/Turbo		dB(A)	25.0/33.0/39.0/53.0
Humidifying operation	Power input	Silent/L/M/Turbo		kW	0.011/0.014/0.019/0.058
	Humidification	Silent/Low/Medium/Turbo		ml/h	200/240/300/500
	Water tank capacity			l	2.7
Air purifying operation	Power input	Silent/L/M/Turbo		kW	0.007/0.010/0.017/0.056
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220-230

The applicable room area is appropriate for operating the unit of maximum fan speed (HH). Applicable room area indicates the space where a certain amount of dust particles can be removed in 30 minutes. ((1) in accordance with JEM (2) in accordance with CADR (JEM) & NRCC-54013-2011 standard) | Humidification amount changes in accordance with indoor and outdoor temperature and humidity. Measurement condition: 20°C in temperature, 30% in humidity. | Operating sound levels are the average of values measured at 1m away from the front, left, right and top of the unit. (These are equal to the values in an anechoic chamber) | Electrostatic HEPA filter and humidifying filters are attached in the unit.

Refer to notes on page 21 for detailed claims on Institut Pasteur de Lille test.





## High grade type humidification MCK70Y

- › Air purification for large spaces such as residential and light commercial applications
- › Pure air thanks to Daikin 'Catch and Clean' approach in decomposing harmful substances
- › High performance HEPA filter with no need to change for 10 years
- › Whisper quiet
- › Colour LEDs to provide info about indoor air quality

### Sensors

Dust (PM2.5/dust) sensor	•
Odour sensor	•
Humidity sensor	•

### Mode

Auto fan mode	•
Anti-pollen mode	•
Turbo mode	•
Quiet mode	•
Econo mode	•
Circulation mode	•
Moist mode	•

### Functions

Catch & clean	•
Deodorizing filter	•
Child proof lock	•
Brightness adjustment	•
Auto restart after power failure	•



- Air flow up to **420 m³/h**
- Air purification up to **96 m²**
- 650 ml/h** humidifying capacity
- Absorbs odour via **deodorising filter**
- High Performing Electrostatic **HEPA filter**



## Specifications



Indoor Unit				MCK70YV	MCK70YB
Applicable room area			m²	48(1)/96(2)	
Dimensions	Unit	HeightxWidthxDepth	mm	600x395x287 (3)	
Weight	Unit		kg	12.5	
Colour				White	
Air flow rate		Air purifying operation	Silent/Low/Medium/Turbo	m³/h	60/132/210/420
		Humidifying operation	Silent/Low/Medium/Turbo	m³/h	102/132/210/420
Sound pressure level	Air purifying operation	Silent/Low/Medium/Turbo	dB(A)	18/27/37/54	
	Humidifying operation	Silent/Low/Medium/Turbo	dB(A)	23/27/37/54	
Humidifying operation	Power input	Silent/L/M/Turbo	kW	0.011/0.012/0.018/0.068	
	Humidification	Turbo	ml/h	650	
	Water tank capacity		l	3.6	
Air purifying operation	Power input	Silent/L/M/Turbo	kW	0.008/0.010/0.016/0.066	
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220-230	

The applicable room area is appropriate for operating the unit of maximum fan speed (HH). Applicable room area indicates the space where a certain amount of dust particles can be removed in 30 minutes. ((1) in accordance with JEM (2) in accordance with CADR (JEM) & NRCC-54013-2011 standard) (3) With caster: 637 × 395 × 287 | Humidification amount changes in accordance with indoor and outdoor temperature and humidity. Measurement condition: 20°C in temperature, 30% in humidity. | Operating sound levels are the average of values measured at 1m away from the front, left, right and top of the unit. (These are equal to the values in an anechoic chamber) | Electrostatic HEPA filter and humidifying filters are attached in the unit.

Refer to notes on page 21 for detailed claims on Institut Pasteur de Lille test.

# Residential ventilation

Centralized Heat Recovery  
Ventilation (CHRV)



# Why DUCO?

## DUCO offers end-to-end solutions

### One-stop-shop for your end-to-end ventilation solution

Complete range of Centralized Heat Recovery Ventilation (CHRV) units, ducts & accessories.

### Smart demand control

The room is only ventilated when necessary and in the correct amount. CO<sub>2</sub> concentration and air humidity are used as indicators. This helps avoiding unnecessary heat loss while guaranteeing an optimal indoor climate.

### Low noise guaranteed

A comfortable indoor climate is created by whisper-quiet ventilation systems. DUCO excels in acoustics both in its supply and exhaust airs.

### Intuitive quotation process

Upon request, Daikin can provide an easy-to-use tool to calculate the units and accessories needed for your specific projects. A complete calculation request can also be carried out on Daikin Heating Solutions Navigator Platform.

### Automatic calibration

The automatic calibration, whereby the measuring and adjustment technology is based on the principles of calibration under constant pressure, always offers a 100% guarantee of a qualitative end result and translates into a 50% saving in set-up time for the installer.

### Connectivity

With the optional Communication Print you have the option of allowing the DUCO ventilation systems to communicate via ModBus and/or Ethernet. ModBus integration enables them to be linked to a building management system.

### High energy conversion efficiency


The combination of dynamic air distribution filters and high performance heat exchangers result in very high efficiency ratio.

## Only at Daikin

Thanks to DUCO, Daikin offers Centralized HRV systems with an integrated 2-zone valve. With the 2-zone version of the DucoBox Energy Premium, Daikin's product range is extended with a unique ventilation system with embedded 2-zone control. If a certain zone does not require ventilation, that zone is not ventilated. Cost savings on heating, lower consumption and noise comfort of the unit itself (lower rpm) are the logical consequences.

Sensors meticulously detect the residents' movements throughout the home. This makes it possible to automatically determine where, when and in what amount ventilation is required.

By controlling the two zones separately with a built-in valve, the consumption of the EC fans is reduced considerably, which translates into an A+ energy label.

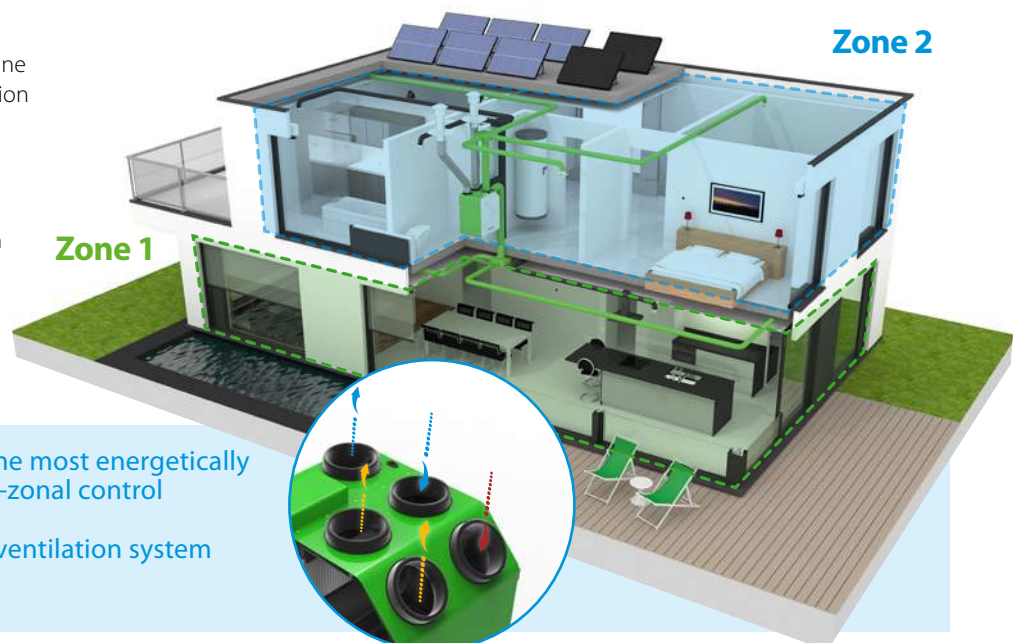

- ✓ Optimal indoor air quality in the most energetically optimised manner thanks to 2-zonal control
- ✓ Low noise guaranteed by our ventilation system
- ✓ Automatic calibration

# A complete portfolio for complete ventilation solutions

Clean air, whenever you need!

Europe's QUIETEST and SMARTEST CHR.V!



## DucoBox Energy Comfort & Comfort Plus

✓  
**A solution for every situation**  
Flow rate up to 550m<sup>3</sup>/h (at 200 Pa)

✓  
**Left/right exchangeable**  
Exchange between left and right variant is carried out 100% by software

✓  
**Automatic calibration**  
Calibration at constant pressure saves up to 50% on the configuration time



## DucoBox Energy Premium

✓  
**Smart 2-zone control**  
Saving up to 40% through smart zone control

✓  
**Quietest CHR.V on the market**  
Enjoy a good night's sleep!

✓  
**Automatic calibration**  
Calibration at constant pressure saves up to 50% on the configuration time



## DucoFlex

Thanks to DUCO, with DucoFlex, Daikin offers a complete air ducting system. If you use this installation-friendly air-duct system you will enjoy the energy-efficient and quiet operation of the ventilation system.

For more information on Ducoflex, please refer to the dedicated page on ducting solutions



# On-demand ventilation for all needs

Only ventilate, when necessary, where it is necessary and as long as it is necessary!

Thanks to DUCO, Daikin brings to you the SMARTEST ventilation solution. On-demand ventilation allows remote control and intelligent usage of the ventilation system, increasing comfort and convenience for the end user.

### How does it work?

Local and/or central sensors permanently measure the indoor air quality in your home. If the air quality is decreasing, the ventilation is triggered immediately according to intelligent algorithms to create a health environment again.

### Compact external 2-zone control

With external 2-zone control, the house is divided into a **day and night zone**.

This zonal control is **based on CO<sub>2</sub> and humidity**. It only provides ventilation **where and when needed**, in the right amount.

**Zonal ventilation** ensures **maximum energy savings** and increases **acoustic and thermal comfort**.



Discover the **4 benefits** of the multi-zone valve:

<p>Compact installation</p>	<p>Energy savings</p>	<p>Quieter operation</p>	<p>Enhanced thermal comfort</p>
-----------------------------	-----------------------	--------------------------	---------------------------------

# DucoBox Energy Comfort




## Making life easy for installers

- ✓ Patented principle of double by-pass

- ✓ Dynamic Airflow Filters

For maximum efficiency.


- ✓ Low power consumption due to energy-efficient EC motors

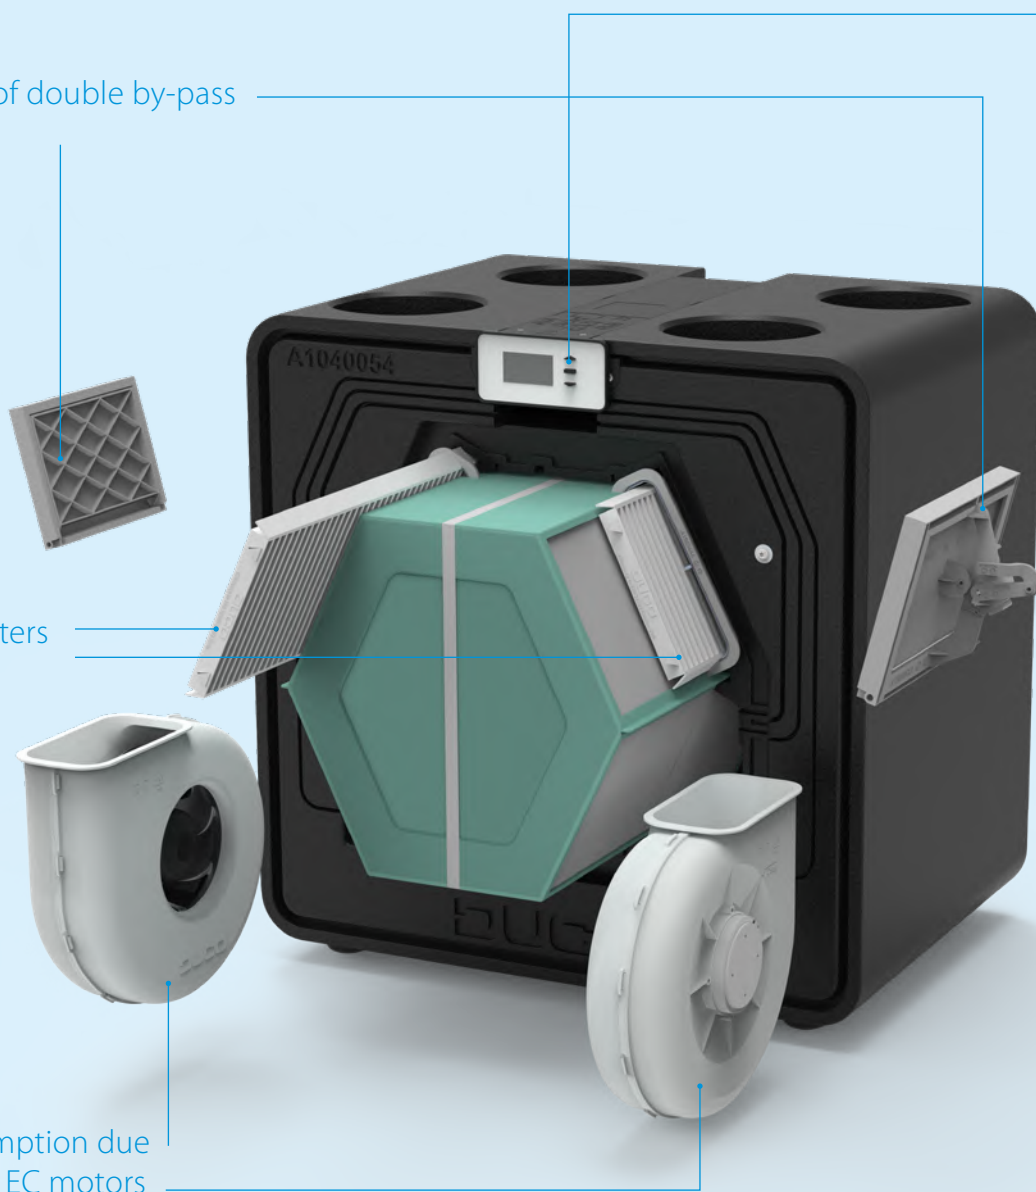

# First choice for building projects


This smart and silent ventilation unit is the ideal solution for apartments and houses due to its compact size. With the addition of DucoBox Energy Comfort D400 to our portfolio, this range now offers adjustable capacity of up to 325 m<sup>3</sup>/h and 400 m<sup>3</sup>/h. The left/right switch is 100% software-driven thanks to the patented principle of double bypass. The dynamic air distribution filters, together with the smart demand control based on CO<sub>2</sub> and humidity, ensure for exceptional efficiency within this compact unit.

- ✓ Optional pre-heater and optional multi-zoning valve

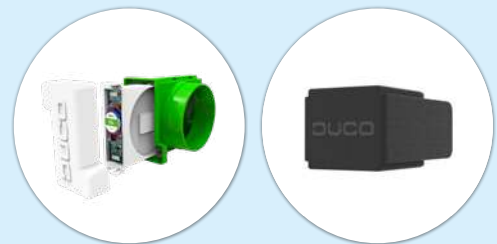

- ✓ L/R switch - 100% software-based

This unit is very user-friendly because physical interventions are not necessary. The left/right switch is carried out 100% by software thanks to a patented principle of double by-pass.



- ✓ Compact & light unit:



This lightweight unit starting from 21kg can easily be installed by 1 person. With its compact dimensions, the DucoBox Energy Comfort is ideal for a small technical space!

- ✓ Smart copy function

Thanks to a "copy" function which is integrated on software level, the installer has the possibility to copy the settings and parametrisation of one DucoBox Energy Comfort onto the next DucoBox Energy Comfort. This is particularly useful in a serial construction with the same types of houses.



- ✓ Automatic calibration

Relying on the principles of calibration at constant pressure, this method achieves a 50% saving on calibration time. DUCO saves you time.

- ✓ Smart demand control based on CO<sub>2</sub> and/or humidity measurement



# DucoBox Energy Comfort 325- D400

The DucoBox Energy Comfort is a compact and light mechanical ventilation unit with heat recovery. With a capacity of up to 400 m<sup>3</sup>/h, this is the balanced ventilation solution for apartments and serial housing construction.


The **demand control** of the DucoBox Energy Comfort results in intelligent and energy-efficient operation.

Together with the **smart demand control** based on CO<sub>2</sub> and humidity, the dynamic air distribution filters ensure exceptional efficiency within this compact unit.

The **left/right switch** is carried out 100% by software thanks to a patented principle of double bypass.

Moreover, this lightweight unit weighs just 21 kg. In other words: easy to install by 1 person.

The **automatic configuration** ensures the device can be installed quickly and professionally.

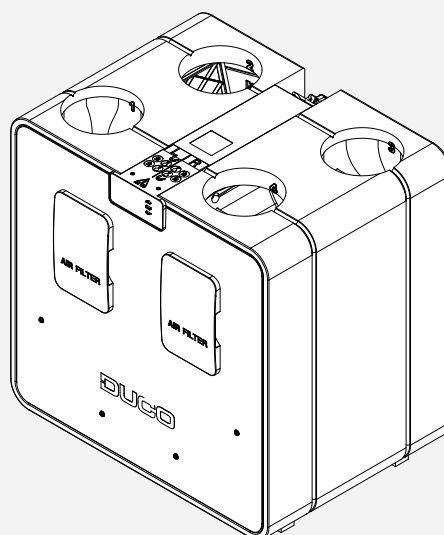
 A<sup>+</sup>

## Versions

Type	Supply and exhaust airflow rate at 150 Pa	2-zone control	Frost protection	Reference number
DucoBox Energy Comfort 325	325 m <sup>3</sup> /h	yes (as external option)	Imbalance or optional external heater	00004649

Type	Pulsion and extraction capacity at 150 Pa	Pulsion and extraction capacity at 200 Pa	2-zone system	Frost protection	Item Number
DucoBox Energy Comfort D400	400 m <sup>3</sup> /h	400 m <sup>3</sup> /h	yes (as external option)	Imbalance or optional external heater	00004707

## Optional Accessories DucoBox Energy Comfort 325

Product	Reference Number
Siphon flat (Energy & Eco)	00004376
Communication Print	00004251
Humidity Sensor (Energy Comfort & Energy Comfort Plus)	00004723
Mounting Chair Standing (Energy Comfort D325)	00004546
Filter set 2 x Coarse 65% (Energy Comfort D325)	00004547
Filter set Coarse 65% / ePM1 55% (Energy Comfort D325)	00004661
Coaxial cable set 8 m	00004418

## Optional Accessories DucoBox Energy Comfort D400

Product	Reference Number
Siphon flat (Energy & Eco)	00004376
Communication Print	00004251
Humidity Sensor (Energy Comfort & Energy Comfort Plus)	00004723
Standing support frame (Energy Comfort D400 / Plus)	00004740
Filter set 2 x Coarse 65% (Energy Comfort D400/Plus)	00004741
Filterset Coarse 65%/ePM1 55% (Energy Comfort D400 & Plus D350/D450/D550)	00004742
Coaxial cable set 8 m	00004418



# DucoBox Energy Comfort 325- D400

More details and final information can be found by scanning or clicking the QR codes.




DucoBox Energy Comfort


Physical Properties	325	D400
Width x Height x Depth (mm)	700 x 705 x 525 mm	756 x 800 x 584 mm
Casing	Coated sheet steel + EPP	
Colours	White + Black	
Connections	Inner Diameter: Ø 160mm	Inner Diameter: Ø 180mm
Condensate drain	Ø 32 mm (1 ¼") (2x)	
Heat exchanger	PET/ Polystyrene	v1: PP - v2: PET/Alu
Material of inside section	EPP / PP / ABS	
Weight	21 kg	31 kg
Power cable length	2 m (from top of unit)	
Mounting	Wall mounting (standard) Floor mounting as an option using support frame	
Miscellaneous Properties	325	D400
Energy class	With 2 sensors (control factor 0.65): A+ Other: A	
Filters	Dynamic airflow filter supply air (460 x 185 x 15 mm) Standard: ISO 16890 Coarse 65 % (= G4) Optional: ISO 16890 ePM1 55% (=F7) Dynamic airflow filter exhaust air (460 x 185 x 15 mm) Standard: ISO 16890 Coarse 65 % (= G4)	Dynamic airflow filter supply air (520 x 190 x 15 mm) Standard: ISO 16890 Coarse 65 % (= G4) Optional: ISO 16890 ePM1 55% (=F7) Dynamic airflow filter exhaust air (520 x 190 x 15 mm) Standard: ISO 16890 Coarse 65 % (= G4)
Summer by-pass	Fully (100% modulating)	
Frost protection	Imbalance or external heater	
Fans	EC fan with backward curved blades	
Automatic Calibration	Yes (constant pressure)	
Constant flow regulation	Yes	
Passive cooling	Automatic passive cooling control	
Operation	Integrated display Use via User controllers and CO <sub>2</sub> or Humidity Sensors Via smartphone / tablet as an option (provided device has Communication Print)	
Sensors	Integrated: pressure, temperature, onboard switch sensor External: CO <sub>2</sub> (via optional Sensor), Humidity (via optional Sensor or measurement in ETA line), external Switch Sensor (voltage-free input) (optional)	
Communication	Standard: Duco RF, Duco Wired, Switch Sensor Expandable with Communication Print: ModBus, PWM-IN, PWM-OUT, Switch Sensor (3x), Ethernet, Micro SD-card slot	
Electrical Characteristics	325	D400
Maximum electrical power	118 W (2 x 59 W)	145 W (2 x 72.5 W)
Power Supply	230 V, 50 Hz Via 3-core power cable with earthed plug	
Contacts	0-10 V in/output	
Type of motor	DC	
Energy conversion efficiency	At 325 m <sup>3</sup> /h: 85% At 279 m <sup>3</sup> /h: 86% At 277 m <sup>3</sup> /h: 88%	At 400 m <sup>3</sup> /h: 83% At 351 m <sup>3</sup> /h: 84% At 307 m <sup>3</sup> /h: 85%

## Dimensions DucoBox Energy Comfort D400


Front view

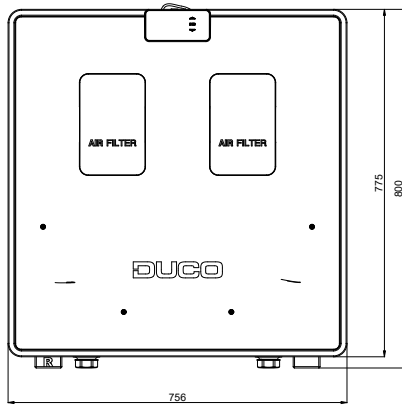


Rear view

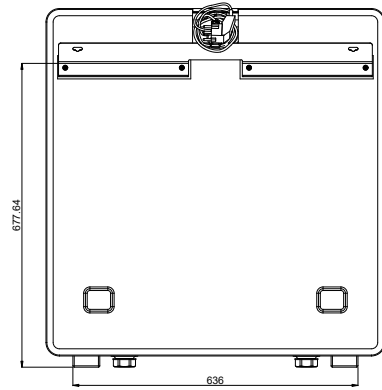


Top view

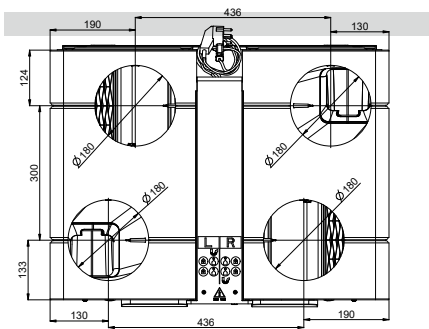

Bottom view

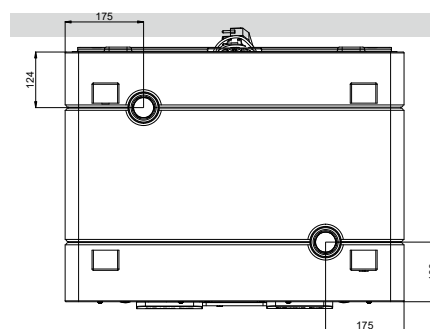


Side view

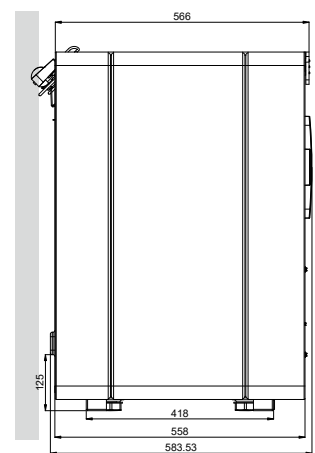


## Dimensions DucoBox Energy Comfort 325


Front view

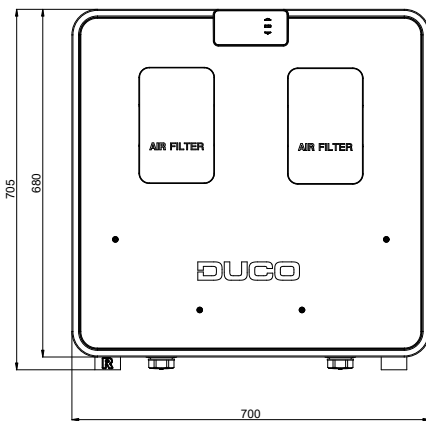


Rear view

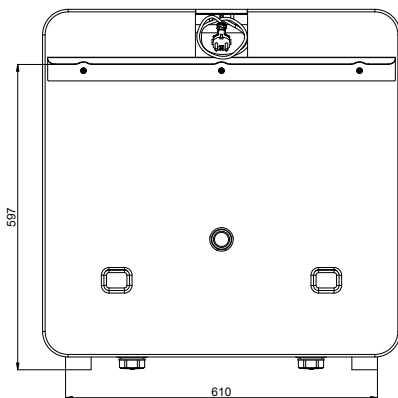


Top view

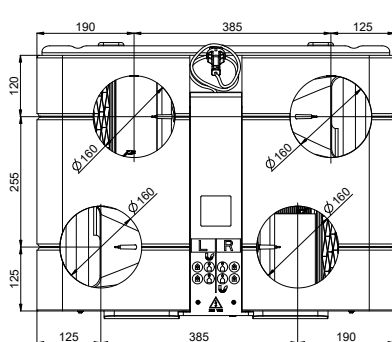

Bottom view

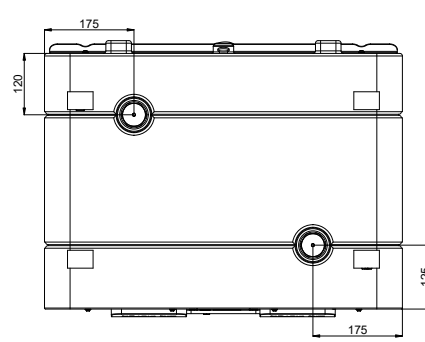

Side view

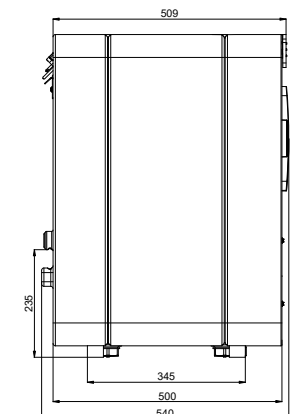



# Introducing DucoBox Energy Comfort Plus (D350/D450/D550)



In the spotlight  
one of Europe's smartest CHRV solution

## 3 models for 3 different air flows Unique for this range


- ✓ Patented principle of double by-pass
- ✓ L/R interchangeable  
100% software-based
- ✓ Smart 2-zone control  
with external valves
- ✓ Comfort Plus  
with acoustic casing =  
10dB quieter!
- ✓ Dynamic Airflow Filters  
For maximum efficiency.
- ✓ Low power consumption due  
to energy-efficient EC motors
- ✓ Smart demand management based on  
CO<sub>2</sub> and/or humidity measurement

# First choice for building projects

The DucoBox Energy Comfort Plus is a Centralized Ventilation unit with Heat Recovery (CHRV). This smart and even more silent ventilation unit with metallic casing can be chosen with a capacity of up to 550 m<sup>3</sup>/h.

It is the ideal solution for various sizes of houses and apartments. The left/right switch is 100% software-driven thanks to the patented principle of double bypass. The dynamic air distribution filters, together with the smart demand control based on CO<sub>2</sub> and humidity, ensure for 2 exceptional efficiency within this compact unit.

## ✓ Optional pre-heater and optional multi-zoning valve

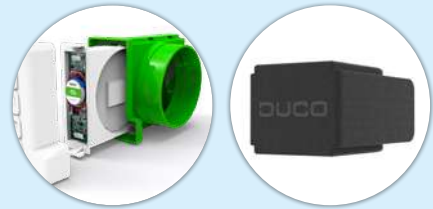


## ✓ L/R switch - 100% software-based

This unit is very user-friendly because physical interventions are not necessary. The left/right switch is carried out 100% by software thanks to a patented principle of double by-pass.


## ✓ Compact unit: 760 x 803 x 584 mm

With its compact dimensions, the DucoBox Energy Comfort is ideal for a small technical space!



## ✓ Smart copy function

Thanks to a "copy" function which is integrated on software level, the installer has the possibility to copy the settings and parametrisation of one DucoBox Energy Comfort Plus onto the next DucoBox Energy Comfort Plus. This is particularly useful in a serial construction with the same types of houses.



## ✓ Automatic calibration

Relying on the principles of calibration at constant pressure, this method achieves a 50% saving on calibration time. DUCO saves you time.




## ✓ Smart demand control based on CO<sub>2</sub> and/or humidity measurement

## DucoBox Energy Comfort Plus (D350/D450/D550)

The DUCO Energy Comfort Plus range is a **centralised ventilation unit with heat recovery**. DucoBox Energy Comfort Plus was developed with the aim of guaranteeing an even quieter operation. Within the DucoBox Energy Comfort range, the left/right exchange is 100% software-driven thanks to the patented principle of the double by-pass.

The demand control of the DucoBox Energy Comfort Plus D550 results in **intelligent and energy-efficient operation**. Together with the smart demand control based on CO<sub>2</sub> and humidity, the dynamic air distribution filters ensure exceptional efficiency within this compact unit.

The compact and quick-to-install 2-zone valves provide the most energy-efficient result that can be achieved with CHR.V. Please note that the zone control reduces the noise **by at least 30%**! Comfort rules!

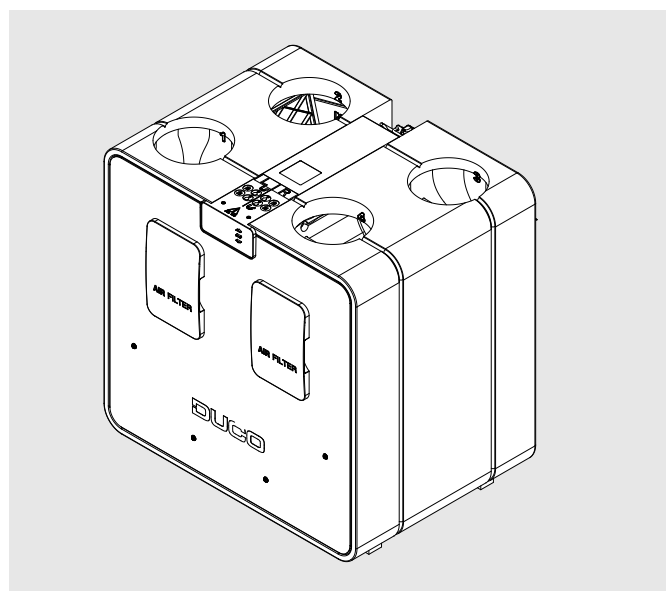

### Versions DucoBox Energy Comfort Plus D350/D450/D550

Type	Pulsion and extraction capacity at 150 Pa	Pulsion and extraction capacity at 200 Pa	2-zone system	Frost protection	Reference Number
DucoBox Energy comfort Plus D350	350 m <sup>3</sup> /h	350 m <sup>3</sup> /h	Yes (as external option)	Imbalance or optional external heater	00004704
DucoBox Energy Comfort Plus D450	450 m <sup>3</sup> /h	450 m <sup>3</sup> /h			00004705
DucoBox Energy Comfort Plus D550	550 m <sup>3</sup> /h	550 m <sup>3</sup> /h			00004706

### Optional Accessories DucoBox Energy Comfort Plus D350/D450/D550

Product	Reference Number
Pre-Heater DucoBox Energy Comfort (Plus) - 1,425W	00004807
Multizone Valve DucoBox Energy Comfort (Plus) (Sensorless) Ø125	00004761
Multizone Valve DucoBox Energy Comfort (Plus) (Sensorless) Ø160	00004760
Siphon flat	00004376
Connectivity Board Modbus and WIFI	00004810
Humidity Sensor (Energy Comfort & Energy Comfort Plus)	00004723
Standing chair (Energy Comfort D400/Plus)	00004740
Filterset 2 x Coarse 65 % (Energy Comfort D400 & Plus D350/D450/D550)	00004741
Filterset Coarse 65% / ePM1 55% (Energy Comfort D400 & Plus D350/D450/D550)	00004742
Coaxial cable set 8m (Energy Premium / Comfort / Comfort Plus)	00004418
Duco Wired power adapter 230VAC-24VDC/20W	00004762
Power supply 230VAC-24VDC/20W + housing	00004763
Muff with rubber D180/D160 (M/M) [connection piece with joint]	00004725
Muff with rubber D180/D180 (M/M) [connection piece with joint]	00004726
Muff with rubber D200/D180 (M/M) [connection piece with joint]	00004727

# DucoBox Energy Comfort Plus

## D350-D450-D550


More details and final information can be found by scanning or clicking the QR codes.






DucoBox Energy Comfort Plus

Physical Properties			
Width x Height x Depth (mm)	760 x 803 x 584 mm		
Casing	Coated sheet steel		
Colours	White + Green		
Connections	Inner Diameter: Ø 180mm		
Condensate drain	Ø 32 mm (1 ¼") (2x)		
Heat exchanger	v1: PP - v2: PET/Alu		
Material of inside section	EPP / PP / ABS		
Weight	47 kg		
Power cable length	2 m (from top of unit)		
Mounting	Wall mounting (standard) Floor mounting as an option using support frame		
Miscellaneous Properties			
Energy class	With 2 sensors (control factor 0.65): A+ Other: A		
Filters	Dynamic airflow filter supply air (520 x 190 x 15 mm) Standard: ISO 16890 Coarse 65 % (= G4) Optional: ISO 16890 ePM1 55% (=F7) Dynamic airflow filter exhaust air (520 x 190 x 15 mm) Standard: ISO 16890 Coarse 65 % (= G4)		
Summer by-pass	Fully (100% modulating)		
Frost protection	Imbalance or external heater		
Fans	EC fan with backward curved blades		
Automatic Calibration	Yes (constant pressure)		
Constant flow regulation	Yes		
Passive cooling	Automatic passive cooling control		
Operation	Integrated display Use via User controllers and CO <sub>2</sub> or Humidity Sensors Via smartphone / tablet as an option (provided device has Communication Print)		
Sensors	Integrated: pressure, temperature, onboard switch sensor External: CO <sub>2</sub> (via optional Sensor), Humidity (via optional Sensor or measurement in ETA line), external Switch Sensor (voltage free input) (optional)		
Communication	Standard: Duco RF, Duco Wired, Switch Sensor Expandable with Communication Print: ModBus, PWM-IN, PWM-OUT, Switch Sensor (3x), Ethernet, Micro SD-card slot		
Electrical Characteristics			
	D350	D450	D550
Maximum electrical power	117 W (2 x 58.5 W)	196 W (2 x 98 W)	276 W (2 x 133.5 W)
Power Supply	230 V, 50 Hz Via 3-core power cable with earthed plug		
Contacts	0-10 V in/output		
Type of motor	DC		
Energy conversion efficiency	At 350 m <sup>3</sup> /h: 84% At 307 m <sup>3</sup> /h: 85% At 255 m <sup>3</sup> /h: 86%	At 450 m <sup>3</sup> /h: 81% At 418 m <sup>3</sup> /h: 82% At 377 m <sup>3</sup> /h: 83%	At 550 m <sup>3</sup> /h: 78% At 515 m <sup>3</sup> /h: 79% At 471 m <sup>3</sup> /h: 80%





## Dimensions DucoBox Energy Comfort Plus D350

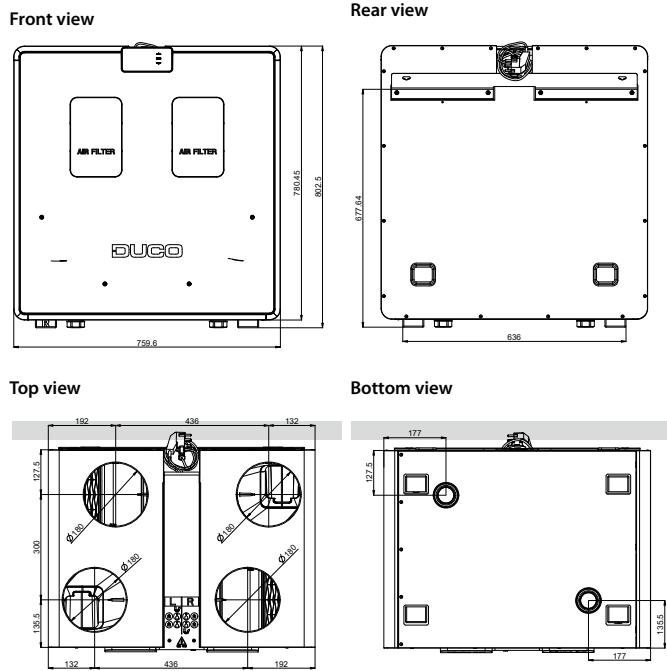

## Dimensions DucoBox Energy Comfort Plus D450

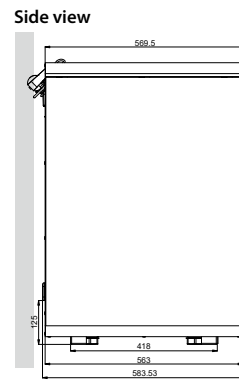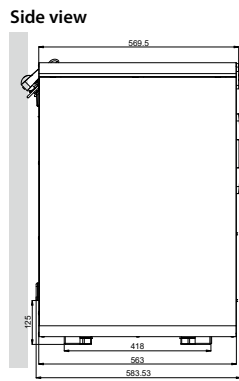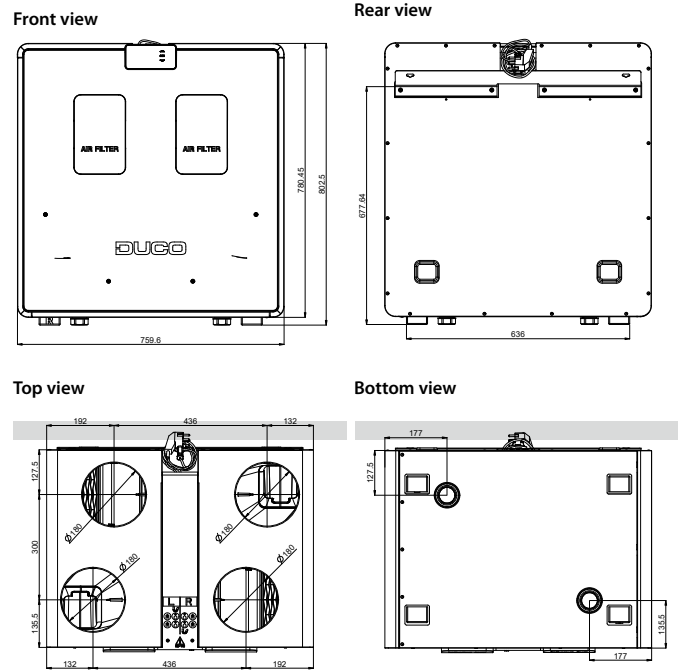

## Dimensions DucoBox Energy Comfort Plus D550

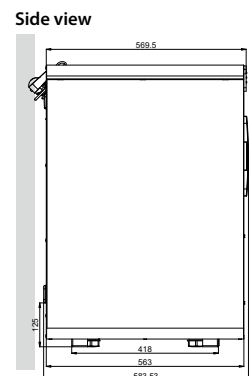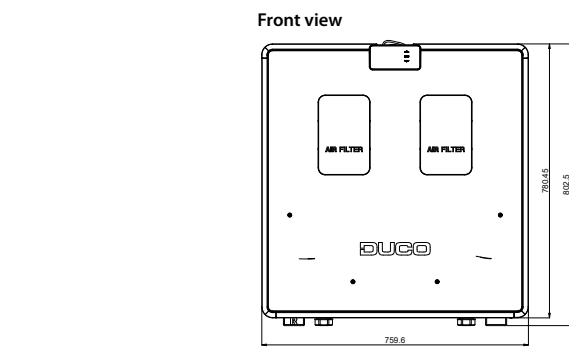






# DucoBox Energy Premium

The DucoBox Energy Premium raises CHRV with heat recovery to the next level. Ideal for installation in an energy-neutral home of the future, automatic calibration and integrated 2-zone control with demand control ensure ultra-quiet, intelligent and energy-saving operation.

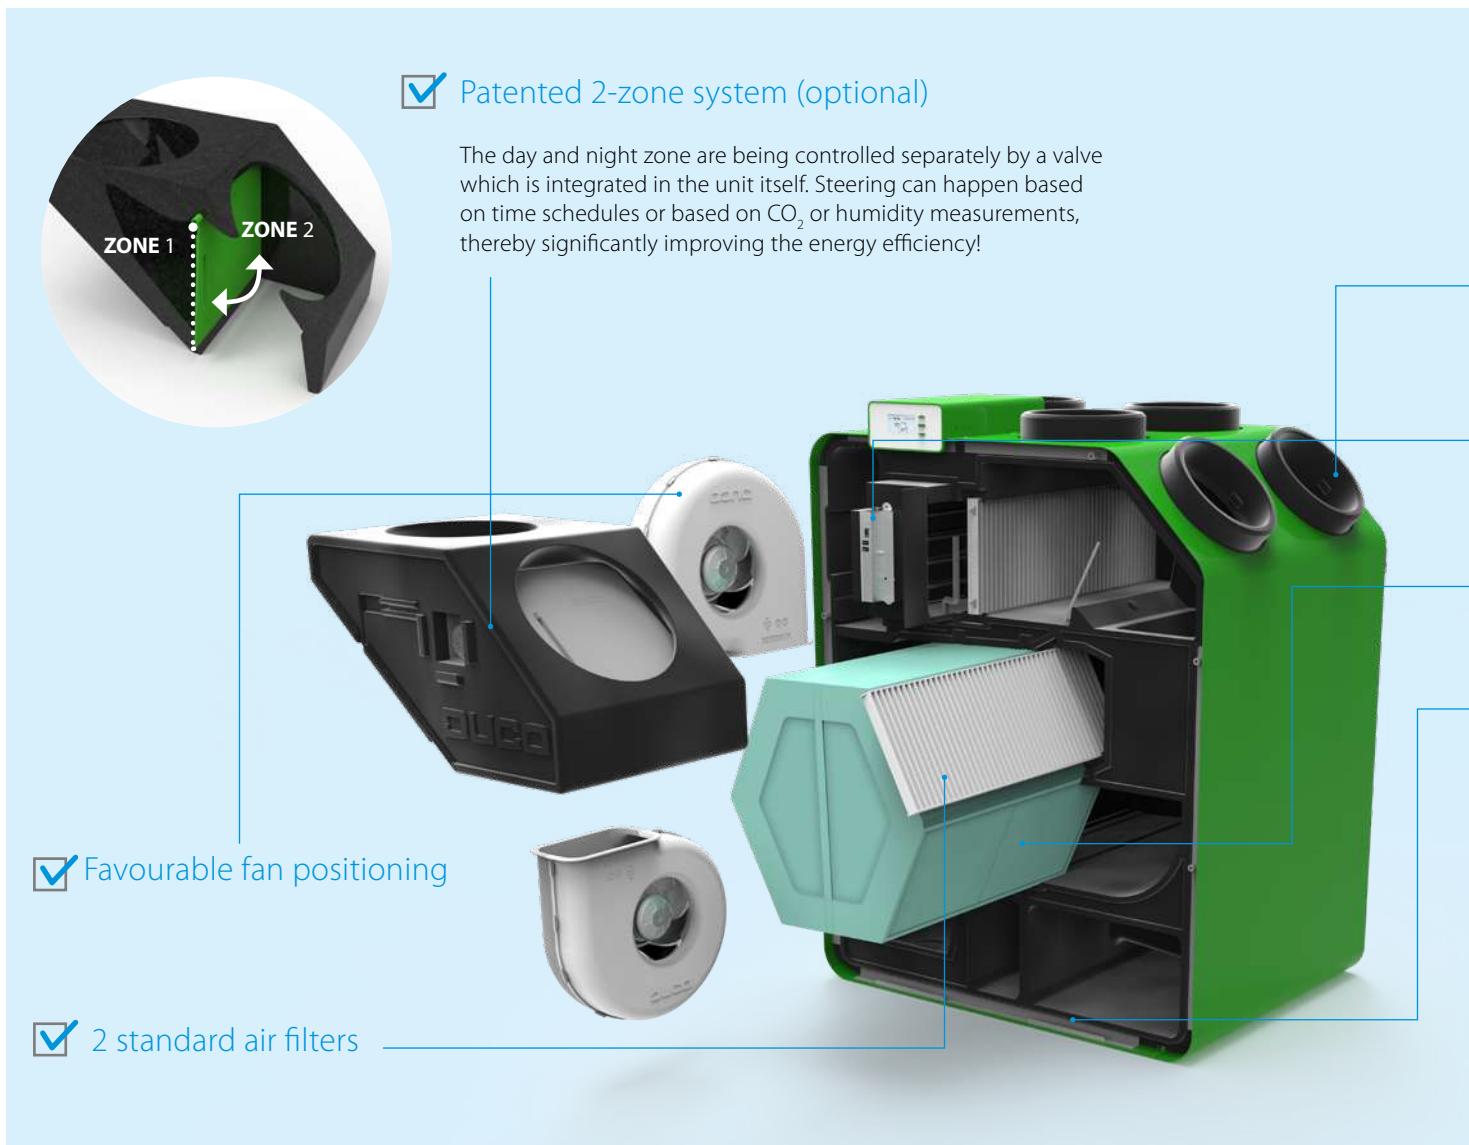

## ✓ Patented 2-zone system (optional)

The day and night zone are being controlled separately by a valve which is integrated in the unit itself. Steering can happen based on time schedules or based on CO<sub>2</sub> or humidity measurements, thereby significantly improving the energy efficiency!

## ✓ Favourable fan positioning

## ✓ 2 standard air filters

## ✓ Distinguishing features

- › Demand-controlled balanced system with heat recovery
- › Lowest sound power (air supply) in the market
- › Patented 2-zone control guarantees maximum energy efficiency (60.5 W)
- › Automatic calibration reduces installation time by at least 50%
- › Modular set-up of on-demand components
- › Minimum number of components
- › Smart communication with domotic systems through ModBus or ethernet



✓ Smart humidity measurement & pressure sensors


✓ Intelligent preheater

✓ Heat exchanger for maximum efficiency

✓ Low noise guaranteed

✓ Automatic calibration

The automatic calibration, which is based on the principle of constant pressure, allows for a very fast and accurate calibration. This easily reduces set-up time to 50%! DUCO saves you time and money.

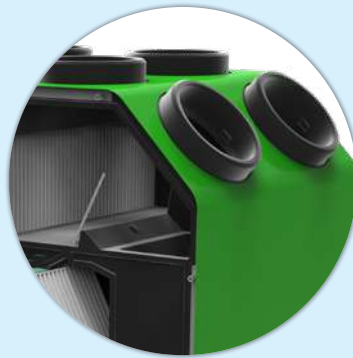

# DucoBox

## Energy Premium 325 - 400

The DucoBox Energy Premium is a mechanical ventilation unit with heat recovery. It mechanically supplies fresh air to the house and mechanically extracts contaminated air from it with the help of integrated fans. During this process, the heat is recovered from the extracted air and transferred to the supplied air.


The **smart demand control** of the DucoBox Energy Premium results in quiet, intelligent and energy efficient operation.

**Control components** can be paired with the DucoBox Energy Premium (= master unit).



The DucoBox Energy Premium features frost protection system (with or without heater), bypass function and constant flow.

The **automatic calibration** ensures the device can be installed quickly.

The DucoBox Energy Premium is available as both a 1-zone and a 2-zone variant, with the latter providing even quieter and more energy-efficient operation.

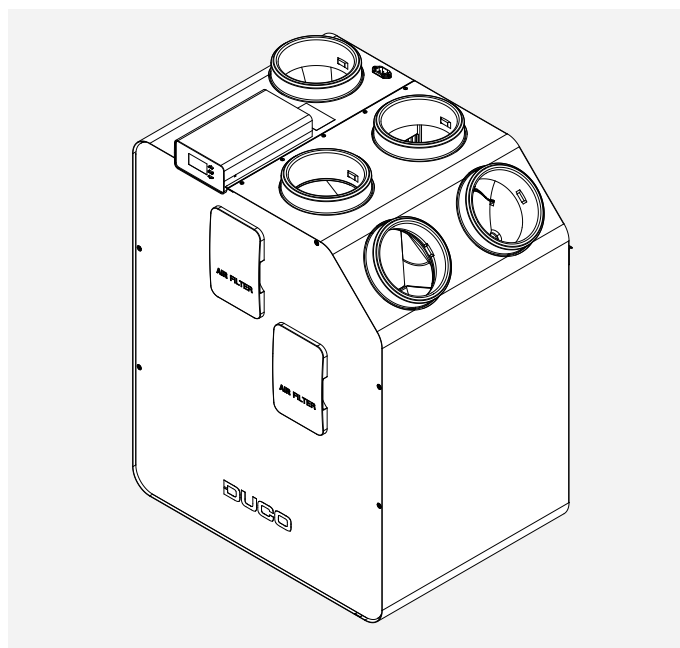

### Versions

Type	Supply and exhaust capacity at 150 Pa in m <sup>3</sup> /h	2-zone system	Frost protection	Reference number	
				 LEFT	 RIGHT
DucoBox Energy Premium 325-1ZS	325	No	Imbalance	00004358	00004359
DucoBox Energy Premium 325-1ZH			Imbalance + heater	00004360	00004361
DucoBox Energy Premium 325-2ZS		Yes	Imbalance	00004362	00004363
DucoBox Energy Premium 325-2ZH			Imbalance + heater	00004364	00004365
DucoBox Energy Premium 400-1ZS	400	No	Imbalance	00004366	00004367
DucoBox Energy Premium 400-1ZH			Imbalance + heater	00004368	00004369
DucoBox Energy Premium 400-2ZS		Yes	Imbalance	00004370	00004371
DucoBox Energy Premium 400-2ZH			Imbalance + heater	00004372	00004373

For UK models, see page 18

### Optional accessories premium 400

Product	Reference number
Mounting chair standing (Energy Premium)	00004421
Mounting chair hanging (Energy Premium)	00004422
Siphon flat (Energy & Eco)	00004376
Communication Print	00004251
Humidity Sensor (Energy Premium)	00004374

# DucoBox

## Energy Premium 325 - 400

More details and final information can be found by scanning or clicking the QR codes.




DucoBox Energy Premium


<b>Physical properties</b>		<b>325</b>	<b>400</b>
Width x Height x Depth (mm)	740 x 957 x 585 mm		
Casing	Coated sheet steel		
Colours	White + green		
Connections	Interior diameter: Ø 160 mm - Exterior diameter: Ø 190 mm		
Condensate drain	Ø 32 mm (1 ¼")		
Heat exchanger	PET / Polystyrene		
Interior material	EPP / PP / ABS		
Weight	47 kg		
Power plug cable length	2 m (connected at the top side of the unit)		
Mounting	Wall mounting (standard) Floor mounting as an option using support frame		
<b>Miscellaneous properties</b>		<b>325</b>	<b>400</b>
Energy class	Control factor 0.65: A+ Other: A		
Filters	Filter supply air (175 x 500 x 25 mm) Standard: ISO 16890 Coarse 65 % (≈ G4) Optional: ISO 16890 ePM1 70% (≈ F7) Filter exhaust air (175 x 500 x 25 mm) Standard: ISO 16890 Coarse 65% (≈ G4)		
Summer bypass	Full (100% modulating)		
Frost protection	Imbalance - Optional via proportional Heater		
Fans	EC fan with curved blades		
Automatic configuration	Yes (constant pressure)		
Constant flow control	Yes		
Controls	Integrated display Use via control switches and room sensors Optionally via smartphone / tablet (if Communication Print in device)		
Sensors	Integrated: pressure, temperature, humidity (via optional box sensor), onboard switch contact External: CO <sub>2</sub> (via optional room sensor), humidity (via optional room sensor), external switch contact (voltage-free input) (optional)		
Communication	Standard: DUCO RF, DUCO Wired, Switch contact Can be expanded with Communication Print: ModBus, PWM-IN, PWM-OUT, Switch contact (3x), Ethernet, Micro SD-card slot		
<b>Electrical characteristics</b>		<b>325</b>	<b>400</b>
Maximum electrical capacity at 150 Pa	120 W (2 x 60 W)	183 W (2 x 91.5 W)	
Maximum electrical capacity heater	1,000 W		
Power supply	230 V, 50 Hz - via 3-core cable with earth plug		
Plugs	0-10 V in/outputs		
Motor type	DC		
IP class	IP40		
Efficiency	At 228 m <sup>3</sup> /h: 87 % At 275 m <sup>3</sup> /h: 86 % At 332 m <sup>3</sup> /h: 85 %	At 301 m <sup>3</sup> /h: 85 % At 351 m <sup>3</sup> /h: 85 % At 401 m <sup>3</sup> /h: 84 %	

**Left model**



Front view

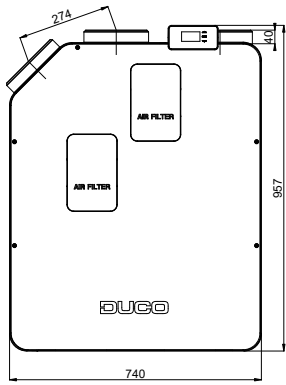


Rear view




Side view

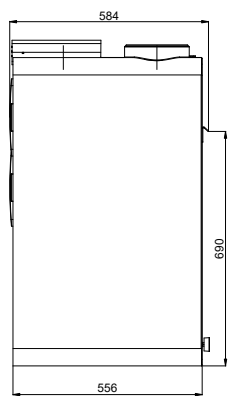

Top view




Bottom view




**Right model**



Front view

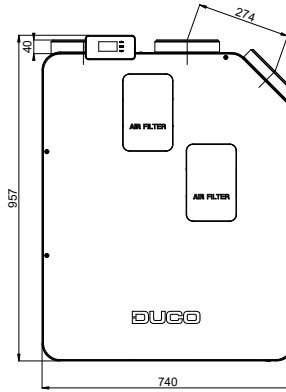


Rear view




Side view

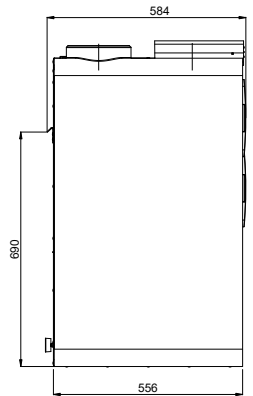

Top view




Bottom view








# Total ventilation package

Are you looking for a total ventilation package? Then you are best going to just one address. With DucoFlex, Daikin provides a complete air duct system for CHR.V. When you use DucoFlex, you will also benefit from the 'Zero Noise' guarantee package. This consists of the highest airtightness class D, the lowest air resistance and maximum acoustic comfort with the quietest ventilation system in Europe! The result is an energy-efficient and quiet ventilation system.

Did you know that this complete air duct system is very easy to install? This is thanks to the handy 'Click & Go' principle and minimum number of fittings. Daikin as a one-stop-shop with 100 % service provision.

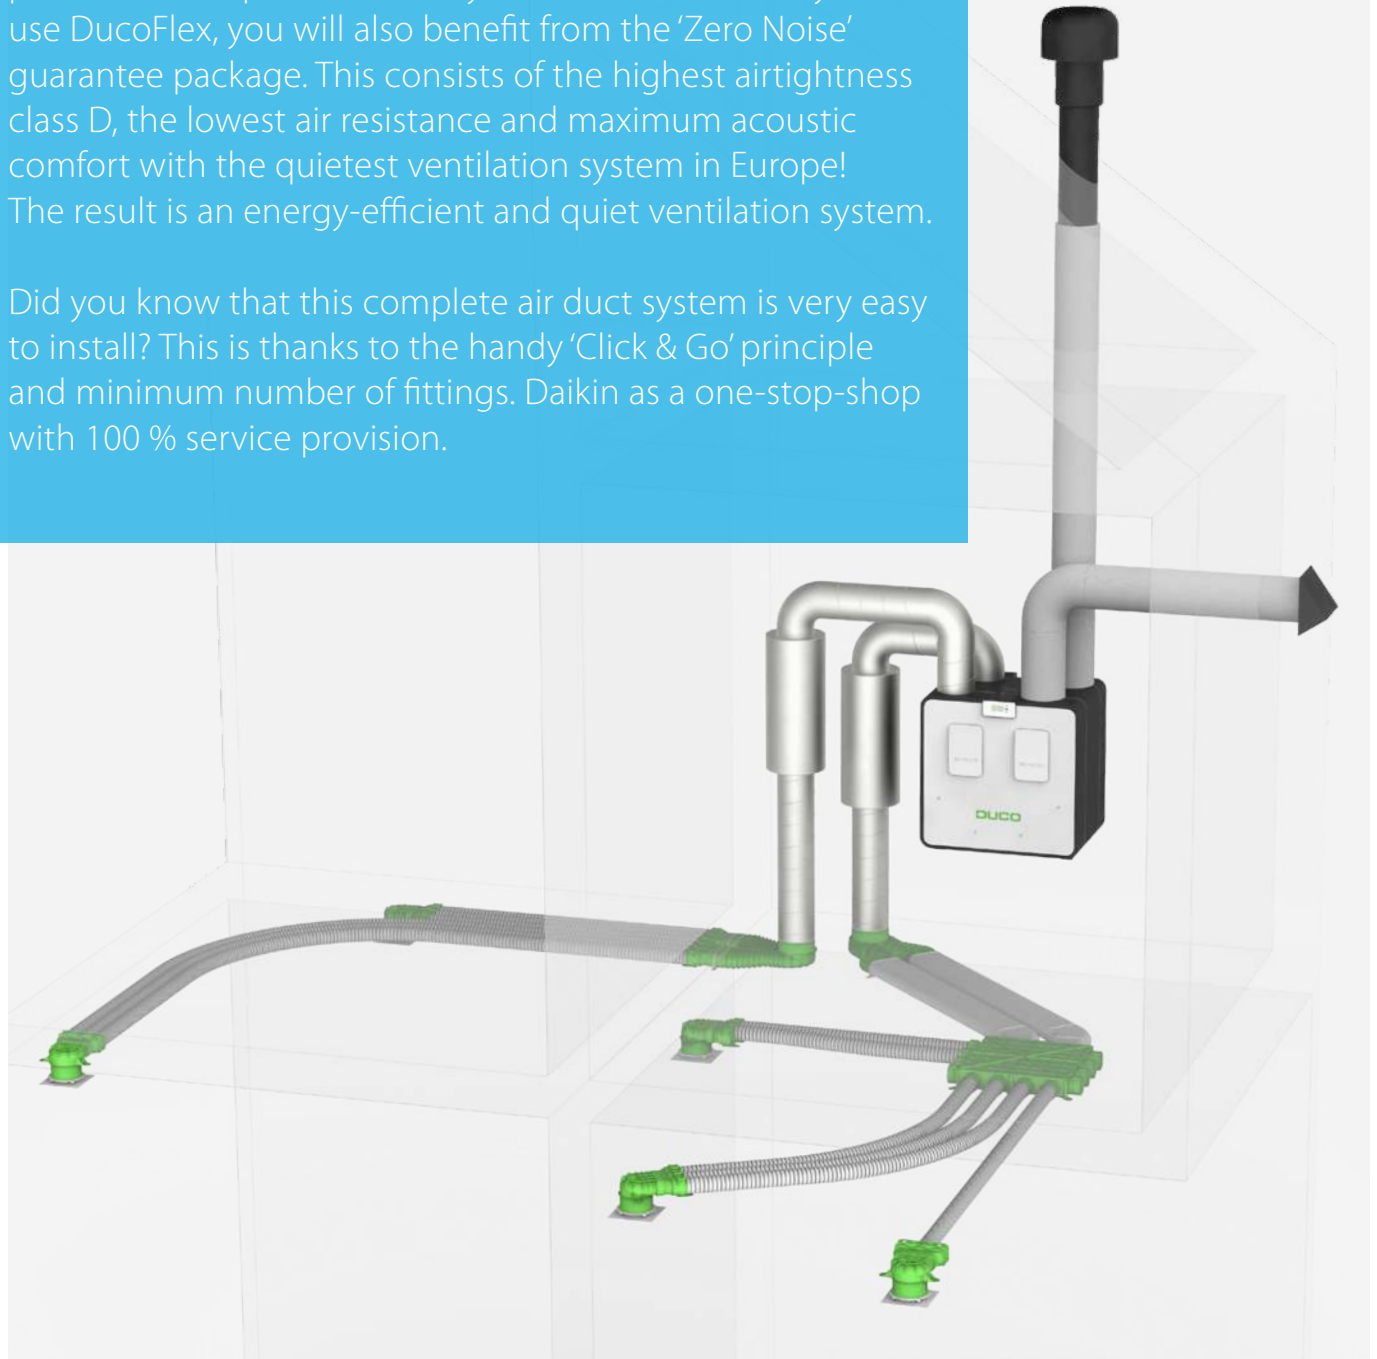

- ✓ **DucoFlex**  
Complete air ducting system for CHR.V
- ✓ **'Click & Go' system**  
Flexible ducting with convenient click system
- ✓ **'Zero noise' guarantee**  
Meets the most stringent requirements
- ✓ **100% service**  
Complete ventilation package with support

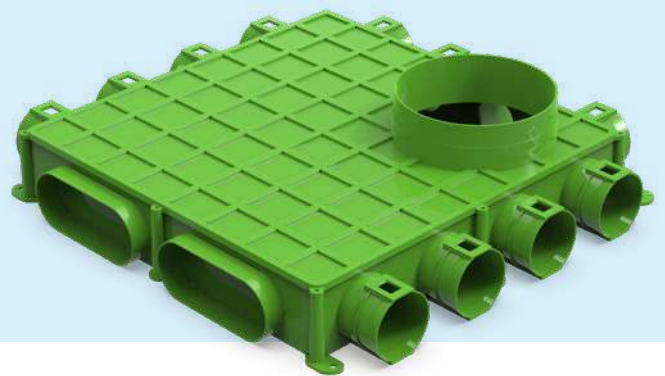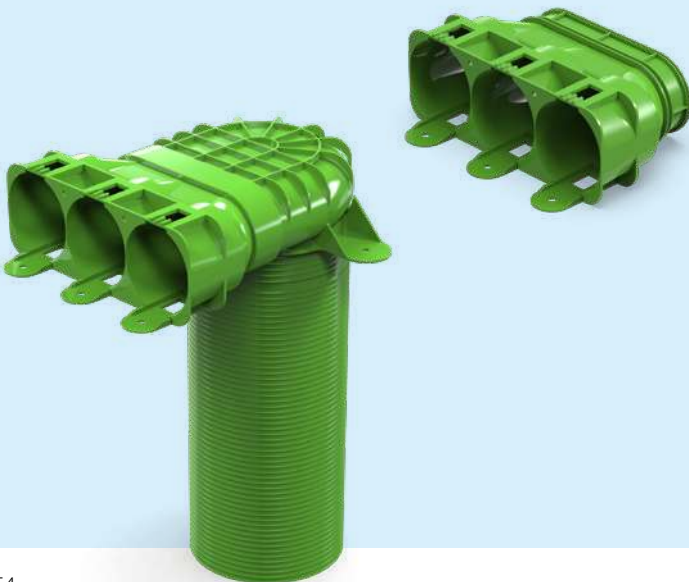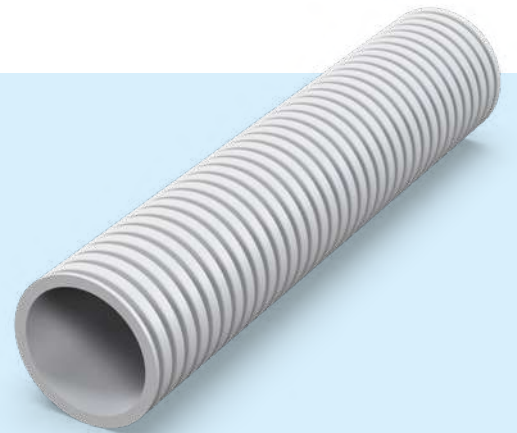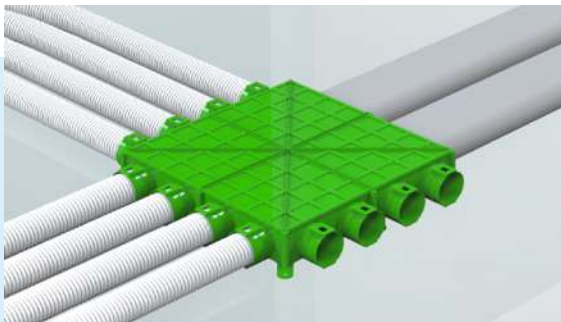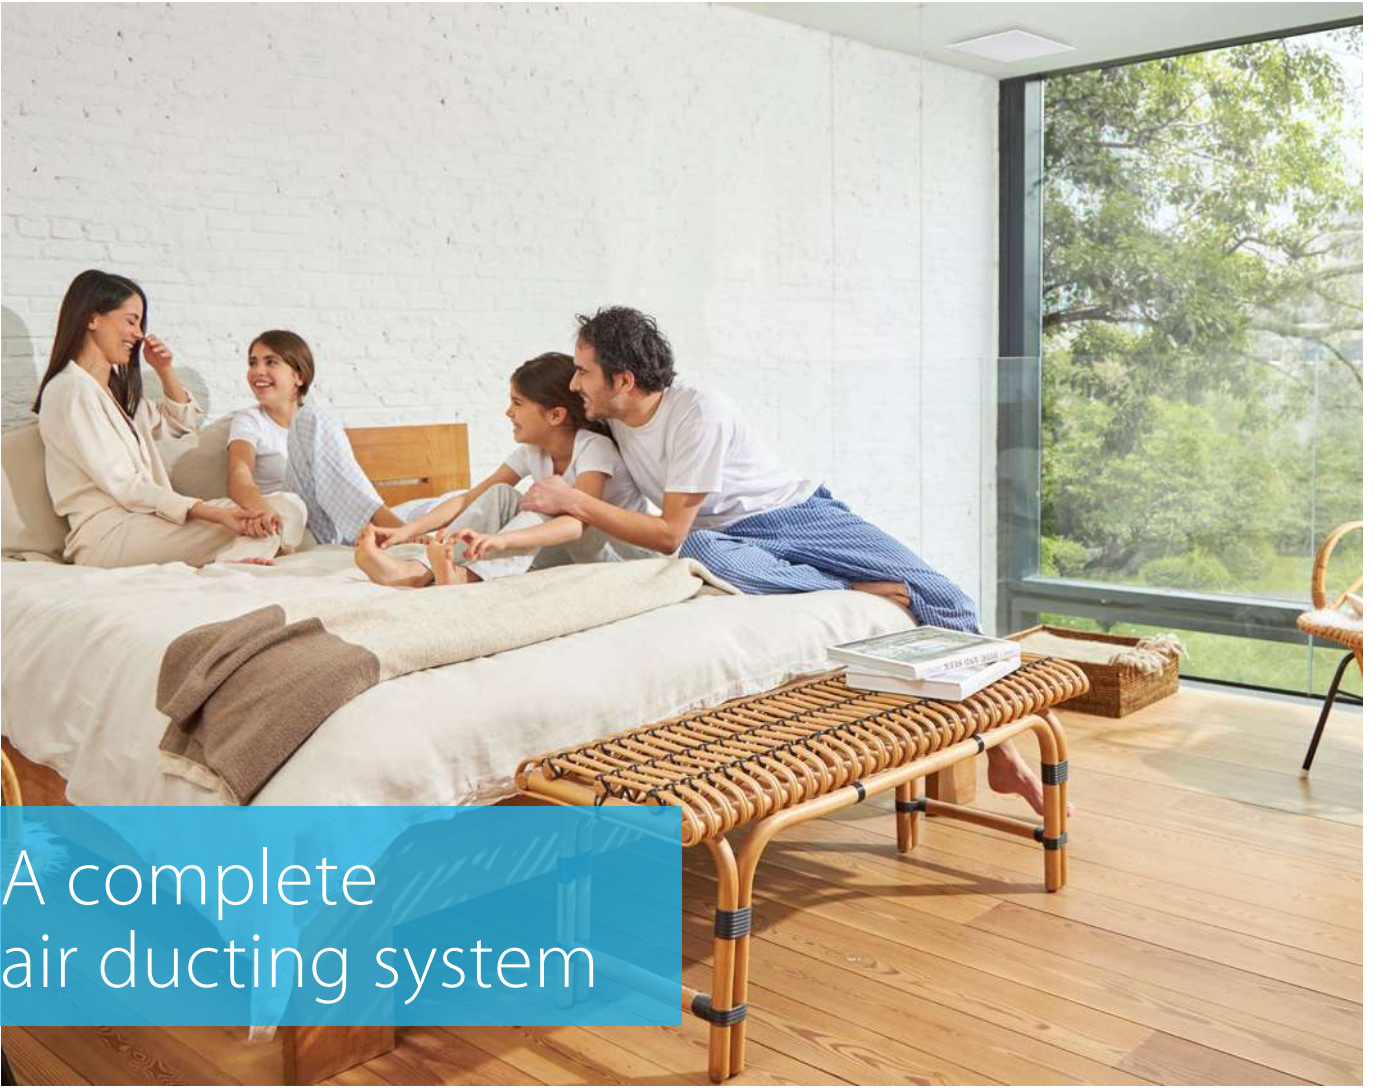



# Offering ducoflex accessories to provide you a total solution for your ventilation needs

With the arrival of the DucoFlex air duct system, thanks to DUCO, Daikin can provide a total residential ventilation solution. From vents, to ducts and including a complete range of ventilation boxes. In short, together with DUCO, we have all we need in-house for a high-quality residential ventilation system.

## Supply and exhaust vents

A wide range of supply and exhaust vents with a fitting diameter of  $\varnothing 125$  mm. Duco vents distinguish themselves through simple calibration, fast installation, aesthetics, acoustics and easy maintenance.



## Wall and roof feed-through

A complete range of roof and wall feed-throughs, available in different materials and colours. The connection diameters of  $\varnothing 160$  mm and  $\varnothing 180$  mm are in line with that of most conventional riser ducts and DucoFlex insulated ventilation ducts.



## Silencers

**Flexible or rigid attenuators** that have pre-fitted connectors. Thanks to their sound-reducing properties, the DucoFlex attenuators are an essential part of the "Zero Noise" guarantee package from Duco.



## Insulated ducting

The range of insulated EPP and EPS ducts with a diameter of  $\varnothing 160$  mm or  $\varnothing 180$  mm are simple to connect to Duco's air duct system. With a limited number of parts, it's easy to create a thermally **insulated connection** between the ventilation unit and the roof/wall feed-through.



## DucoBox Energy Series



### DucoBox Energy Premium

Article Number	Description
00004358	DucoBox Energy Premium 325 - 1ZS Left
00004360	DucoBox Energy Premium 325 - 1ZH Left
00004366	DucoBox Energy Premium 400 - 1ZS Left
00004368	DucoBox Energy Premium 400 - 1ZH Left
00004362	DucoBox Energy Premium 325 - 2ZS Left
00004364	DucoBox Energy Premium 325 - 2ZH Left
00004370	DucoBox Energy Premium 400 - 2ZS Left
00004372	DucoBox Energy Premium 400 - 2ZH Left
00004359	DucoBox Energy Premium 325 - 1ZS Right
00004361	DucoBox Energy Premium 325 - 1ZH Right
00004367	DucoBox Energy Premium 400 - 1ZS Right
00004369	DucoBox Energy Premium 400 - 1ZH Right
00004363	DucoBox Energy Premium 325 - 2ZS Right
00004365	DucoBox Energy Premium 325 - 2ZH Right
00004371	DucoBox Energy Premium 400 - 2ZS Right
00004373	DucoBox Energy Premium 400 - 2ZH Right



### DucoBox Energy Comfort Plus

Article Number	Description
<b>NEW</b> 00004706	DucoBox Energy Comfort Plus D550
<b>NEW</b> 00004705	DucoBox Energy Comfort Plus D450
<b>NEW</b> 00004704	DucoBox Energy Comfort Plus D350



### DucoBox Energy Comfort

Article Number	Description
<b>NEW</b> 00004707	DucoBox Energy Comfort D400
00004485	DucoBox Energy Comfort 325 (Name will change during FY24 to 00004649 and Comfort D325)
<b>NEW</b> 00004657	DucoBox Energy Comfort D325 FR (NF Unit: France only)

## Controllers, sensors, ...

Article Number	Description
00004174	Switch sensor (Energy Premium / Comfort / Comfort Plus)
00004374	Humidity Sensor (Energy Premium)
00004723	Humidity Sensor (Energy Comfort & Energy Comfort Plus)
00004603	CO <sub>2</sub> Sensor RF / Wired (User control + Air quality measurement - Black)
00004604	CO <sub>2</sub> Sensor RF / Wired (User control + Air quality measurement - White)
00004605	Humidity Sensor RF / Wired (User control + Air quality measurement - Black)
00004606	Humidity Sensor RF / Wired (User control + air quality measurement - White)
00004175	User controller RF / Battery (Black)
00004600	User controller RF / Battery (White)
00004601	User controller RF / Wired (Black)
00004602	User controller RF / Wired (White)
00004636	CO <sub>2</sub> Room sensor without control RF/Wired (Air quality measurement only - Black)
00004637	CO <sub>2</sub> Room sensor without control RF/Wired (Air quality measurement only - White)



## DucoVent Basic, Comfort, Design, ...

Article Number	Description
00004178	DucoVent Basic (supply and exhaust)
<b>NEW</b> 00004769	DucoVent Comfort
00004179	DucoVent Design square standard AK (exhaust) - RAL 9010
00004226	DucoVent Design square XL AK (supply and exhaust) - RAL 9010
00004210	DucoVent Design round AK (supply and exhaust) - RAL 9010
00004211	DucoVent Design rounded square standard AK (exhaust) - RAL 9010
00004227	DucoVent Design rounded square XL AK (supply and exhaust) - RAL 9010
10300800	DoorVent RAL 9001
10300700	DoorVent RAL 9010



## Options & accessories

### Filters, siphons, mounting chair, ...

Article Number	Description
00004376	Siphon flat (Energy Premium & Comfort)
00004422	Mounting chair hanging (Energy Premium)
00004546	Mounting chair standing (Energy Comfort D325)
<b>NEW</b> 00004740	Standing chair (Energy Premium / Comfort D400/Plus)
00004418	Coaxial cable set 8m (Energy Premium / Comfort / Comfort Plus)



### Power adapter/power supply

Article Number	Description
<b>NEW</b> 00004762	Duco Wired power adapter 230VAC-24VDC/20W
<b>NEW</b> 00004763	Power supply 230VAC-24VDC/20W + housing



### Filters

Article Number	Description
00004417	Filter set 2 x Coarse 65 % (Energy Premium)
00004416	Filter set Coarse 65 % / ePM1 70 % (Energy Premium)
<b>NEW</b> 00004661	Filterset Coarse 65% / ePM1 55% (Energy Comfort D325)
00004547	Filter set 2 x Coarse 65 % (Energy Comfort D325)
<b>NEW</b> 00004741	Filterset 2 x Coarse 65 % (Energy Comfort D400 & Plus D350/D450/D550)
<b>NEW</b> 00004742	Filterset Coarse 65% / ePM1 55% (Energy Comfort D400 & Plus D350/D450/D550)



Pre-heater & Multizone Valve

Article Number	Description
<b>NEW</b> 00004807	Pre-Heater DucoBox Energy Comfort (Plus) - 1,425W (available from 1/4/2023)
<b>NEW</b> 00004825	Pre-Heater DucoBox Energy Comfort (Plus) UK - 1,425W (available from 1/4/2023)
<b>NEW</b> 00004761	Multizone Valve DucoBox Energy Comfort (Plus) (Sensorless) Ø125
<b>NEW</b> 00004760	Multizone Valve DucoBox Energy Comfort (Plus) (Sensorless) Ø160




Communication prints





Article Number	Description
00004251	Communication print (Energy Premium & Comfort)
<b>NEW</b> 00004810	Connectivity Board; Modbus; WIFI

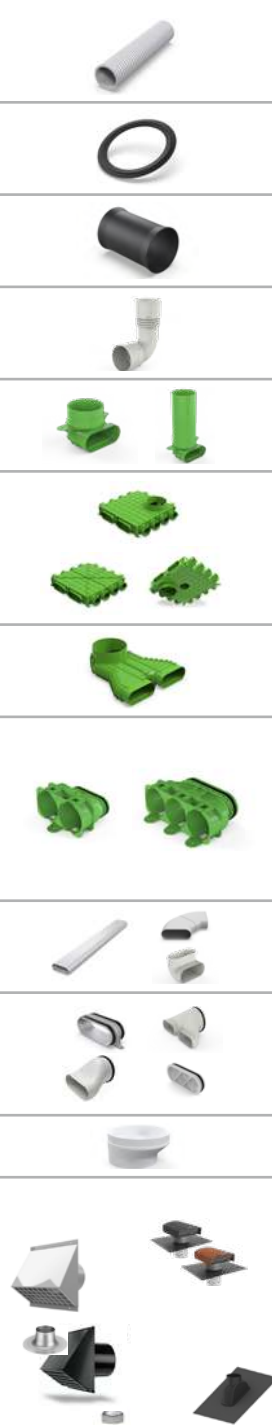


DucoFlex Standard Components

Article Number	Description
00004552	DucoFlex round semi-rigid duct D63 (50 m)
00004674	DucoFlex round semi-rigid duct D75 (50 m)
00004692	DucoFlex round semi-rigid duct D90 (50 m)
00004553	DucoFlex rubber O-ring D63 (10 pieces)
00004675	DucoFlex rubber O-ring D75 (10 pieces)
00004676	DucoFlex rubber O-ring D90 (10 pieces)
00004554	DucoFlex Coupling D63
00004677	DucoFlex Coupling D75
00004678	DucoFlex Coupling D90
00004679	DucoFlex Elbow 90° D75
00004680	DucoFlex Elbow 90° D90
00004681	DucoFlex 90° Bend splitter vent connector long - oval/D125
00004682	DucoFlex 90° Bend splitter vent connector short - oval/D125
00004563	DucoFlex Manifold box (floor) 12x63 D180
00004564	DucoFlex Manifold box (ceiling) 12x63 D180
00004565	DucoFlex Manifold box (floor) 12x63 + 2 x oval air ducts
00004701	DucoFlex Manifold box (floor and ceiling) 3 x oval air ducts (F) + 1 x oval air duct (M)
00004687	DucoFlex Manifold box (floor and ceiling) 4 x oval air ducts (F) D160
00004566	DucoFlex connector riser round D160 - 2 oval
00004684	DucoFlex Adapter 3x63 oval
00004685	DucoFlex Adapter 2x75 oval
00004841	DucoFlex Adapter 3x75 oval
00004686	DucoFlex Adapter 2x90 oval
00004555	DucoFlex clamp coupling D63
00004829	DucoFlex clamp coupling D75/D90
00004567	DucoFlex oval air duct B163xH68xL1,150
00004609	DucoFlex horizontal elbow 90°/45° rigid oval duct
00004699	DucoFlex vertical elbow 90° rigid oval duct
00004568	DucoFlex oval duct coupling
00004638	DucoFlex horizontal connector oval - D125
00004700	DucoFlex horizontal connector D160 2 x oval
00004713	DucoFlex Oval Cap
00004543	Reducer 160 / 125
00004542	Reducer 125 / 80
00004627	DucoFlex Wall feed-through D160 white
00004584	DucoFlex Wall feed-through D160 black
00004628	DucoFlex Wall feed-through D180 white
00004585	DucoFlex Wall feed-through D180 black
00004582	DucoFlex Roof feed-through Compact D160 - Slate
00004580	DucoFlex Roof feed-through Compact D160 - Terracotta
00004578	DucoFlex universal roof feed-through D160/180 (1.0 m)
00004581	DucoFlex Roof feed-through plate flat roof D204
00004579	DucoFlex universal roof feed-through tile D205



Article Number	Description	
00004586	DucoFlex Silencer flexible D125 L1,000	
00004630	DucoFlex Silencer flexible D125 (M/F) L1,000	
00004631	DucoFlex Silencer flexible D160 (M/M) L1,000	
00004632	DucoFlex Silencer flexible D180 (M/M) L1,000	
00004587	DucoFlex Silencer semi rigid D160 (M/M) L1,000 mm	
00004588	DucoFlex Silencer semi rigid D180 (M/M) L1,000 mm	
00004724	Muff with rubber D160/D160 (M/M) [connection piece with joint]	
00004725	Muff with rubber D180/D160 (M/M) [connection piece with joint]	
00004726	Muff with rubber D180/D180 (M/M) [connection piece with joint]	
00004727	Muff with rubber D200/D180 (M/M) [connection piece with joint]	
00004569	DucoFlex insulated circular duct with integrated coupler D160 L1,000	
00004570	DucoFlex insulated circular duct with integrated coupler D180 L1,000	
00004571	DucoFlex insulated 90° bend with integrated coupler D160	
00004572	DucoFlex insulated 90° bend with integrated coupler D180	
00004573	DucoFlex insulated 45° bend with integrated coupler D160	
00004574	DucoFlex insulated 45° bend with integrated coupler D180	
00004575	DucoFlex insulated coupler D160	
00004576	DucoFlex insulated coupler D180	

## Tools

Article Number	Description	
00004599	DucoFlex Tube cutter D63	
00004688	DucoFlex Tube cutter D75	
00004689	DucoFlex Tube cutter D90	



## Your next heating system will be a heat pump

**Heat pumps are ready to take on the challenge of home decarbonization and Daikin is ready to be the most suitable partner in this challenge.**

Home decarbonisation is the sustainability challenge of today. It's the newest addition to the global paradigm shift towards a more sustainable economy. In the automotive industry, agriculture and even in air travel, efforts have already been made to reduce or eliminate carbon emissions from energy sources. Next on the list: homes.

The European Union pledged to "play a central role" in achieving net-zero greenhouse gas emissions by 2050.

**In order to achieve their goals, they are betting on heat pumps**

And at Daikin, we are convinced that they're right. Heat pumps are more than ready to take on the challenge of home decarbonisation. They are not a technology of the future, but an established solution, ready to provide comfort.

### **Did you know?**

In several European countries, heat pumps are already installed in more than 50% of new buildings. In renovations, heat pumps are increasingly being considered as a replacement for boilers, especially for high-temperature models with a similar leaving water temperature of 70 °C.

# Heating

Daikin's vision on heating	60	Boilers	235
Introduction	62	Condensing boilers	236
4 steps to decarbonising residential heat	62	Gas condensing boilers	238
Stand By Me	64	Daikin Altherma 3 C Gas (D2C/TND*)	238
<b>NEW</b> Stand By Me, Certified Partner	68	Daikin Altherma 3 C Gas (D2CNL)	244
		Daikin Altherma C Gas W	246
		Flue-gas evacuation system	248
<b>Individual solutions</b>	<b>72</b>	<b>Collective solutions</b>	<b>255</b>
Heat pumps	75	Decentralised solutions	256
Daikin Altherma 3 R (ERGA-E series, 4-6-8 kW)	76	Centralised solutions	257
Daikin Altherma 3 R F	78	Water loop	258
Daikin Altherma 3 R ECH <sub>2</sub> O	84	Daikin Altherma 3 WS	258
Daikin Altherma 3 R W	90		
Daikin Altherma 3 R (ERLA-D series, 11-14-16 kW)	96	<b>Peripherals</b>	<b>268</b>
Daikin Altherma 3 R F	102	Tanks	271
Daikin Altherma 3 R ECH <sub>2</sub> O	108	Thermal stores and tanks	272
Daikin Altherma 3 R W	114	<b>Controllers</b>	<b>277</b>
Daikin Altherma 3 M	120	Wired remote controller	279
Daikin Altherma 3 M (4-6-8 kW)	120	Individual room controllers	282
Daikin Altherma 3 M (9-11-14-16 kW)	126	Onecta App	284
Daikin Altherma 3 H MT/HT	136	<b>Heating &amp; cooling emitters</b>	<b>289</b>
Daikin Altherma 3 H MT/HT F	144	Daikin Altherma UFH	290
Daikin Altherma 3 H MT/HT ECH <sub>2</sub> O	152	Daikin Altherma HPC floor standing	296
Daikin Altherma 3 H MT/HT W	162	Daikin Altherma HPC wall mounted	298
<b>NEW</b> Daikin Altherma 3 R MT	170	Daikin Altherma HPC concealed	299
Daikin Altherma 3 R MT F	178	<b>Solar heating systems</b>	<b>305</b>
Daikin Altherma 3 R MT ECH <sub>2</sub> O	186	Solar panels for pressurised use and Drain-back system	312
Daikin Altherma 3 R MT W	196	Solar panel - pressurised system	314
Daikin Altherma R HT	202	Solar panels - drain-back system	316
Daikin Altherma M HW	206	Solar collector	319
Daikin Altherma		Pump station	319
Ground source heat pump	212		
Daikin Altherma 3 GEO	212		
Daikin Altherma Hybrid heat pump	220		
Daikin Altherma R Hybrid	223		
Daikin Altherma R Hybrid + multi	224		
Daikin Altherma H Hybrid	228		

# 4 Steps to decarbonising residential heat

1

## Strengthened new build rules

All European member states have already put measures in place to ensure that new build houses and apartments have a better carbon performance by making an improved building envelope and the use of renewable energy mandatory. As a result, Daikin estimates that heat pumps already have up to 50% market share in new (single family) houses.

A considerable additional benefit of hydronic heat pumps is the ability to use it to cool as well heat, which is increasingly becoming a consumer requirement. This is partly due to the climate change effect, but also because of the higher insulation level built houses.

2

## Increase replacement rate

Today's replacement rate is, on average, 1% of the total number of heating systems installed per year and meeting the minimum target would require that replacement ratio to double within the coming 10 years.

Substituting heating devices with more efficient ones will constitute a move towards reducing CO<sub>2</sub> emission. The challenge however is to motivate EU citizens to choose renewable heating more often, thereby convincing those in the replacement market that heat pumps are an efficient, cost-effective and established solution.

2020

2030

1

40%

3

2



One of the biggest challenges we face to ensure a healthy and sustainable environment and contribute to carbon neutrality is to maximize usage of renewable energy, specifically when heating our homes. The majority of residential housing is still heated with outdated systems, often using polluting fossil fuels such as coal and oil.

The challenge involved in tackling this is made all the more clear by The European Green Deal, which is a set of policy initiatives by the European Commission with the key aim of making Europe climate neutral in 2050 using green technology.

Heat pumps start to play a crucial role in decarbonizing Europe, and in certain areas there has already been an impressive uptake. For example, heat pumps are the default heating system in Sweden and enjoy 50% of the market share in new builds in some European countries.

However, in the whole of Europe, renewable heating via heat pumps represents only 10% of all heating systems installed annually. This contrasts sharply with the EU Commission's ambitious target by 2030: 40% penetration of renewables in heating and cooling. At Daikin, we see the solution will be to take 4 steps to decarbonizing residential heat, in order to achieve the EU Commission's targets by 2030.

### 3 End fossil fuel incentives

Policy makers could avoid incentives for fossil fuels. Currently, direct or indirect incentives benefit oil or gas-based boilers, due to different taxation of heat pumps compared with boilers for instance. While doing this, the gap between today's electricity and gas prices in many member states is too high to make a heat pump an economically attractive investment for EU citizens. In the short term, government incentives can help accelerate the transition to carbon-neutral heating and make heat pumps accessible to all Europeans, but in the longer term more balanced energy prices and a correct indication of the energy and carbon performance of a building need to support the end user motivations to invest in heat pump technology.

### 4 Renewable heating standard in replacement

At Daikin, we believe heat pump systems have to become the standard when replacing heating systems. It is a fact that heat pumps are increasingly capable of high efficiencies, even at lower outdoor temperatures. The hydronic heat pump technology has developed quickly in recent years, making it fit for any type of residential building in Europe whether it is for the new build market or the replacement market. By increasing the share of green electricity to 60% of total EU electricity production, heat pumps will continue to increase their contribution to a decarbonized residential heating world.

2050

4

100%

## The future

At Daikin we're excited and passionate about taking on the changing environment and playing a key role in bringing this innovative technology into people's homes while ensuring all stakeholders, such as installers and architects, are on board. We can do our bit as well by making installation as simple as possible through great design. Europe has the technology, the expertise and the investments to expand the heat pump market further. From single family to multi-family homes, from small to large commercial buildings and industrial plants, heat pumps today are ready to go mainstream. All the signs are indicating that we need to act now! Let's convince those in the replacement market that heat pumps are the future and increase awareness regarding energy, cost-efficiency and environment-related advantages.

# Stand By Me, a journey to customer satisfaction

It's time to relax. With your customer's new Daikin installation and Stand By Me service programme, you can rest assured they are benefiting from the best comfort, energy efficiency, usability and service available on the market. Stand By Me eliminates your clients' worries and provides them with a free, extended warranty, quick follow-up from Daikin service providers, and additional warranties for specific parts.

## Discover in detail the Daikin Metroline

Have a detailed look at each stop to see how our tools can facilitate your journey with Daikin.



NEW



### Heat Pump Calculator

Provides you with leads that come with more in-depth details

 Web portal  Consumer



### Heating Solutions Navigator

Provide the best fit solution for your customers homes

 Web portal  Professionals



### Daikin e-Care

Access to registration, commissioning, configuration and trouble shooting

 Mobile app  Professionals



### Stand By Me

Manage your installation database and offer comfort and service to your customer

 Web portal  Professionals



### Onecta app

End-user app to control the residential unit

 Mobile app  Consumer

NEW

## Discover the new features

We keep investing in the support towards our installers. With your Daikin account, you have access to Stand By Me and the Heating Solutions Navigator online. Use the same account to access the Daikin e-Care app. The tools offer now new features, check it out!



### Heating Solutions Navigator

Newest function:  
Multi-Family Home  
Daikin Home Controls



### Heat Pump Calculator

Summer Cooling  
Winter Heating



### Stand By Me

Newest functions:  
Trainings for professionals (SBM CP Program)  
Direct Service offering from professionals to end-users via SBM (Daikin à la Carte)



### Daikin e-Care

Newest function:  
Guided commissioning via online check list  
Support for trouble shooting  
Direct access to installation manuals


## Guided commissioning via online checklist

e-Commissioning is the latest tool released in the e-Care app, aiming to improve the quality and reliability of Daikin installations. It is a step-by-step checklist that assists service partners during the commissioning of the unit.

- › Product-specific and country-specific checklist, to ensure maximum flexibility of use and compliance with local requirement
- › Get instant feedback if there are problems with the checklist (screen will display an error message)
- › Generated PDF report available at all times via the e-Care app or via the SBM professional portal
- › Generated commissioning declaration that is automatically sent to the end user in case of successful commissioning
- › Possibility to save a draft of the checklist at any time
- › Offline use (from Dec '23)
- › Possibility to upload pictures of the installation site (from April '24)
- › Possibility to add end user and professional signatures (from Dec '23)
- › Available for Altherma units



e-Care installation details after Registration

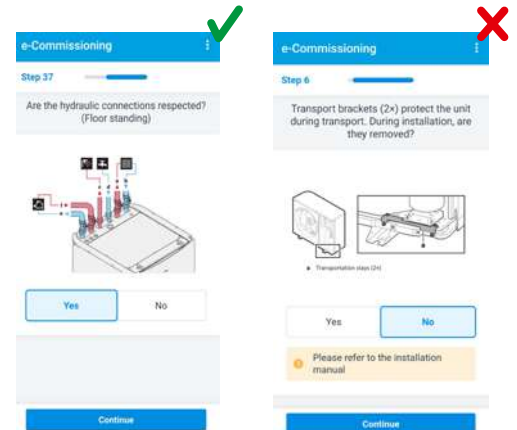

Example of the correct answer


Example of the incorrect answer

Scan the QR code to download Daikin e-Care now




## Get on board on our train to ultimate customer satisfaction


On our underground map, you can discover all the tools we offer to Daikin installers to help them from the first point of contact with a new client, to the maintenance and repair after installation.

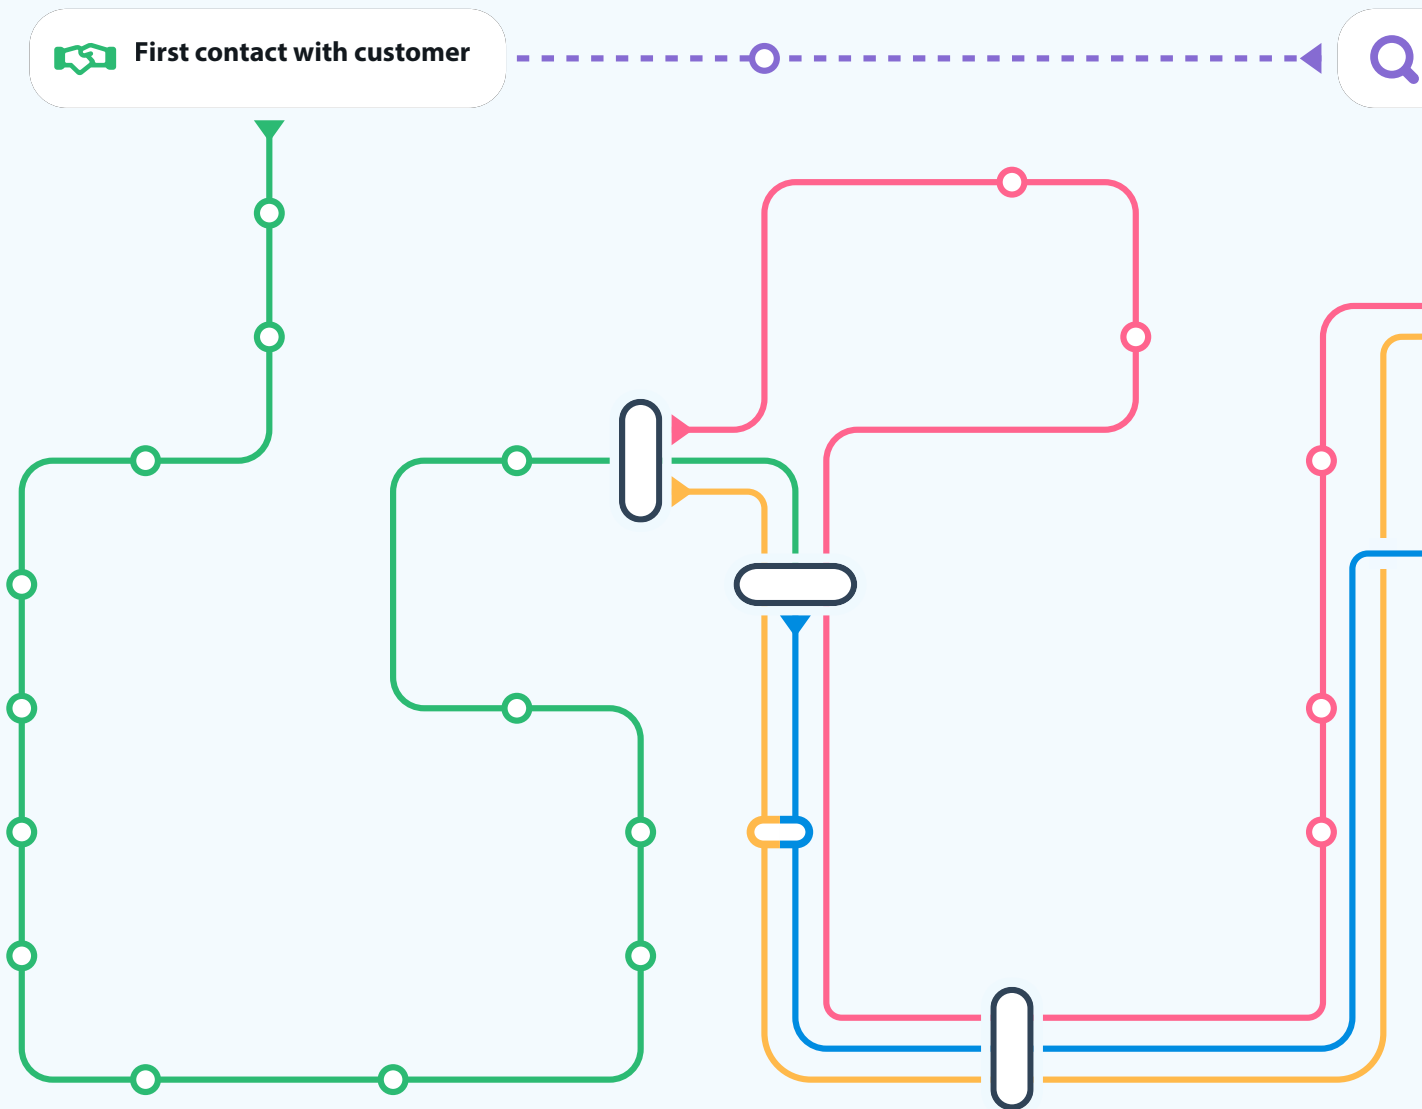

Scan the QR code or go to <http://metro.standbyme.daikin.eu> for the tool

Customers explore solutions

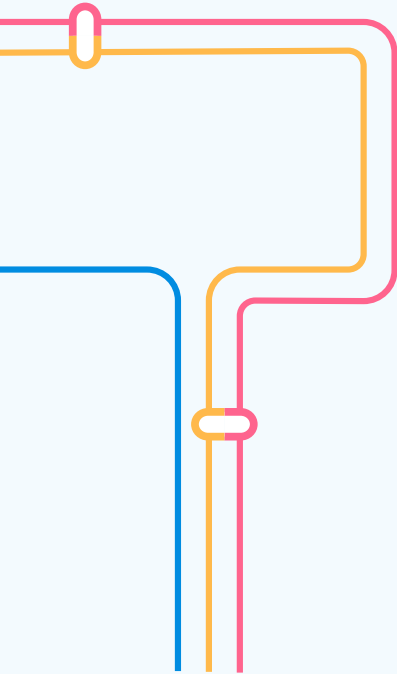

 Ultimate customer satisfaction

### Heating Solutions Navigator

- Do the radiator test
- Simplified heat load
- Room by Room Heat Load Calculation
- Radiator selection
- Heatpump Convector
- End user quotation
- Piping & Wiring
- Thermal solar calculation tool
- Underfloor heating
- Pipe sizing
- Ventilation
- Literature
- Economic Viability Study
- e-Configuration tool
- Installation registration

### Daikin e-Care

- e-Configuration tool
- Hydrobalancing tool
- Installation registration
- Commissioning tool
- Maintenance
- Maintenance guide
- e-Doctor
- Installation monitoring
- Spareparts ordering
- Repair

### Stand By Me

- e-Configuration tool
- Installation registration
- Installation monitoring
- Warranty extension
- Maintenance
- Repair

### Daikin ONECTA App

- Installation registration
- Warranty extension
- Maintenance
- Repair
- Remote control

### Heat Pump Calculator

- Heat Pump Calculator

# Stand By Me Certified Partner



## Purpose of the programme

The programme was created to provide you and your customers **peace of mind**, ensuring **highest installation quality** and **after sales care** throughout the product lifespan.

We want to support our installer networks and provide you with **extensive training** given by Daikin professionals. Thanks to that, you will be able to **grow your business** with the **endorsement of a globally recognized brand**.

## Benefits

- ✓ **Set yourself apart from the competition** with specialized knowledge to maximize installation speed, assure best quality and minimise the needs for call-backs after installation
- ✓ **Help you grow your business and expand your network** with an advanced product trainings, **strong technical foundation** and enhanced visibility with Stand By Me Certified Partner logo
- ✓ Customers **value highly qualified professionals** with **recognized certification**. You provide them with an additional label of trust along with comprehensive product lifespan care of Daikin Altherma units.
- ✓ **Access to the wearables, professional protective equipment and accessories exclusive** to the Stand By Me Certified Partner network.



# Certification levels


The authorization level depends on your programme participation. As a Certified Partner you are granted to conduct after-sales services for a specific product range.

There are 2 different programmes:

- › Programme 1 applies to Daikin Altherma units based on R-32 refrigerant
- › Programme 2 applies to Daikin Altherma units based on R-290 refrigerant

## Programme 1: Daikin Altherma - R-32 range


To perform maintenance/repair

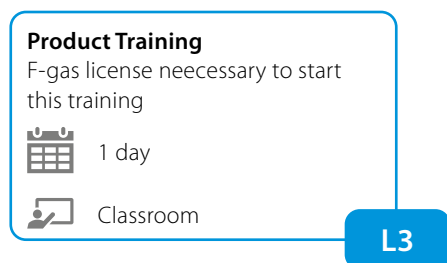

This training is necessary to perform maintenance and repair activities on R-32 products for contracts on Stand By Me platform that belong to the Daikin Altherma 3 series.

## Programme 2: Daikin Altherma - R-290 range

To perform commissioning/maintenance/repair

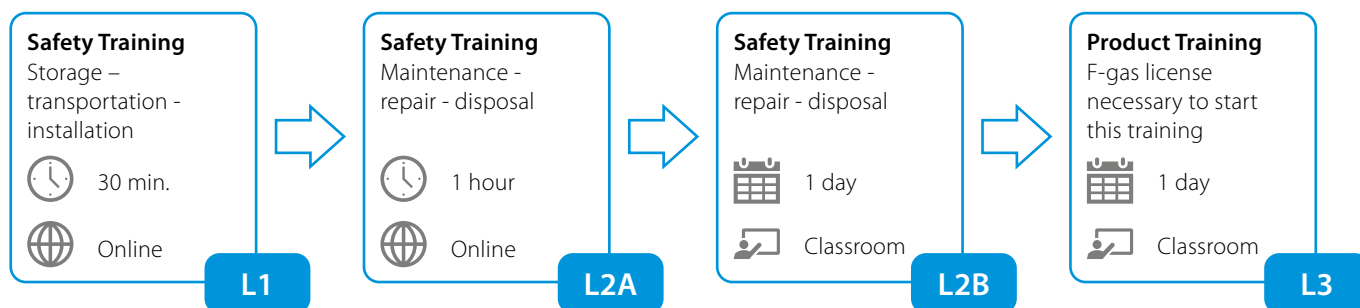


These trainings are necessary to perform commissioning, maintenance and repair activities on R-290 products that belong to the Daikin Altherma 4 series.

# Residential heating

Whether you're renovating or building a new house or apartment, a Daikin heat pump is an optimal choice.

Our heat pumps integrate with a range of peripheral products to provide a custom solution that creates a healthy, comfortable climate year-round while helping you further optimize the efficiency of your heating system.

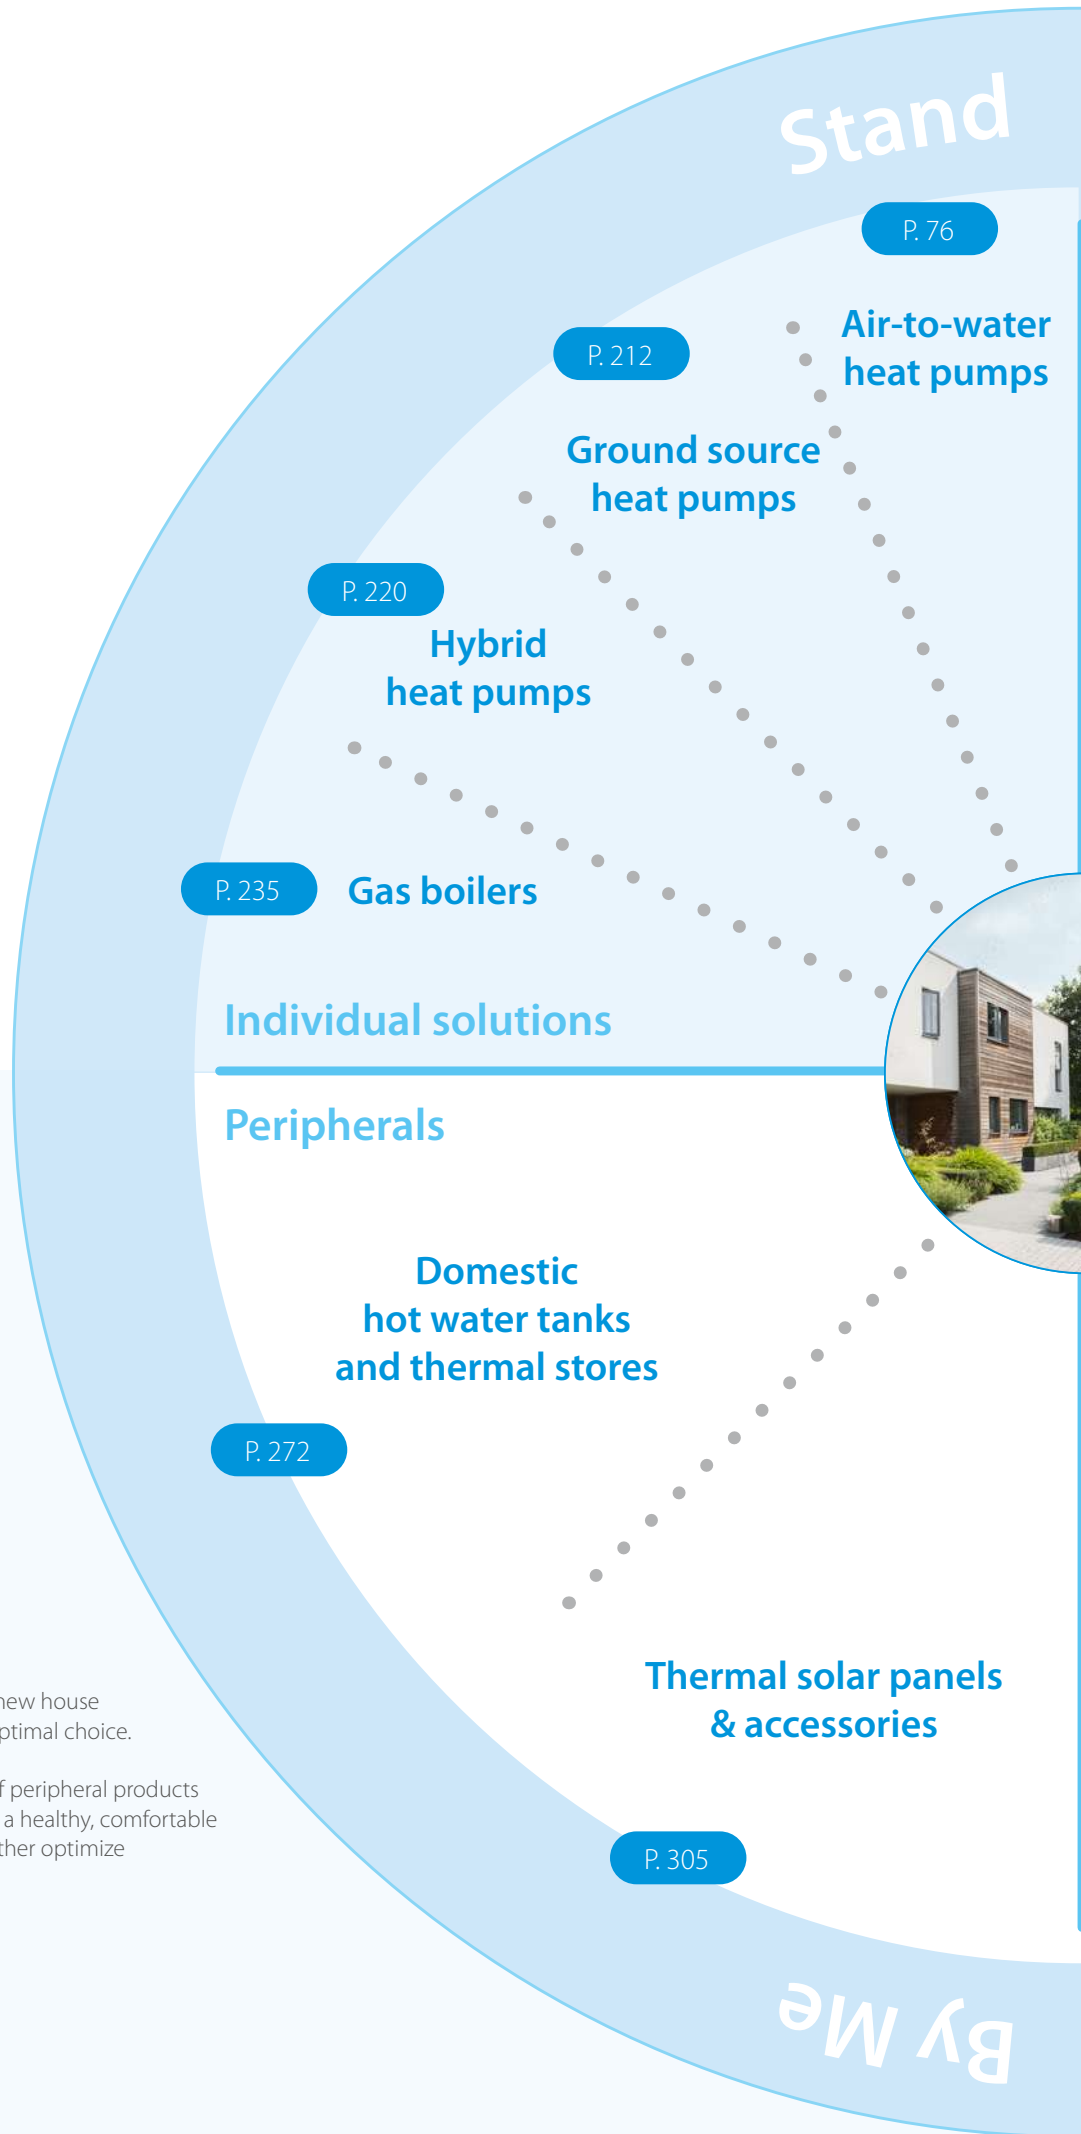



# By Me

P. 256

Decentralised

P. 257

Centralised

Water loop

P. 258

Collective solutions

Peripherals

Controls

P. 277

Heating and cooling emitters  
Air purification and ventilation

P. 289

# Stand





P. 76

DAIKIN ALTHERMA 3 R



P. 136

DAIKIN ALTHERMA 3 H MT & HT

DAIKIN ALTHERMA 3 R MT

**Air-to-water**  
**Mid to high temperature**

Heating  
Cooling  
DHW

**HEAT**

Heating  
Cooling  
DHW

Heating  
Cooling  
DHW



DAIKIN ALTHERMA 3 GEO

P. 212

**Ground source**  
**Gas hybrid**



DAIKIN ALTHERMA R HYBRID


P. 220

# Individual solutions

Daikin's DNA is all about heat pumps.

In residential heating, we offer a wide range of heat pumps from air-to-water to hybrid heat pumps, including ground source heat pumps.

Daikin heat pumps can answer all need by providing the necessary comfort in space heating, space cooling or domestic hot water.

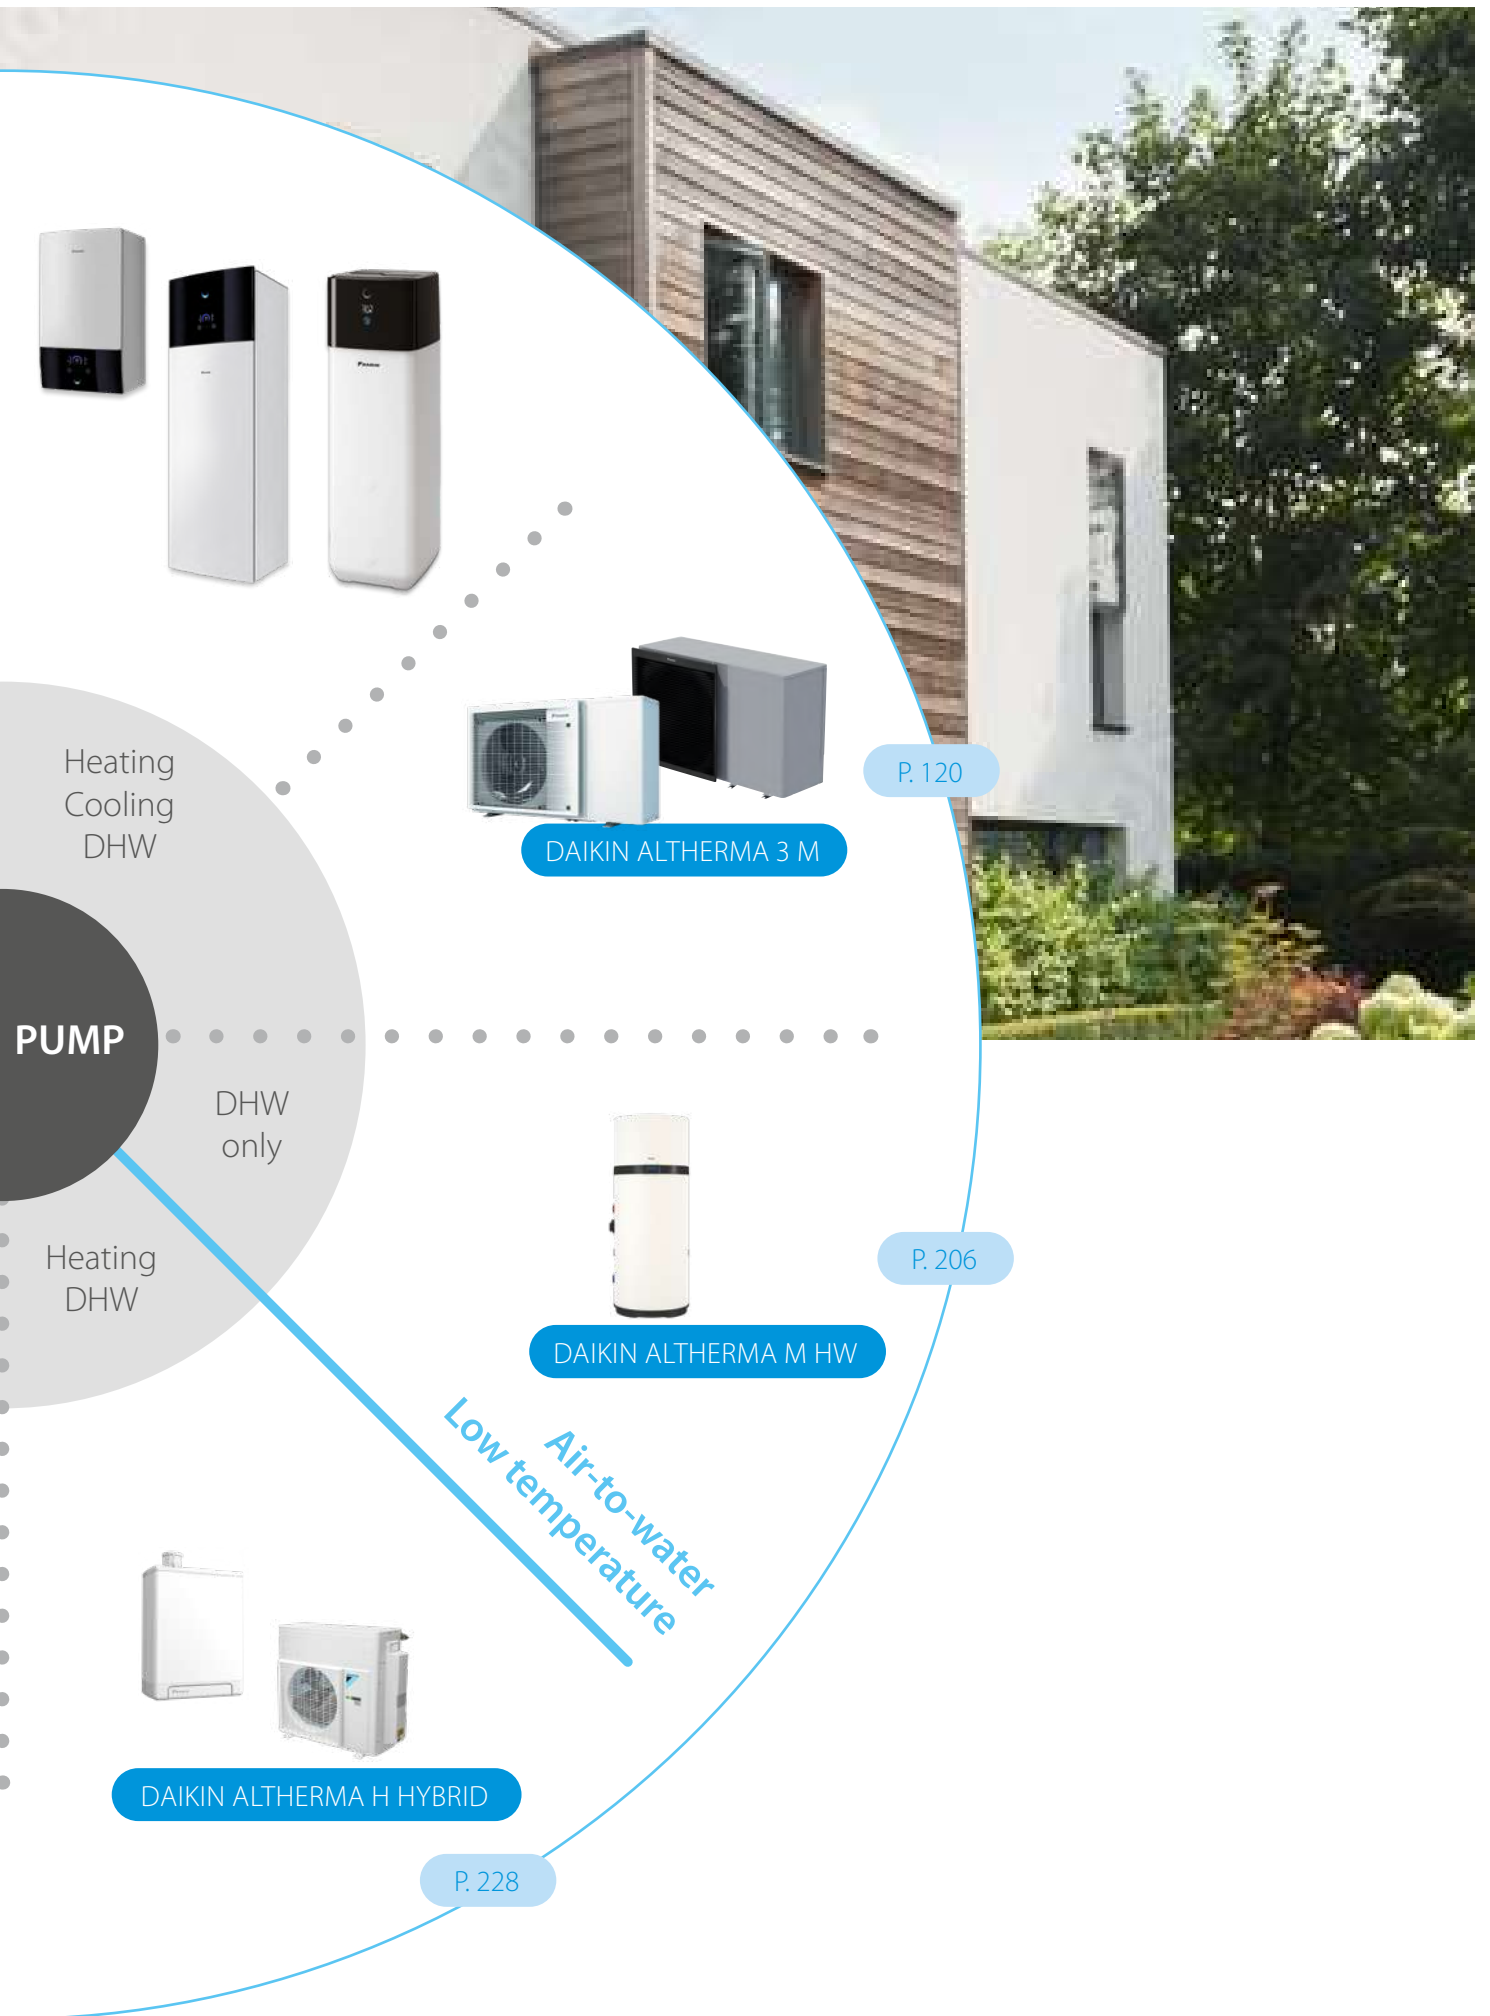

Heating  
Cooling  
DHW

P. 120



DAIKIN ALTHERMA 3 M

**PUMP**

DHW  
only

P. 206

Heating  
DHW



DAIKIN ALTHERMA M HW

*Air-to-water  
Low temperature*



DAIKIN ALTHERMA H HYBRID

P. 228



# Heat Pumps

Daikin Altherma 3 R (ERGA-E series, 4-6-8 kW)	76
Daikin Altherma 3 R F	78
Daikin Altherma 3 R ECH <sub>2</sub> O	84
Daikin Altherma 3 R W	90
Daikin Altherma 3 R (ERLA-D series, 11-14-16 kW)	96
Daikin Altherma 3 R F	102
Daikin Altherma 3 R ECH <sub>2</sub> O	108
Daikin Altherma 3 R W	114
Daikin Altherma 3 M	120
Daikin Altherma 3 M (4-6-8 kW)	120
Daikin Altherma 3 M (9-11-14-16 kW)	126
Daikin Altherma 3 H MT/HT	136
Daikin Altherma 3 H MT/HT F	144
Daikin Altherma 3 H MT/HT ECH <sub>2</sub> O	152
Daikin Altherma 3 H MT/HT W	162
<b>NEW</b> Daikin Altherma 3 R MT	170
Daikin Altherma 3 R MT F	178
Daikin Altherma 3 R MT ECH <sub>2</sub> O	186
Daikin Altherma 3 R MT W	196
Daikin Altherma R HT	202
Daikin Altherma M HW	206
Daikin Altherma Ground source heat pump	212
Daikin Altherma 3 GEO	212
Daikin Altherma Hybrid heat pump	220
Daikin Altherma R Hybrid	223
Daikin Altherma R Hybrid + multi	224
Daikin Altherma H Hybrid	228



# Daikin Altherma 3 R

powered by Bluevolution with R-32 refrigerant

## Why choose Daikin Altherma 3 R?

Bluevolution technology combines very high efficient compressors developed by Daikin with the future of refrigerants: R-32.



### High performance

- › Leaving water temperature up to 65 °C at high efficiency
- › Suitable for both underfloor heating and radiators
- › Pedigree trademark in frost protection down to -25 °C, ensuring reliable operation even in the coldest climates
- › The Bluevolution technology offers the highest performance:
  - Seasonal efficiency up to A+++
  - Heating efficiency up to a COP of 5.1 (at 7 °C/35 °C)
  - Domestic hot water efficiency up to COP of 3.3 (EN16147)
- › Available in 4, 6 and 8 kW

### Easy to install

- › Delivered ready to operate: all key hydraulic elements are factory mounted
- › All servicing can be done from the front and all pipings can be accessed at the top of the unit
- › Black and white modern design
- › Reduced installation time: the outdoor unit is tested and charged with refrigerant

### Easy commissioning

- › Integrated high resolution colour interface
- › Quick wizard allowing commissioning in maximum 9 easy steps to have the full system ready to operate
- › Configuration can take place remotely to upload later on the unit after the day of the installation

### Easy to control

- › The combined effect of the Daikin Altherma weather dependent set-point controls and its inverter compressor ensures consistent room temperatures at all times.
- › Control your system from anywhere at any time via the Onecta app. This online controller allows adjustment of home comfort levels to suit individual preferences while achieving further energy efficiencies. The R-32 Daikin Altherma 3 R range can also be fully integrated with other home control systems



Control with Onecta app



## Daikin Altherma 3 R offers a wide range to adapt to your customers needs

✓ **Best seasonal efficiencies**  
providing the highest savings on running costs

✓ Perfect fit for **new buildings**, as well as for low energy houses

✓ A leaving water temperature up to 65 °C makes it also **a suitable choice for refurbishments**

To cover all applications, the Daikin Altherma 3 R is available in 3 different indoor units



### Daikin Altherma 3 R F

#### Floor standing unit with integrated domestic hot water tank

Compact and yet 100% comfort guaranteed

- › All components and connections are factory mounted
- › Very small 595 x 625 mm installation footprint required
- › Minimum electrical input with constantly available hot water
- › Dedicated Bi-Zone models available: two temperature zones automatically regulated by the same indoor unit
- › Modern stylish design available in white or silver-grey
- › Compatible with the Onecta app
- › Voice control available



### Daikin Altherma 3 R ECH<sub>2</sub>O

#### Floor standing unit with integrated ECH<sub>2</sub>O tank

Integrated solar unit and domestic hot water tank

- › Maximising renewable energy with top comfort for hot water preparation
- › Solar support for domestic hot water
- › Lightweight plastic tank
- › Bivalent option: can be combined with a secondary heat source
- › App control available



### Daikin Altherma 3 R W

#### Wall mounted unit

High flexibility for installation and domestic hot water connection

- › Compact unit with small installation (almost no side clearance is required)
- › Can be combined with a space separate domestic hot water tank up to 500 litres, with or without solar support
- › Stylish modern design
- › Compatible with the Onecta app
- › Voice control available



# Daikin Altherma 3 R F

floor standing unit with integrated domestic hot water tank

## Why choose Daikin floor standing unit with integrated domestic hot water tank?

The Daikin Altherma 3 floor standing unit is the ideal system **to deliver heating, domestic hot water and cooling** for new build and low energy houses.

### All in one system to save installation space and time

- > A combined stainless steel domestic hot water tank of 180 or 230 L and heat pump ensures a faster installation compared to traditional systems
- > Inclusion of all hydraulic components means no third party components are required
- > PCB board and hydraulic components are located in the front for easy access
- > Small installation footprint of 595 x 625 mm
- > Integrated back-up heater choice of 3, 6, 9 kW
- > Dedicated Bi-Zone models allowing temperature monitoring for 2 zones connect underfloor heating to radiators for optimise efficiency

### Domestic hot water

Heat pump convector for heating or cooling



Heat pump convector for heating or cooling

Underfloor heating

### Typical application:

- > Location: Paris
- > Design temperature: -7 °C
- > Heat load: 7 kW
- > Heating off temperature: 16 °C



# All-in one design

## Reduces the installation footprint and height


Compared to the traditional split version for a wall mounted indoor unit and a separate domestic hot water tank, the integrated indoor unit greatly reduces the installation space required.

With a small footprint of 595 x 625 mm, the integrated indoor unit has a similar footprint when compared to other household appliances.

For installation projects, almost no side clearance is necessary as the piping is located at the top of the unit.

With an installation height of 1.65 m for a 180 L tank and 1.85 m for a 230 L tank, the required installation height is less than 2 m.

The compactness of the integrated indoor unit is emphasised by its sleek design and modern look, easy blending in with other household appliances.

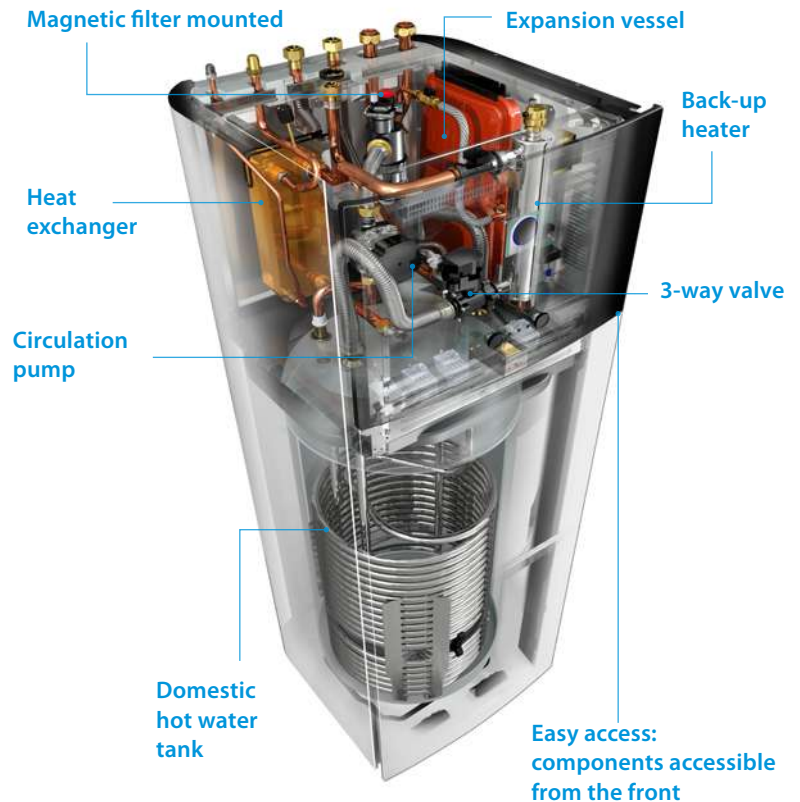

## Advanced user interface



### The Daikin Eye

The intuitive Daikin eye shows you in real time the status of the system. Blue is perfect! Should the eye turn red, an error has occurred.

## Quick to configure

Log in and you'll be able to completely configure the unit via the new interface in less than 10 steps. You can even check if the unit is ready for use by running test cycles!


## Easy operation

Work super-fast with the new interface. It's super easy to use with just a few buttons and 2 navigational knobs.

## Beautiful design

The interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.


## Integrated indoor unit

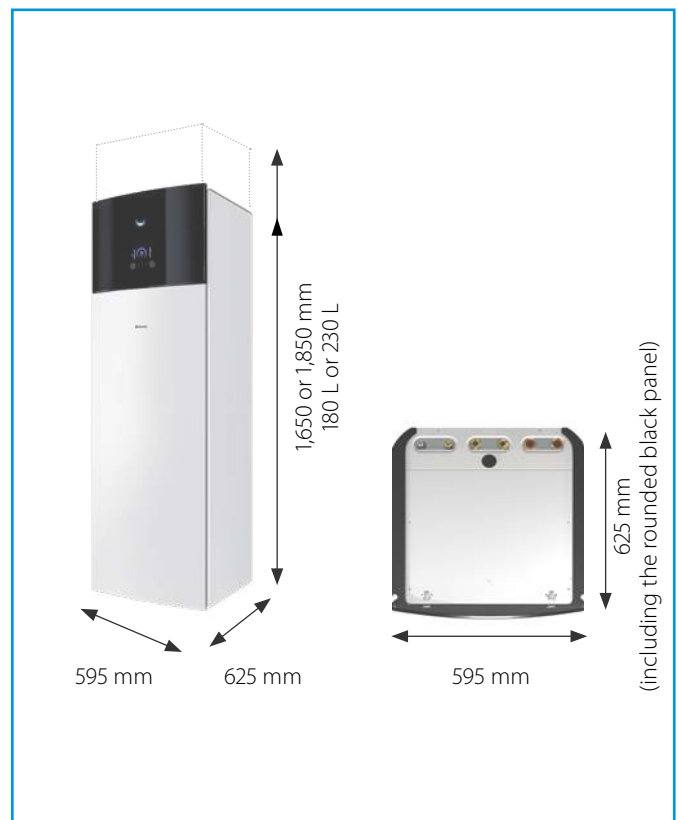

# Daikin Altherma 3 R F

Floor standing air to water heat pump for heating and hot water; ideal for low energy houses

- › A combined stainless steel domestic hot water tank of 180 or 230 L and heat pump for easy installation
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 625 mm
- › Integrated back-up heater choice of 6 or 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -25 °C
- › Compatible with the Onecta app
- › Voice control available



More details and final information can be found by scanning or clicking the QR codes.



EHVH-E6V



EHVH-E9W

ERGA-EV

ERGA-EVH

ERGA-EVH7

Efficiency data				EHVH + ERGA		04S18E6V + 04EV	04S23E6V + 04EV	08S18E6V/9W + 06EVH	08S23E6V/9W + 06EVH	08S18E6V/9W + 08EVH7	08S23E6V/9W + 08EVH7
Heating capacity	Nom.			kW		4.30 (1)/4.60 (2)		6.00 (1)/5.90 (2)		7.50 (1)/7.80 (2)	
Power input	Heating	Nom.		kW		0.850 (1)/1.26 (2)		1.24 (1)/1.69 (2)		1.63 (1)/2.23 (2)	
COP						5.10 (1)/3.65 (2)		4.85 (1)/3.50 (2)		4.60 (1)/3.50 (2)	
Space heating	Average climate water outlet 55 °C	General	SCOP ηs (Seasonal space heating efficiency)	%	3.26				3.32		
					127				130		
			Seasonal space heating eff. class		A++						
	Average climate water outlet 35 °C	General	SCOP ηs (Seasonal space heating efficiency)	%	4.48		4.47		4.56		
					176				179		
			Seasonal space heating eff. class		A+++						
Domestic hot water heating	General	Declared load profile	Average η <sub>wh</sub> (water heating efficiency)	%	L	XL	L	XL	L	XL	
					125	133	125	133	125	133	
		Water heating energy efficiency class			A+						
Indoor Unit				EHVH		04S18E6V	04S23E6V	08S18E6V/E9W	08S23E6V/E9W	08S18E6V/E9W	08S23E6V/E9W
Casing	Colour			White + Black							
	Material			Resin / Sheet metal							
Dimensions	Unit	HeightxWidthxDepth	mm	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,850x595x625	
Weight	Unit			kg	119	128	119	128	119	128	
Tank	Water volume			l	180	230	180	230	180	230	
	Maximum water temperature			°C	70						
	Maximum water pressure			bar	10						
	Corrosion protection				Pickling						
Operation range	Heating	Ambient	Min.~Max.	°C	5~30						
		Water side	Min.~Max.	°C	15~65						
	Domestic hot water	Ambient	Min.~Max.	°CDB	5~35						
		Water side	Max.	°C	70						
Sound power level	Nom.			dBA	42						
Sound pressure level	Nom.			dBA	28						
Outdoor Unit				ERGA		04EV	06EVH	08EVH7			
Dimensions	Unit	HeightxWidthxDepth	mm	740x884x388							
Weight	Unit			kg	58.5						
Compressor	Quantity				1						
	Type				Hermetically sealed swing compressor						
Operation range	Cooling	Min.~Max.	°CDB	10~43							
	Domestic hot water	Min.~Max.	°CDB	-25~35							
Refrigerant	Type				R-32						
	GWP				675.0						
	Charge			kg	1.50						
	Charge			TCO:Eq	1.01						
	Control				Expansion valve						
Sound power level	Heating	Nom.	dBA	58	60		62		62		
	Cooling	Nom.	dBA	61							
Sound pressure level	Heating	Nom.	dBA	44	47		49		49		
	Cooling	Nom.	dBA	48	49		50		50		
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230						
Current	Recommended fuses			A	25						

(1) Cooling Ta 35 °C - LWE 18 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 35 °C (DT = 5 °C) (2) Cooling Ta 35 °C - LWE 7 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 45 °C (DT = 5 °C). This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R F

Floor standing air to water heat pump for heating, cooling and hot water; ideal for low energy houses

- › A combined stainless steel domestic hot water tank of 180 or 230 L and heat pump for easy installation
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 625 mm
- › Integrated back-up heater choice of 3, 6, 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -25 °C
- › Compatible with the Onecta app
- › Voice control available



011-1W0218 → 222  
011-1W0245, 247  
011-1W0249 → 251

More details and final information can be found by scanning or clicking the QR codes.

up to **A+++** **A+** **65 °C** **R-32**



EHVX-E3V



EHVX-E6V



EHVX-E9W

ERGA-EV

ERGA-EVH

ERGA-EVH7

Efficiency data				EHVX + ERGA		04S18E3V/E6V + 04EV		04S23E3V/E6V + 04EV		08S18E6V/E9W + 06EVH		08S23E6V/E9W + 06EVH		08S18E6V/E9W + 08EVH7		08S23E6V/E9W + 08EVH7		
Heating capacity	Nom.		kW	4.30 (1)/4.60 (2)		6.00 (1)/5.90 (2)		7.50 (1)/7.80 (2)		6.00 (1)/5.90 (2)		7.50 (1)/7.80 (2)		1.63 (1)/2.23 (2)		6.25 (1)/5.44 (2)		
Power input	Heating	Nom.	kW	0.850 (1)/1.26 (2)		1.24 (1)/1.69 (2)		1.06 (1)/1.55 (2)		1.06 (1)/1.55 (2)		1.16 (1)/1.73 (2)		1.16 (1)/1.73 (2)		1.16 (1)/1.73 (2)		
Cooling capacity	Nom.		kW	4.86 (1)/4.52 (2)		5.96 (1)/5.09 (2)		4.85 (1)/3.50 (2)		4.85 (1)/3.50 (2)		4.60 (1)/3.50 (2)		4.60 (1)/3.50 (2)		4.60 (1)/3.50 (2)		
Power input	Cooling	Nom.	kW	0.810 (1)/1.36 (2)		1.06 (1)/1.55 (2)		1.06 (1)/1.55 (2)		1.06 (1)/1.55 (2)		1.06 (1)/1.55 (2)		1.06 (1)/1.55 (2)		1.06 (1)/1.55 (2)		
COP				5.10 (1)/3.65 (2)		4.85 (1)/3.50 (2)		4.85 (1)/3.50 (2)		4.85 (1)/3.50 (2)		4.60 (1)/3.50 (2)		4.60 (1)/3.50 (2)		4.60 (1)/3.50 (2)		
EER				5.98 (1)/3.32 (2)		5.61 (1)/3.28 (2)		5.61 (1)/3.28 (2)		5.61 (1)/3.28 (2)		5.40 (1)/3.14 (2)		5.40 (1)/3.14 (2)		5.40 (1)/3.14 (2)		
Space heating	Average climate water outlet 55 °C	General	SCOP	3.29		3.28		3.35		3.28		3.35		3.35		3.35		
			ηs (Seasonal space heating efficiency)	129		128		131		128		131		131		131		
			Seasonal space heating eff. class			A++		A++		A++		A++		A++		A++		A++
Average climate water outlet 35 °C	General	SCOP	4.54		4.52		4.61		4.52		4.61		4.61		4.61		4.61	
		ηs (Seasonal space heating efficiency)	179		178		181		178		181		181		181		181	
		Seasonal space heating eff. class			A+++		A+++		A+++		A+++		A+++		A+++		A+++	
Domestic hot water heating	General	Declared load profile		L	XL	L	XL	L	XL	L	XL	L	XL	L	XL	L	XL	
			Average climate	127	125	134	133	125	133	125	133	125	133	125	133	125	133	133
Water heating energy efficiency class					A+		A+		A+		A+		A+		A+		A+	

Indoor Unit				EHVX	04S18E3V/E6V	04S23E3V/E6V	08S18E6V/E9W	08S23E6V/E9W	08S18E6V/E9W	08S23E6V/E9W	
Casing	Colour	White + Black									
	Material	Resin / Sheet metal									
Dimensions	Unit	HeightxWidthxDepth	mm	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,850x595x625	
Weight	Unit		kg	119	128	119	128	119	128	128	
Tank	Water volume		l	180	230	180	230	180	230	230	
	Maximum water temperature		°C	70						70	
Operation range	Heating	Ambient	Min.~Max.	5~30						5~30	
		Water side	Min.~Max.	15~65						15~65	
	Cooling	Ambient	Min.~Max.	5~35						5~35	
		Water side	Min.~Max.	5~22						5~22	
	Domestic hot water	Ambient	Min.~Max.	5~35						5~35	
Water side		Max.	70						70		
Sound power level	Nom.		dBA	42						42	
Sound pressure level	Nom.		dBA	28						28	

Outdoor Unit				ERGA	04EV	06EVH	08EVH7
Dimensions	Unit	HeightxWidthxDepth	mm	740x884x388			
Weight	Unit		kg	58.5			
Compressor	Quantity			1			
	Type			Hermetically sealed swing compressor			
Operation range	Cooling	Min.~Max.	°CDB	10~43			
	Domestic hot water	Min.~Max.	°CDB	-25~35			
Refrigerant	Type			R-32			
	GWP			675.0			
	Charge		kg	1.50			
	Charge		TCO:Eq	1.01			
Sound power level	Heating	Nom.	dBA	58	60	62	
	Cooling	Nom.	dBA	61	62	62	
Sound pressure level	Heating	Nom.	dBA	44	47	49	
	Cooling	Nom.	dBA	48	49	50	
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1N~/50/230			
Current	Recommended fuses		A	25			

(1) Cooling Ta 35 °C - LWE 18 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 35 °C (DT = 5 °C) (2) Cooling Ta 35 °C - LWE 7 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 45 °C (DT = 5 °C). This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R F

Floor standing integrated with **two different temperature zones monitoring**

- › A combined stainless steel domestic hot water tank of 180 or 230 L and heat pump for easy installation
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 625 mm
- › Integrated back-up heater choice of 6 or 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -25 °C
- › Compatible with the Onecta app
- › Voice control available



up to **A+++** **A+** **65 °C** **R-32**

More details and final information can be found by scanning or clicking the QR codes.



EHVZ-E6V



EHVZ-E9W

ERGA-EV

ERGA-EVH

ERGA-EVH7

Efficiency data				EHVZ + ERGA		04S18E6V + 04EV	08S18E6V/E9W + 06EVH	08S23E6V/E9W + 06EVH	08S18E6V/E9W + 08EVH7	08S23E6V/E9W + 08EVH7	
Heating capacity	Nom.			kW		4.30 (1)/4.60 (2)	6.00 (1)/5.90 (2)		7.50 (1)/7.80 (2)		
Power input	Heating	Nom.		kW		0.850 (1)/1.26 (2)	1.24 (1)/1.69 (2)		1.63 (1)/2.23 (2)		
COP						5.10 (1)/3.65 (2)	4.85 (1)/3.50 (2)		4.60 (1)/3.50 (2)		
Space heating	Average climate water outlet 55 °C	General	SCOP	%	3.26				3.32		
			ηs (Seasonal space heating efficiency)		127				130		
	Average climate water outlet 35 °C	General	SCOP	%	4.48		4.47		4.56		
			ηs (Seasonal space heating efficiency)		176				179		
Domestic hot water heating	General	Declared load profile	Average ηwh (water heating efficiency)	%	L		XL		L		
					Water heating energy efficiency class	125		133		125	
										A+	

Indoor Unit				EHVZ	04S18E6V	08S18E6V/E9W	08S23E6V/E9W	08S18E6V/E9W	08S23E6V/E9W		
Casing	Colour	White + Black									
	Material	Resin / Sheet metal									
Dimensions	Unit	HeightxWidthxDepth	mm	1,650x595x625		1,850x595x625		1,650x595x625		1,850x595x625	
Weight	Unit	kg									
	Tank	125									
Operation range	Heating	Ambient	Min.~Max.	°C							
			Water side	5~30							
	Domestic hot water	Ambient	Min.~Max.	°C							
			Water side	15~65							
Sound power level	Nom.			dBA							
				5~35							
Sound pressure level	Nom.			dBA							
				70							

Outdoor Unit				ERGA	04EV	06EVH	08EVH7	
Dimensions	Unit	HeightxWidthxDepth	mm	740x884x388				
Weight	Unit						kg	
Compressor	Quantity						58.5	
		Type						1
Operation range	Cooling	Min.~Max.					°CDB	
							10~43	
Refrigerant	Domestic hot water	Min.~Max.					°CDB	
							-25~-35	
Sound power level	Heating	Nom.					dBA	
							58	
							60	
							62	
Sound pressure level	Cooling	Nom.					dBA	
							44	
							47	
							49	
Power supply	Name/Phase/Frequency/Voltage					Hz/V		
						V3/1N~/50/230		
						A		
						25		

(1) Cooling Ta 35 °C - LWE 18 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 35 °C (DT = 5 °C) (2) Cooling Ta 35 °C - LWE 7 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 45 °C (DT = 5 °C). This product contains fluorinated greenhouse gases.





# Floor standing unit with integrated ECH<sub>2</sub>O tank

The Daikin Altherma low temperature split integrated ECH<sub>2</sub>O is renowned for its ability to maximise renewable energy sources to provide the ultimate comfort in heating, domestic hot water and cooling.

### Intelligent storage management

- › The unit is 'Smart Grid' ready to take advantage of low energy tariffs and efficiently store thermal energy for space heating and domestic hot water
- › Continuous heating during defrost mode and use of stored heat for space heating (500 l tank only)
- › Electronic management of both heat pump and ECH<sub>2</sub>O thermal store maximises energy efficiency, as well as convenient heating and domestic hot water
- › Achieves the highest standards for water sanitation
- › Uses more renewable energy with solar connection


### Innovative and high-quality tank

- › Lightweight plastic tank
- › No corrosion, anode, scale or lime deposits
- › Contains impact resistant polypropylene inner and outer walls filled with high-grade insulation foam to reduce heat losses to a minimum

### Combinable with other heat sources

- › The bivalent option allows heat from other sources such as oil, gas or pellet-fired boilers to be stored in the solar system, further lowering energy consumption

## ECH<sub>2</sub>O

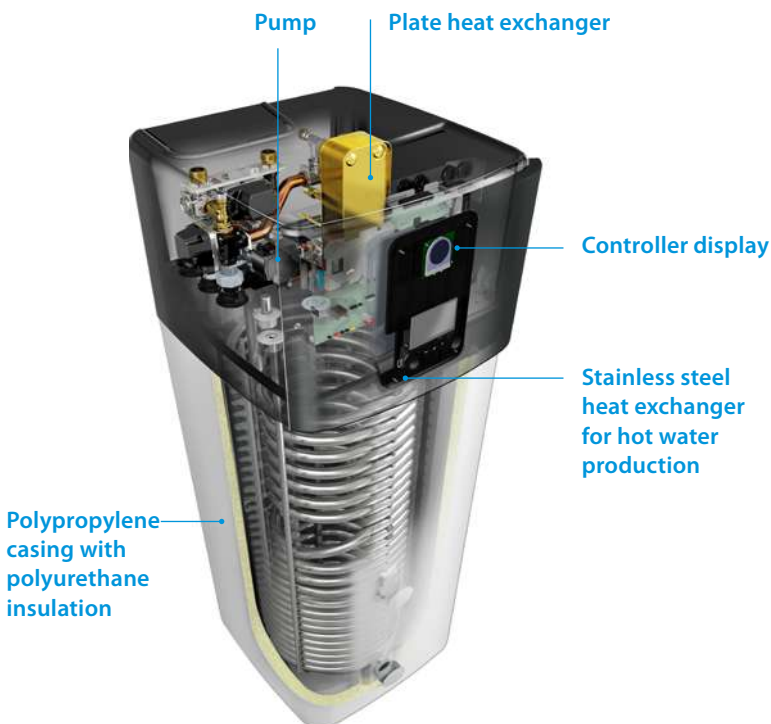

### Advanced user interface



#### The Daikin-Eye

The intuitive Daikin eye shows you in real time the status of your system. Blue is perfect! Should the eye turn red, an error has occurred.

#### Quick to configure

Log in and you'll be able to completely configure the unit in less than 10 steps. You can even check if the unit is ready for use by running test cycles!

#### Easy operation

The user interface works really fast thanks to its icon-based menus.

#### Beautiful design

The interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

## ECH<sub>2</sub>O thermal store range: additional hot water comfort

Combine your indoor unit with a thermal store to achieve the ultimate comfort at home

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance



- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options

### Pressureless (drain-back) solar system (EHSH-E, EHSX-E)

- › The solar collectors are only filled with water when sufficient heating is provided by the sun
- › The pumps in the control and pump unit switch on briefly and fill the collectors with storage tank water
- › After filling, water circulation is maintained by the remaining pump

### Pressurised solar system (EHSXB-E, EHSXB-E)

- › System is filled with heat transfer fluid with the correct amount of antifreeze to avoid freezing in winter
- › System is pressurised and sealed

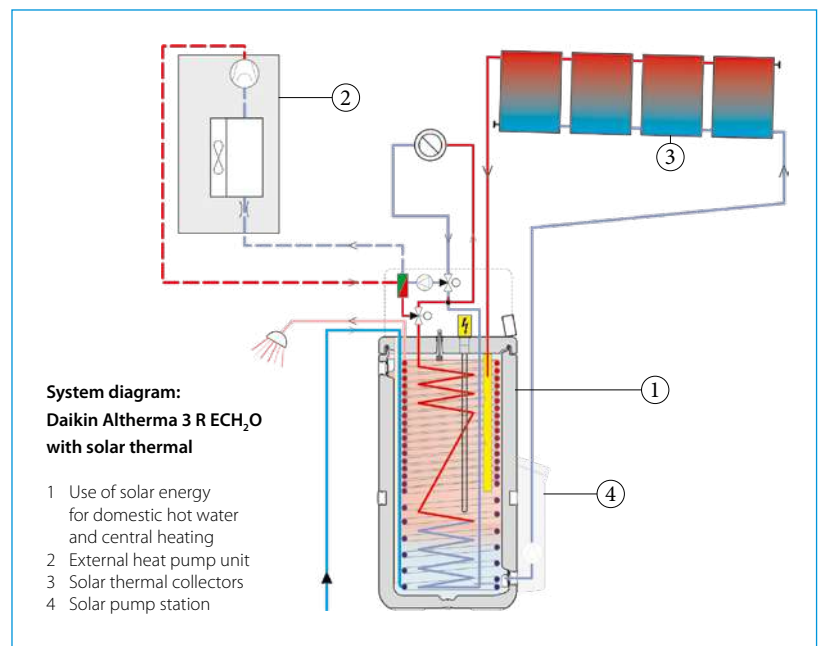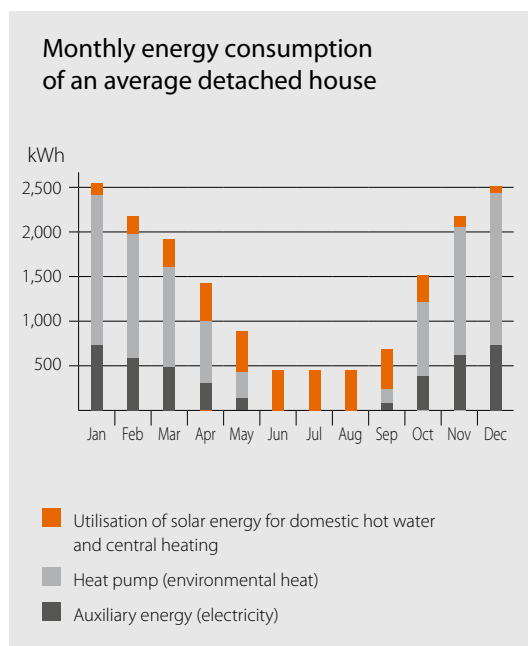


# Daikin Altherma 3 R ECH<sub>2</sub>O

Floor standing air to water heat pump for heating and hot water with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Solar support of domestic hot water with pressureless (drain-back) solar system
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating, hot water and cooling operation
- › Outdoor unit extracts heat from the outdoor air, even at -25 °C
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump
- › Compatible with the Onecta app
- › Voice control available



up to **A+++** **A+** **65°C** **R-32**



More details and final information can be found by scanning or clicking the QR codes.



EHS-E

ERGA-EV

ERGA-EVH

ERGA-EVH7

Efficiency data				EHS-E + ERGA	04P30E + 04EV	08P30E + 06EVH	08P50E + 06EVH	08P30E + 08EVH7	08P50E + 08EVH7	
Heating capacity	Nom.			kW	4.30 (1)/4.60 (2)	6.00 (1)/5.90 (2)		7.50 (1)/7.80 (2)		
Power input	Heating	Nom.			kW	0.84 (1)/1.26 (2)	1.24 (1)/1.69 (2)		1.63 (1)/2.23 (2)	
COP					5.10 (1)/3.65 (2)	4.85 (1)/3.50 (2)		4.60 (1)/3.50 (2)		
Space heating	Average climate water outlet 55 °C	General	SCOP	%	3.26		3.32		130	
					127		A++			
	Average climate water outlet 35 °C	General	SCOP	%	4.48	4.47		4.56		
					176		A+++			
Domestic hot water heating	Average climate	Declared load profile			L	XL		L	XL	
		η <sub>wh</sub> (water heating efficiency)		%	118	125		118	125	
				Water heating energy efficiency class		A+				

Indoor Unit				EHS-E	04P30E	08P30E	08P50E	08P30E	08P50E
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)							
	Material	Impact resistant polypropylene							
Dimensions	Unit	HeightxWidthxDepth	mm	1,892x594x644		1,905x792x812		1,892x594x644	
Weight	Unit			kg	77		107	77	
Tank	Water volume			l	294		477	294	
	Maximum water temperature			°C	85		85		
Operation range	Heating	Ambient	Min.~Max.	°C	-25~-25				
		Water side	Min.~Max.	°C	18~65				
	Domestic hot water	Ambient	Min.~Max.	°CDB	-25~35				
		Water side	Min.~Max.	°C	25~55				
Sound power level	Nom.			dBA	39				

Outdoor Unit				ERGA	04EV	06EVH	08EVH7
Dimensions	Unit	HeightxWidthxDepth	mm	740x884x388			
Weight	Unit			kg			
Compressor	Quantity			1			
	Type			Hermetically sealed swing compressor			
Operation range	Cooling	Min.~Max.	°CDB	10.0~43.0			
	Domestic hot water	Min.~Max.	°CDB	-25~35			
Refrigerant	Type			R-32			
	GWP			675.0			
	Charge			kg			
	Charge			TCO:Eq			
Sound power level	Heating	Nom.	dBA	58	60		62
	Cooling	Nom.	dBA	61	62		62
Sound pressure level	Heating	Nom.	dBA	44	47		49
	Cooling	Nom.	dBA	48	49		50
Power supply	Name/Phase/Frequency/Voltage			Hz/V			
Current	Recommended fuses			A			

(1) Cooling Ta 35 °C - LWE 18 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 35 °C (DT = 5 °C) (2) Cooling Ta 35 °C - LWE 7 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 45 °C (DT = 5 °C). This product contains fluorinated greenhouse gases.




# Daikin Altherma 3 R ECH<sub>2</sub>O

Floor standing air to water heat pump for **bivalent heating and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation
- › Compatible with the Onecta app
- › Voice control available



up to



More details and final information can be found by scanning or clicking the QR codes.



EHSB-E

ERGA-EV

ERGA-EVH

ERGA-EVH7

Efficiency data				EHSB + ERGA	04P30E + 04EV	08P30E + 06EVH	08P50E + 06EVH	08P30E + 08EVH7	08P50E + 08EVH7	
Heating capacity	Nom.			kW	4.30 (1)/4.60 (2)	6.00 (1)/5.90 (2)		7.50 (1)/7.80 (2)		
Power input	Heating			Nom. kW	0.84 (1)/1.26 (2)	1.24 (1)/1.69 (2)		1.63 (1)/2.23 (2)		
COP					5.10 (1)/3.65 (2)	4.85 (1)/3.50 (2)		4.60 (1)/3.50 (2)		
Space heating	Average climate water outlet 55 °C	General	SCOP	%	3.26			3.32		
			η <sub>sp</sub> (Seasonal space heating efficiency)	%	127			130		
	Seasonal space heating eff. class				A++					
	Average climate water outlet 35 °C	General	SCOP	%	4.48	4.47		4.56		
η <sub>sp</sub> (Seasonal space heating efficiency)			%	176			179			
Seasonal space heating eff. class				A+++						
Domestic hot water heating	General	Declared load profile			L		XL		L XL	
		Average climate	η <sub>wh</sub> (water heating efficiency)			118		125		118 125
Water heating energy efficiency class				A+						

Indoor Unit				EHSB	04P30E	08P30E	08P50E	08P30E	08P50E
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)							
	Material	Impact resistant polypropylene							
Dimensions	Unit	HeightxWidthxDepth	mm	1,892x594x644		1,905x792x812		1,892x594x644 1,905x792x812	
Weight	Unit	kg							
Tank	Water volume	l							
	Maximum water temperature	°C							
Operation range	Heating	Ambient	Min.~Max.	°C					
		Water side	Min.~Max.	°C					
	Domestic hot water	Ambient	Min.~Max.	°CDB					
		Water side	Min.~Max.	°C					
Sound power level	Nom.	dBA							


Outdoor Unit				ERGA	04EV	06EVH	08EVH7
Dimensions	Unit	HeightxWidthxDepth	mm	740x884x388			
Weight	Unit	kg					
Compressor	Quantity	1					
	Type	Hermetically sealed swing compressor					
Operation range	Cooling	Min.~Max.	°CDB				
	Domestic hot water	Min.~Max.	°CDB				
Refrigerant	Type	R-32					
	GWP	675.0					
	Charge	kg					
	Charge	TCO:Eq					
Control			Expansion valve				
Sound power level	Heating	Nom.	dBA	58	60		62
	Cooling	Nom.	dBA	61	62		
Sound pressure level	Heating	Nom.	dBA	44	47		49
	Cooling	Nom.	dBA	48	49		50
Power supply	Name/Phase/Frequency/Voltage	Hz/V					
Current	Recommended fuses	A					

(1) Cooling Ta 35 °C - LWE 18 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 35 °C (DT = 5 °C) (2) Cooling Ta 35 °C - LWE 7 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 45 °C (DT = 5 °C). This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R ECH<sub>2</sub>O

Floor standing air to water heat pump for **heating, cooling and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating, hot water and cooling
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Solar support of domestic hot water with pressureless (drain-back) solar system
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating, hot water and cooling operation
- › Outdoor unit extracts heat from the outdoor air, even at -25 °C
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump
- › Compatible with the Onecta app
- › Voice control available



011-1W0262 → 267

More details and final information can be found by scanning or clicking the QR codes.



EHSX-E

ERGA-EV

ERGA-EVH

ERGA-EVH7

Efficiency data				EHSX + ERGA	04P30E + 04EV	04P50E + 04EV	08P30E + 06EVH	08P50E + 06EVH	08P30E + 08EVH7	08P50E + 08EVH7	
Heating capacity	Nom.			kW	4.30 (1)/4.60 (2)		6.00 (1)/5.90 (2)		7.50 (1)/7.80 (2)		
Power input	Heating	Nom.			kW	0.84 (1)/1.26 (2)		1.24 (1)/1.69 (2)		1.63 (1)/2.23 (2)	
Cooling capacity	Nom.			kW	4.86 (1)/4.52 (2)		5.96 (1)/5.09 (2)		6.25 (1)/5.44 (2)		
Power input	Cooling	Nom.			kW	0.81 (1)/1.36 (2)		1.06 (1)/1.55 (2)		1.16 (1)/1.73 (2)	
COP						5.10 (1)/3.65 (2)		4.85 (1)/3.50 (2)		4.60 (1)/3.50 (2)	
EER						5.98 (1)/3.32 (2)		5.61 (1)/3.28 (2)		5.40 (1)/3.14 (2)	
Space heating	Average climate water outlet 55 °C	General	SCOP ηs (Seasonal space heating efficiency)	%	3.29		3.28		3.35		
					129		128		131		
				Seasonal space heating eff. class				A++			
Average climate water outlet 35 °C	General	SCOP ηs (Seasonal space heating efficiency)	%	4.54		4.52		4.61			
				179		178		181			
				Seasonal space heating eff. class				A+++			
Domestic hot water heating	General climate	Declared load profile			L	XL	L	XL	L	XL	
			Average ηwh (water heating efficiency)	%		118	125	118	125	118	125
				Water heating energy efficiency class				A+			

Indoor Unit				EHSX	04P30E	04P50E	08P30E	08P50E	08P30E	08P50E
Casing	Colour			Traffic white (RAL9016) / Traffic black (RAL9017)						
	Material			Impact resistant polypropylene						
Dimensions	Unit	HeightxWidthxD	mm	1,892x594x644	1,905x792x812	1,892x594x644	1,905x792x812	1,892x594x644	1,905x792x812	
	Weight	Unit	kg	77	107	77	107	77	107	
Tank	Water volume			294	477	294	477	294	477	
	Maximum water temperature			85						
Operation range	Heating	Ambient	Min.~Max.					-25~25		
		Water side	Min.~Max.					18~65		
	Cooling	Ambient	Min.~Max.					10~43		
		Water side	Min.~Max.					5~22		
	Domestic hot water	Ambient	Min.~Max.					-25~35		
		Water side	Min.~Max.					25~55		
Sound power level	Nom.							39		


Outdoor Unit				ERGA	04EV	06EVH	08EVH7
Dimensions	Unit	HeightxWidthxD	mm	740x884x388			
Weight	Unit			58.5			
Compressor	Quantity			1			
	Type			Hermetically sealed swing compressor			
Operation range	Cooling	Min.~Max.	°CDB	10.0~43.0			
	Domestic hot water	Min.~Max.	°CDB	-25 ~35			
Refrigerant	Type			R-32			
	GWP			675.0			
	Charge			1.50			
	Charge			1.01			
Sound power level	Heating	Nom.	dB(A)	58		60	62
	Cooling	Nom.	dB(A)	61		62	
Sound pressure level	Heating	Nom.	dB(A)	44		47	49
	Cooling	Nom.	dB(A)	48		49	50
Power supply	Name/Phase/Frequency/Voltage			V3/1N~/50/230			
Current	Recommended fuses			A			

(1) Cooling Ta 35 °C - LWE 18 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 35 °C (DT = 5 °C) (2) Cooling Ta 35 °C - LWE 7 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 45 °C (DT = 5 °C). This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R ECH<sub>2</sub>O

Floor standing air to water heat pump for **bivalent heating, cooling and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation
- › Compatible with the Onecta app
- › Voice control available



More details and final information can be found by scanning or clicking the QR codes.



EHSXB-E

ERGA-EV

ERGA-EVH

ERGA-EVH7

Efficiency data				EHSXB + ERGA	04P30E + 04EV	04P50E + 04EV	08P30E + 06EVH	08P50E + 06EVH	08P30E + 08EVH7	08P50E + 08EVH7
Heating capacity	Nom.			4.30 (1)/4.60 (2)			6.00 (1)/5.90 (2)		7.50 (1)/7.80 (2)	
Power input	Heating	Nom.		0.84 (1)/1.26 (2)			1.24 (1)/1.69 (2)		1.63 (1)/2.23 (2)	
Cooling capacity	Nom.			4.86 (1)/4.52 (2)			5.96 (1)/5.09 (2)		6.25 (1)/5.44 (2)	
Power input	Cooling	Nom.		0.81 (1)/1.36 (2)			1.06 (1)/1.55 (2)		1.16 (1)/1.73 (2)	
COP				5.10 (1)/3.65 (2)			4.85 (1)/3.50 (2)		4.60 (1)/3.50 (2)	
EER				5.98 (1)/3.32 (2)			5.61 (1)/3.28 (2)		5.40 (1)/3.14 (2)	
Space heating	Average climate water outlet 55 °C	General	SCOP	3.29			3.28		3.35	
			η <sub>s</sub> (Seasonal space heating efficiency)	129			128		131	
							A++			
	Average climate water outlet 35 °C	General	SCOP	4.54			4.52		4.61	
η <sub>s</sub> (Seasonal space heating efficiency)			179			178		181		
						A+++				
Domestic hot water heating	General	Declared load profile		L	XL	L	XL	L	XL	
	Average climate	η <sub>wh</sub> (water heating efficiency)		118	125	118	125	118	125	
			Water heating energy efficiency class		A+					

Indoor Unit				EHSXB	04P30E	04P50E	08P30E	08P50E	08P30E	08P50E
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)								
	Material	Impact resistant polypropylene								
Dimensions	Unit	HeightxWidthxD	mm	1,892x594x644	1,905x792x812	1,892x594x644	1,905x792x812	1,892x594x644	1,905x792x812	1,905x792x812
	Weight	Unit	kg	79	110	79	110	79	110	
Tank	Water volume		l	294	477	294	477	294	477	
	Maximum water temperature		°C	85						
	Operation range	Heating	Ambient	Min.~Max.	-25~25					
Water side			Min.~Max.	18~65						
Cooling		Ambient	Min.~Max.	°CDB 10~43						
		Water side	Min.~Max.	°C 5~22						
Domestic hot water	Ambient	Min.~Max.	°CDB -25~35							
	Water side	Min.~Max.	°C 25~55							
Sound power level	Nom.		dBA	39						

Outdoor Unit				ERGA	04EV	06EVH	08EVH7
Dimensions	Unit	HeightxWidthxD	mm	740x884x388			
	Weight	Unit	kg	58.5			
Compressor	Quantity			1			
	Type			Hermetically sealed swing compressor			
Operation range	Cooling	Min.~Max.	°CDB	10.0~43.0			
	Domestic hot water	Min.~Max.	°CDB	-25 ~35			
Refrigerant	Type			R-32			
	GWP			675.0			
	Charge		kg	1.50			
	Charge		TCO:Eq	1.01			
Sound power level	Heating	Nom.	dBA	58		60	62
	Cooling	Nom.	dBA	61		62	
Sound pressure level	Heating	Nom.	dBA	44		47	49
	Cooling	Nom.	dBA	48		49	50
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1N~/50/230			
Current	Recommended fuses		A	25			

(1) Cooling Ta 35 °C - LWE 18 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 35 °C (DT = 5 °C) (2) Cooling Ta 35 °C - LWE 7 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 45 °C (DT = 5 °C). This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R W


Wall mounted unit

## Why choose Daikin wall mounted unit?

The Daikin Altherma 3 R W wall mounted unit offers **heating and cooling** with high flexibility for a quick and easy installation, **with an optional connection to deliver domestic hot water.**

### High flexibility for installation and domestic hot water connection

- > Inclusion of all hydraulic components means no third party components are required
- > PCB board and hydraulic components are located in the front for easy access
- > Compact dimensions allows for small installation space, as almost no side clearances are required
- > The unit's sleek design blends in with other household appliances
- > Combine with a stainless steel or ECH<sub>2</sub>O thermal store

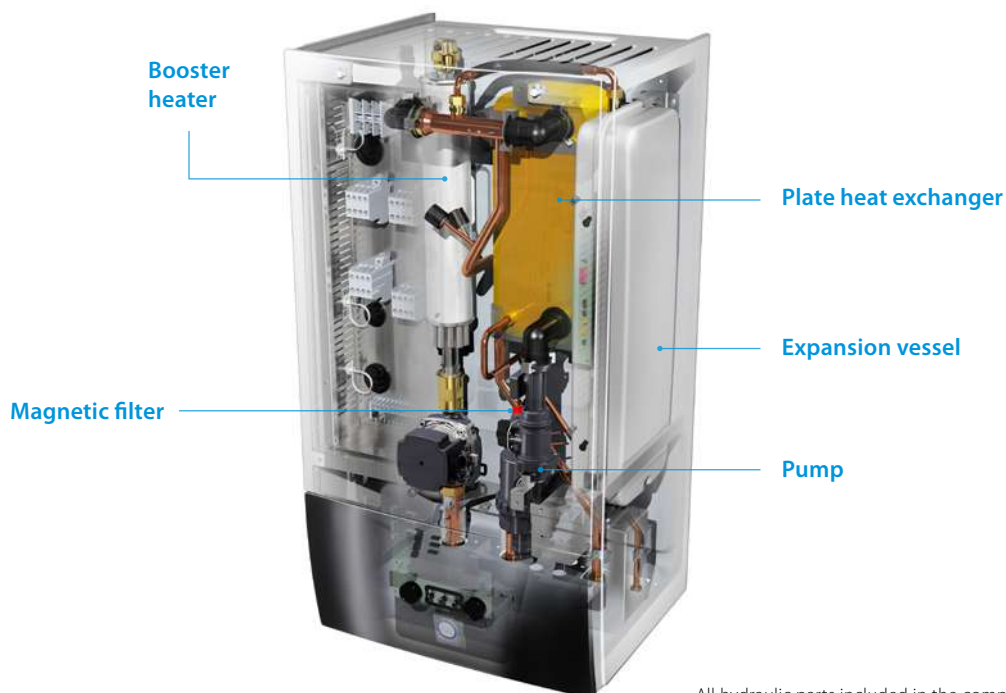

All hydraulic parts included in the compact wall mounted unit.

## Flexibility in providing domestic hot water

If the end user only requires hot water and installation height is limited, a separate tank can provide the required installation flexibility. At the side of our standard stainless steel tanks, we propose the ECH<sub>2</sub>O thermal stores.

### ECH<sub>2</sub>O thermal store range: additional hot water comfort

Combine your wall mounted unit with a thermal store for additional hot water comfort.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: with high tapping performance
- › Fit for future possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build on the unit combined with cascade principle offers flexible installation options



Example of installation with a stainless steel domestic hot water tank (EKHWS(P)-D).

# Daikin Altherma 3 R W

Wall mounted **heating only** air-to-water heat pump ideal for low energy houses

- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required
- › The unit's sleek design blends in with other household appliances
- › Combine with a stainless steel tank or ECH<sub>2</sub>O thermal store
- › Outdoor unit extracts heat from the outdoor air, even at -25 °C
- › Compatible with the Onecta app
- › Voice control available



More details and final information can be found by scanning or clicking the QR codes.



EHBH-E6V



EHBH-E9W

ERGA-EV

ERGA-EVH

ERGA-EVH7

Efficiency data				EHBH + ERGA		04E6V + 04EV	08E6V + 06EVH	08E9W + 06EVH	08E6V + 08EVH7	08E9W + 08EVH7
Heating capacity	Nom.			kW		4.30 (1)/4.60 (2)	6.00 (1)/5.90 (2)		7.50 (1)/7.80 (2)	
Power input	Heating	Nom.		kW		0.85 (1)/1.26 (2)	1.24 (1)/1.69 (2)		1.63 (1)/2.23 (2)	
COP						5.10 (1)/3.65 (2)	4.85 (1)/3.50 (2)		4.60 (1)/3.50 (2)	
Space heating	Average climate water outlet 55 °C	General	SCOP			3.26				3.32
			η <sub>s</sub> (Seasonal space heating efficiency)			127				130
	Seasonal space heating eff. class							A++		
	Average climate water outlet 35 °C	General	SCOP			4.48	4.47			
η <sub>s</sub> (Seasonal space heating efficiency)							176			
Seasonal space heating eff. class									A+++	
Indoor Unit				EHBH	04E6V	08E6V	08E9W	08E6V	08E9W	
Casing	Colour			White + Black						
	Material			Resin, sheet metal						
Dimensions	Unit	HeightxWidthxDepth		mm						
Weight	Unit			kg						
Operation range	Heating	Water side	Min.~Max.			42.0		42.4	42.4	
			Domestic hot water	Water side	Min.~Max.			15 ~65		25~75
Sound power level	Nom.			dBA						
Sound pressure level	Nom.			dBA						
Outdoor Unit				ERGA	04EV	06EVH	08EVH7			
Dimensions	Unit	HeightxWidthxDepth		mm						
Weight	Unit			kg						
Compressor	Quantity				1					
	Type				Hermetically sealed swing compressor					
Operation range	Cooling	Domestic hot water	Min.~Max.			10~43				
			Min.~Max.			-25~-35				
Refrigerant	Type				R-32					
	GWP				675.0					
	Charge				kg					
	Charge		TCO:Eq		1.01					
Control				Expansion valve						
Sound power level	Heating	Nom.				58	60		62	
						61			62	
Sound pressure level	Heating	Nom.				44	47		49	
						48	49		50	
Power supply	Name/Phase/Frequency/Voltage			Hz/V						
Current	Recommended fuses			A						

(1) Cooling Ta 35 °C - LWE 18 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 35 °C (DT = 5 °C) (2) Cooling Ta 35 °C - LWE 7 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 45 °C (DT = 5 °C). This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R W

Wall mounted **reversible** air-to-water heat pump ideal for low energy houses

- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required
- › The unit's sleek design blends in with other household appliances
- › Combine with a stainless steel tank or ECH<sub>2</sub>O thermal store
- › Outdoor unit extracts heat from the outdoor air, even at -25 °C
- › Compatible with the Onecta app
- › Voice control available



More details and final information can be found by scanning or clicking the QR codes.



EHBX-E6V



EHBX-E9W

ERGA-EV

ERGA-EVH

ERGA-EVH7

Efficiency data				EHBX + ERGA	04E6V + 04EV	08E6V + 06EVH	08E9W + 06EVH	08E6V + 08EVH7	08E9W + 08EVH7
Heating capacity	Nom.		kW	4.30 (1)/4.60 (2)		6.00 (1)/5.90 (2)		7.50 (1)/7.80 (2)	
Power input	Heating	Nom.	kW	0.850 (1)/1.26 (2)		1.24 (1)/1.69 (2)		1.63 (1)/2.23 (2)	
Cooling capacity	Nom.		kW	4.86 (1)/4.52 (2)		5.96 (1)/5.09 (2)		6.25 (1)/5.44 (2)	
Power input	Cooling	Nom.	kW	0.810 (1)/1.36 (2)		1.06 (1)/1.55 (2)		1.16 (1)/1.73 (2)	
COP				5.10 (1)/3.65 (2)		4.85 (1)/3.50 (2)		4.60 (1)/3.50 (2)	
EER				5.98 (1)/3.32 (2)		5.61 (1)/3.28 (2)		5.40 (1)/3.14 (2)	
Space heating	Average climate water outlet 55 °C	General	SCOP	3.29		3.28		3.35	
			η <sub>s</sub> (Seasonal space heating efficiency)	%	129		128		131
	Seasonal space heating eff. class			A++					
	Average climate water outlet 35 °C	General	SCOP	4.54		4.52		4.61	
η <sub>s</sub> (Seasonal space heating efficiency)			%	179		178		181	
Seasonal space heating eff. class			A+++						

Indoor Unit				EHBX	04E6V	08E6V	08E9W	08E6V	08E9W
Casing	Colour	White + Black							
	Material	Resin, sheet metal							
Dimensions	Unit	HeightxWidthxDepth	mm	840x440x390					
Weight	Unit		kg	42.0		42.4		42.0	42.4
Operation range	Heating	Water side	Min.~Max.	°C					
	Domestic hot water	Water side	Min.~Max.	°C					
Sound power level	Nom.		dBA	42					
Sound pressure level	Nom.		dBA	28					

Outdoor Unit				ERGA	04EV	06EVH	08EVH7	
Dimensions	Unit	HeightxWidthxDepth	mm	740x884x388				
Weight	Unit		kg	58.5				
Compressor	Quantity			1				
	Type			Hermetically sealed swing compressor				
Operation range	Cooling	Min.~Max.	°CDB	10~43				
	Domestic hot water	Min.~Max.	°CDB	-25~-35				
Refrigerant	Type			R-32				
	GWP			675.0				
	Charge		kg	1.50				
	Charge		TCO:Eq	1.01				
	Control			Expansion valve				
Sound power level	Heating	Nom.	dBA	58		60		62
	Cooling	Nom.	dBA	61			62	
Sound pressure level	Heating	Nom.	dBA	44		47		49
	Cooling	Nom.	dBA	48		49		50
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1N~/50/230				
Current	Recommended fuses		A	25				

(1) Cooling Ta 35 °C - LWE 18 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 35 °C (DT = 5 °C) (2) Cooling Ta 35 °C - LWE 7 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 45 °C (DT = 5 °C). This product contains fluorinated greenhouse gases.

# Combination table and options

			Floor standing				
			Heating only		Reversible		
			EHVH04S18E6V	EHVH08S18E6V	EHVX04S18E3V	EHVX08S18E6V	EHVZ04S18E6V
			EHVH04S23E6V	EHVH08S23E6V	EHVX04S23E3V	EHVX08S23E6V	
				EHVH08S18E9W	EHVX04S18E6V	EHVX08S18E9W	
				EHVH08S23E9W	EHVX04S23E6V	EHVX08S23E9W	
Type	Description	Material name					
Outdoor unit	4kW	ERGA04EAV3	•		•		•
	6kW	ERGA06EAV3H		•		•	
	8kW	ERGA08EAV3H7		•		•	
Controls	Madoka wired room thermostat	BRC1HHDK/S/W	•	•	•	•	•
	Wireless room thermostat	EKRTRB	•	•	•	•	•
	Wired digital thermostat	EKRRTWA	•	•	•	•	•
	Wireless room by room control	Daikin Home Controls (pages 272-275)	•	•	•	•	•
	LAN adapter	BRP069A62 <small>(with MMI from v6.8.0)</small>	•	•	•	•	•
	WLAN module	BRP069A71	• (1)	• (1)	• (1)	• (1)	• (1)
	WLAN cartridge	BRP069A78	• (1)	• (1)	• (1)	• (1)	• (1)
	Universal centralised controller for cascade	EKCC8-W DCOM-LT/IO,-LT/MB	•	•	•	•	•
Sensors	Remote indoor sensor	KRCS01-1	• (2)	• (2)	• (2)	• (2)	• (2)
	Remote outdoor sensor	EKRSCA1	• (2)	• (2)	• (2)	• (2)	• (2)
	External sensor for EKRTRB room thermostat	EKRSETS	• (3)	• (3)	• (3)	• (3)	• (3)
Bizone kits	Watts kit	BZKA7V3	•	•	•	•	
	Generic bizone kit	EKMIKPOAF					
	Generic bizone kit	EKMIKPHAF					
Domestic hot water	DHW tank	EKHWS(P)(U)-D(3)V3					
	Thermal stores	EKHWP-(P)B					
	Third party tank kit	EKHY3PART					
	Third party tank kit	EKHY3PART2					
Heat pump convector	Floor standing	FWXV15/20/25*	• (5)	• (5)	• (5)	• (5)	• (5)
	Wall mounted	FWXT15/20/25*	• (5)	• (5)	• (5)	• (5)	• (5)
	Concealed	FWXM15/20/25*	• (5)	• (5)	• (5)	• (5)	• (5)
Other options	Digital I/O PCB	EKRPIHBAA	• (6)	• (6)	• (6)	• (6)	• (6)
	Demand PCB	EKRPIAHTA	•	•	•	•	•
	PC USB cable	EKPCCAB4	•	•	•	•	•
	Relay smart grid	EKRESLG	•	•	•	•	•
	Corner pipe bend kit	EKHVTC	•	•	•	•	•
Dedicated ECH <sub>2</sub> O options	Inline back-up heater (3kW, for *3V (1N ~, 230 V, 3 kW)	EKECBUAF3V					
	Inline back-up heater (6kW, for *6V (1N ~, 230 V, 6 kW)	EKECBUAF6V					
	Inline back-up heater (9kW, for *9WN (3N ~, 400 V, 9 kW)	EKECBUAF9W					
	Inline back-up heater connection kit	EKECBUCO3AF					
	Dirt separator	156021					
	Bivalent connector kit	EKECBIVCO2AF					
	Drain-back connector kit	EKECDBC02AF					
	Circulation stop valves (2 pcs)	165070					
Fill and drain connection KFE BA	165215						

- (1) W-LAN cartridge is supplied in the accessory bag of the unit => To be plugged in the SD-Slot on MMI-2 (in case of bad reception of signal, the WLAN cartridge can be removed and replaced by the WLAN or LAN module).
- (2) Only 1 sensor can be connected: indoor OR outdoor sensor.
- (3) Can only be used in combination with the wireless room thermostat EKRTRB(1).
- (4) EKHY3PART2 can be used if you have a tank in which you can't insert a thermostat.



zone	ECH <sub>2</sub> O				Wall mounted			
	Standard		Bivalent		Heating only		Reversible	
	EHS04P30E	EHS08P30E	EHSB04P30E	EHSB08P30E	EHBH04E6V	EHBH08E6V	EHBX04E6V	EHBX08E6V
EHVZ08S18E6V	EHS04P30E	EHS08P30E	EHSB04P30E	EHSB08P30E	EHBH04E6V	EHBH08E6V	EHBX04E6V	EHBX08E6V
EHVZ08S23E6V		EHS08P50E		EHSB08P50E		EHBH08E9W		EHBX08E9W
EHVZ08S18E9W		EHSX04P30E		EHSXB04P30E				
EHVZ08S23E9W		EHSX04P50E		EHSXB04P50E				
		EHSX08P30E		EHSXB08P30E				
		EHSX08P50E		EHSXB08P50E				
	•		•		•		•	
•		•		•		•		•
•		•		•		•		•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
• (1)	• (1)	• (1)	• (1)	• (1)	• (1)	• (1)	• (1)	• (1)
• (1)	• (1)	• (1)	• (1)	• (1)	• (1)	• (1)	• (1)	• (1)
•	•	•	•	•	•	•	•	•
• (2)	• (2)	• (2)	• (2)	• (2)	• (2)	• (2)	• (2)	• (2)
• (2)	• (2)	• (2)	• (2)	• (2)	• (2)	• (2)	• (2)	• (2)
• (3)	• (3)	• (3)	• (3)	• (3)	• (3)	• (3)	• (3)	• (3)
					•	•	•	•
	•	•	•	•				
	•	•	•	•				
					•	•	•	•
					•	•	•	•
					•	•	•	•
					• (4)	• (4)	• (4)	• (4)
• (5)	• (5)	• (5)	• (5)	• (5)	• (5)	• (5)	• (5)	• (5)
• (5)	• (5)	• (5)	• (5)	• (5)	• (5)	• (5)	• (5)	• (5)
• (5)	• (5)	• (5)	• (5)	• (5)	• (5)	• (5)	• (5)	• (5)
• (6)					• (6)	• (6)	• (6)	• (6)
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
	• (7)	• (7)	• (7)	• (7)				
	• (7)	• (7)	• (7)	• (7)				
	• (7)	• (7)	• (7)	• (7)				
	• (7)	• (7)	• (7)	• (7)				
	•	•	•	•				
			•	•				
	•	•		•				
	•	•	•	•				
	•	•	•	•				

(5) Multi combination (quantity, depends on capacity class). EKVKHPC needs to be installed mandatory on heat pump convector (exception: LT- H/O).

(6) Additional relays to allow bivalent control in combination with external room thermostat are field supply.

(7) Only 1 Backup heater can be connected on one unit: 3 or 6\* or 9 kW (\*No 6TI-model applicable). EKEBCUCO\*AF is needed to connect the backup heater to the main unit.



# Daikin Altherma 3 R

The power pact



The Daikin Altherma 3 R is the world's first high capacity R-32 refrigerant split unit, providing cooling next to heating and domestic hot water.

## Improved compactness

### A redesigned casing

A black horizontal front grille hides the single fan, reducing the perception of sound produced by the unit.

The light grey casing reflects the installation space to help the unit blend into any environment.

### A single fan for high-capacity units

Daikin engineers replaced the double fan with one larger fan and optimised its shape to lower the operational sound and improve air circulation.



1,100 mm





Check out the improved compactness!

## Running on refrigerant R-32

Daikin is a pioneer in launching heat pumps equipped with R-32. With a lower Global Warming Potential (GWP), the R-32 is equivalent in power to standard refrigerants, but achieves higher energy efficiency and lower CO<sub>2</sub> emissions. Easy to recover and reuse, R-32 is the perfect solution for attaining the new European CO<sub>2</sub> emission targets.

Reduced environmental impact: CO<sub>2</sub>eq > reduced by 75%

- > GWP: R410A: 2,088 > R-32: 675
- > 30% less refrigerant charge needed

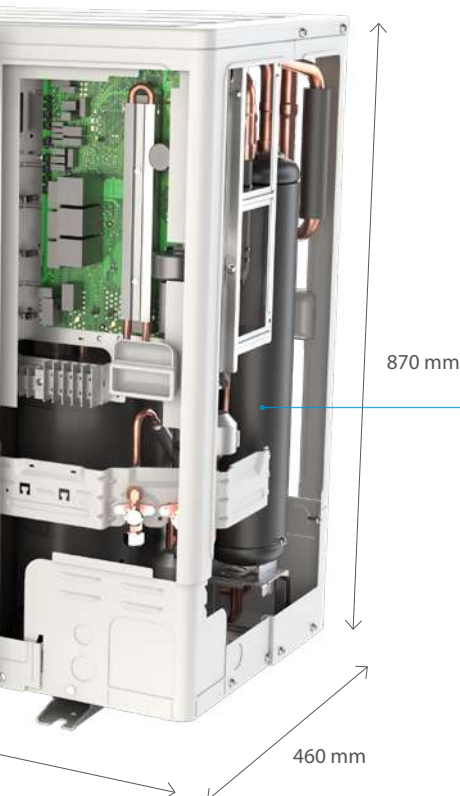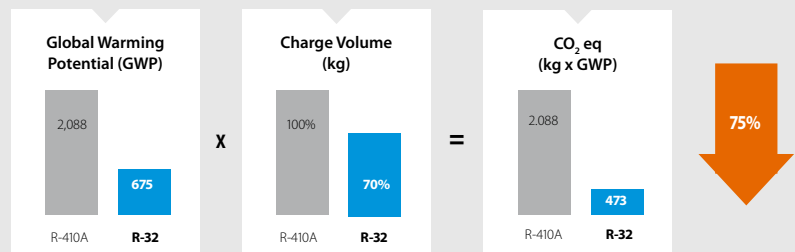

**R-32** BLUEVOLUTION

## Ideal for small spaces

Thanks to its single fan, the height is reduced, and its black grille makes it fit discretely in all kind of exteriors.



# Improved design



## Meeting modern society expectations

Outside, the outdoor unit blends in thanks to its black front grille. The horizontal lines of the grille hides the fan from view, making it more discreet.

In Europe, design has a huge importance. That's why, at Daikin, we have developed a new design line for outdoor units.

Customers invest in their property to make it look better and more sustainable, heat pumps must tick all boxes.



Check out the improved design!





## Discretion and peace of mind

As a third generation Daikin Altherma heat pump, indoor units gather all the installation and design improvements, rewarded in 2018 by RedDot, iF and Plus X awards.

Daikin indoor units can be installed in different places, garage, basement, utility room or even a kitchen while still blending in with the indoor design.

The units have also been designed to ease the work of the installer and therefore contribute to your peace of mind!



reddot award 2018  
winner



PLUS X AWARD  
High Quality  
Design  
Ease of Use  
EcoType



reddot award 2018  
winner



# Improved performance

## All year round comfort

Daikin Altherma 3 R provides heating efficiently, both for space or domestic water.

With a leaving water temperature of up to 60°C at -7°C outside, the unit is intended for new buildings. The unit operations are ensured down to -25°C outside temperature.

As a low temperature heat pump, it is particularly efficient with low temperature emitters, such as underfloor heating and heat pump convectors, both available in the total Daikin solution.

## World first in its category


Indeed, Daikin Altherma 3 R is the world first high capacity R-32 refrigerant split heat pump to provide cooling, next to heating!

A patent is also pending for the plate heat exchanger, positioning once more Daikin as the heat pump leader (patent application n°EP3839360).



Check out the improved performance!



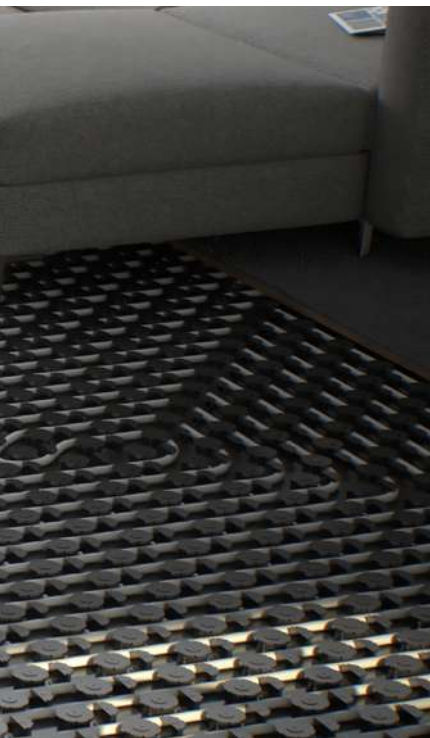

Underfloor heating



Heat pump convector



## Daikin Altherma 3 R, a complete offer

- Space Heating
- Space Cooling
- Domestic hot water
- App and voice control
- Flexible emitter choice
- All year round peace of mind



# Daikin Altherma 3 R F

Floor standing unit with integrated tank

## Why choose Daikin floor standing unit with integrated domestic hot water tank?

The Daikin Altherma 3 floor standing unit is the ideal system **to deliver heating, domestic hot water and cooling** for renovation or large new built.

### All in one system to save installation space and time

- › A combined stainless steel domestic hot water tank of 180 or 230 L and heat pump ensures a faster installation compared to traditional systems.
- › Inclusion of all hydraulic components means no third party components are required.
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 634 mm
- › Integrated back-up heater choice of 6, 9 kW models are available
- › Dedicated bi-zone models allowing temperature monitoring for 2 zones.

### Heating and cooling

Floor standing with integrated tank for domestic hot water



Underfloor heating



# All-in one design

## Reduces the installation footprint and height


Compared to the traditional split version for a wall mounted indoor unit and a separate domestic hot water tank, the integrated indoor unit greatly reduces the installation space required.

With a small footprint of 595 x 634 mm, the integrated indoor unit has a similar footprint when compared to other household appliances.

For installation projects, almost no side clearance is necessary as the piping is located at the top of the unit.

With an installation height of 1.65 m for an 180 L tank and 1.85 m for a 230 L tank, the required installation height is less than 2m.

The compactness of the integrated indoor unit is emphasised by its sleek design and modern look, easy blending in with other household appliances.

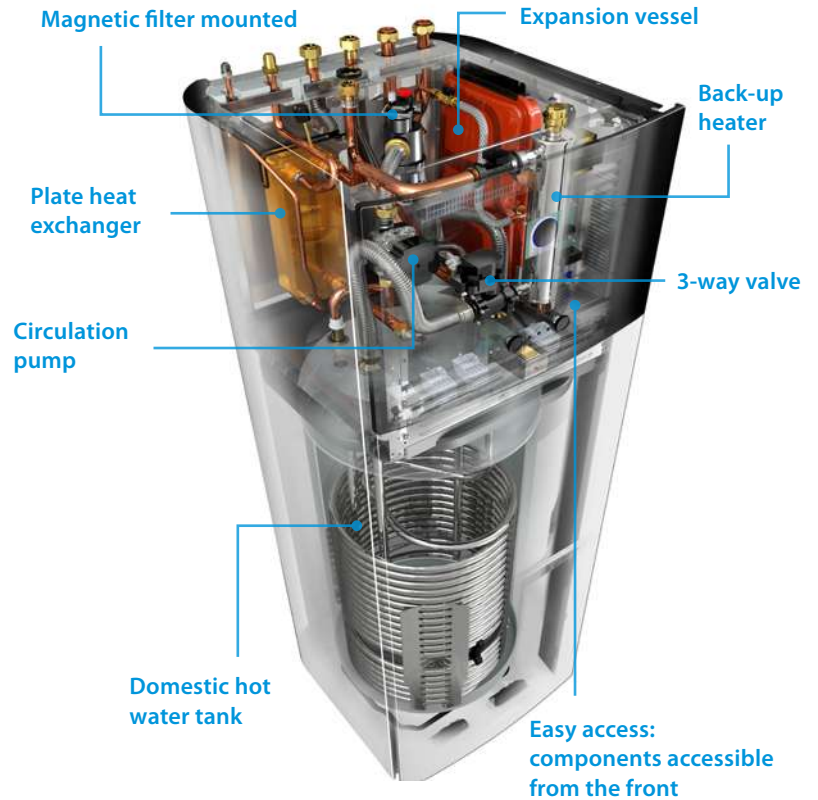

## Advanced user interface



### The Daikin Eye

The intuitive Daikin eye shows you in real time the status of your system.

Blue is perfect! Should the eye turn red, an error has occurred.

### Quick to configure

Log in and you'll be able to completely configure the unit via the new interface in less than 10 steps. You can even check if the unit is ready for use by running test cycles!


### Easy operation

Work super-fast with the new interface. It's super easy to use with just a few buttons and 2 navigational knobs.

### Beautiful design

The interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

## Integrated indoor unit

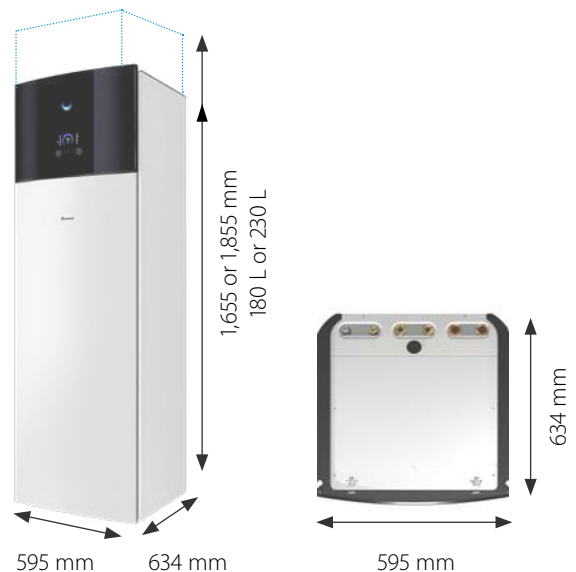

# Daikin Altherma 3 R F

Floor standing air to water heat pump for heating and hot water

- > A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- > Inclusion of all hydraulic components means no third party components are required
- > PCB board and hydraulic components are located in the front for easy access
- > Small installation footprint of 595 x 634 mm
- > Integrated back-up heater of 6 or 9 kW
- > Heat pump operation down to -25°C



011-1W0495  
011-1W0496  
011-1W0497  
011-1W0498  
011-1W0499  
011-1W0500

More details and final information can be found by scanning or clicking the QR codes.

up to **A+++** up to **A+** **60°C** **R-32**

ERLA11-14DV3

ERLA11-14DW1

ERLA-DV37

ERLA-DW17

Efficiency data				EBVH + ERLA		11S18D6V/9W + 11DV/W		11S23D6V/9W + 11DV/W		16S18D6V/9W + 14DV/W		16S23D6V/9W + 14DV/W		16S18D6V/9W + 16DV7/W7		16S23D6V/9W + 16DV7/W7			
Space heating	Average climate water outlet 55°C	General	SCOP	3.23		126		3.22		130		3.32		130					
			η <sub>sp</sub> (Seasonal space heating efficiency)																
			Seasonal space heating eff. class																
Domestic hot water heating	Average climate	General	SCOP	4.63		182		4.60		181		4.61							
			η <sub>wh</sub> (water heating efficiency)																
			Water heating energy efficiency class																
				Declared load profile		L	XL	L	XL	L	XL	L	XL						
				COP <sub>dhw</sub>		2.73	2.63	2.73	2.63	2.73	2.63	2.73	2.63						
				η <sub>wh</sub> (water heating efficiency)		116	109	116	109	116	109	116	109						
				Water heating energy efficiency class		A+	A	A+	A	A+	A	A+	A						
<b>Indoor Unit</b>				<b>EBVH</b>		<b>11S18D6V/9W</b>		<b>11S23D6V/9W</b>		<b>16S18D6V/9W</b>		<b>16S23D6V/9W</b>		<b>16S18D6V/9W</b>		<b>16S23D6V/9W</b>			
Casing	Colour	White + Black																	
	Material	Precoated sheet metal																	
Dimensions	Unit	HeightxWidthxDepth	mm	1,655x595x634	1,855x595x634	1,655x595x634	1,655x595x634	1,655x595x634	1,655x595x634	1,655x595x634	1,855x595x634	1,855x595x634							
Weight	Unit		kg	124	133	124	133	124	133	124	133								
Tank	Water volume		l	180	230	180	230	180	230	180	230								
	Maximum water temperature		°C	70															
	Maximum water pressure		bar	10															
Operation range	Corrosion protection			Pickling															
	Heating	Ambient	Min. ~ Max.	°C	-25 ~ 35														
		Water side	Min. ~ Max.	°C	18 ~ 60														
	Domestic hot water	Ambient	Min. ~ Max.	°C	-25 ~ 35														
		Water side	Min. ~ Max.	°C	10 ~ 60														
Sound power level	Nom.		dBA	44															
Sound pressure level	Nom.		dBA	30															
<b>Outdoor Unit</b>				<b>ERLA</b>		<b>11DV3/W1</b>		<b>14DV3/W1</b>		<b>16DV37/W17</b>									
Dimensions	Unit	HeightxWidthxDepth	mm	870x1,100x460															
Weight	Unit		kg	101															
Compressor	Quantity			1															
	Type			Hermetically sealed swing inverter compressor															
Operation range	Heating	Min. ~ Max.	°CDB	-25 ~ 35															
	Cooling	Min. ~ Max.	°CDB	10 ~ 43															
	Domestic hot water	Min. ~ Max.	°CDB	-25 ~ 35															
Refrigerant	Type			R-32															
	GWP			675															
	Charge		kg	3.80															
	Charge		TCO <sub>2</sub> Eq	2.57															
	Control			Expansion valve															
LW(A) Sound power level (according to EN14825)				62															
Sound pressure level (at 1 meter)	Nom.			48															
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1 ~ /50/230 / W1/3 ~ /50/400															
Current	Recommended fuses		A	32/16															

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R F

Floor standing air to water heat pump for heating, cooling and hot water

- > A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- > Inclusion of all hydraulic components means no third party components are required
- > PCB board and hydraulic components are located in the front for easy access
- > Small installation footprint of 595 x 634 mm
- > Integrated back-up heater of 6 or 9 kW
- > Heat pump operation down to -25°C



- 011-1W0495
- 011-1W0496
- 011-1W0497
- 011-1W0498
- 011-1W0499
- 011-1W0500

More details and final information can be found by scanning or clicking the QR codes.

up to up to

EBVX-D6V EBVX-D9W

ERLA11-14DV3

ERLA11-14DW1

ERLA-DV37

ERLA-DW17

Efficiency data				EBVX + ERLA	11S18D6V/9W + 11DV/W	11S23D6V/9W + 11DV/W	16S18D6V/9W + 14DV/W	16S23D6V/9W + 14DV/W	16S18D6V/9W + 16DV7/W7	16S23D6V/9W + 16DV7/W7
Space heating	Average climate water outlet 55°C	General	SCOP	3.27		3.26		3.35		3.35
			ηs (Seasonal space heating efficiency)	128		128		131		131
		Seasonal space heating eff. class		A++		A++		A++		A++
Domestic hot water heating	Average climate	General	SCOP	4.72		4.68		4.68		4.68
			ηs (Seasonal space heating efficiency)	186		184		184		184
		Seasonal space heating eff. class		A+++		A+++		A+++		A+++
Domestic hot water heating	Average climate	General	Declared load profile	L	XL	L	XL	L	XL	XL
			COPdhw	2.73	2.63	2.73	2.63	2.73	2.63	2.63
			ηwh (water heating efficiency)	116	109	116	109	116	109	109
	Water heating energy efficiency class		A+	A	A+	A	A+	A	A	
Indoor Unit				EBVX	11S18D6V/9W	11S23D6V/9W	16S18D6V/9W	16S23D6V/9W	16S18D6V/9W	16S23D6V/9W
Casing	Colour	White + Black								
	Material	Precoated sheet metal								
Dimensions	Unit	HeightxWidthxDepth	mm	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634	1,855x595x634
Weight	Unit		kg	124	133	124	133	124	133	133
Tank	Water volume		l	180	230	180	230	180	230	230
	Maximum water temperature		°C	70						
	Maximum water pressure		bar	10						
Operation range	Heating	Ambient	Min. ~ Max.	°C						
		Water side	Min. ~ Max.	°C						
	Cooling	Ambient	Min. ~ Max.	°C						
		Water side	Min. ~ Max.	°C						
	Domestic hot water	Ambient	Min. ~ Max.	°C						
		Water side	Min. ~ Max.	°C						
Sound power level	Nom.		dBA	44						
Sound pressure level	Nom.		dBA	30						
Outdoor Unit				ERLA	11DV3/W1	14DV3/W1	16DV37/W17			
Dimensions	Unit	HeightxWidthxDepth	mm	870x1,100x460						
Weight	Unit		kg	101						
Compressor	Quantity			1						
	Type			Hermetically sealed swing inverter compressor						
Operation range	Heating	Min. ~ Max.	°CDB	-25 ~ 35						
	Cooling	Min. ~ Max.	°CDB	10 ~ 43						
	Domestic hot water	Min. ~ Max.	°CDB	-25 ~ 35						
Refrigerant	Type			R-32						
	GWP			675						
	Charge		kg	3.80						
	Charge		TCO <sub>2</sub> Eq	2.57						
	Control			Expansion valve						
LW(A) Sound power level (according to EN14825)				62						
Sound pressure level (at 1 meter)	Nom.			48						
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1 ~ /50/230 / W1/3 ~ /50/400						
Current	Recommended fuses		A	32/16						

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R F

## Floor standing integrated with two different temperature zones monitoring

- › A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 634 mm
- › Integrated back-up heater of 6 or 9 kW
- › Heat pump operation down to -25°C



up to **A+++** up to **A+** **60°C** **R-32**

More details and final information can be found by scanning or clicking the QR codes.

ERLA11-14DV3

ERLA11-14DW1

ERLA-DV37

ERLA-DW17

Efficiency data				EBVZ + ERLA	16S18D6V/9W + 11DV/W	16S23D6V/9W + 11DV/W	16S18D6V/9W + 14DV/W	16S23D6V/9W + 14DV/W	16S18D6V/9W + 16DV7/W7	16S23D6V/9W + 16DV7/W7	
Space heating	Average climate water outlet 55°C	General	SCOP	3.23		3.22		3.32		3.32	
			η <sub>s</sub> (Seasonal space heating efficiency)	131		126		130		130	
			Seasonal space heating eff. class			A++					
Average climate water outlet 35°C	General	SCOP	4.61		4.60		4.61		4.61		
		η <sub>s</sub> (Seasonal space heating efficiency)	182		181		181		181		
			Seasonal space heating eff. class			A+++					
Domestic hot water heating	Average climate	Declared load profile		L	XL	L	XL	L	XL	XL	
		COP <sub>dhw</sub>	2.73		2.63		2.73		2.63		
		η <sub>wh</sub> (water heating efficiency)	116		109		116		109		
		Water heating energy efficiency class		A+		A		A+		A	
<b>Indoor Unit</b>				<b>EBVZ</b>	<b>16S18D6V/9W</b>	<b>16S23D6V/9W</b>	<b>16S18D6V/9W</b>	<b>16S23D6V/9W</b>	<b>16S23D6V/9W</b>	<b>16S23D6V/9W</b>	
Casing	Colour	White + Black									
	Material	Precoated sheet metal									
Dimensions	Unit	HeightxWidthxDepth	mm	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634	1,855x595x634	
Weight	Unit		kg	137	145	137	145	137	145	145	
Tank	Water volume		l	180	230	180	230	180	230	230	
	Maximum water temperature		°C	70							
	Maximum water pressure		bar	10							
	Corrosion protection			Pickling							
Operation range	Heating	Ambient	Min. ~ Max.	°C		-25 ~ 35		-25 ~ 35		-25 ~ 35	
		Water side	Min. ~ Max.	°C		18 ~ 60		18 ~ 60		18 ~ 60	
	Domestic hot water	Ambient	Min. ~ Max.	°C		-25 ~ 25		-25 ~ 25		-25 ~ 25	
		Water side	Min. ~ Max.	°C		10 ~ 60		10 ~ 60		10 ~ 60	
Sound power level	Nom.		dBA	44							
Sound pressure level	Nom.		dBA	30							
<b>Outdoor Unit</b>				<b>ERLA</b>	<b>11DV3/W1</b>	<b>14DV3/W1</b>	<b>16DV37/W17</b>				
Dimensions	Unit	HeightxWidthxDepth	mm	870x1,100x460							
Weight	Unit		kg	101							
Compressor	Quantity			1							
	Type			Hermetically sealed swing inverter compressor							
Operation range	Heating	Min. ~ Max.	°CDB		-25 ~ 35		-25 ~ 35		-25 ~ 35		
	Cooling	Min. ~ Max.	°CDB		10 ~ 43		10 ~ 43		10 ~ 43		
	Domestic hot water	Min. ~ Max.	°CDB		-25 ~ 35		-25 ~ 35		-25 ~ 35		
Refrigerant	Type			R-32							
	GWP			675							
	Charge		kg	3.80							
	Charge		TCO <sub>2</sub> Eq	2.57							
	Control			Expansion valve							
LW(A) Sound power level (according to EN14825)				62							
Sound pressure level (at 1 meter)	Nom.			48							
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1 ~ /50/230 / W1/3 ~ /50/400							
Current	Recommended fuses		A	32/16							

This product contains fluorinated greenhouse gases.



# Daikin Altherma 3 R ECH<sub>2</sub>O

## Floor standing unit with integrated ECH<sub>2</sub>O tank

The Daikin Altherma low temperature split integrated ECH<sub>2</sub>O is renowned for its ability to maximise renewable energy sources to provide the ultimate comfort in heating, domestic hot water and cooling

### Intelligent storage management

- › The unit is 'Smart Grid' ready to take advantage of low energy tariffs and efficiently store thermal energy for space heating and domestic hot water
- › Continuous heating during defrost mode and use of stored heat for space heating (500l tank only)
- › Electronic management of both heat pump and ECH<sub>2</sub>O thermal store maximises energy efficiency, as well as convenient heating and domestic hot water
- › Achieves the highest standards for water sanitation
- › Uses more renewable energy with solar connection


### Innovative and high-quality tank

- › Lightweight plastic tank
- › No corrosion, anode, scale or lime deposits
- › Contains impact resistant polypropylene inner and outer walls filled with high-grade insulation foam to reduce heat losses to a minimum

### Combinable with other heat sources

- › The bivalent option allows heat from other sources such as oil, gas or pellet-fired boilers to be stored in the solar system, further lowering energy consumption

## ECH<sub>2</sub>O

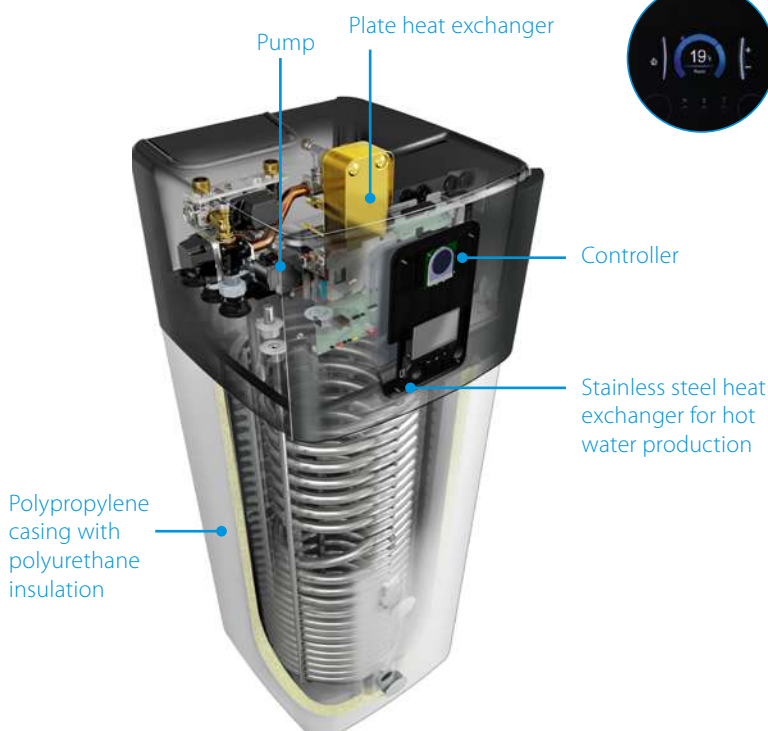

### Advanced user interface

#### The Daikin-Eye

The intuitive Daikin eye shows you in real time the status of your system. Blue is perfect! Should the eye turn red, an error has occurred.

#### Quick to configure

Log in and you'll be able to completely configure the unit in less than 10 steps. You can even check if the unit is ready for use by running test cycles!

#### Easy operation

The user interface works really fast thanks to its icon-based menus.

#### Beautiful design

The interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

## ECH<sub>2</sub>O thermal store range: additional hot water comfort

Combine your indoor unit with a thermal store to achieve the ultimate comfort at home.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options

Built for small and large homes, customers can choose between a pressureless and a pressurised hot water system.


### Pressureless (drain-back) solar system EBSH-D, EBSX-D

- › The solar collectors are only filled with water when sufficient heating is provided by the sun
- › The pumps in the control and pump unit switch on briefly and fill the collectors with storage tank water
- › After filling, water circulation is maintained by the remaining pump

### Pressurised solar system EBSHB-D, EBSXB-D

- › System is filled with heat transfer fluid with the correct amount of antifreeze to avoid freezing in winter
- › System is pressurised and sealed


### Monthly energy consumption of an average detached house

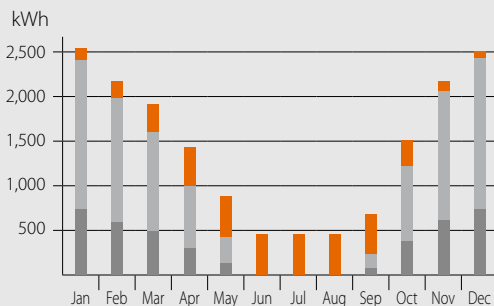

- Utilisation of solar energy for domestic hot water and central heating
- Heat pump (environmental heat)
- Auxiliary energy (electricity)

### System diagram: Integrated solar unit

- 1 Use of solar energy for domestic hot water and central heating
- 2 External heat pump unit
- 3 Solar thermal collectors
- 4 Solar pump station

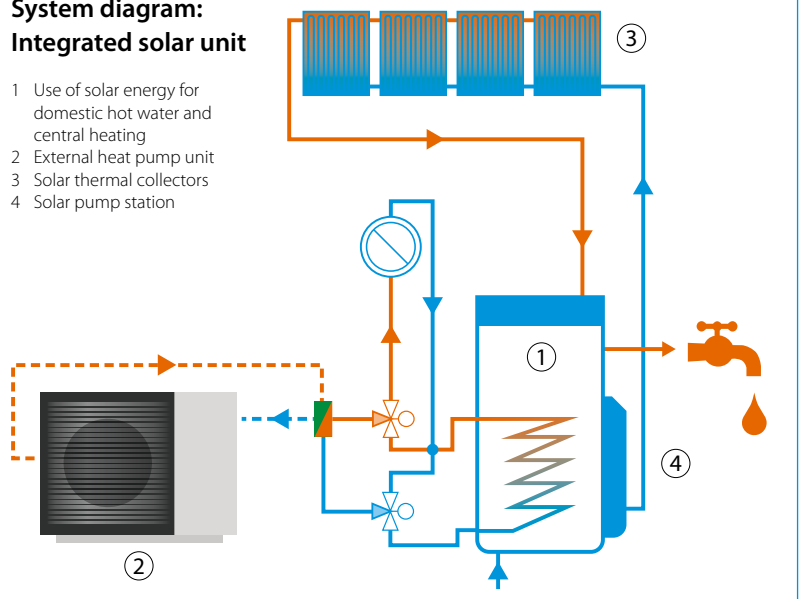

# Daikin Altherma 3 R ECH<sub>2</sub>O

Floor standing air-to-water heat pump for heating and hot water with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Solar support of domestic hot water with pressureless (drain-back) solar system
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating, hot water and cooling operation
- › Heat pump operation down to -25°C
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump



up to up to



More details and final information can be found by scanning or clicking the QR codes.



EBSH-D

ERLA11-14DV3

ERLA11-14DW1

ERLA-DV37

ERLA-DW17

Efficiency data				EBSH + ERLA		11P30D + 11DV/W	11P50D + 11D/W	16P30D + 14DV/W	16P50D + 14DV/W	16P30D + 16DV7/W7	16P50D + 16DV7/W7
Space heating	Average climate water outlet 55°C	General	SCOP ηs (Seasonal space heating efficiency) Seasonal space heating eff. class	%	3.23	126	3.22			3.32	130
	Average climate water outlet 35°C	General	SCOP ηs (Seasonal space heating efficiency) Seasonal space heating eff. class	%	4.63 182		4.60	181	4.61		
Domestic hot water heating	General	Declared load profile			L	XL	L	XL	L	XL	
	Average climate	COP <sub>dhw</sub>	η <sub>wh</sub> (water heating efficiency) Water heating energy efficiency class	%	2.73/2.75 115/116	3.05/3.10 126/128	2.73/2.75 115/116	3.05/3.10 126/128	2.73/2.75 115/116	3.05/3.10 126/128	A+
Indoor Unit				EBSH	11P30D	11P50D	16P30D	16P50D	16P30D	16P50D	
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)									
	Material	Impact resistant polypropylene									
Dimensions	Unit	HeightxWidthxDepth	mm	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817		
Weight	Unit		kg	93	114	93	114	93	114		
Tank	Water volume		l	294	477	294	477	294	477		
	Maximum water temperature		°C	85							
Operation range	Heating	Ambient	Min. ~ Max.	°C							
		Water side	Min. ~ Max.	°C							
	Domestic hot water	Ambient	Min. ~ Max.	°C							
		Water side	Min. ~ Max.	°C							
Sound power level	Nom.		dBA	44.70							
Sound pressure level	Nom.		dBA	36.80							
Outdoor Unit				ERLA	11DV3/W1	14DV3/W1	16DV37/W17				
Dimensions	Unit	HeightxWidthxDepth	mm	870x1,100x460							
Weight	Unit		kg	101							
Compressor	Quantity			1							
	Type			Hermetically sealed swing inverter compressor							
Operation range	Heating	Min. ~ Max.	°CDB	-25 ~ 35							
	Cooling	Min. ~ Max.	°CDB	10 ~ 43							
	Domestic hot water	Min. ~ Max.	°CDB	-25 ~ 35							
Refrigerant	Type			R-32							
	GWP			675							
	Charge		kg	3.80							
	Charge		TCO <sub>2</sub> Eq	2.57							
	Control			Expansion valve							
LW(A) Sound power level (according to EN14825)				62							
Sound pressure level (at 1 meter)	Nom.			48							
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1 ~ /50/230 / W1/3 ~ /50/400							
Current	Recommended fuses		A	32/16							

This product contains fluorinated greenhouse gases.



# Daikin Altherma 3 R ECH<sub>2</sub>O

Floor standing air-to-water heat pump for **bivalent heating and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation
- › Heat pump operation down to -25°C



up to



011-1W0493  
011-1W0494

More details and final information can be found by scanning or clicking the QR codes.



EBSHB-D

ERLA11-14DV3

ERLA11-14DW1

ERLA-DV37

ERLA-DW17

Efficiency data				EBSHB + ERLA	11P30D + 11DV/W	11P50D + 11DV/W	16P30D + 14DV/W	16P50D + 14DV/W	16P30D + 16DV7/W7	16P50D + 16DV7/W7	
Space heating	Average climate water outlet 55°C	General	SCOP ηs (Seasonal space heating efficiency) %	3.23		3.22		3.32		3.32	
		General	Seasonal space heating eff. class	126		A++		130		130	
Domestic hot water heating	Average climate water outlet 35°C	General	SCOP ηs (Seasonal space heating efficiency) %	4.63		4.60		4.61		4.61	
		General	Seasonal space heating eff. class	182		A+++		181		181	
Indoor Unit	Average COPdhw	Declared load profile		L	XL	L	XL	L	XL	XL	
		Water heating energy efficiency class		2.73/2.75	3.05/3.10	2.73/2.75	3.05/3.10	2.73/2.75	3.05/3.10	3.05/3.10	
Outdoor Unit	Nom.	ηwh (water heating efficiency) %		115/116	126/128	115/116	126/128	115/116	126/128	126/128	
		Water heating energy efficiency class		A+							
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)									
	Material	Impact resistant polypropylene									
Dimensions	Unit	HeightxWidthxDepth	mm	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817	1,910x792x817	
Weight	Unit	kg									
Tank	Water volume	l									
	Maximum water temperature	°C									
Operation range	Heating	Ambient	Min. ~ Max.	°C							
		Water side	Min. ~ Max.	°C							
	Domestic hot water	Ambient	Min. ~ Max.	°C							
		Water side	Min. ~ Max.	°C							
Sound power level	Nom.	dBA									
Sound pressure level	Nom.	dBA									
Dimensions	Unit	HeightxWidthxDepth	mm	ERLA 11DV3/W1			ERLA 14DV3/W1		ERLA 16DV37/W17		
	Unit	kg									
Compressor	Quantity	1									
Operation range	Heating	Type	Hermetically sealed swing inverter compressor								
		Min. ~ Max.	°CDB								
		Min. ~ Max.	°CDB								
		Min. ~ Max.	°CDB								
Refrigerant	Type	R-32									
	GWP	675									
	Charge	kg									
	Charge	TCO <sub>2</sub> Eq									
	Control	Expansion valve									
LW(A) Sound power level (according to EN14825)	Nom.	62									
Sound pressure level (at 1 meter)	Nom.	48									
Power supply	Name/Phase/Frequency/Voltage	Hz/V									
Current	Recommended fuses	A									

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R ECH<sub>2</sub>O

Floor standing air-to-water heat pump for **heating, cooling and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating, hot water and cooling
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Solar support of domestic hot water with pressureless (drain-back) solar system
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating, hot water and cooling operation
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump



up to



More details and final information can be found by scanning or clicking the QR codes.



EBSX-D

ERLA11-14DV3

ERLA11-14DW1

ERLA-DV37

ERLA-DW17

Efficiency data				EBSX + ERLA	11P30D + 11DV/W	11P50D + 11DV/W	16P30D + 14DV/W	16P50D + 14DV/W	16P30D + 16DV7/W7	16P50D + 16DV7/W7
Space heating	Average climate water outlet 55°C	General	SCOP ηs (Seasonal space heating efficiency) %		3.27			3.26		3.35
			Seasonal space heating eff. class			128				131
	Average climate water outlet 35°C	General	SCOP ηs (Seasonal space heating efficiency) %		4.72			4.68		
			Seasonal space heating eff. class		186			184		
Domestic hot water heating	Average climate	General	Declared load profile	L	XL	L	XL	L	XL	
			COPdhw ηwh (water heating efficiency) %	2.73/2.75	3.05/3.10	2.73/2.75	3.05/3.10	2.73/2.75	3.05/3.10	
			Water heating energy efficiency class		115/116	126/128	115/116	126/128	115/116	126/128
				A+						
Indoor Unit				EBSX	11P30D	11P50D	16P30D	16P50D	16P30D	16P50D
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)								
	Material	Impact resistant polypropylene								
Dimensions	Unit	HeightxWidthxDepth	mm	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817	
Weight	Unit		kg	93	114	93	114	93	114	
Tank	Water volume		l	294	477	294	477	294	477	
	Maximum water temperature		°C				85			
Operation range	Heating	Ambient	Min. ~ Max.	°C						
		Water side	Min. ~ Max.	°C						
	Cooling	Ambient	Min. ~ Max.	°C						
		Water side	Min. ~ Max.	°C						
	Domestic hot water	Ambient	Min. ~ Max.	°C						
		Water side	Min. ~ Max.	°C						
Sound power level	Nom.		dBA	44.70						
Sound pressure level	Nom.		dBA	36.80						
Outdoor Unit				ERLA	11DV3/W1	14DV3/W1	16DV37/W17			
Dimensions	Unit	HeightxWidthxDepth	mm	870x1,100x460						
Weight	Unit		kg	101						
Compressor	Quantity			1						
	Type			Hermetically sealed swing inverter compressor						
Operation range	Heating	Min. ~ Max.	°CDB	-25 ~ 35						
	Cooling	Min. ~ Max.	°CDB	10 ~ 43						
	Domestic hot water	Min. ~ Max.	°CDB	-25 ~ 35						
Refrigerant	Type			R-32						
	GWP			675						
	Charge		kg	3.80						
	Charge		TCO <sub>2</sub> Eq	2.57						
	Control			Expansion valve						
LW(A) Sound power level (according to EN14825)				62						
Sound pressure level (at 1 meter)	Nom.			48						
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1 ~ /50/230 / W1/3 ~ /50/400						
Current	Recommended fuses		A	32/16						

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R ECH<sub>2</sub>O

Floor standing air-to-water heat pump for **bivalent heating, cooling and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation
- › Heat pump operation down to -25°C



More details and final information can be found by scanning or clicking the QR codes.



EBSXB-D

ERLA11-14DV3

ERLA11-14DW1

ERLA-DV37

ERLA-DW17

Efficiency data				EBSXB + ERLA		11P30D + 11DV/W	11P50D + 11DV/W	16P30D + 14DV/W	16P50D + 14DV/W	16P30D + 16DV7/W7	16P50D + 16DV7/W7	
Space heating	Average climate water outlet 55°C	General	SCOP			3.27		3.26		3.35		
			η <sub>sp</sub> (Seasonal space heating efficiency)			128				131		
			Seasonal space heating eff. class					A++				
Domestic hot water heating	Average climate	General	SCOP			4.72		4.68				
			η <sub>sp</sub> (Seasonal space heating efficiency)			186		184				
			Seasonal space heating eff. class					A+++				
Indoor Unit	Casing	Material	Declared load profile			L	XL	L	XL	L	XL	
			Average COP <sub>dhw</sub>			2.73/2.75	3.05/3.10	2.73/2.75	3.05/3.10	2.73/2.75	3.05/3.10	
			η <sub>wh</sub> (water heating efficiency)			115/116	126/128	115/116	126/128	115/116	126/128	
Water heating energy efficiency class							A+					
Indoor Unit	Tank	Water volume			294	477	294	477	294	477		
			Maximum water temperature					85				
Operation range	Heating	Ambient	Min. ~ Max.					-25 ~ 35				
		Water side	Min. ~ Max.					18 ~ 60				
	Cooling	Ambient	Min. ~ Max.					10 ~ 43				
		Water side	Min. ~ Max.					5 ~ 22				
	Domestic hot water	Ambient	Min. ~ Max.					-25 ~ 35				
		Water side	Min. ~ Max.					-25 ~ 35				
Sound power level	Nom.							44.70				
Sound pressure level	Nom.							36.80				
Outdoor Unit	Dimensions	Unit	HeightxWidthxDepth	mm	ERLA		11DV3/W1		14DV3/W1		16DV37/W17	
									870x1,100x460			
											101	
Compressor	Quantity							1				
Operation range	Heating											
Refrigerant	Type							R-32				
								675				
								3.80				
LW(A) Sound power level (according to EN14825)	Sound pressure level (at 1 meter)									62		
Power supply	Name/Phase/Frequency/Voltage									V3/1 ~ /50/230 / W1/3 ~ /50/400		
Current	Recommended fuses									32/16		

This product contains fluorinated greenhouse gases.


# Daikin Altherma 3 R W Wall mounted unit

## Why choose Daikin wall mounted unit?

The Daikin Altherma 3 split wall mounted unit offers heating and cooling with high flexibility for a quick and easy installation, with an optional connection to deliver domestic hot water.

## High flexibility for installation and domestic hot water connection

- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required
- › The unit's sleek design blends in with other household appliances
- › Combine with a stainless steel or ECH<sub>2</sub>O thermal store

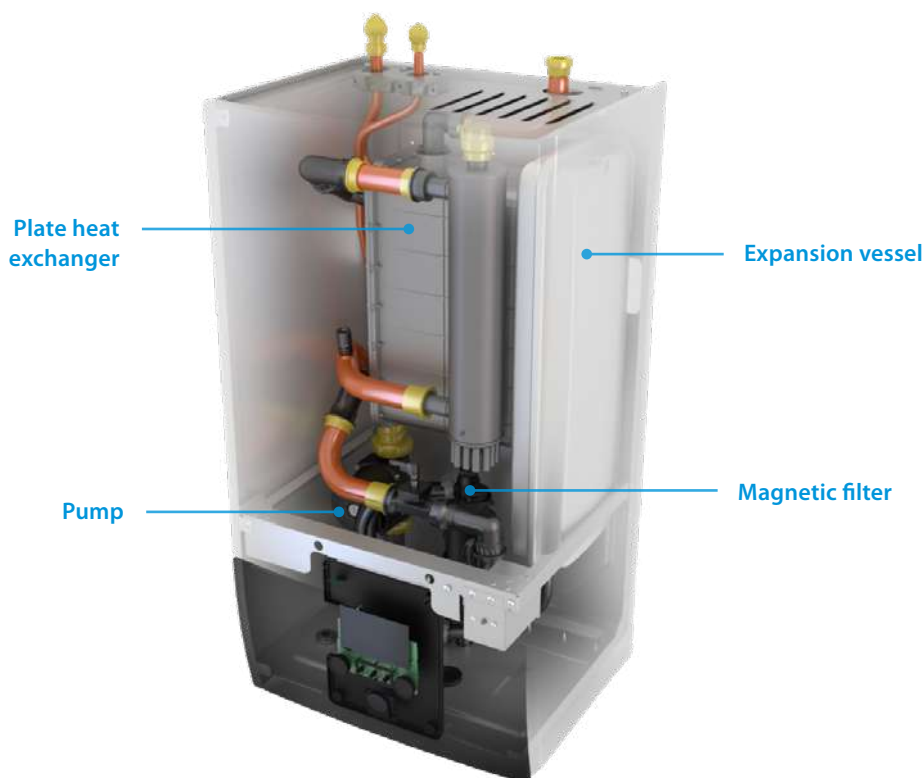

## Flexibility in providing domestic hot water

If the end user requires hot water and installation height is limited, a separate stainless steel tank provides the required installation flexibility.

ECH<sub>2</sub>O thermal store range: additional hot water comfort

Combine your wall mounted unit with a thermal store for additional hot water comfort.


- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: with high tapping performance
- › Fit for future possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build on the unit combined with cascade principle offers flexible installation options



## Flexibility in providing space heating

Daikin Altherma 3 RW is the perfect choice in case the end user is looking for space heating or cooling while domestic hot water is provided by another system.


Example of installation with a stainless steel domestic hot water tank.

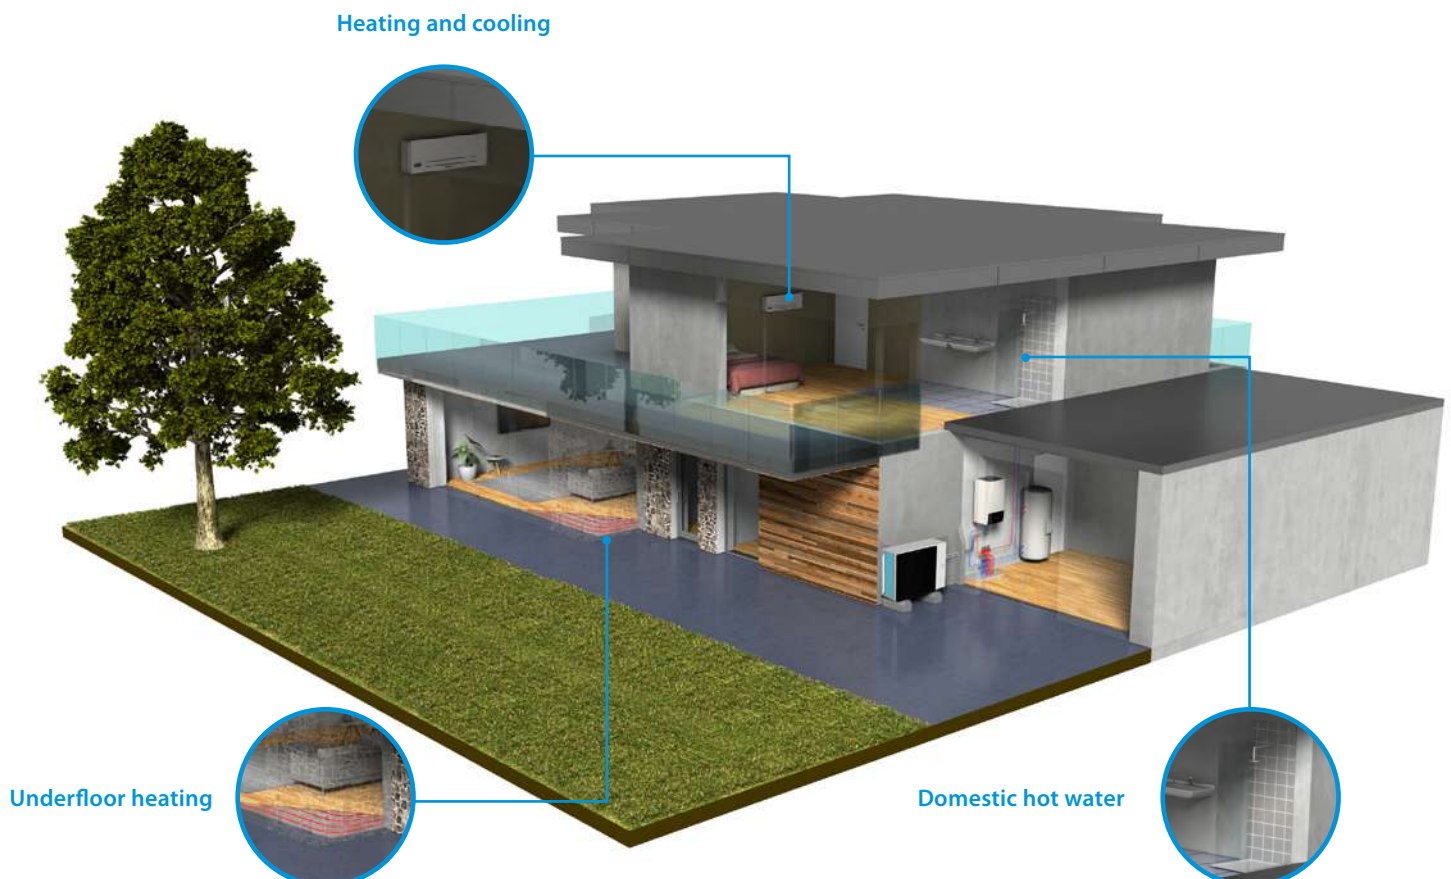

# Daikin Altherma 3 R W

Wall mounted **heating only** air-to-water heat pump

- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required
- › The unit's sleek design blends in with other household appliances
- › Combine with a stainless steel tank or ECH<sub>2</sub>O thermal store
- › Heat pump operation down to -25°C

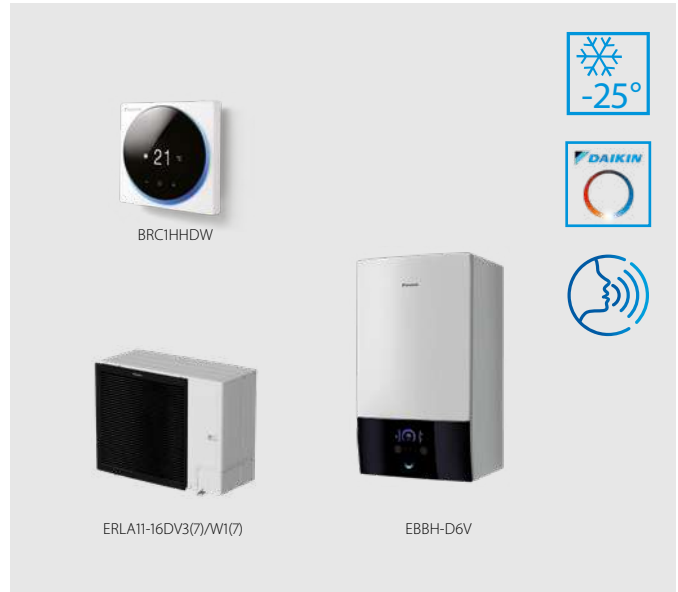

up to

**A+++**

**R-32**



011-1W0498  
011-1W0499  
011-1W0500

More details and final information can be found by scanning or clicking the QR codes.



EBBH-D6V



EBBH-D9W

ERLA11-14DV3				ERLA11-14DW1				ERLA-DV37				ERLA-DW17							
Efficiency data				EBBH + ERLA				11D6V + 11DV/W		11D9W + 11DV/W		16D6V + 14DV/W		16D9W + 14DV/W		16D6V + 16DV7/W7		16D9W + 16DV7/W7	
Space heating	Average climate water outlet 55°C	General	SCOP					3.23				3.22				3.32			
			η <sub>s</sub> (Seasonal space heating efficiency)	%					126						130				
			Seasonal space heating eff. class							A++									
	Average climate water outlet 35°C	General	SCOP					4.63				4.60				4.61			
		η <sub>s</sub> (Seasonal space heating efficiency)	%					182						181					
		Seasonal space heating eff. class							A+++										
Indoor Unit				EBBH				11D6V		11D9W		16D6V		16D9W		16D6V		16D9W	
Casing	Colour									White + Black									
	Material									Resin, sheet metal									
Dimensions	Unit	HeightxWidthxDepth	mm								840x440x390								
Weight	Unit					52.50						54.50							
Operation range	Heating	Ambient	Min. ~ Max.	°C								-25 ~ 35							
		Water side	Min. ~ Max.	°C								18 ~ 60							
	Domestic hot water	Ambient	Min. ~ Max.	°C								-25 ~ 35							
		Water side	Min. ~ Max.	°C								10 ~ 60							
Sound power level	Nom.											44							
Sound pressure level	Nom.													30					
Outdoor Unit				ERLA				11DV3/W1		14DV3/W1		16DV37/W17							
Dimensions	Unit	HeightxWidthxDepth	mm								870x1,100x460								
Weight	Unit											101							
Compressor	Quantity											1							
	Type											Hermetically sealed swing inverter compressor							
Operation range	Heating	Min. ~ Max.	°CDB										-25 ~ 35						
	Cooling	Min. ~ Max.	°CDB										10 ~ 43						
	Domestic hot water	Min. ~ Max.	°CDB										-25 ~ 35						
Refrigerant	Type											R-32							
	GWP											675							
	Charge											3.80							
	Charge	TCO <sub>2</sub> Eq										2.57							
	Control											Expansion valve							
LW(A) Sound power level (according to EN14825)													62						
Sound pressure level (at 1 meter)	Nom.											48							
Power supply	Name/Phase/Frequency/Voltage	Hz/V										V3/1 ~ /50/230 / W1/3 ~ /50/400							
Current	Recommended fuses	A										32/16							

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R W

Wall mounted **reversible** air-to-water heat pump

- > Inclusion of all hydraulic components means no third party components are required
- > PCB board and hydraulic components are located in the front for easy access
- > Compact dimensions allows for small installation space, as almost no side clearances are required
- > The unit's sleek design blends in with other household appliances
- > Combine with a stainless steel tank or ECH<sub>2</sub>O thermal store
- > Heat pump operation down to -25°C



up to



011-1W0498  
011-1W0499  
011-1W0500

More details and final information can be found by scanning or clicking the QR codes.



EBBX-D6V



EBBX-D9W

ERLA11-14DV3

ERLA11-14DW1

ERLA-DV37

ERLA-DW17

Efficiency data				EBBX + ERLA	11D6V + 11DV/W	11D9W + 11DV/W	16D6V + 14DV/W	16D9W + 14DV/W	16D6V + 16DV7/W7	16D9W + 16DV7/W7	
Space heating	Average climate water outlet 55°C	General	SCOP		3.27			3.26		3.35	
			η <sub>s</sub> (Seasonal space heating efficiency)	%		128				131	
	Seasonal space heating eff. class						A++				
	Average climate water outlet 35°C	General	SCOP		4.72			4.68			
η <sub>s</sub> (Seasonal space heating efficiency)			%		186			184			
Seasonal space heating eff. class							A+++				
Indoor Unit				EBBX	11D6V	11D9W	16D6V	16D9W	16D6V	16D9W	
Casing	Colour	White + Black									
	Material	Resin, sheet metal									
Dimensions	Unit	HeightxWidthxDepth	mm	840x440x390							
Weight	Unit	kg		52.50				54.50			
Operation range	Heating	Ambient	Min. ~ Max.	°C							
		Water side	Min. ~ Max.	°C	-25 ~ 35						
	Cooling	Ambient	Min. ~ Max.	°C							
		Water side	Min. ~ Max.	°C	18 ~ 60						
	Domestic hot water	Ambient	Min. ~ Max.	°C							
		Water side	Min. ~ Max.	°C	10 ~ 43						
Sound power level	Nom.	dBA		44							
Sound pressure level	Nom.	dBA		30							
Outdoor Unit				ERLA	11DV3/W1	14DV3/W1	16DV37/W17				
Dimensions	Unit	HeightxWidthxDepth	mm	870x1,100x460							
Weight	Unit	kg		101							
Compressor	Quantity	1									
	Type	Hermetically sealed swing inverter compressor									
Operation range	Heating	Min. ~ Max.	°CDB	-25 ~ 35							
	Cooling	Min. ~ Max.	°CDB	10 ~ 43							
	Domestic hot water	Min. ~ Max.	°CDB	-25 ~ 35							
Refrigerant	Type	R-32									
	GWP	675									
	Charge	kg	3.80								
	Charge	TCO <sub>2</sub> Eq	2.57								
	Control	Expansion valve									
LW(A) Sound power level (according to EN14825)	62										
Sound pressure level (at 1 meter)	48										
Power supply	Name/Phase/Frequency/Voltage	Hz/V	V3/1 ~ /50/230 / W1/3 ~ /50/400								
Current	Recommended fuses	A	32/16								

This product contains fluorinated greenhouse gases.

# Combination table and options

Combination table and options			Floor standing integrated stainless steel tank			
			H/O		Reversible	
			11 class	16 class	11 class	16 class
			EBVH11S18D6V	EBVH16S18D6V	EBVX11S18D6V	EBVX16S18D6V
			EBVH11S18D9W	EBVH16S18D9W	EBVX11S18D9W	EBVX16S18D9W
Type	Description	Material name				
Outdoor unit	4kW	ERLA11DV3/W1	●		●	
	6kW	ERLA14DV3/W1		●		●
	8kW	ERLA16DV37/W17		●		●
Controls	Madoka wired room thermostat	BRC1HHDK/S/W	●	●	●	●
	Wireless room thermostats	EKRTRB	●	●	●	●
	Wired digital thermostat	EKRRTWA	●	●	●	●
	Wireless room by room control	Daikin Home Controls (pages 272-275)	●	●	●	●
	LAN adapter	BRP069A62 (with MMI from v6.8.0)	●	●	●	●
	WLAN module	BRP069A71	●	●	●	●
	WLAN cartridge	BRP069A78	●	●	●	●
	Wired digital thermostat	EKWCTRD1V3	●	●	●	●
	Wired analog thermostat	EKWCTRAN1V3	●	●	●	●
	Valve actuator	EKWCVATR1V3	●	●	●	●
	Wired underfloor heating base station	EKWUFHTA1V3	●	●	●	●
	Universal centralised controller	EKCC8-W, DCOM-LT/IO, LT/MB	●	●	●	●
Domestic hot water	Stainless steel tank	EKHWS(P)(U)150D3V3				
		EKHWS(P)(U)180D3V3				
		EKHWS(P)(U)200D3V3				
		EKHWS(P)(U)250D3V3				
		EKHWS(P)(U)300D3V3				
	Polypropylene tank	EKHWP300B				
		EKHWP500B				
		EKHWP300PB				
		EKHWP500PB				
	Third party tank kit	EKHY3PART				
EKHY3PART2						
Sensors	External sensor for EKTRTB room thermostat	EKRTETS	● (5)	● (5)	● (5)	● (5)
	High voltage smart grid relay kit	EKRELSG	●	●	●	●
	Remote indoor temperature sensor	KRCS01-1	● (6)	● (6)	● (6)	● (6)
	Remote outdoor temperature sensor	EKRSCA1	● (6)	● (6)	● (6)	● (6)
Bizone kits	Generic Bizone kit (PCB only)	EKMIKPOA	●	●	●	●
	Generic Bizone kit	EKMIKPHA	●	●	●	●
Other options	Digital I/O PCB	EKRP1HBA	● (7)	● (7)	● (7)	● (7)
	Demand PCB	EKRP1AHT	●	●	●	●
	PC USB cable	EKPCCAB4	●	●	●	●
	Balancing valve	KBLNVALVE	●	●	●	●
	Decoupler	KDECOUP	●	●	●	●
E <sub>CH</sub> O options	Inline BUH - connection kit	EKECBUCO2AF				
	Inline BUH - 3kW, for *3V (IN ~, 230 V, 3 kW)	EKECBUAF3V				
	Inline BUH - 6kW, for *6V (IN ~, 230 V, 6 kW)	EKECBUAF6V				
	Inline BUH - 9kW, for *9WN (3N ~, 400 V, 9 kW)	EKECBUAF9W				
	Caleffi sludge and magnetite separator SAS1	156021				
	Biv Connector Kit	EKECBIVCO2AF				
	DB connector Kit	EKECDBCO2AF				

(1) Dedicated connection kit: EKEPRHLT3HX.

(2) Dedicated connection kit: ETBH: EKEPRHLT5H / ETBX: EKEPRHLT5X.

(3) EKHY3PART can be used if you have a tank in which you can insert the thermistor.

(4) EKHY3PART2 can be used if you have a tank in which you can't insert a thermistor.

(5) Can only be used in combination with the wireless room thermostat EKTRTB.



	Floor standing integrated ECH <sub>2</sub> O				Wall mounted			
Bizone	Drain-back		Bivalent		H/O		Reversible	
16 class	11 class	16 class	11 class	16 class	11 class	16 class	11 class	16 class
EBVZ16S18D6V	EBSH11P30D	EBSH16P30D	EBSHB11P30D	EBSHB16P30D				
EBVZ16S18D9W	EBSH11P50D	EBSH16P50D	EBSHB11P50D	EBSHB16P50D				
EBVZ16S23D6V	EBSX11P30D	EBSX16P30D	EBSXB11P30D	EBSXB16P30D	EBBH11D6V	EBBH16D6V	EBBX11D6V	EBBX16D6V
EBVZ16S23D9W	EBSX11P50D	EBSX16P50D	EBSXB11P50D	EBSXB16P50D	EBBH11D9W	EBBH16D9W	EBBX11D9W	EBBX16D9W
	●		●		●		●	
		●		●		●		●
		●		●		●		●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
					●	●	●	●
					●	●	●	●
					●	●	●	●
					●	●	●	●
					●	●	●	●
					● (1)	● (1)	● (1)	● (1)
					● (2)	● (2)	● (2)	● (2)
					● (1)	● (1)	● (1)	● (1)
					● (2)	● (2)	● (2)	● (2)
					● (3)	● (3)	● (3)	● (3)
					● (4)	● (4)	● (4)	● (4)
● (5)	● (5)	● (5)	● (5)	● (5)	● (5)	● (5)	● (5)	● (5)
●	●	●	●	●	●	●	●	●
● (6)	● (6)	● (6)	● (6)	● (6)	● (6)	● (6)	● (6)	● (6)
● (6)	● (6)	● (6)	● (6)	● (6)	● (6)	● (6)	● (6)	● (6)
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
● (7)					● (7)	● (7)	● (7)	● (7)
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
	●	●	●	●				
	● (8)	● (8)	● (8)	● (8)				
	● (8)	● (8)	● (8)	● (8)				
	● (8)	● (8)	● (8)	● (8)				
	●	●	●	●				
			●	●				
	●	●						

(6) Only one sensor can be connected: indoor or outdoor.  
(7) Additional relays to allow bivalent control in combination with external room thermostat are field supply.  
(8) Only 1 Backup heater can be connected on one unit: 3 or 6\* or 9 kW (\*No 6T1-model applicable). EKECBUCO1AF is needed to connect the backup heater to the main unit.

# Daikin Altherma 3 M (4-6-8 kW)

The monobloc standard



## Functional design

Daikin Altherma 3 M is the Daikin's first third generation monobloc, benefiting from a new design and using the R-32 refrigerant, also now available in 4, 6 and 8 kW.

### A redesigned casing

The white front grille made of horizontal lines is hiding the fan from view, reducing the perception of the sound produced by the unit.


The light grey and seamless casing is slightly reflecting the environment where the unit is installed, helping it to blend in in any decor.

### A renewed fan shape

The shape of the fan has been reviewed to reduce the contact surface with air and improve the air circulation.


### Help installers and commissioning

- › The rotary switchbox is a brand-new feature in this monobloc heat pump.
- › It helps installers accessing the hydraulic and refrigerant components of the unit in an easy way.
- › The service and commissioning can be then performed with ease.

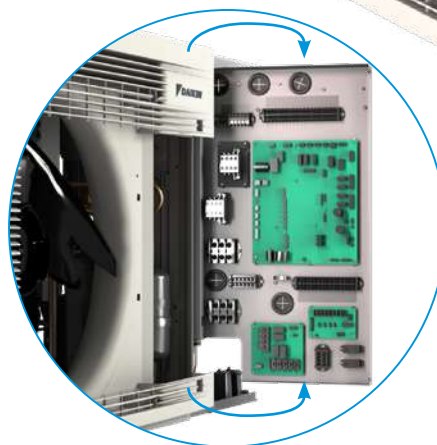



Reduced environmental impact: 70% less CO<sub>2</sub> equivalent  
 > GWP: R-410A: 2,088 > R-32: 675

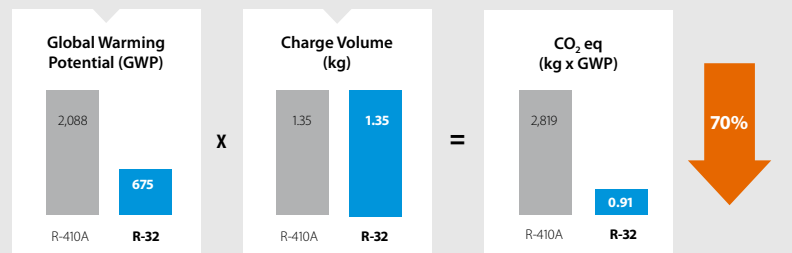

## R-32 monobloc **R-32** BLUEEVOLUTION

Daikin is a pioneer in launching heat pumps equipped with R-32. With a lower Global Warming Potential (GWP), the R-32 is equivalent in power to standard refrigerants, but achieves higher energy efficiency and lower CO<sub>2</sub> emissions. Easy to recover and reuse, R-32 is the perfect solution for attaining the new European CO<sub>2</sub> emission targets.

## A simple solution to space limitation

Thanks to the monobloc set-up, no indoor unit is required which helps when space is limited inside. The monobloc can even fit under a window!

The monobloc also gets its power from inside: all hydraulic components are integrated in one unit, including the sealed refrigerant circuit: no need for refrigerant handling or F-gas qualifications

# Fully connected control

The Daikin Altherma 3 M is equipped with the most intuitive control solutions.



## Heating and cooling emitters

Daikin Altherma 3 M works perfectly with various emitters, including fan coils, underfloor heating and heat pump convectors.



Cloud ready with  
WLAN

## Onecta app, with voice control

- › Control the heating system from home or remote via smartphone
- › Control the heating system with the voice
- › Include integrations with Google Assistant and Amazon Alexa
- › Featuring other functions: scheduling and holiday mode, control multiple units and boosting mode, monitoring energy consumption...



reddot award 2018  
winner



## Madoka: a user-friendly wired room thermostat

- › Sleek and elegant design
- › Intuitive touch button control
- › Three colours to match any interior (white, black and silver-grey)
- › Compact unit measuring only 85 x 85 mm

## Domestic hot water production

The monobloc combines with stainless steel tanks (EKHWS(P)-D), thermal stores and panels (EKHWP) to provide domestic hot water quickly.



✓ **Man-Machine Interface (MMI)** **NEW**

Inspired by the award-winning design of the Daikin Altherma 3 indoor units, Daikin also upgraded this controller to deliver an even more user-friendly interface.



### Quick configuration

After logging in, you'll be able to configure the unit with the new controller in less than 10 steps. You can even check if the unit is ready to use by running test cycles.

### Easy operation

The new interface features a few buttons and 2 navigational knobs to help you quickly set the room temperature and control units.

### User-friendly design

The interface features an intuitive design. The high contrasted colour screen delivers stunning and practical visuals for both installers and service engineers.

### WLAN cartridge connection

**Small dimensions for a discreet unit:**  
136 x 160 x 37 mm (HxWxD)

# Consistent compactness

Daikin Altherma 3 M is the most compact heat pump solution, as it only consists of one outdoor unit only. This is therefore ideal for limited space.

## ✔ Strengthened performances

The Daikin Altherma 3 M shows improved performances as well as a wide product range

- › Space heating up to **A+++**
- › Domestic hot water up to **A+**
- › Operating down to -25°C
- › Delivers LWT 55°C at -15°C without back-up heater
- › Suitable for small new buildings, or system replacement

## ✔ Extended product range

- › Heating only models (EDLA\*)
- › Reversible models providing cooling (EBLA\*)
- › One-phase models only
- › Back-up heater less models (EB/DLA-EV3)
- › Plug & play integrated back-up heater models (EB/DLA-E3V3)
- › Available in 4, 6 and 8 kW
- › Completing the existing range of 9, 11, 14 and 16 kW


## ✔ Flexibility in domestic hot water production

- › Combination with stainless steel domestic hot water tank (EKHWS(P)(U)-D)
- › Combination with ECH<sub>2</sub>O thermal store EKHWP-(P)B to provide domestic hot water with support from the sun

## ✔ Perfect match with any heat emitters

- › Combination with underfloor heating applications
- › Combination with heat pump convectors Daikin Altherma HPC


## ✔ Fits under a window



# Daikin Altherma 3 M

Air-to-water monobloc system that provides **heating**, **domestic hot water** and **optionally cooling**.  
Ideal for limited installation space.

- › WLAN cartridge connection standard included
- › Possible to combine with domestic hot water tanks
- › Heating only or reversible models available
- › Monobloc all-in-one concept including all hydraulic parts
- › Optional plug & play integrated 3 kW electric back-up heater
- › Available in one phase

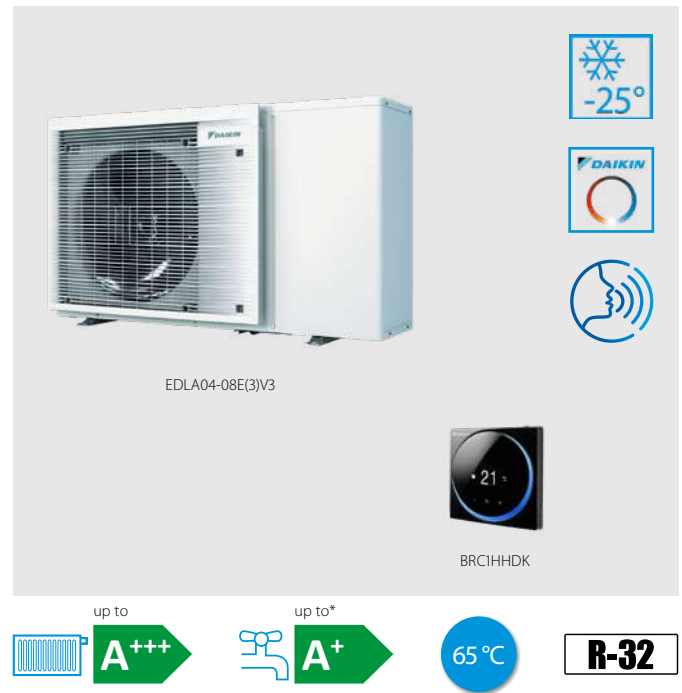

More details and final information can be found by scanning or clicking the QR codes.

EBLA04-08EV3

EBLA04-08E3V3

EDLA04-08EV3

EDLA04-08E3V3

Single Unit					EDLA04E(3)V3	EBLA04E(3)V3	EDLA06E(3)V3	EBLA06E(3)V3	EDLA08E(3)V3	EBLA08E(3)V3
Heating capacity	Nom.			kW	4.30 (1)/4.60 (2)	4.30 (1)/4.60 (2)	6.00 (1)/5.90 (2)	6.00 (1)/5.90 (2)	7.50 (1)/7.90 (2)	7.50 (1)/7.80 (2)
Power input	Heating	Nom.		kW	0.84 (1)/1.26 (2)	0.84 (1)/1.26 (2)	1.24 (1)/1.69 (2)	1.24 (1)/1.69 (2)	1.63 (1)/2.23 (2)	1.63 (1)/2.23 (2)
					COP	5.10 (1)/3.65 (2)	5.10 (1)/3.65 (2)	4.85 (1)/3.50 (2)	4.85 (1)/3.50 (2)	4.60 (1)/3.50 (2)
Cooling capacity	Nom.			kW	-	4.86 (1)/4.52 (2)	-	5.83 (1)/5.09 (2)	-	6.18 (1)/5.44 (2)
Power input	Heating	Nom.		kW	-	0.82 (1)/1.36 (2)	-	1.08 (1)/1.55 (2)	-	1.19 (1)/1.73 (2)
					EER	-	5.91 (1)/3.32 (2)	-	5.40 (1)/3.28 (2)	-
Space heating	Average climate water outlet 55 °C	General	ηs (Seasonal space heating efficiency)	SCOP	127	129	127	128	130	131
					Seasonal space heating eff. class	A++				
	Average climate water outlet 35 °C	General	ηs (Seasonal space heating efficiency)	SCOP	176	179	176	178	179	181
					Seasonal space heating eff. class	A+++				
Casing	Colour	Ivory white								
	Material	Zinc coated low carbon steel								
Dimensions	Unit	HeightxWidthxDepth	mm							
Weight	Unit	kg								
Compressor	Quantity	1								
	Type	Hermetically sealed swing compressor								
Operation range	Heating	Ambient	Min.~Max.	°CWB	-25 ~ 25	-25 ~ 35	-25 ~ 25	-25 ~ 35	-25 ~ 25	-25 ~ 35
		Water side	Min.~Max.	°C	EV3: 9 ~ 65 / E3V3: 15 ~ 65					
	Cooling	Ambient	Min.~Max.	°CDB	-	10 ~ 43	-	10 ~ 43	-	10 ~ 43
		Water side	Min.~Max.	°C	-	5 ~ 22	-	5 ~ 22	-	5 ~ 22
	Domestic hot water	Ambient	Min.~Max.	°CDB	-27 ~ 35					
		Water side	Min.~Max.	°C	25 ~ 55					
Refrigerant	Type	R-32								
	GWP	675								
	Charge	kg								
	Charge	TCO2Eq								
	Control	Expansion valve								
Sound power level	Heating	Nom.		dB(A)	58		60		62	
Power supply	Name/Phase/Frequency/Voltage				Hz/V					
Current	Recommended fuses				A					

(1) Cooling Ta 35°C - LWE 18°C (DT=5°C), Heating Ta DB/WB 7°C/6°C - LWC 35°C (DT=5°C) (2) Cooling Ta 35°C - LWE 7°C (DT=5°C), Heating Ta DB/WB 7°C/6°C - LWC 55°C (DT=5°C).  
This product contains fluorinated greenhouse gases.

\*Domestic hot water in combinations with stainless steel tank EKHWS(P)(U)-D and ECH2O thermal store EKHWP-(P)-B.

# Daikin Altherma 3 M (11-14-16 kW)

The power pact



The Daikin Altherma 3 M is the Daikin's first third generation monobloc, benefiting from a new design and using the R-32 refrigerant.

## Compact improved design

### A redesigned casing

The black front grill made of horizontal lines is hiding the fan from view, reducing the perception of the sound produced by the unit.


The light grey casing is slightly reflecting the environment where the unit is installed, helping it to blend in in any decor.

### A single fan for high capacity units

The single fan is slightly larger, replacing the usual double fan for high capacity units. The shape of the fan has also been reviewed to reduce the contact surface with air therefore lower the sound level by improving the air circulation.





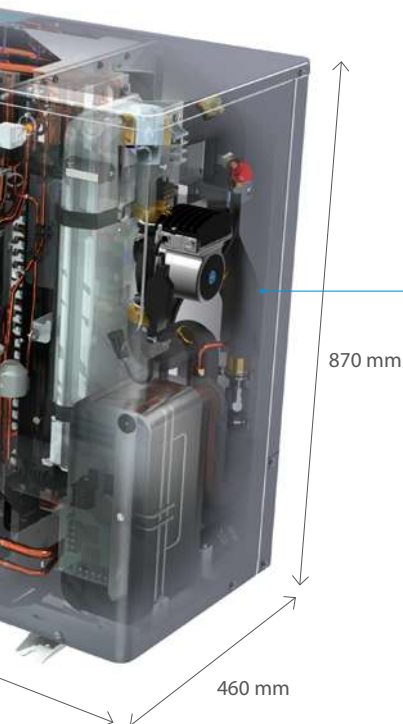


## R-32 monobloc

Daikin is a pioneer in launching heat pumps equipped with R-32. With a lower Global Warming Potential (GWP), the R-32 is equivalent in power to standard refrigerants, but achieves higher energy efficiency and lower CO<sub>2</sub> emissions. Easy to recover and reuse, R-32 is the perfect solution for attaining the new European CO<sub>2</sub> emission targets.

Reduced environmental impact: CO<sub>2</sub>eq > 75% reduction

- > GWP: R410A: 2,088 > R32: 675
- > 30% less refrigerant charge needed

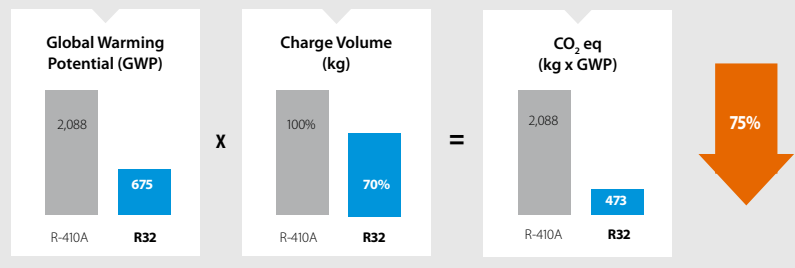

**R-32** BLUEEVOLUTION

### A simple solution to space limitation

Thanks to the monobloc set-up, no indoor unit is required which helps when space is limited inside. The monobloc can even fit under a window!



## Fully connected

The Daikin Altherma 3 M also finds its power in Daikin Altherma total solution, including controls, heat collectors and heat emitters.



### Onecta App, with voice control

- › Control the heating system from home or remote via smartphone
- › Control the heating system with the voice
- › Include integrations with Google Assistant and Amazon Alexa
- › Featuring other functions: scheduling and holiday mode, control multiple units and boosting mode, monitoring energy consumption...



### Cloud ready with WLAN option




### Madoka, user-friendly wired room thermostat

- › Sleek and elegant design
- › Intuitive touch-button control
- › Three colours to match any interior (white, black and silver-grey)
- › Compact, measures only 85 x 85 mm



### Heating and cooling emitters

As a mid-temperature heat pump, the Daikin Altherma 3 M fits perfectly with any type of emitters such as fan coils, underfloor heating or heat pumps convectors.

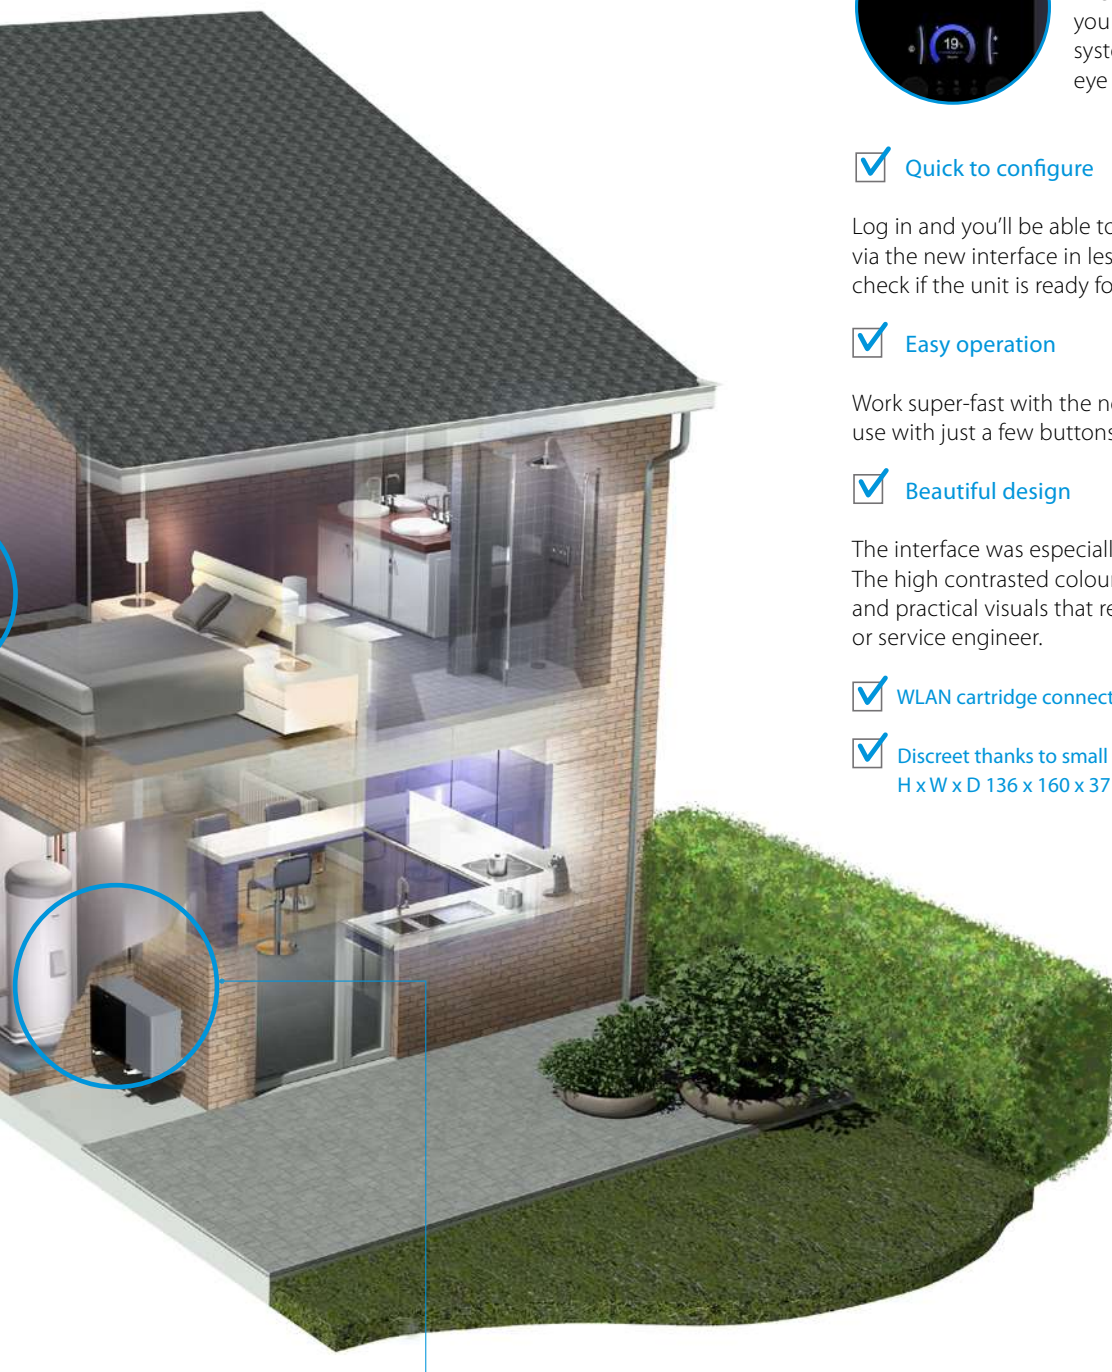

**NEW**

### Man-machine interface

Inspired from the design awarded Daikin Altherma third generation interface of indoor units, this new controller gathers all benefits:



#### ✓ The Daikin Eye

The intuitive Daikin eye shows you in real time the status of the system. Blue is perfect! Should the eye turn red, an error has occurred.

#### ✓ Quick to configure

Log in and you'll be able to completely configure the unit via the new interface in less than 10 steps. You can even check if the unit is ready for use by running test cycles!

#### ✓ Easy operation

Work super-fast with the new interface. It's super easy to use with just a few buttons and 2 navigational knobs.

#### ✓ Beautiful design

The interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

#### ✓ WLAN cartridge connection


#### ✓ Discreet thanks to small dimensions H x W x D 136 x 160 x 37 mm

### Domestic hot water production

The Daikin Altherma 3 M monobloc combines with stainless steel tanks (EKHWS(P)-D) and thermal stores and panels (EKHWP) to provide efficient domestic hot water.

# Straight forward installation & maintenance

The Daikin Altherma 3 M also gets its power from inside by including all hydraulic components into one single unit.

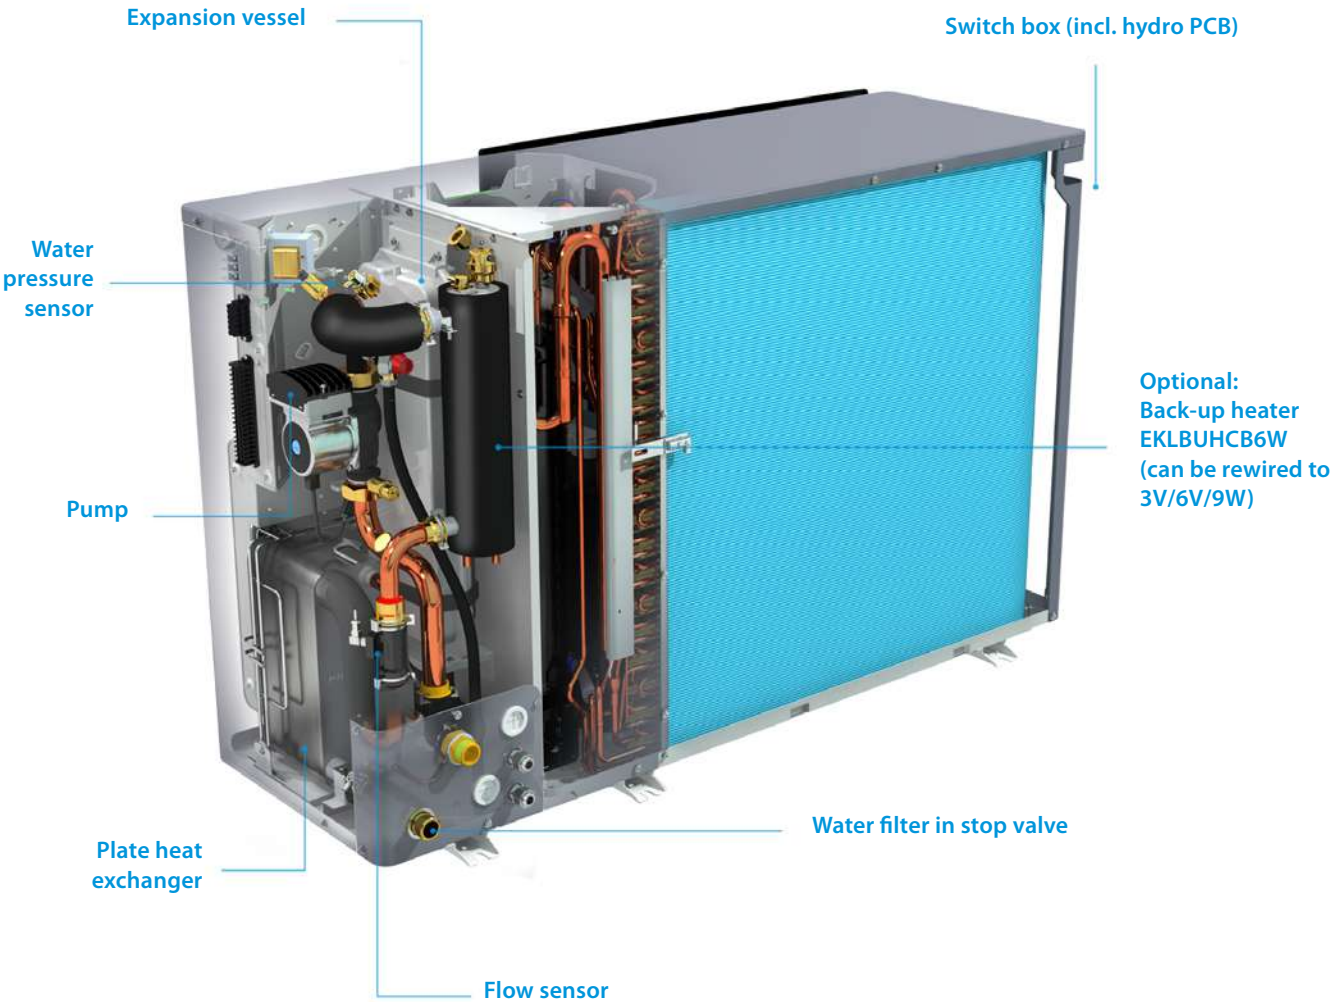

## Comfort and premium performance

The Daikin Altherma 3 M shows improved performances as well as a wide product range.

### Extended product range

- › Heating only models (EDLA\*)
- › Reversible models providing cooling (EBLA\*)
- › One-phase models (EB/DLA-DV\*)
- › Three-phase models (EB/DLA-DW\*)
- › Back-up heater models (EB/DLA-D3V/D3W)
- › Back-up heater less models (EB/DLA-D/DW)
- › All available in 9, 11, 14 and 16 kW

### Improved performances

- › Up to **A+++**
- › Operation down to -25°C outside temperature
- › Guaranteed heating capacities down to -20°C
- › Delivers LWT 60°C at -7°C
- › Suitable for renovations, replacement, and large new buildings

### Flexibility in domestic hot water production

- › Combination with stainless steel domestic hot water tank (EKHWS(P)(U)-D)
- › Combination with ECH<sub>2</sub>O thermal store to provide domestic hot water with support from the sun

### Perfect match with any heat emitters

- › Combination with underfloor heating applications
- › Combination with heat pump convectors Daikin Altherma HPC



# Daikin Altherma 3 M


Heating only air to water monobloc system, ideal when indoor space is limited

- › W-LAN cartridge connection (optional)
- › Possible to combine with domestic hot water tanks
- › Heating only air-to-water heat pump
- › Monobloc all-in-one concept including all hydraulic parts
- › Available with Built-in 3 kW electric back-up heater for additional heating or with a separate back-up heater kit
- › Available in one phase and three phase



up to

**R-32**



More details and final information can be found by scanning or clicking the QR codes.

EDLA09-14DV3

EDLA09-14D3V3

EDLA09-14DW1

EDLA09-14D3W1

EDLA-DV37

EDLA-DW17

EDLA-D3V37

EDLA-D3W17

Single Unit				EDLA	09D(3)V3/D(3)W1	11D(3)V3/D(3)W1	14D(3)V3/D(3)W1	16D(3)V3/D(3)W1
Heating capacity	Nom.			kW	9.37 (1)/9.00 (2)	10.6 (1)/9.82 (2)	12.0 (1)/12.5 (2)	16.0 (1)/16.0 (2)
Power input	Heating	Nom.		kW	1.91 (1)/2.43 (2)	2.18 (1)/2.68 (2)	2.46 (1)/3.42 (2)	3.53 (1)/4.56 (2)
COP					4.91 (1)/3.71 (2)	4.83 (1)/3.66 (2)	4.87 (1)/3.64 (2)	4.53 (1)/3.51 (2)
Space heating	Average climate water outlet 55 °C	General	ηs (Seasonal space heating efficiency)	133	130	132	130	
			SCOP	3.39	3.32	3.37	3.33	
	Average climate water outlet 35 °C	General	ηs (Seasonal space heating efficiency)	186	182			
			SCOP	4.72	4.64	4.62		
			Seasonal space heating eff. class	A++				
			Seasonal space heating eff. class	A+++				
Casing	Colour			Silver				
	Material			Polyester painted galvanised steel plate				
Dimensions	Unit	HeightxWidthxDepth		mm				
Weight	Unit			kg				
Compressor	Quantity			DV3/DW1: 147, D3V3/D3W1: 149				
	Type			1				
Operation range	Heating	Ambient	Min. ~ Max.	°CWB				
		Water side	Min. ~ Max.	°C				
	Domestic hot water	Ambient	Min. ~ Max.	°CDB				
		Water side	Min. ~ Max.	°C				
Refrigerant	Type			R-32				
	GWP			675				
	Charge			kg				
	Charge			TCO <sub>2</sub> Eq				
	Control			Expansion valve				
				62				
Sound power level (3)	Heating	Nom.		dB(A)				
Power supply	Name/Phase/Frequency/Voltage			Hz/V				
Current	Recommended fuses			A				
				V3/1 ~ /50/230 - W1/3 ~ /50/400				
				32/16				

(1) Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2) Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3) According to EN14825  
This product contains fluorinated greenhouse gases.


# Daikin Altherma 3 M

Reversible air to water monobloc system, ideal when indoor space is limited

- › W-LAN cartridge connection (optional)
- › Possible to combine with domestic hot water tanks
- › Heating and cooling air-to-water heat pump
- › Monobloc all-in-one concept including all hydraulic parts
- › Available with Built-in 3 kW electric back-up heater for additional heating or with a separate back-up heater kit
- › Available in one phase and three phase



up to



More details and final information can be found by scanning or clicking the QR codes.

EBLA09-14DV3

EBLA09-14D3V3

EBLA09-14DW1

EBLA09-14D3W1

EBLA-DV37

EBLA-DW17

EBLA-D3V37

EBLA-D3W17

Single Unit				EBLA	09D(3)V3/D(3)W1	11D(3)V3/D(3)W1	14D(3)V3/D(3)W1	16D(3)V3(7)/D(3)W1(7)
Heating capacity	Nom.			kW	9.37 (1)/9.00 (2)	10.6 (1)/9.82 (2)	12.0 (1)/12.5 (2)	16.0 (1)/16.0 (2)
Power input	Heating	Nom.		kW	1.91 (1)/2.43 (2)	2.18 (1)/2.68 (2)	2.46 (1)/3.42 (2)	3.53 (1)/4.56 (2)
COP					4.91 (1)/3.71 (2)	4.83 (1)/3.66 (2)	4.87 (1)/3.64 (2)	4.53 (1)/3.51 (2)
Cooling capacity	Nom.			kW	9.35 (3)/9.10 (4)	11.6 (3)/11.5 (4)	12.8 (3)/12.7 (4)	14.0 (3)/15.3 (4)
Power input	Cooling	Nom.		kW	2.79 (3)/1.71 (4)	3.56 (3)/2.17 (4)	4.06 (3)/2.51 (4)	4.58 (3)/3.24 (4)
EER					3.35 (3)/5.34 (4)	3.26 (3)/5.31 (4)	3.16 (3)/5.04 (4)	3.06 (3)/4.74 (4)
SEER					5.62 (5)	5.79 (5)	5.71 (5)	5.59 (5)
Space heating	Average climate water outlet 55 °C	General	ηs (Seasonal space heating efficiency)		135	132	134	132
			SCOP		3.44	3.37	3.42	3.37
	Average climate water outlet 35 °C	General	ηs (Seasonal space heating efficiency)		190	186	185	
			SCOP		4.82	4.73	4.70	4.69
					A++			
					A+++			
Casing	Colour	Silver						
	Material	Polyester painted galvanised steel plate						
Dimensions	Unit	HeightxWidthxDepth	mm	870x1,380x460				
Weight	Unit		kg	DV3/DW1: 147, D3V3/D3W1: 149				
Compressor	Quantity	1						
	Type	Hermetically sealed swing compressor						
Operation range	Heating	Ambient	Min. ~ Max.	°CWB	DV3(7)/DW1(7): -25 ~ 25, D3V3(7)/D3W1(7): -25 ~ 35			
		Water side	Min. ~ Max.	°C	DV3(7)/DW1(7): 9 ~ 60, D3V3(7)/D3W1(7): 15 ~ 60			
	Cooling	Ambient	Min. ~ Max.	°CDB	10 ~ 43			
		Water side	Min. ~ Max.	°C	5 ~ 22			
Domestic hot water	Ambient	Min. ~ Max.	°CDB	-25 ~ 35				
	Water side	Min. ~ Max.	°C	25 ~ 55				
Refrigerant	Type	R-32						
	GWP	675						
	Charge		kg	3.80				
	Charge		TCO <sub>2</sub> Eq	2.57				
	Control	Expansion valve						
Sound power level (5)	Heating	Nom.		dBA	62			
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1 ~ /50/230 - W1/3 ~ /50/400			
Current	Recommended fuses			A	32/16			

(1) Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2) Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3) Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (4) Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (5) According to EN14825. This product contains fluorinated greenhouse gases.

# Combination table and options

			R-32 small monobloc (4-6-8 kW)			
			Without back-up heater		With back-up heater	
			Rev	H/O	Rev	H/O
			EBLA04EV3	EDLA04EV3	EBLA04E3V3	EDLA04E3V3
			EBLA06EV3	EDLA06EV3	EBLA06E3V3	EDLA06E3V3
EBLA08EV3	EDLA08EV3	EBLA08E3V3	EDLA08E3V3			
Type	Description	Material name				
Controls	Madoka wired room thermostat	BRC1HHDAAK/S/W	●	●	●	●
	Wired digital thermostat	EKRTWA	●	●	●	●
	Wireless room by room control	Daikin Home Controls (pages 272-275)	●	●	●	●
	LAN Adapter	BRP069A62 (with MMI from v6.8.0)	●	●	●	●
	WLAN cartridge	BRP069A78	●	●	●	●
	Universal centralised controller for cascade	EKCC8-W DCOM-LT/IO,-LT/MB	●	●	●	●
Multi-zoning controls	Digital wired room thermostat	EKWCTRDIV3	●	●	●	●
	Analog wired room thermostat	EKWCTRANIV3	●	●	●	●
	Actuator	EKWCVATRIV3	●	●	●	●
	Multi-zoning base station (10 channels)	EKWUFHTAIV3	●	●	●	●
Sensors	Remote indoor temperature sensor	KRCS01-1	● (1)	● (1)	● (1)	● (1)
	Remote outdoor temperature sensor	EKRSCA1	● (1)	● (1)	● (1)	● (1)
	Temperature sensor for EKHS(P)-D	EKTESE1	●	●	●	●
	Temperature sensor for EKHW(P)-B	EKTESE2	●	●	●	●
Domestic hot water	DHW tank	EKHS(U)-D(3)V3	●	●	●	●
	Thermal stores	EKHWP500(P)B	●	●	●	●
	Third party tank kit	EKHY3PART	● (2)	● (2)	● (2)	● (2)
	Third party tank kit	EKHY3PART2	● (3)	● (3)	● (3)	● (3)
Heat pump convector	Floor standing	FWXV15/20/25*	● (4)	● (4)	● (4)	● (4)
	Wall mounted	FWXT15/20/25*	● (4)	● (4)	● (4)	● (4)
	Concealed	FWXM15/20/25*	● (4)	● (4)	● (4)	● (4)
Other options	Back-up heater kit	EKLBHUCB6W	● (5)	●		
	By-pass kit	EKMBHBP1	● (5)			
	Generic Bizon kit (PCB only)	EKMIKPOA	●	●	●	●
	Generic Bizon kit	EKMIKPHA	●	●	●	●
	Digital I/O PCB	EKRPIHBAA	● (6)	● (6)	● (6)	● (6)
	Demand PCB	EKRPIAHTA	●	●	●	●
	Anti-freeze valve with diam. 1	AFVALVE1	●	●	●	●
	Anti-freeze valve with diam. 1 1/4"	AFVALVE125	●	●	●	●
	Balancing valve	KBLNVALVE				
	Decoupler	KDECOUP				
	PC USB cable	EKPCCAB4	●	●	●	●
	Smart grid relay kit (high voltage)	EKRELSG	●	●	●	●
	Flow switch	EKFLSW1				
	Flow switch	EKEFLSW2	● (7)	● (7)	● (7)	● (7)

(1) Only 1 sensor can be connected: indoor OR outdoor sensor.

(2) EKHY3PART can be used if you have a tank in which you can insert a thermistor.

(3) EKHY3PART2 can be used if you have a tank in which you can't insert a thermistor.

(4) Multi combination (quantity, depends on capacity class). EKVKHPC needs to be installed mandatory on heat pump convector (exception: LT- H/O).

(5) Check 'EKMBHBP1 necessity drawing' to decide to install it in combination with reversible models, in order to avoid sweat on the back-up heater.

(6) Additional relays to allow bivalent control in combination with external room thermostat are field supply.

(7) Mandatory if glycol is used.



R-32 large monobloc (9-11-14-16 kW)				
Without back-up heater		With back-up heater		
Rev	H/O	Rev	H/O	
EBLA09DV3/W1	EDLA09DV3/W1	EBLA09D3V3/W1	EDLA09D3V3/W1	
EBLA11DV3/W1	EDLA11DV3/W1	EBLA11D3V3/W1	EDLA11D3V3/W1	
EBLA14DV3/W1	EDLA14DV3/W1	EBLA14D3V3/W1	EDLA14D3V3/W1	
EBLA16DV37/W17	EDLA16DV37/W17	EBLA16D3V37/W17	EDLA16D3V37/W17	
●	●	●	●	
●	●	●	●	
●	●	●	●	
●	●	●	●	
●	●	●	●	
●	●	●	●	
●	●	●	●	
●	●	●	●	
● (1)	● (1)	● (1)	● (1)	
● (1)	● (1)	● (1)	● (1)	
●	●	●	●	
●	●	●	●	
● (2)	● (2)	● (2)	● (2)	
● (3)	● (3)	● (3)	● (3)	
● (4)	● (4)	● (4)	● (4)	
● (4)	● (4)	● (4)	● (4)	
● (4)	● (4)	● (4)	● (4)	
● (5)	●			
● (5)				
●	●	●	●	
●	●	●	●	
● (6)	● (6)	● (6)	● (6)	
●	●	●	●	
●	●	●	●	
●	●	●	●	
●	●	●	●	
●	●	●	●	
●	●	●	●	
● (7)	● (7)	● (7)	● (7)	

# The ideal boiler replacement gets extended

## Ideal to replace gas boilers


Houses built in the 90s often need a refurbishment to still look up-to-date.

In a renovation project, this is also important to consider changing your initial heating system.

Daikin Altherma 3 H MT comes as a perfect replacement in such houses, where a leaving water temperature of 65 °C is sufficient. Easy to install, you can even leave the recent radiators installed!

## Suitable for medium sized new buildings

With a capacity range going from 8 to 12 class, Daikin Altherma 3 H MT also fits in medium sized new buildings.

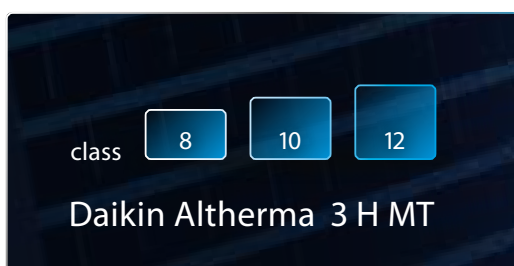




## Ideal to replace oil boilers

Daikin Altherma 3 H HT is a high temperature heat pump, able to deliver a leaving water temperature of 70 °C. Thanks to this operation range, the unit can replace oil boilers in older houses.

Traditional radiators can also stay in place, but more recent radiators could be a good option in order to make further energy savings.

## Suitable for large new buildings

With a capacity range going from 14 to 18 class, Daikin Altherma 3 H HT can answer the needs of large new buildings.

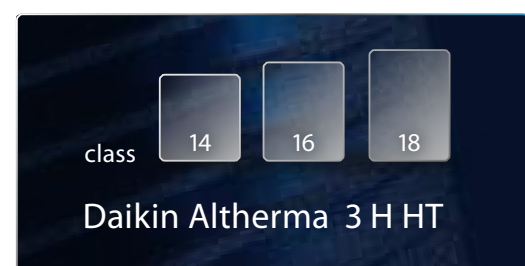

# The Quintessence of heat pump

meeting modern society's expectations



## Made in Europe, for Europe

European weather can be tough sometimes. That's why we designed the Daikin Altherma 3 H MT & HT.

Heating capacities are also maintained high by low ambient temperature thanks to genuine Daikin technology.

As the market leader, Daikin is always striving to make the most reliable and efficient heat pumps possible. Daikin developed the Bluevolution technology to achieve higher and greener performance. This technology is now part of all new products. The Daikin Altherma 3 H HT was the first Daikin outdoor unit with a distinctive design. Its single fan reduces the noise level and its black front grille makes the unit fit into any environment.

All these dedicated components were developed in-house to make the quintessence of heat pump unique.

**Superior performance, renewable energy use, design and acoustic comfort. This is what the Quintessence of heat pump is all about.**

## BLUEvolution

The Bluevolution technology combines a specifically developed compressor and the R-32 refrigerant. Daikin is one of the pioneers in the world to launch heat pumps equipped with R-32. With a lower Global Warming Potential (GWP), the R-32 is equivalent in power to standard refrigerants, but achieves higher energy efficiency and lower CO<sub>2</sub> emissions.


Easy to recover and re-use, R-32 is the perfect solution to attain the new European CO<sub>2</sub> emission targets.

**R-32**

## Timeless design and space-saving installation

Aside from the acoustic comfort, design is a decisive point nowadays. Specific attention was paid to making the outdoor unit blend in with your home.

The black front grille stretches horizontally making the fan inside invisible. The mat grey casing reflects the colour of the wall behind for more discretion. This unit received the IF and reddot design awards 2019.

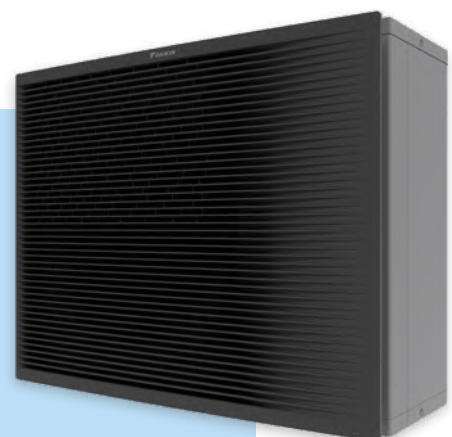

Witness a timeless design





## Silence rhymes with comfort

The Quintessence of heat pump has been designed to reduce its acoustic level and meet the expectations of today's society.

In standard sound mode, the unit produces a sound pressure of 38 dBA at 3 metres, so somewhere between birds chirping and the inside of a library.

The unit also offers greater flexibility by having a low sound mode that reduces the sound pressure at 3 metres to 35 dBA, representing a real reduction of half the sound level!

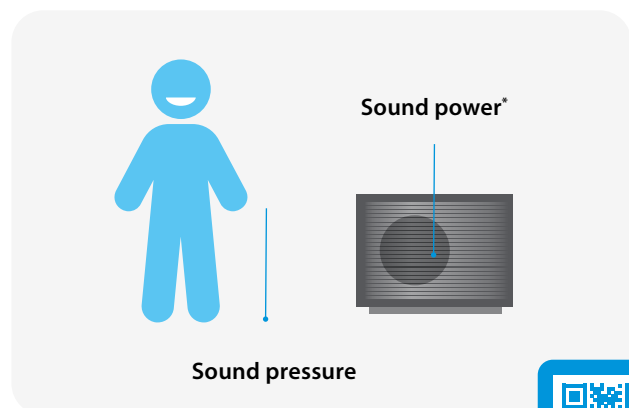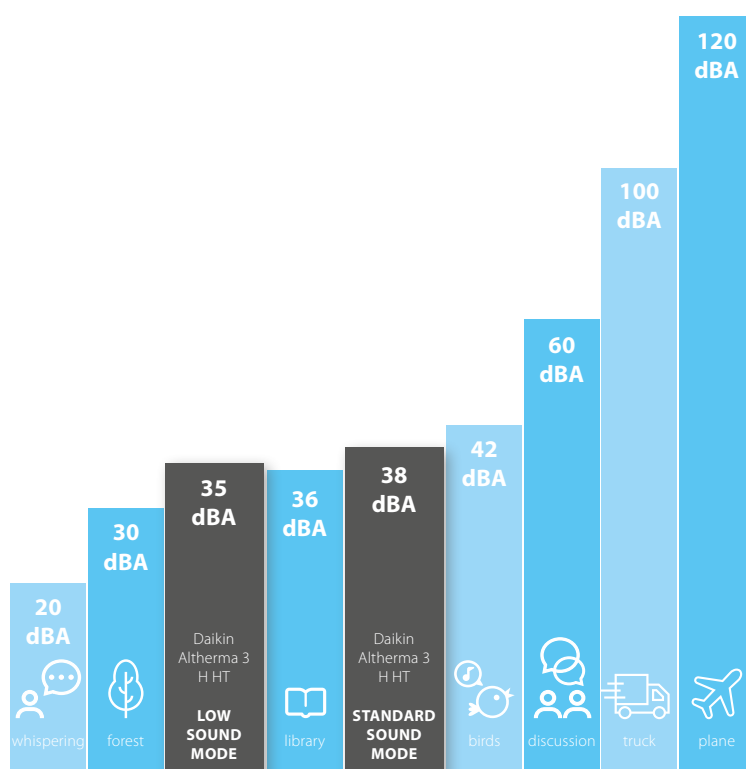

\* Erp sound power:  
 Daikin Altherma 3 H MT = 53 dBA  
 Daikin Altherma 3 H HT = 54 dBA

## The acoustic level can be evaluated in two ways

- › The **sound power** is generated by the unit itself, independently of distance and environment
- › The **sound pressure** is the sound perceived at a certain distance. The sound pressure is usually calculated at between 1 and 5 metres from the unit.



Listen to the silence of our outdoor unit

# Innovation at the heart of our concerns

The Daikin Altherma 3 H MT & HT are at top of low sound and heating performances thanks to dedicated developments. Several major components are designed to make this product reach the excellence such as a double injection compressor and a single fan even for large capacity units as well as a brand-new casing.

## A redesigned casing

The black front grille made of horizontal lines is hiding the fan from view, reducing the perception of the sound produced by the unit.

The light grey casing is slightly reflecting the environment where the unit is installed, helping it to blend in in any decor.

This unique design already got design awards.




reddot design award  
winner 2019

## A single fan for all capacities

The single fan is slightly larger, replacing the usual double fan for high capacity units (classes 8-10-12-14-16-18).

The shape of the fan has also been reviewed to reduce the contact surface with air therefore lower the sound level by improving the air circulation.

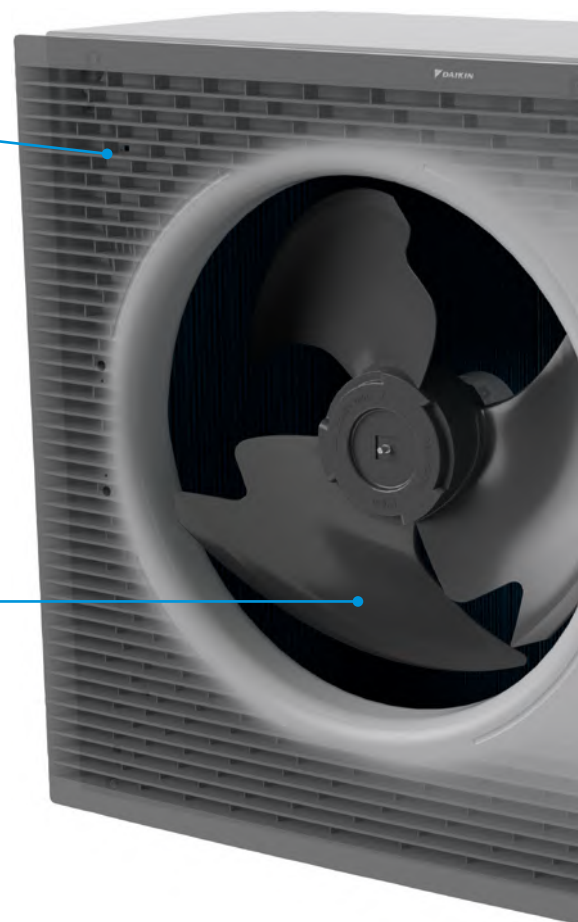


## Compressor insulation and anti-vibration

To reduce the compressor sound power, several actions were taken in terms of absorption and insulation.

First, the compressor is surrounded by a 3-layer insulation made of air, insulation material and a metal box.

Regarding the absorption, the unit benefits from a double sound reduction by using rubber pads between the bottom plate and the vibration plate under the compressor.

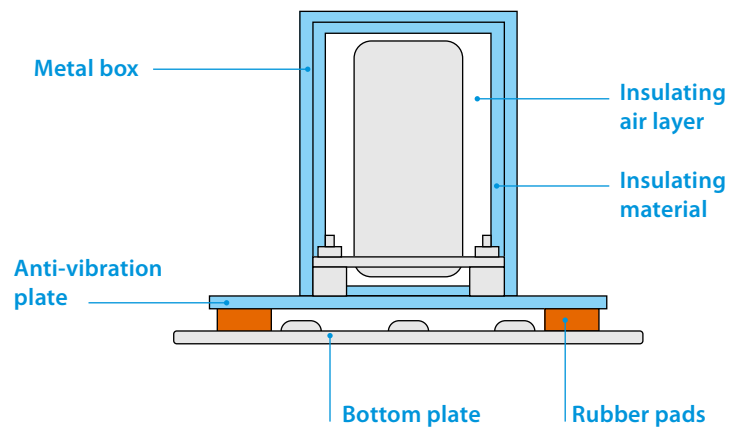

## New double injection compressor

To make this product unique, Daikin Europe cooperated with Daikin Japan to develop top notch components. The Daikin Altherma 3 H HT compressor is able to deliver a high leaving water temperature of 70 °C on its own, while the Daikin Altherma 3 H MT available in classes 8-10-12 delivers up to 65 °C leaving water temperature.

## Impressive performance

With these new developments, the Daikin Altherma 3 H MT & HT reach the best performances illustrated in the energy labels:



Feel a true performance

# One solution, multiple combinations

The Quintessence range can be combined with three different indoor units to connect to the outdoor unit, offering specific features to ensure heating, cooling and domestic hot water in your home.

## Outdoor unit

The outdoor unit is available in 6 classes 8-10-12-14-16-18 kW.



## Integrated DHW stainless steel tank model

This model is a compact unit with a small footprint of 595 x 625 mm. The unit is equipped with a tank of 180 or 230 L to answer your domestic hot water demand.



## Integrated ECH<sub>2</sub>O DHW tank model

The ECH<sub>2</sub>O unit is equipped with a thermal DHW tank of 300 or 500 L that can be connected to thermal solar panels.



## Wall mounted model

This model is the most compact unit but needs to be with a separate tank to deliver domestic hot water.



See exact dimensions per model in the specification tables (p22-29).



# Get the best comfort

## with the best functionalities


Choose from the Daikin "Three Pluses" the functionality that best fits your customer's needs. The indoor units come in 3 possible versions: heating only, reversible and bizona, giving you the opportunity to tailor your Daikin heating system.

### + Heating only model

The heating only model is standard in the Daikin product range and is available for all three indoor units. This means that your heating system provides space heating and domestic hot water.

### + Reversible model

If cooling is needed, all three indoors have dedicated reversible models. Reversible means that the system can invert its way of working and provide cooling instead of heating. The cooling function requires a underfloor piping system or fan coil units.

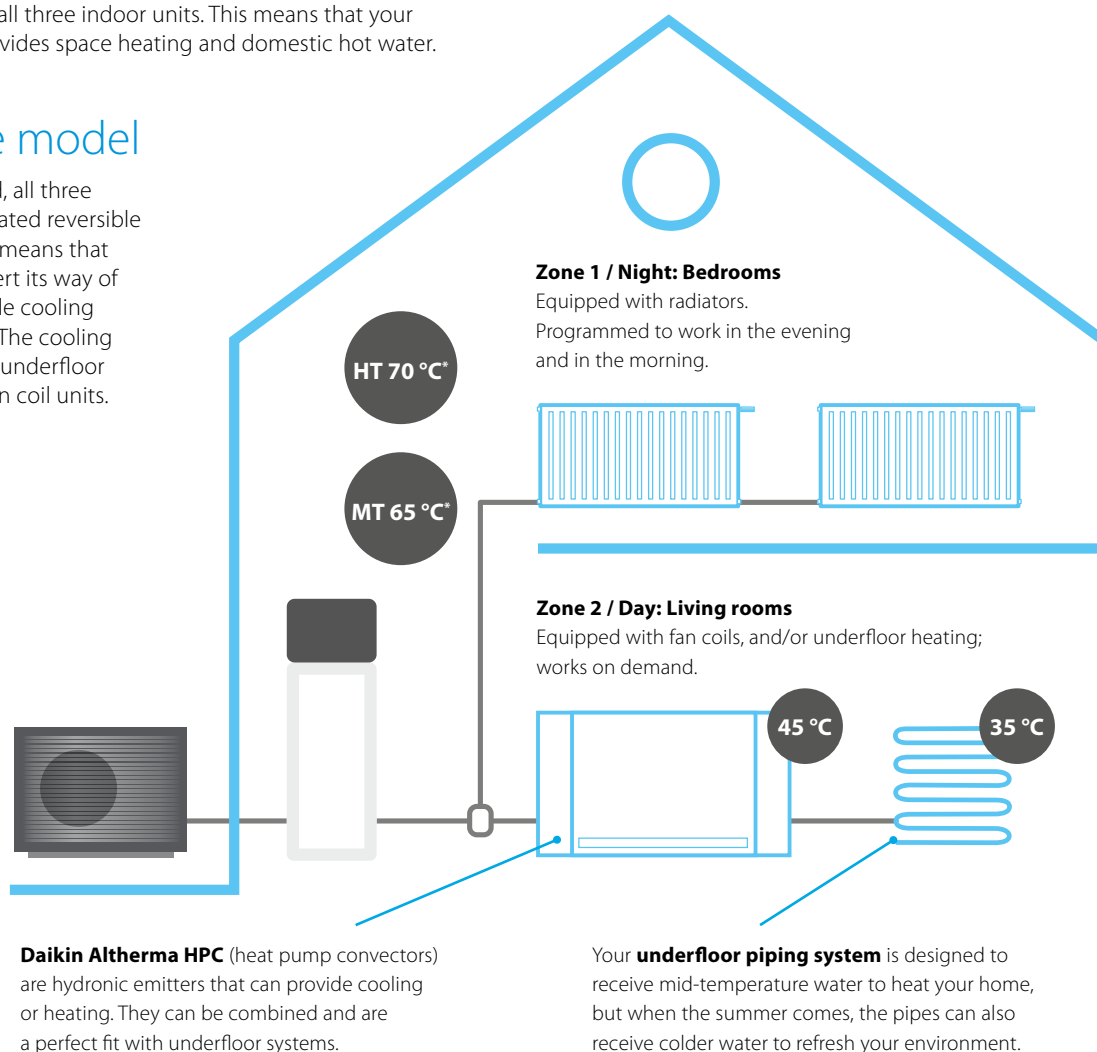

### + Bizona model

Only the DHW stainless steel tank model has a dedicated bizona model: you can choose two independent zones with different emitters that need a different temperature level in different rooms (example: underfloor system in the living room and radiators in the bedroom upstairs).

The 2 zones can also be managed independently: deactivate heating on the first floor during the day in order to reduce over consumption.

\* Daikin Altherma 3 H HT models produce a LWT up to 70 °C (14-16-18 classes). Daikin Altherma 3 H MT produces a LWT up to 65 °C (08-10-12 classes).




## Floor standing unit with integrated tank

### Why choose Daikin floor standing unit with integrated domestic hot water tank?

The Daikin Altherma 3 floor standing unit is the ideal system **to deliver heating, domestic hot water and cooling** for renovation or large new built.

#### All in one system to save installation space and time

- › A combined stainless steel domestic hot water tank of 180 or 230 L and heat pump ensures a faster installation compared to traditional systems.
- › Inclusion of all hydraulic components means no third party components are required.
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 625 mm
- › Integrated back-up heater choice of 6, 9 kW models are available
- › Dedicated bi-zone models allowing temperature monitoring for 2 zones.

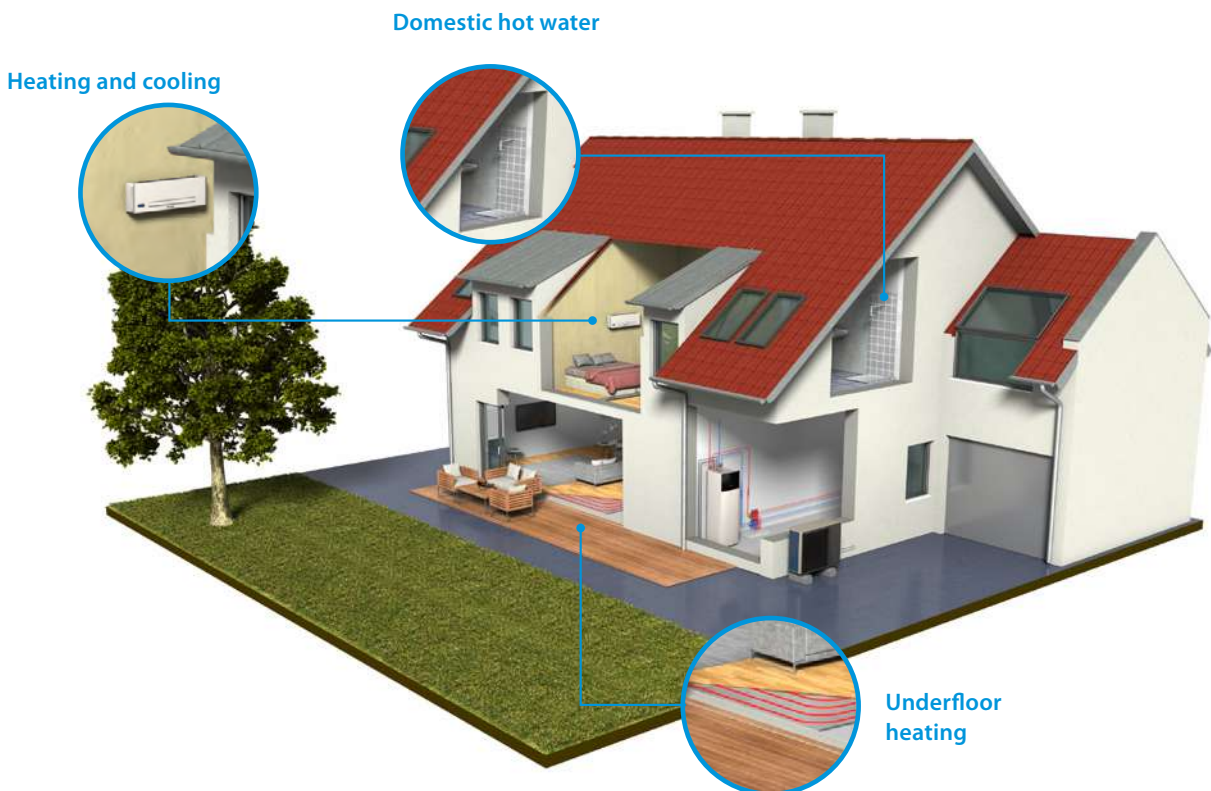

# All-in one design

## Reduces the installation footprint and height


Compared to the traditional split version for a wall mounted indoor unit and a separate domestic hot water tank, the integrated indoor unit greatly reduces the installation space required.

With a small footprint of 595 x 625 mm, the integrated indoor unit has a similar footprint when compared to other household appliances.

For installation projects, almost no side clearance is necessary as the piping is located at the top of the unit.

With an installation height of 1.65 m for an 180 L tank and 1.85 m for a 230 L tank, the required installation height is less than 2m.

The compactness of the integrated indoor unit is emphasised by its sleek design and modern look, easy blending in with other household appliances.

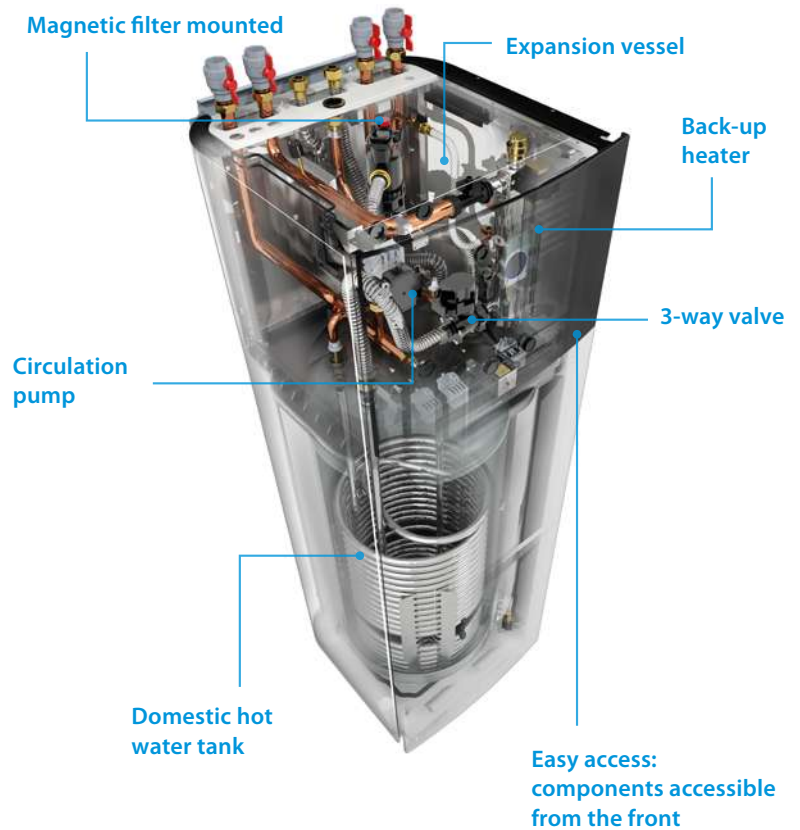

## Advanced user interface



### The Daikin Eye

The intuitive Daikin eye shows you in real time the status of your system.

Blue is perfect! Should the eye turn red, an error has occurred.

### Quick to configure

Log in and you'll be able to completely configure the unit via the new interface in less than 10 steps. You can even check if the unit is ready for use by running test cycles!

### Easy operation

Work super-fast with the new interface. It's super easy to use with just a few buttons and 2 navigational knobs.

### Beautiful design

The interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

## Integrated indoor unit



# Daikin Altherma 3 H MT F

Floor standing air to water heat pump for heating and hot water

- › A combined stainless steel domestic hot water tank of 180 or 230 L and heat pump for easy installation
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 625 mm
- › Integrated back-up heater of 6 or 9 kW
- › Heat pump operation down to -28 °C



More details and final information can be found by scanning or clicking the QR codes.



ETVH12E6V      ETVH12E9W      EPRA08-12EV3      EPRA08-12EW1

Efficiency data				ETVH + EPRA	12S18E6V/E9W + 08EV/W	12S23E6V/E9W + 08EV/W	12S18E6V/E9W + 10EV/W	12S23E6V/E9W + 10EV/W	12S18E6V/E9W + 12EV/W	12S23E6V/E9W + 12EV/W
Space heating	Average climate water outlet 55 °C	General	SCOP	3.41/3.52			3.43/3.53			
			ηs (Seasonal space heating efficiency)				134/138			
		Seasonal space heating eff. class	A++							
	Average climate water outlet 35 °C	General	SCOP	4.69/4.81			4.71/4.84		4.71/4.84	
		ηs (Seasonal space heating efficiency)	184/190			186/191		186/191		
		Seasonal space heating eff. class	A+++							
Domestic hot water heating	General	Declared load profile		L	XL	L	XL	L	XL	
	Average climate	COPdhw		2.72/2.80	2.96/3.05	2.72/2.80	2.96/3.05	2.72/2.80	2.96/3.05	
		ηwh (water heating efficiency)	%	117/120	126/130	117/120	126/130	117/120	126/130	
		Water heating energy efficiency class	A+							
Indoor Unit				ETVH	12S18E6V/E9W	12S23E6V/E9W	12S18E6V/E9W	12S23E6V/E9W	12S18E6V/E9W	12S23E6V/E9W
Casing	Colour	White + Black								
	Material	Precoated sheet metal								
Dimensions	Unit	HeightxWidthxDepth	mm	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	
Weight	Unit		kg	108	117	108	117	108	117	
Tank	Water volume		l	180	230	180	230	180	230	
	Maximum water temperature		°C	70						
	Maximum water pressure		bar	10						
	Corrosion protection			Pickling						
Operation range	Heating	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
	Domestic hot water	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
Sound power level	Nom.		dBA	44						
Sound pressure level	Nom.		dBA	30						
Outdoor Unit				EPRA	08EV3/W1	10EV3/W1	12EV3/W1			
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533						
Weight	Unit		kg	118						
Compressor	Quantity			1						
	Type			Hermetically sealed swing compressor						
Operation range	Heating	Min.~Max.	°CDB	-28 ~ 25						
	Cooling	Min.~Max.	°CDB	10 ~ 43						
	Domestic hot water	Min.~Max.	°CDB	-28 ~ 35						
Refrigerant	Type			R-32						
	GWP			675						
	Charge		kg	3.25						
	Charge		TCO <sub>2</sub> Eq	2.19						
	Control			Expansion valve						
LW(A) Sound power level (according to EN14825)				53						
Sound pressure level (at 1 meter)	Nom.			40.60/41.10						
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50/230 - W1/3~/50/400						
Current	Recommended fuses		A	32/16						

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 H HT F

Floor standing air to water heat pump for heating and hot water

- › A combined stainless steel domestic hot water tank of 180 or 230 L and heat pump for easy installation
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 625 mm
- › Integrated back-up heater of 6 or 9 kW
- › Heat pump operation down to -28 °C



up to



More details and final information can be found by scanning or clicking the QR codes.



ETVH16E6V7



ETVH16E9W7

EPRA14-18DV37

EPRA14-18DW17

Efficiency data				ETVH + EPRA	16S18E6V7/E9W7 + 14DV7/W7	16S23E6V7/E9W7 + 14DV7/W7	16S18E6V7/E9W7 + 16DV7/W7	16S23E6V7/E9W7 + 16DV7/W7	16S18E6V7/E9W7 + 18DV7/W7	16S23E6V7/E9W7 + 18DV7/W7
Space heating	Average climate water outlet 55 °C	General	SCOP	3.58/3.57						
			ηs (Seasonal space heating efficiency) %	140						
		Seasonal space heating eff. class	A++							
	Average climate water outlet 35 °C	General	SCOP	4.51/4.71						
			ηs (Seasonal space heating efficiency) %	177/186						
			Seasonal space heating eff. class	A+++						
Domestic hot water heating	General	Declared load profile		L						
	Average climate	COPdhw		2.62/2.51	2.61/2.55	2.62/2.51	2.61/2.55	2.62/2.51	2.61/2.55	
		ηwh (water heating efficiency) %		110/106	108/107	110/106	108/107	110/106	108/107	
		Water heating energy efficiency class		A						
Indoor Unit				ETVH	16S18E6V7/E9W7	16S23E6V7/E9W7	16S18E6V7/E9W7	16S23E6V7/E9W7	16S18E6V7/E9W7	16S23E6V7/E9W7
Casing	Colour	White + Black								
	Material	Precoated sheet metal								
Dimensions	Unit	HeightxWidthxDepth	mm	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	
Weight	Unit		kg	109	118	109	118	109	118	
Tank	Water volume		l	180	230	180	230	180	230	
	Maximum water temperature		°C	70						
	Maximum water pressure		bar	10						
	Corrosion protection			Pickling						
Operation range	Heating	Ambient	Min.~Max.	°C	-28 ~ 35					
		Water side	Min.~Max.	°C	15 ~ 70					
	Domestic hot water	Ambient	Min.~Max.	°C	-28 ~ 35					
		Water side	Min.~Max.	°C	10 ~ 63					
Sound power level	Nom.		dBA	44						
Sound pressure level	Nom.		dBA	30						
Outdoor Unit				EPRA	14DV37/W17	16DV37/W17	18DV37/W17			
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533						
Weight	Unit		kg	146/151						
Compressor	Quantity			1						
	Type			Hermetically sealed scroll compressor						
Operation range	Heating	Min.~Max.	°CDB	-28 ~ 25						
	Cooling	Min.~Max.	°CDB	10 ~ 43						
	Domestic hot water	Min.~Max.	°CDB	-28 ~ 35						
Refrigerant	Type			R-32						
	GWP			675						
	Charge		kg	4.20						
	Charge		TCO <sub>2</sub> Eq	2.84						
	Control			Expansion valve						
LW(A) Sound power level (according to EN14825)				54						
Sound pressure level (at 1 meter)	Nom.			43		48				
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50/230 / W1/3~/50/400						
Current	Recommended fuses		A	32/16						

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 H MT F

Floor standing air to water heat pump for heating, cooling and hot water

- › A combined stainless steel domestic hot water tank of 180 or 230 L and heat pump for easy installation
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 625 mm
- › Integrated back-up heater of 6 or 9 kW
- › Heat pump operation down to -28 °C



011-1W0503  
011-1W0504  
011-1W0505  
011-1W0506  
011-1W0507  
011-1W0508



up to

More details and final information can be found by scanning or clicking the QR codes.



ETVX12E6V



ETVX12E9W

EPRA08-12EV3

EPRA08-12EW1

Efficiency data				ETVX + EPRA	12S18E6V/E9W + 08EV/W	12S23E6V/E9W + 08EV/W	12S18E6V/E9W + 10EV/W	12S23E6V/E9W + 10EV/W	12S18E6V/E9W + 12EV/W	12S23E6V/E9W + 12EV/W
Space heating	Average climate water outlet 55 °C	General	SCOP	3.47/3.59				3.48/3.60		
			ηs (Seasonal space heating efficiency)			136/141				
			Seasonal space heating eff. class			A++				
Average climate water outlet 35 °C	General	SCOP	4.79/4.95				4.82/4.98			
		ηs (Seasonal space heating efficiency)	188/195				190/196			
		Seasonal space heating eff. class			A+++					
Domestic hot water heating	General	Declared load profile						L		
		COPdhw	2.72/2.80		2.96/3.05		2.72/2.80		2.96/3.05	
		ηwh (water heating efficiency)	117/120		126/130		117/120		126/130	
		Water heating energy efficiency class					A+			

Indoor Unit				ETVX	12S18E6V/D9W	12S23E6V/D9W	12S18E6V/D9W	12S23E6V/D9W	12S18E6V/D9W	12S23E6V/D9W
Casing	Colour	White + Black								
	Material	Precoated sheet metal								
Dimensions	Unit	HeightxWidthxDepth	mm	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	
Weight	Unit		kg	108	117	108	117	108	117	
Tank	Water volume		l	180	230	180	230	180	230	
	Maximum water temperature		°C	70						
	Maximum water pressure		bar	10						
	Corrosion protection			Pickling						
Operation range	Heating	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
	Cooling	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
	Domestic hot water	Ambient	Max.	°C						
		Water side	Min.~Max.	°C						
Sound power level	Nom.		dBA	44						
Sound pressure level	Nom.		dBA	30						

Outdoor Unit				EPRA	08EV3/W1	10EV3/W1	12EV3/W1
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533			
Weight	Unit		kg	118			
Compressor	Quantity			1			
	Type			Hermetically sealed swing compressor			
Operation range	Heating	Min.~Max.	°CDB	-28 ~ 25			
	Cooling	Min.~Max.	°CDB	10 ~ 43			
	Domestic hot water	Min.~Max.	°CDB	-28 ~ 35			
Refrigerant	Type			R-32			
	GWP			675			
	Charge		kg	3.25			
	Charge		TCO <sub>2</sub> Eq	2.19			
	Control			Expansion valve			
LW(A) Sound power level (according to EN14825)				53			
Sound pressure level (at 1 meter)	Nom.			40.60/41.10			
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50/230 - W1/3~/50/400			
Current	Recommended fuses		A	32/16			

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 H HT F

Floor standing air to water heat pump for heating, cooling and hot water

- › A combined stainless steel domestic hot water tank of 180 or 230 L and heat pump for easy installation
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 625 mm
- › Integrated back-up heater of 6 or 9 kW
- › Heat pump operation down to -28 °C



More details and final information can be found by scanning or clicking the QR codes.



ETVX16E6V7



ETVX16E9W7

EPRA14-18DV37

EPRA14-18DW17

Efficiency data				ETVX + EPRA	16S18E6V7/E9W7 + 14DV7/W7	16S23E6V7/E9W7 + 14DV7/W7	16S18E6V7/E9W7 + 16DV7/W7	16S23E6V7/E9W7 + 16DV7/W7	16S18E6V7/E9W7 + 18DV7/W7	16S23E6V7/E9W7 + 18DV7/W7
Space heating	Average climate water outlet 55 °C	General	SCOP	3.62/3.63						
			ηs (Seasonal space heating efficiency)	142						
			Seasonal space heating eff. class	A++						
	Average climate water outlet 35 °C	General	SCOP	4.57/4.81						
		ηs (Seasonal space heating efficiency)	180/190							
			Seasonal space heating eff. class	A+++						
Domestic hot water heating	General	Declared load profile		L	XL	L	XL	L	XL	XL
	Average climate	COPdhw		2.62/2.51	2.61/2.55	2.62/2.51	2.61/2.55	2.62/2.51	2.61/2.55	2.61/2.55
		ηwh (water heating efficiency)	%	110/106	108/107	110/106	108/107	110/106	108/107	108/107
			Water heating energy efficiency class	A						

Indoor Unit				ETVX	16S18E6V7/E79W7	16S23E6V7/E79W7	16S18E6V7/E79W7	16S23E6V7/E79W7	16S18E6V7/E79W7	16S23E6V7/E79W7
Casing	Colour	White + Black								
	Material	Precoated sheet metal								
Dimensions	Unit	HeightxWidthxDepth	mm	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,850x595x625
Weight	Unit		kg	109	118	109	118	109	118	118
Tank	Water volume		l	180	230	180	230	180	230	230
	Maximum water temperature		°C	70						
	Maximum water pressure		bar	10						
	Corrosion protection			Pickling						
Operation range	Heating	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
	Cooling	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
	Domestic hot water	Ambient	Max.	°C						
		Water side	Min.~Max.	°C						
Sound power level	Nom.		dBA	44						
Sound pressure level	Nom.		dBA	30						

Outdoor Unit				EPRA	14DV37/W17	16DV37/W17	18DV37/W17
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533			
Weight	Unit		kg	146/151			
Compressor	Quantity			1			
	Type			Hermetically sealed scroll compressor			
Operation range	Heating	Min.~Max.	°CDB	-28 ~ 25			
	Cooling	Min.~Max.	°CDB	10 ~ 43			
	Domestic hot water	Min.~Max.	°CDB	-28 ~ 35			
Refrigerant	Type			R-32			
	GWP			675			
	Charge		kg	4.20			
	Charge		TCO <sub>2</sub> Eq	2.84			
	Control			Expansion valve			
LW(A) Sound power level (according to EN14825)				54			
Sound pressure level (at 1 meter)	Nom.			43		48	
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50/230 / W1/3~/50/400			
Current	Recommended fuses		A	32/16			

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 H MT F

## Floor standing integrated with two different temperature zones monitoring

- › A combined stainless steel domestic hot water tank of 180 or 230 L and heat pump for easy installation
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 625 mm
- › Integrated back-up heater of 6 or 9 kW
- › Heat pump operation down to -28 °C



More details and final information can be found by scanning or clicking the QR codes.



ETVZ12E6V



ETVZ12E9W

EPRA08-12EV3

EPRA08-12EW1

Efficiency data				ETVZ + EPRA	12S18E6V/E9W + 08EV/W	12S23E6V/E9W + 08EV/W	12S18E6V/E9W + 10EV/W	12S23E6V/E9W + 10EV/W	12S18E6V/E9W + 12EV/W	12S23E6V/E9W + 12EV/W
Space heating	Average climate water outlet 55 °C	General	SCOP	3.41/3.52			3.43/3.53			
			ηs (Seasonal space heating efficiency)	134/138			A++			
	Average climate water outlet 35 °C	General	SCOP	4.69/4.82			4.71/4.69		4.71/4.84	
			ηs (Seasonal space heating efficiency)	184/190			186/184		186/191	
Domestic hot water heating	General	Declared load profile		A+++ L						
	Average climate	COPdhw		2.72/2.80	2.96/3.05	2.72/2.80	2.96/3.05	2.72/2.80	2.96/3.05	
		ηwh (water heating efficiency)		117/120	126/130	117/120	126/130	117/120	126/130	
		Water heating energy efficiency class		A+						
Indoor Unit				ETVZ	12S18E6V/E9W	12S23E6V/E9W	12S18E6V/E9W	12S23E6V/E9W	12S18E6V/E9W	12S23E6V/E9W
Casing	Colour	White + Black								
	Material	Precoated sheet metal								
Dimensions	Unit	HeightxWidthxDepth	mm	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	
Weight	Unit		kg	114	122	114	122	114	122	
Tank	Water volume		l	180	230	180	230	180	230	
	Maximum water temperature		°C	70						
	Maximum water pressure		bar	10						
	Corrosion protection			Pickling						
Operation range	Heating	Ambient	Min.~Max.	°C	-28 ~ 25					
		Water side	Min.~Max.	°C	18 ~ 65					
	Domestic hot water	Ambient	Min.~Max.	°C	-28 ~ 35					
		Water side	Min.~Max.	°C	10 ~ 65					
Sound power level	Nom.		dBA	44						
Sound pressure level	Nom.		dBA	30						
Outdoor Unit				EPRA	08EV3/W1	10EV3/W1	12EV3/W1			
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533						
Weight	Unit		kg	118						
Compressor	Quantity			1						
	Type			Hermetically sealed swing compressor						
Operation range	Heating	Min.~Max.	°CDB	-28 ~ 25						
	Domestic hot water	Min.~Max.	°CDB	-28 ~ 35						
Refrigerant	Type			R-32						
	GWP			675						
	Charge		kg	3.25						
	Charge		TCO <sub>2</sub> Eq	2.19						
	Control			Expansion valve						
LW(A) Sound power level (according to EN14825)				53						
Sound pressure level (at 1 meter)	Nom.			40.60/41.10						
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50/230 - W1/3~/50/400						
Current	Recommended fuses		A	32/16						

This product contains fluorinated greenhouse gases.



# Daikin Altherma 3 H HT F

Floor standing integrated with **two different temperature zones monitoring**

- › A combined stainless steel domestic hot water tank of 180 or 230 L and heat pump for easy installation
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 625 mm
- › Integrated back-up heater of 6 or 9 kW
- › Heat pump operation down to -28 °C



up to



More details and final information can be found by scanning or clicking the QR codes.



ETVZ16E6V7



ETVZ16E9W7

EPRA14-18DV37

EPRA14-18DW17

Efficiency data				ETVZ + EPRA	16S18E6V7/E9W7 + 14DV7/W7	16S23E6V7/E9W7 + 14DV7/W7	16S18E6V7/E9W7 + 16DV7/W7	16S23E6V7/E9W7 + 16DV7/W7	16S18E6V7/E9W7 + 18DV7/W7	16S23E6V7/E9W7 + 18DV7/W7
Space heating	Average climate water outlet 55 °C	General	SCOP	3.58/3.57						
		ηs (Seasonal space heating efficiency)	%	140						
	General	Seasonal space heating eff. class	A++							
	Average climate water outlet 35 °C	General	SCOP	4.51/4.71						
			ηs (Seasonal space heating efficiency)	177/186						
			Seasonal space heating eff. class	A+++						
Domestic hot water heating	Average climate	General	Declared load profile	L	XL	L	XL	L	XL	
		COP <sub>dhw</sub>	2.62/2.51	2.61/2.55	2.62/2.51	2.61/2.55	2.62/2.51	2.61/2.55		
	η <sub>wh</sub> (water heating efficiency)	%	110/106	108/107	110/106	108/107	110/106	108/107		
	Water heating energy efficiency class	A								
<b>Indoor Unit</b>				<b>ETVZ</b>	<b>16S18E6V7/E9W7</b>	<b>16S23E6V7/E9W7</b>	<b>16S18E6V7/E9W7</b>	<b>16S23E6V7/E9W7</b>	<b>16S18E6V7/E9W7</b>	<b>16S23E6V7/E9W7</b>
Casing	Colour	White + Black								
	Material	Precoated sheet metal								
Dimensions	Unit	HeightxWidthxDepth	mm	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	
Weight	Unit		kg	120	128	120	128	120	128	
Tank	Water volume		l	180	230	180	230	180	230	
	Maximum water temperature		°C	70						
	Maximum water pressure		bar	10						
	Corrosion protection			Pickling						
Operation range	Heating	Ambient	Min.~Max.	°C	-28 ~ 35					
		Water side	Min.~Max.	°C	15 ~ 70					
	Domestic hot water	Ambient	Min.~Max.	°C	-28 ~ 35					
		Water side	Min.~Max.	°C	10 ~ 63					
Sound power level	Nom.		dBA	44						
Sound pressure level	Nom.		dBA	30						
<b>Outdoor Unit</b>				<b>EPRA</b>	<b>14DV37/W17</b>	<b>16DV37/W17</b>	<b>18DV37/W17</b>			
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533						
Weight	Unit		kg	146/151						
Compressor	Quantity			1						
	Type			Hermetically sealed scroll compressor						
Operation range	Heating	Min.~Max.	°CDB	-28 ~ 25						
	Domestic hot water	Min.~Max.	°CDB	-28 ~ 35						
Refrigerant	Type			R-32						
	GWP			675						
	Charge		kg	4.20						
	Charge		TCO <sub>2</sub> Eq	2.84						
	Control			Expansion valve						
LW(A) Sound power level (according to EN14825)				54						
Sound pressure level (at 1 meter)	Nom.			43				48		
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50/230 / W1/3~/50/400						
Current	Recommended fuses		A	32/16						

This product contains fluorinated greenhouse gases.

## Floor standing unit with integrated ECH<sub>2</sub>O tank

The Daikin Altherma high temperature split integrated ECH<sub>2</sub>O is renowned for its ability to maximise renewable energy sources to provide the ultimate comfort in heating, domestic hot water and cooling

### Intelligent storage management

- › The unit is 'Smart Grid' ready to take advantage of low energy tariffs and efficiently store thermal energy for space heating and domestic hot water
- › Continuous heating during defrost mode and use of stored heat for space heating (500 L tank only)
- › Electronic management of both heat pump and ECH<sub>2</sub>O thermal store maximises energy efficiency, as well as convenient heating and domestic hot water
- › Achieves the highest standards for water sanitation
- › Uses more renewable energy with solar connection

### Innovative and high-quality tank

- › Lightweight plastic tank
- › No corrosion, anode, scale or lime deposits
- › Contains impact resistant polypropylene inner and outer walls filled with high-grade insulation foam to reduce heat losses to a minimum

### Combinable with other heat sources

- › The bivalent option allows heat from other sources such as oil, gas or pellet-fired boilers to be stored in the solar system, further lowering energy consumption

## ECH<sub>2</sub>O



### Advanced user interface

#### The Daikin-Eye

The intuitive Daikin eye shows you in real time the status of your system. Blue is perfect! Should the eye turn red, an error has occurred.

#### Quick to configure

Log in and you'll be able to completely configure the unit in less than 10 steps. You can even check if the unit is ready for use by running test cycles!

#### Easy operation

The user interface works really fast thanks to its icon-based menus.

#### Beautiful design

The interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

## ECH<sub>2</sub>O thermal store range: additional hot water comfort

Combine your indoor unit with a thermal store to achieve the ultimate comfort at home.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options

Built for small and large homes, customers can choose between a pressureless and a pressurised hot water system.


### Pressureless (drain-back) solar system (ETS<sup>H</sup>\*, ETS<sup>X</sup>\*)

- › The solar collectors are only filled with water when sufficient heating is provided by the sun
- › The pumps in the control and pump unit switch on briefly and fill the collectors with storage tank water
- › After filling, water circulation is maintained by the remaining pump

### Pressurised solar system (ETS<sup>HB</sup>\*, ETS<sup>XB</sup>\*)


- › System is filled with heat transfer fluid with the correct amount of antifreeze to avoid freezing in winter
- › System is pressurised and sealed

### Monthly energy consumption of an average detached house

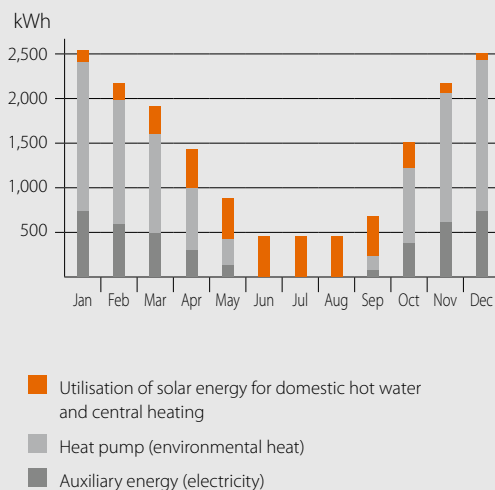

### System diagram: Integrated solar unit

- 1 Use of solar energy for domestic hot water and central heating
- 2 External heat pump unit
- 3 Solar thermal collectors
- 4 Solar pump station

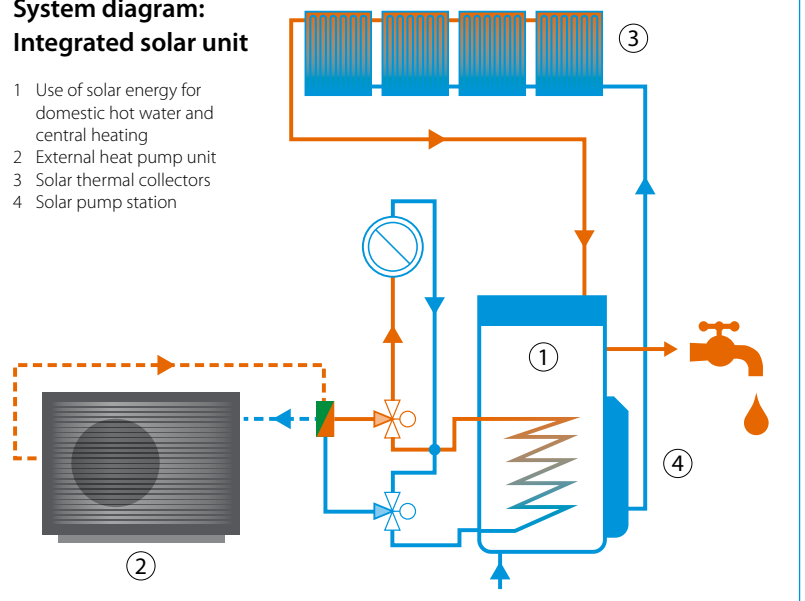

# Daikin Altherma 3 H MT ECH<sub>2</sub>O

Floor standing air-to-water heat pump for heating and hot water with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Solar support of domestic hot water with pressureless (drain-back) solar system
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating, hot water and cooling operation
- › Heat pump operation down to -28 °C
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump



up to



011-1W0501  
011-1W0502

More details and final information can be found by scanning or clicking the QR codes.



ETSH12E

EPRA08-12EV3

EPRA08-12EW1

Efficiency data				ETSH + EPRA	12P30E + 08EV/W	12P50E + 08EV/W	12P30E + 10EV/W	12P50E + 10EV/W	12P30E + 12EV/W	12P50E + 12EV/W	
Space heating	Average climate water outlet 55 °C	General	SCOP	3.41/3.52			3.43/3.53				
			η <sub>s</sub> (Seasonal space heating efficiency)				134/138				
			Seasonal space heating eff. class				A++				
Average climate water outlet 35 °C	General	SCOP	4.69/4.81			4.71/4.84		4.71/4.84			
		η <sub>s</sub> (Seasonal space heating efficiency)	184/190			186/191		186/191			
		Seasonal space heating eff. class				A+++					
Domestic hot water heating	Average climate	General	Declared load profile				L				
			COP <sub>dhw</sub>	2.75/2.83			3.10/3.17		2.75/2.83		3.10/3.17
			η <sub>wh</sub> (water heating efficiency)	116/119			128/131		116/119		128/131
Water heating energy efficiency class						A+					

Indoor Unit				ETSH	12P30E	12P50E	12P30E	12P50E	12P30E	12P50E
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)								
	Material	Impact resistant polypropylene								
Dimensions	Unit	HeightxWidthxDepth	mm	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816	
Weight	Unit		kg	75	98	75	98	75	98	
Tank	Water volume		l	294	477	294	477	294	477	
	Maximum water temperature		°C	85						
Operation range	Heating	Ambient	Min.~Max.	°C -28 ~ 25						
		Water side	Min.~Max.	°C 18 ~ 65						
	Domestic hot water	Ambient	Min.~Max.	°C -28 ~ 35						
		Water side	Min.~Max.	°C 10 ~ 63						
Sound power level	Nom.		dBA	47.30						
Sound pressure level	Nom.		dBA	38.60						

Outdoor Unit				EPRA	08EV3/W1	10EV3/W1	12EV3/W1
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533			
Weight	Unit		kg	118			
Compressor	Quantity			1			
	Type			Hermetically sealed swing compressor			
Operation range	Heating	Min.~Max.	°CDB	-28 ~ 25			
	Domestic hot water	Min.~Max.	°CDB	-28 ~ 35			
Refrigerant	Type			R-32			
	GWP			675			
	Charge		kg	3.25			
	Charge		TCO <sub>2</sub> Eq	2.19			
	Control			Expansion valve			
LW(A) Sound power level (according to EN14825)				53			
Sound pressure level (at 1 meter)	Nom.			40.60/41.10			
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50/230 - W1/3~/50/400			
Current	Recommended fuses		A	32/16			

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 H HT ECH<sub>2</sub>O

Floor standing air-to-water heat pump for heating and hot water with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Solar support of domestic hot water with pressureless (drain-back) solar system
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating, hot water and cooling operation
- › Heat pump operation down to -28 °C
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump



up to



011-1W0355-356  
011-1W0359-360  
011-1W0363-364

More details and final information can be found by scanning or clicking the QR codes.



ETSH16E7

EPRA14-18DV37

EPRA14-18DW17

Efficiency data				ETSH + EPRA		16P30E7 + 14DV7/W7	16P50E7 + 14DV7/W7	16P30E7 + 16DV7/W7	16P50E7 + 16DV7/W7	16P30E7 + 18DV7/W7	16P50E7 + 18DV7/W7		
Space heating	Average climate water outlet 55 °C	General	SCOP	3.58/3.57									
			η <sub>s</sub> (Seasonal space heating efficiency) %	140									
	Average climate water outlet 35 °C	General	SCOP	4.51/4.71									
			η <sub>s</sub> (Seasonal space heating efficiency) %	177/186									
			Seasonal space heating eff. class	A+++									
Domestic hot water heating	General	Declared load profile		L	XL	L	XL	L	XL	L	XL		
		Average COP <sub>dhw</sub>	2.86/2.85		3.00/2.99		2.86/2.85		3.00/2.99		2.86/2.85		
	Average climate	η <sub>wh</sub> (water heating efficiency) %		124		125		124		125		125	
		Water heating energy efficiency class		A+									
<b>Indoor Unit</b>				<b>ETSH</b>	<b>16P30E7</b>	<b>16P50E7</b>	<b>16P30E7</b>	<b>16P50E7</b>	<b>16P30E7</b>	<b>16P50E7</b>			
Casing	Colour	Traffic white (RAL9016) / Dark grey (RAL7011)											
	Material	Impact resistant polypropylene											
Dimensions	Unit	HeightxWidthxDepth	mm	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816		
Weight	Unit		kg	75	98	75	98	75	98	75	98		
Tank	Water volume		l	294	477	294	477	294	477	294	477		
	Maximum water temperature		°C	85									
Operation range	Heating	Ambient	Min.~Max.	°C -28 ~ 35									
		Water side	Min.~Max.	°C 15 ~ 70									
	Domestic hot water	Ambient	Min.~Max.	°C -28 ~ 35									
		Water side	Min.~Max.	°C 10 ~ 63									
Sound power level	Nom.		dBA	45.6									
Sound pressure level	Nom.		dBA	32.8									
<b>Outdoor Unit</b>				<b>EPRA</b>	<b>14DV37/W17</b>	<b>16DV37/W17</b>	<b>18DV37/W17</b>						
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533									
Weight	Unit		kg	146/151									
Compressor	Quantity			1									
	Type			Hermetically sealed scroll compressor									
Operation range	Heating	Min.~Max.	°CDB	-28 ~ 25									
	Domestic hot water	Min.~Max.	°CDB	-28 ~ 35									
Refrigerant	Type			R-32									
	GWP			675									
	Charge		kg	4.20									
	Charge		TCO <sub>2</sub> Eq	2.84									
	Control			Expansion valve									
LW(A) Sound power level (according to EN14825)				54									
Sound pressure level (at 1 meter)	Nom.			43.0				48.0					
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50/230 / W1/3~/50/400									
Current	Recommended fuses		A	32/16									

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 H MT ECH<sub>2</sub>O

Floor standing air-to-water heat pump for **bivalent heating and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation
- › Heat pump operation down to -28 °C



up to



More details and final information can be found by scanning or clicking the QR codes.



ETSHB12E

EPRA08-12EV3

EPRA08-12EW1

Efficiency data				ETSHB + EPRA	12P30E + 08EV/W	12P50E + 08EV/W	12P30E + 10EV/W	12P50E + 10EV/W	12P30E + 12EV/W	12P50E + 12EV/W
Space heating	Average climate water outlet 55 °C	General	SCOP	3.41/3.52		3.43/3.53				
			η <sub>s</sub> (Seasonal space heating efficiency)	134/138		A++				
Domestic hot water heating	Average climate	General	SCOP	4.69/4.81		4.71/4.84		4.71/4.84		
			η <sub>wh</sub> (water heating efficiency)	184/190		186/191		186/191		
		Declared load profile		L						
		Water heating energy efficiency class		A+						
Indoor Unit				ETSHB	12P30E	12P50E	12P30E	12P50E	12P30E	12P50E
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)								
	Material	Impact resistant polypropylene								
Dimensions	Unit	HeightxWidthxDepth	mm	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816	1,910x792x816
Weight	Unit		kg	76	100	76	100	76	100	100
Tank	Water volume		l	294	477	294	477	294	477	477
	Maximum water temperature		°C	85						
Operation range	Heating	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
	Domestic hot water	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
Sound power level	Nom.		dBA	45.6						
Sound pressure level	Nom.		dBA	32.8						
Outdoor Unit				EPRA	08EV3/W1	10EV3/W1	12EV3/W1			
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533						
Weight	Unit		kg	118						
Compressor	Quantity			1						
	Type			Hermetically sealed swing compressor						
Operation range	Heating	Min.~Max.	°CDB	-28 ~ 25						
	Domestic hot water	Min.~Max.	°CDB	-28 ~ 35						
Refrigerant	Type			R-32						
	GWP			675						
	Charge		kg	3.25						
	Charge		TCO <sub>2</sub> Eq	2.19						
		Control		Expansion valve						
LW(A) Sound power level (according to EN14825)				53						
Sound pressure level (at 1 meter)	Nom.			40.60/41.10						
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50/230 - W1/3~/50/400						
Current	Recommended fuses		A	32/16						

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 H HT ECH<sub>2</sub>O

Floor standing air-to-water heat pump for **bivalent heating and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation
- › Heat pump operation down to -28 °C



up to



011-1W0355-356  
011-1W0359-360  
011-1W0363-364

More details and final information can be found by scanning or clicking the QR codes.



ETSHB16E7

EPRA14-18DV37

EPRA14-18DW17

Efficiency data				ETSHB + EPRA		16P30E7 + 14DV7/W7	16P50E7 + 14DV7/W7	16P30E7 + 16DV7/W7	16P50E7 + 16DV7/W7	16P30E7 + 18DV7/W7	16P50E7 + 18DV7/W7
Space heating	Average climate water outlet 55 °C	General	SCOP	3.58/3.57							
			η <sub>s</sub> (Seasonal space heating efficiency)	140							
	Seasonal space heating eff. class	A++									
Average climate water outlet 35 °C	General	SCOP	4.51/4.71								
		η <sub>s</sub> (Seasonal space heating efficiency)	177/186								
	Seasonal space heating eff. class	A+++									
Domestic hot water heating	General	Declared load profile		L	XL	L	XL	L	XL	L	XL
		Average COP <sub>dhw</sub>	2.86/2.85		3.00/2.99		2.86/2.85		3.00/2.99		2.86/2.85
	Climate	η <sub>wh</sub> (water heating efficiency)	124		125		124		125		124
Water heating energy efficiency class			A+								
Indoor Unit				ETSHB	16P30E7	16P50E7	16P30E7	16P50E7	16P30E7	16P50E7	
Casing	Colour	Traffic white (RAL9016) / Dark grey (RAL7011)									
	Material	Impact resistant polypropylene									
Dimensions	Unit	HeightxWidthxDepth	mm	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816		
Weight	Unit	kg	76	100	76	100	76	100			
Tank	Water volume	l	294	477	294	477	294	477			
	Maximum water temperature	°C	85								
Operation range	Heating	Ambient	Min.~Max.	°C							
		Water side	Min.~Max.	°C							
	Domestic hot water	Ambient	Min.~Max.	°C							
		Water side	Min.~Max.	°C							
Sound power level	Nom.	dB(A)	45.6								
Sound pressure level	Nom.	dB(A)	32.8								
Outdoor Unit				EPRA	14DV37/W17	16DV37/W17	18DV37/W17				
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533							
Weight	Unit	kg	146/151								
Compressor	Quantity	1									
	Type	Hermetically sealed scroll compressor									
Operation range	Heating	Min.~Max.	°CDB								
	Domestic hot water	Min.~Max.	°CDB								
Refrigerant	Type	R-32									
	GWP	675									
	Charge	kg									
	Charge	TCO <sub>2</sub> Eq									
	Control	Expansion valve									
LW(A) Sound power level (according to EN14825)	54										
Sound pressure level (at 1 meter)	Nom.	43.0				48.0					
Power supply	Name/Phase/Frequency/Voltage	Hz/V									
Current	Recommended fuses	A									

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 H MT ECH<sub>2</sub>O

Floor standing air-to-water heat pump for heating, cooling and hot water with thermal solar support

- › Integrated solar unit, offering top comfort in heating, hot water and cooling
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Solar support of domestic hot water with pressureless (drain-back) solar system
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating, hot water and cooling operation
- › Outdoor unit extracts heat from the outdoor air, even at -28 °C
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump



up to



More details and final information can be found by scanning or clicking the QR codes.



ETSX12E

EPRA08-12EV3

EPRA08-12EW1

Efficiency data				ETSX + EPRA	12P30E + 08EV/W	12P50E + 08EV/W	12P30E + 10EV/W	12P50E + 10EV/W	12P30E + 12EV/W	12P50E + 12EV/W	
Space heating	Average climate water outlet 55 °C	General	SCOP	3.47/3.59			3.48/3.60				
			ηs (Seasonal space heating efficiency) %	136/141			136/141				
			Seasonal space heating eff. class	A++			A++				
Average climate water outlet 35 °C	General	SCOP	4.79/4.95			4.82/4.98					
		ηs (Seasonal space heating efficiency) %	189/195			190/196					
		Seasonal space heating eff. class	A+++			A+++					
Domestic hot water heating	Average climate	General		Declared load profile							
			COPdhw	2.75/2.83		3.10/3.17		2.75/2.83		3.10/3.17	
			ηwh (water heating efficiency) %	116/119		128/131		116/119		128/131	
			Water heating energy efficiency class	A+							

Indoor Unit				ETSX	12P30E	12P50E	12P30E	12P50E	12P30E	12P50E
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)								
	Material	Impact resistant polypropylene								
Dimensions	Unit	HeightxWidthxDepth	mm	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816	
Weight	Unit		kg	75	98	75	98	75	98	
Tank	Water volume		l	294	477	294	477	294	477	
	Maximum water temperature		°C	85						
Operation range	Heating	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
				-28 ~ 25						
	Cooling	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
				18 ~ 65						
Domestic hot water	Ambient	Min.~Max.	°C							
	Water side	Min.~Max.	°C							
		10 ~ 43								
		5 ~ 22								
		-28 ~ 35								
		10 ~ 63								
Sound power level	Nom.		dBA	47.30						
Sound pressure level	Nom.		dBA	38.60						

Outdoor Unit				EPRA	08EV3/W1	10EV3/W1	12EV3/W1
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533			
Weight	Unit		kg	118			
Compressor	Quantity			1			
	Type			Hermetically sealed swing compressor			
Operation range	Heating	Min.~Max.	°CDB	-28 ~ 25			
	Cooling	Min.~Max.	°CDB	10 ~ 43			
	Domestic hot water	Min.~Max.	°CDB	-28 ~ 35			
Refrigerant	Type			R-32			
	GWP			675			
	Charge		kg	3.25			
	Charge		TCO <sub>2</sub> Eq	2.19			
	Control			Expansion valve			
LW(A) Sound power level (according to EN14825)				53			
Sound pressure level (at 1 meter)	Nom.			40.60/41.10			
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50/230 - W1/3~/50/400			
Current	Recommended fuses		A	32/16			

This product contains fluorinated greenhouse gases.



# Daikin Altherma 3 H HT ECH<sub>2</sub>O

Floor standing air-to-water heat pump for **heating, cooling and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating, hot water and cooling
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Solar support of domestic hot water with pressureless (drain-back) solar system
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating, hot water and cooling operation
- › Outdoor unit extracts heat from the outdoor air, even at -28 °C
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump



up to **A+++** **A+** **70°C** **R-32**



More details and final information can be found by scanning or clicking the QR codes.



ETSX16E7

EPRA14-18DV37

EPRA14-18DW17

Efficiency data				ET SX + EPRA		16P30E7 + 14DV7/W7	16P50E7 + 14DV7/W7	16P30E7 + 16DV7/W7	16P50E7 + 16DV7/W7	16P30E7 + 18DV7/W7	16P50E7 + 18DV7/W7
Space heating	Average climate water outlet 55 °C	General	SCOP	3.62/3.63							
			η <sub>s</sub> (Seasonal space heating efficiency) %	142							
	Seasonal space heating eff. class			A++							
	Average climate water outlet 35 °C	General	SCOP	4.57/4.81							
η <sub>s</sub> (Seasonal space heating efficiency) %			180/190								
Seasonal space heating eff. class			A+++								
Domestic hot water heating	General	Declared load profile		L	XL	L	XL	L	XL		
		Average COP <sub>dhw</sub>	2.86/2.85	3.00/2.99	2.86/2.85	3.00/2.99	2.86/2.85	3.00/2.99			
	Average climate	η <sub>ywh</sub> (water heating efficiency) %		124	125	124	125	124	125		
		Water heating energy efficiency class		A+							
<b>Indoor Unit</b>				<b>ET SX</b>	<b>16P30E7</b>	<b>16P50E7</b>	<b>16P30E7</b>	<b>16P50E7</b>	<b>16P30E7</b>	<b>16P50E7</b>	
Casing	Colour	Traffic white (RAL9016) / Dark grey (RAL7011)									
	Material	Impact resistant polypropylene									
Dimensions	Unit	HeightxWidthxDepth	mm	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816		
Weight	Unit		kg	75	98	75	98	75	98		
Tank	Water volume		l	294	477	294	477	294	477		
	Maximum water temperature		°C	85							
Operation range	Heating	Ambient	Min.~Max.	°C							
		Water side	Min.~Max.	°C							
	Cooling	Ambient	Min.~Max.	°C							
		Water side	Min.~Max.	°C							
	Domestic hot water	Ambient	Min.~Max.	°C							
		Water side	Min.~Max.	°C							
Sound power level	Nom.		dBA	45.6							
Sound pressure level	Nom.		dBA	32.8							
<b>Outdoor Unit</b>				<b>EPRA</b>	<b>14DV37/W17</b>		<b>16DV37/W17</b>		<b>18DV37/W17</b>		
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533							
Weight	Unit		kg	146/151							
Compressor	Quantity			1							
	Type			Hermetically sealed scroll compressor							
Operation range	Heating	Min.~Max.	°CDB	-28 ~ 25							
	Cooling	Min.~Max.	°CDB	10 ~ 43							
	Domestic hot water	Min.~Max.	°CDB	-28 ~ 35							
Refrigerant	Type			R-32							
	GWP			675							
	Charge		kg	4.20							
	Charge		TCO <sub>2</sub> Eq	2.84							
	Control			Expansion valve							
LW(A) Sound power level (according to EN14825)				54							
Sound pressure level (at 1 meter)	Nom.			43.0				48.0			
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50/230 / W1/3~/50/400							
Current	Recommended fuses		A	32/16							

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 H MT ECH<sub>2</sub>O

Floor standing air-to-water heat pump for **bivalent heating, cooling and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation



More details and final information can be found by scanning or clicking the QR codes.



ETSXB12E

EPRA08-12EV3

EPRA08-12EW1

Efficiency data				ETSXB + EPRA		12P30E + 08EV/W	12P50E + 08EV/W	12P30E + 10EV/W	12P50E + 10EV/W	12P30E + 12EV/W	12P50E + 12EV/W
Space heating	Average climate water outlet 55 °C	General	SCOP ηs (Seasonal space heating efficiency) %	3.47/3.59				136/141		3.48/3.60	
			Seasonal space heating eff. class					A++			
	Average climate water outlet 35 °C	General	SCOP ηs (Seasonal space heating efficiency) %	4.79/4.95				4.82/4.98			
			Seasonal space heating eff. class	189/195				190/196			
Domestic hot water heating	General	Declared load profile						L			
	Average climate	COPdhw		2.75/2.83	3.10/3.17	2.75/2.83	3.10/3.17	2.75/2.83	3.10/3.17		
		ηwh (water heating efficiency) %		116/119	128/131	116/119	128/131	116/119	128/131		
		Water heating energy efficiency class						A+			
Indoor Unit				ETSXB	12P30E	12P50E	12P30E	12P50E	12P30E	12P50E	
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)									
	Material	Impact resistant polypropylene									
Dimensions	Unit	HeightxWidthxDepth	mm	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816		
Weight	Unit		kg	76	100	76	100	76	100		
Tank	Water volume		l	294	477	294	477	294	477		
	Maximum water temperature		°C	85							
Operation range	Heating	Ambient	Min.~Max.	°C		-28 ~ 25					
		Water side	Min.~Max.	°C		18 ~ 65					
	Cooling	Ambient	Min.~Max.	°C		10 ~ 43					
		Water side	Min.~Max.	°C		5 ~ 22					
	Domestic hot water	Ambient	Min.~Max.	°C		-28 ~ 35					
		Water side	Min.~Max.	°C		10 ~ 63					
Sound power level	Nom.		dBA	47.30							
Sound pressure level	Nom.		dBA	38.60							
Outdoor Unit				EPRA	08EV3/W1		10EV3/W1		12EV3/W1		
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533							
Weight	Unit		kg	118							
Compressor	Quantity			1							
	Type			Hermetically sealed swing compressor							
Operation range	Heating	Min.~Max.	°CDB	-28 ~ 25							
	Cooling	Min.~Max.	°CDB	10 ~ 43							
	Domestic hot water	Min.~Max.	°CDB	-28 ~ 35							
Refrigerant	Type			R-32							
	GWP			675							
	Charge		kg	3.25							
	Charge		TCO <sub>2</sub> Eq	2.19							
	Control			Expansion valve							
LW(A) Sound power level (according to EN14825)				53							
Sound pressure level (at 1 meter)	Nom.			40.60/41.10							
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50/230 - W1/3~/50/400							
Current	Recommended fuses		A	32/16							

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 H HT ECH<sub>2</sub>O

Floor standing air-to-water heat pump for **bivalent heating, cooling and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation



More details and final information can be found by scanning or clicking the QR codes.



up to **A+++** **A+** **70°C** **R-32**

ETSXB16E7      EPRA14-18DV37      EPRA14-18DW17

Efficiency data				ETSXB + EPRA	16P30E7 + 14DV7/W7	16P50E7 + 14DV7/W7	16P30E7 + 16DV7/W7	16P50E7 + 16DV7/W7	16P30E7 + 18DV7/W7	16P50E7 + 18DV7/W7
Space heating	Average climate water outlet 55 °C	General	SCOP	3.62/3.63						
		ηs (Seasonal space heating efficiency) %	142							
	General	Seasonal space heating eff. class	A++							
	Average climate water outlet 35 °C	General	SCOP	4.57/4.81						
		General	ηs (Seasonal space heating efficiency) %	180/190						
		General	Seasonal space heating eff. class	A+++						
Domestic hot water heating	General	Declared load profile			L	XL	L	XL	L	XL
	Average COPdhw				2.86/2.85	3.00/2.99	2.86/2.85	3.00/2.99	2.86/2.85	3.00/2.99
	Climate ηwh (water heating efficiency) %				124	125	124	125	124	125
		Water heating energy efficiency class			A+					

Indoor Unit				ETSXB	16P30E7	16P50E7	16P30E7	16P50E7	16P30E7	16P50E7
Casing	Colour	Traffic white (RAL9016) / Dark grey (RAL7011)								
	Material	Impact resistant polypropylene								
Dimensions	Unit	HeightxWidthxDepth	mm	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816	1,892x594x644	1,910x792x816	
Weight	Unit		kg	76	100	76	100	76	100	
Tank	Water volume		l	294	477	294	477	294	477	
	Maximum water temperature		°C	85						
Operation range	Heating	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
	Cooling	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
	Domestic hot water	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
Sound power level	Nom.		dBA	45.6						
Sound pressure level	Nom.		dBA	32.8						

Outdoor Unit				EPRA	14DV37/W17	16DV37/W17	18DV37/W17	
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533				
Weight	Unit		kg	146/151				
Compressor	Quantity			1				
	Type			Hermetically sealed scroll compressor				
Operation range	Heating	Min.~Max.	°CDB	-28 ~ 25				
	Cooling	Min.~Max.	°CDB	10 ~ 43				
	Domestic hot water	Min.~Max.	°CDB	-28 ~ 35				
Refrigerant	Type			R-32				
	GWP			675				
	Charge		kg	4.20				
	Charge		TCO <sub>2</sub> Eq	2.84				
	Control			Expansion valve				
LW(A) Sound power level (according to EN14825)				54				
Sound pressure level (at 1 meter)	Nom.			43.0				48.0
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50/230 / W1/3~/50/400				
Current	Recommended fuses		A	32/16				

This product contains fluorinated greenhouse gases.


# Wall mounted unit

## Why choose Daikin wall mounted unit?

The Daikin Altherma 3 split wall mounted unit offers heating and cooling with high flexibility for a quick and easy installation, with an optional connection to deliver domestic hot water.

## High flexibility for installation and domestic hot water connection

- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required
- › The unit's sleek design blends in with other household appliances
- › Combine with a stainless steel or ECH<sub>2</sub>O thermal store

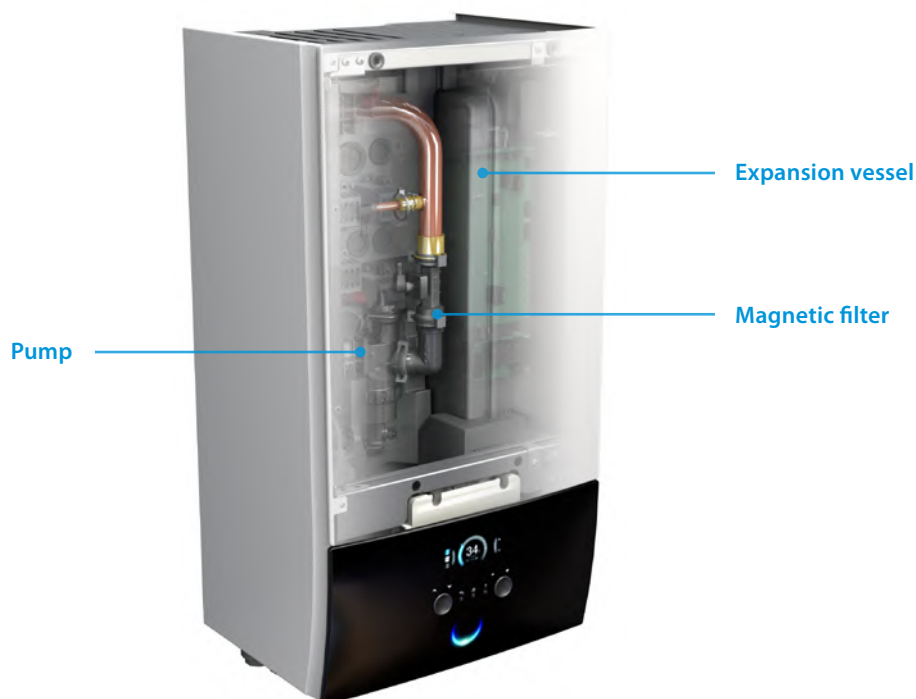

## Flexibility in providing domestic hot water

If the end user requires hot water and installation height is limited, a separate stainless steel tank provides the required installation flexibility.

ECH<sub>2</sub>O thermal store range: additional hot water comfort

Combine your wall mounted unit with a thermal store for additional hot water comfort.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: with high tapping performance
- › Fit for future possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build on the unit combined with cascade principle offers flexible installation options




## Flexibility in providing space heating

The wall mounted unit is the perfect choice in case the end user is looking for space heating or cooling while domestic hot water is provided by another system.

Example of installation with a stainless steel domestic hot water tank.

### Heating and cooling

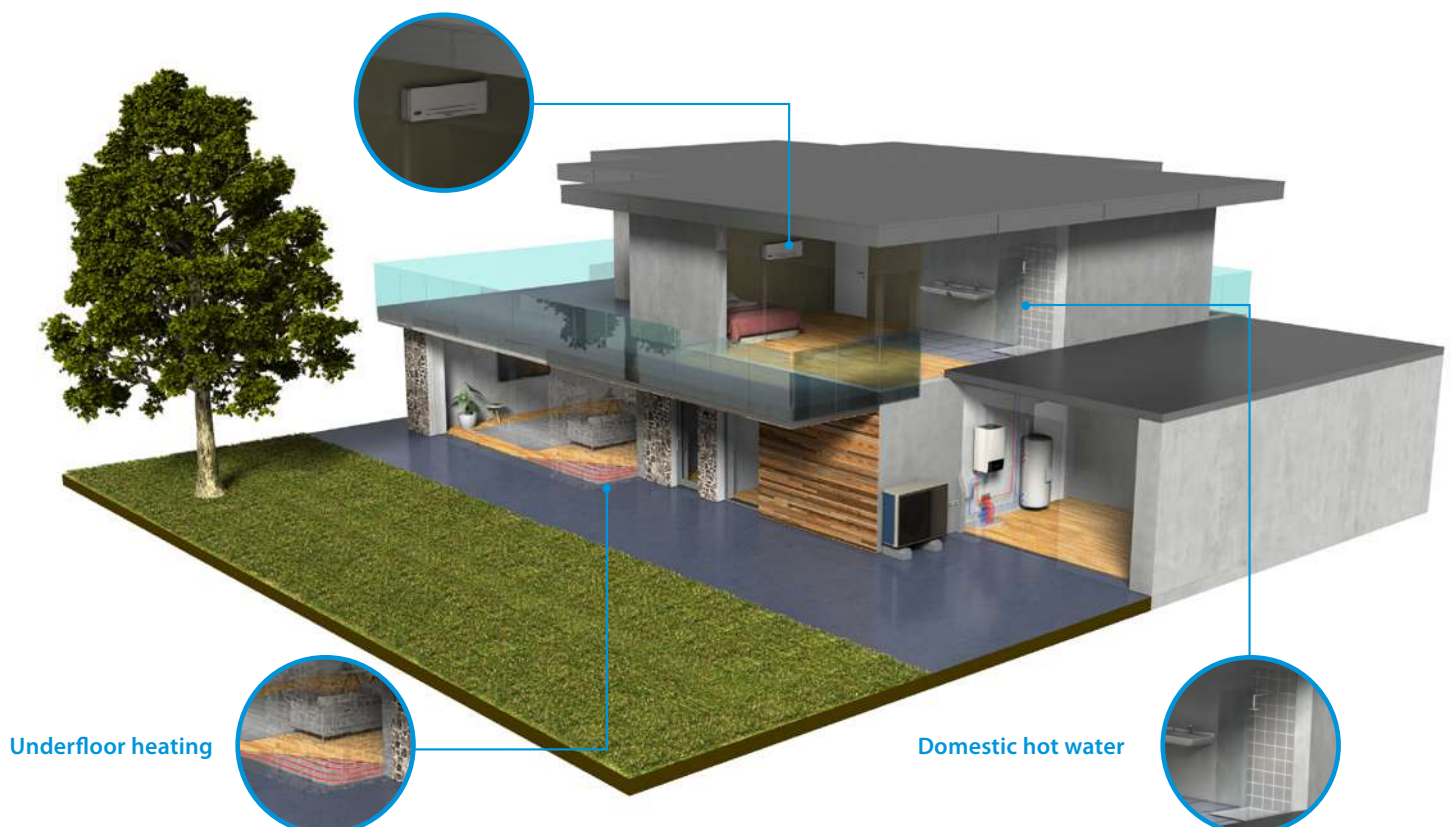

# Daikin Altherma 3 H MT W

Wall mounted **heating only** air-to-water heat pump

- > Inclusion of all hydraulic components means no third party components are required
- > PCB board and hydraulic components are located in the front for easy access
- > Compact dimensions allows for small installation space, as almost no side clearances are required
- > The unit's sleek design blends in with other household appliances
- > Combine with a stainless steel tank or ECH<sub>2</sub>O thermal store
- > Heat pump operation down to -28 °C



up to

**A+++**

**R-32**



More details and final information can be found by scanning or clicking the QR codes.



ETBH12E6V



ETBH12E9W

EPRA08-12EV3

EPRA08-12EW1

Efficiency data				ETBH + EPRA	12E6V + 08EV/W	12E9W + 08EV/W	12E6V + 10EV/W	12E9W + 10EV/W	12E6V + 12EV/W	12E9W + 12EV/W
Space heating	Average climate water outlet 55 °C	General	SCOP	3.41/3.52		134/138		3.43/3.53		
			ηs (Seasonal space heating efficiency)							
		General	SCOP	4.69/4.81		4.71/4.84		4.71/4.84		
		ηs (Seasonal space heating efficiency)	184/190		186/191		186/191			
	Average climate water outlet 35 °C	General	SCOP			A++				
		ηs (Seasonal space heating efficiency)			A+++					
		Seasonal space heating eff. class								
Indoor Unit				ETBH	12E6V	12E9W	12E6V	12E9W	12E6V	12E9W
Casing	Colour			White + Black						
	Material			Sheet metal						
Dimensions	Unit	HeightxWidthxDepth	mm	840x440x390						
Weight	Unit			36.50						
Operation range	Heating	Ambient	Min.~Max.			-28 ~ 25				
		Water side	Min.~Max.			18 ~ 65				
	Domestic hot water	Ambient	Min.~Max.			-28 ~ 35				
		Water side	Min.~Max.			10 ~ 63				
Sound power level	Nom.			44						
Sound pressure level	Nom.			30						
Outdoor Unit				EPRA	08EV3/W1	10EV3/W1	12EV3/W1			
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533						
Weight	Unit			118						
Compressor	Quantity			1						
	Type			Hermetically sealed swing compressor						
Operation range	Heating	Min.~Max.	°CDB			-28 ~ 25				
	Domestic hot water	Min.~Max.	°CDB			-28 ~ 35				
Refrigerant	Type			R-32						
	GWP			675						
	Charge			3.25						
	Charge	TCO <sub>2</sub> Eq		2.19						
	Control			Expansion valve						
LW(A) Sound power level (according to EN14825)					53					
Sound pressure level (at 1 meter)	Nom.			40.60/41.10						
Power supply	Name/Phase/Frequency/Voltage			V3/1~/50/230 - W1/3~/50/400						
Current	Recommended fuses			A 32/16						

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 H HT W

Wall mounted **heating only** air-to-water heat pump

- > Inclusion of all hydraulic components means no third party components are required
- > PCB board and hydraulic components are located in the front for easy access
- > Compact dimensions allows for small installation space, as almost no side clearances are required
- > The unit's sleek design blends in with other household appliances
- > Combine with a stainless steel tank or ECH<sub>2</sub>O thermal store
- > Heat pump operation down to -28 °C



up to **A+++** **R-32**



More details and final information can be found by scanning or clicking the QR codes.



ETBH16E6V7



ETBH16E9W7

EPRA14-18DV37

EPRA14-18DW17

Efficiency data					ETBH + EPRA		16E6V7 + 14DV7/DW7	16E9W7 + 14DV7/DW7	16E6V7 + 16DV7/W7	16E9W7 + 16DV7/W7	16E6V7 + 18DV7/DW7	16E9W7 + 18DV7/DW7
Space heating	Average climate water outlet 55 °C	General	SCOP	%				3.58/3.57				
			η <sub>s</sub> (Seasonal space heating efficiency)	%				140				
			Seasonal space heating eff. class					A++				
	Average climate water outlet 35 °C	General	SCOP	%				4.51/4.71				
		η <sub>s</sub> (Seasonal space heating efficiency)	%				177/186					
		Seasonal space heating eff. class					A+++					
Indoor Unit					ETBH	16E6V7	16E9W7	16E6V7	16E9W7	16E6V7	16E9W7	
Casing	Colour				White + Black							
	Material				Sheet metal							
Dimensions	Unit	HeightxWidthxDepth		mm	840x440x390							
Weight	Unit			kg	42							
Operation range	Heating	Ambient	Min.~Max.	°C	-28 ~ 35							
		Water side	Min.~Max.	°C	18 ~ 70							
	Domestic hot water	Ambient	Min.~Max.	°C	-28 ~ 35							
		Water side	Min.~Max.	°C	10 ~ 63							
Sound power level	Nom.			dB(A)	44							
Sound pressure level	Nom.			dB(A)	30							
Outdoor Unit					EPRA	14DV37/W17		16DV37/W17		18DV37/W17		
Dimensions	Unit	HeightxWidthxDepth		mm	1,003x1,270x533							
Weight	Unit			kg	146/151							
Compressor	Quantity				1							
	Type				Hermetically sealed scroll compressor							
Operation range	Heating	Min.~Max.		°CDB	-28 ~ 35							
	Domestic hot water	Min.~Max.		°CDB	-28 ~ 35							
Refrigerant	Type				R-32							
	GWP				675							
	Charge			kg	4.20							
	Charge			TCO <sub>2</sub> Eq	2.84							
	Control				Expansion valve							
LW(A) Sound power level (according to EN14825)					54							
Sound pressure level (at 1 meter)	Nom.				43					48		
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50/230 / W1/3~/50/400								
Current	Recommended fuses		A	32/16								

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 H MT W

Wall mounted **reversible** air-to-water heat pump

- > Inclusion of all hydraulic components means no third party components are required
- > PCB board and hydraulic components are located in the front for easy access
- > Compact dimensions allows for small installation space, as almost no side clearances are required
- > The unit's sleek design blends in with other household appliances
- > Combine with a stainless steel tank or ECH<sub>2</sub>O thermal store
- > Heat pump operation down to -28 °C



up to



011-1W0506  
011-1W0507  
011-1W0508

More details and final information can be found by scanning or clicking the QR codes.



ETBX12E6V



ETBX12E9W

EPRA08-12EV3

EPRA08-12EW1

Efficiency data				ETBX + EPRA	12E6V + 08EV/W	12E9W + 08EV/W	12E6V + 10EV/W	12E9W + 10EV/W	12E6V + 12EV/W	12E9W + 12EV/W
Space heating	Average climate water outlet 55 °C	General	SCOP	3.47/3.59			3.48/3.60			
			ηs (Seasonal space heating efficiency)	%			136/141			
	Seasonal space heating eff. class			A++						
	Average climate water outlet 35 °C	General	SCOP	4.79/4.95			4.82/4.98			
ηs (Seasonal space heating efficiency)			188/195			190/196				
Seasonal space heating eff. class			A+++							
Indoor Unit		ETBX		12E6V	12E9W	12E6V	12E9W	12E6V	12E9W	
Casing	Colour	White + Black								
	Material	Sheet metal								
Dimensions	Unit	HeightxWidthxDepth	mm							
Weight	Unit	kg								
Operation range	Heating	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
	Cooling	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
	Domestic hot water	Ambient	Max.	°C						
		Water side	Min.~Max.	°C						
Sound power level	Nom.	dBA								
Sound pressure level	Nom.	dBA								
Outdoor Unit		EPRA		08EV3/W1	10EV3/W1	12EV3/W1				
Dimensions	Unit	HeightxWidthxDepth	mm							
Weight	Unit	kg								
Compressor	Quantity	1								
	Type	Hermetically sealed swing compressor								
Operation range	Heating	Min.~Max.	°CDB							
	Cooling	Min.~Max.	°CDB							
	Domestic hot water	Min.~Max.	°CDB							
Refrigerant	Type	R-32								
	GWP	675								
	Charge	kg								
	Charge	TCO <sub>2</sub> Eq								
	Control	Expansion valve								
LW(A) Sound power level (according to EN14825)	53									
Sound pressure level (at 1 meter)	Nom.									
Power supply	Name/Phase/Frequency/Voltage	Hz/V								
Current	Recommended fuses	A								

This product contains fluorinated greenhouse gases.



# Daikin Altherma 3 H HT W

Wall mounted **reversible** air-to-water heat pump

- > Inclusion of all hydraulic components means no third party components are required
- > PCB board and hydraulic components are located in the front for easy access
- > Compact dimensions allows for small installation space, as almost no side clearances are required
- > The unit's sleek design blends in with other household appliances
- > Combine with a stainless steel tank or ECH<sub>2</sub>O thermal store
- > Heat pump operation down to -28 °C



up to



More details and final information can be found by scanning or clicking the QR codes.



ETBX16E6V



ETBX16E9W

EPRA14-18DV37

EPRA14-18DW17

Efficiency data				ETBX + EPRA		16E6V7 + 14DV7/W7	16E9W7 + 14DV7/W7	16E6V7 + 16DV7/W7	16E9W7 + 16DV7/W7	16E6V7 + 18DV7/W7	16E9W7 + 18DV7/W7
Space heating	Average climate water outlet 55 °C	General	SCOP					3.62/3.63			
			ηs (Seasonal space heating efficiency)	%			142				
	Seasonal space heating eff. class							A++			
	Average climate water outlet 35 °C	General	SCOP					4.57/4.81			
ηs (Seasonal space heating efficiency)			%			180/190					
Seasonal space heating eff. class							A+++				
Indoor Unit				ETBX	16E6V7	16E9W7	16E6V7	16E9W7	16E6V7	16E9W7	
Casing	Colour							White + Black			
	Material							Sheet metal			
Dimensions	Unit	HeightxWidthxDepth		mm				840x440x390			
Weight	Unit			kg				42			
Operation range	Heating	Ambient	Min.~Max.	°C				-28 ~ 35			
		Water side	Min.~Max.	°C				18 ~ 70			
	Cooling	Ambient	Min.~Max.	°C				10 ~ 43			
		Water side	Min.~Max.	°C				5 ~ 22			
	Domestic hot water	Ambient	Max.	°C				-28 ~ 35			
		Water side	Min.~Max.	°C				10 ~ 63			
Sound power level	Nom.			dBA				44			
Sound pressure level	Nom.			dBA				30			
Outdoor Unit				EPRA	14DV37/W17	16DV37/W17	18DV37/W17				
Dimensions	Unit	HeightxWidthxDepth		mm		1,003x1,270x533					
Weight	Unit			kg		146/151					
Compressor	Quantity					1					
	Type					Hermetically sealed scroll compressor					
Operation range	Heating	Min.~Max.		°CDB		-28 ~ 25					
	Cooling	Min.~Max.		°CDB		10 ~ 43					
	Domestic hot water	Min.~Max.		°CDB		-28 ~ 35					
Refrigerant	Type					R-32					
	GWP					675					
	Charge			kg		4.20					
	Charge			TCO <sub>2</sub> Eq		2.84					
	Control					Expansion valve					
LW(A) Sound power level (according to EN14825)							54				
Sound pressure level (at 1 meter)	Nom.					43		48			
Power supply	Name/Phase/Frequency/Voltage			Hz/V		V3/1~/50/230 / W1/3~/50/400					
Current	Recommended fuses			A		32/16					

This product contains fluorinated greenhouse gases.

# Combination table and options

Combination table and options			H/O	
			3 H MT	3 H HT
			ETVH12S18E6V	ETVH16S18E6V7
			ETVH12S18E9W	ETVH16S18E9W7
Type	Description	Material name	ETVH12S23E6V	ETVH16S23E6V7
Outdoor unit		EPRA08EV3/W1	●	
		EPRA10EV3/W1	●	
		EPRA12EV3/W1	●	
		EPRA14DV37/W17		●
		EPRA16DV37/W17		●
		EPRA18DV37/W17		●
Controller	Madoka wired room thermostat	BRC1HHDK/S/W	●	●
	Wireless room thermostats	EKRTRB	●	●
	Wired digital thermostat	EKRTWA	●	●
	Wireless room by room control	Daikin Home Controls (pages 272-275)	●	●
	LAN Adapter	BRP069A62 <small>(with MMI from v6.8.0)</small>	●	●
	WLAN module	BRP069A71	●	●
	WLAN cartridge	BRP069A78	● (1)	● (1)
	Wired digital thermostat	EKWCTRD1V3	●	●
	Wired analog thermostat	EKWCTRAN1V3	●	●
	Valve actuator	EKWCVATR1V3	●	●
	Wired underfloor heating base station	EKWUFHTA1V3	●	●
	Universal centralised controller	EKCC8-W, DCOM-LT/IO, LT/MB	●	●
Domestic hot water	Stainless steel tank	EKHWS(P)(U)150D3V3		
		EKHWS(P)(U)180D3V3		
		EKHWS(P)(U)200D3V3		
		EKHWS(P)(U)250D3V3		
	Polypropylene tank	EKHWP300B		
		EKHWP500B		
		EKHWP300PB		
		EKHWP500PB		
	Third party tank kit	EKHY3PART		
		EKHY3PART2		
Sensors	External sensor for EKTR room thermostat	EKRTETS	●	●
	High voltage smart grid relay kit	EKRELSG	●	●
	Remote indoor temperature sensor	KRCS01-1	● (6)	● (6)
	Remote outdoor temperature sensor	EKRSCA1	● (6)	● (6)
Bizone kits	Generic Bizone kit (PCB only)	EKMIKPOA	●	●
	Generic Bizone kit	EKMIKPHA	●	●
Other options	Digital I/O PCB	EKRPIHBA	● (7)	● (7)
	Demand PCB	EKRPIAHT	●	●
	PC USB cable	EKPCAB4	●	●
	Conversion kit H/O to reversible for floor standing	EKHVCONV4		●
	Conversion kit H/O to reversible for wall mounted	EKBCONV	●	
	Booster heater kit	EKBH3SD		
	Anti-freeze valve with diam. 1"	AFVALVE1	●	●
	Anti-freeze valve with diam. 1 1/4"	AFVALVE125	●	●
	Balancing valve	KBLNVALVE		●
	Decoupler	KDECOP		●
ECH <sub>2</sub> O options	Inline BUH - connection kit	EKECBUCO1AF		
	Inline BUH - 3kW, for *3V (1N~, 230 V, 3 kW)	EKECBUAF3V		
	Inline BUH - 6kW, for *6V (1N~, 230 V, 6 kW)	EKECBUAF6V		
	Inline BUH - 9kW, for *9WN (3N~, 400 V, 9 kW)	EKECBUAF9W		
	Caleffi sludge and magnetite separator SAS1	156021		
	Biv Connector Kit	EKECBIVCO1AF		
	DB connector Kit	EKECDBC01AF		

- (1) W-LAN cartridge is supplied in the accessory bag of the unit => To be plugged in the SD-Slot on MMI-2 (In case bad reception of signal, the W-LAN cartridge can be removed and replaced by WLAN module).
- (2) Dedicated connection kit: EKEPRHLT3HX.
- (3) Dedicated connection kit: ETBH: EKEPRHLT5H / ETBX: EKEPRHLT5X.
- (4) EKHY3PART can be used if you have a tank in which you can insert the thermistor.
- (5) EKHY3PART2 can be used if you have a tank in which you can't insert a thermistor.

Floor standing integrated stainless steel tank				Floor standing integrated ECH <sub>2</sub> O		Wall mounted			
Reversible		Bizone				H/O		Reversible	
3 H MT	3 H HT	3 H MT	3 H HT	3 H MT	3 H HT	3 H MT	3 H HT	3 H MT	3 H HT
ETVX12S18E6V	ETVX16S18E6V7	ETVZ12S18E6V	ETVZ16S18E6V7	ETSH(B)12P30E	ETSH(B)16P30E				
ETVX12S18E9W	ETVX16S18E9W7	ETVZ12S18E9W	ETVZ16S18E9W7	ETSH(B)12P50E	ETSH(B)16P50E				
ETVX12S23E6V	ETVX16S23E6V7	ETVZ12S23E6V	ETVZ16S23E6V7	ETSX(B)12P30E	ETSX(B)16P30E	ETBH12E6V	ETBH16E6V7	ETBX12E6V	ETBX16E6V7
ETVX12S23E9W	ETVX16S23E9W7	ETVZ12S23E9W	ETVZ16S23E9W7	ETSX(B)12P50E	ETSX(B)16P50E	ETBH12E9W	ETBH16E9W7	ETBX12E9W	ETBX16E9W7
●		●		●		●		●	
●		●		●		●		●	
●		●		●		●		●	
	●		●		●		●		●
	●		●		●		●		●
	●		●		●		●		●
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
● (1)	● (1)	● (1)	● (1)	● (1)	● (1)	● (1)	● (1)	● (1)	● (1)
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
						●	●	●	●
						●	●	●	●
						●	●	●	●
						●	●	●	●
						●	●	●	●
						●	●	●	●
						●	●	●	●
						● (2)	● (2)	● (2)	● (2)
						● (3)	● (3)	● (3)	● (3)
						● (2)	● (2)	● (2)	● (2)
						● (3)	● (3)	● (3)	● (3)
						● (4)	● (4)	● (4)	● (4)
						● (5)	● (5)	● (5)	● (5)
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
● (6)	● (6)	● (6)	● (6)	● (6)	● (6)	● (6)	● (6)	● (6)	● (6)
● (6)	● (6)	● (6)	● (6)	● (6)	● (6)	● (6)	● (6)	● (6)	● (6)
●	●			●	●	●	●	●	●
●	●			●	●	●	●	●	●
● (7)	● (7)	● (7)	● (7)			● (7)	● (7)	● (7)	● (7)
●	●			●	●	●	●	●	●
●	●			●	●	●	●	●	●
		●				●	●		●
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
	●		●			●	●		●
				●	●				
				● (8)	● (8)				
				● (8)	● (8)				
				● (8)	● (8)				
				●	●				
				●	●				
				●	●				

(6) Only one sensor can be connected: indoor or outdoor.  
(7) Additional relays to allow bivalent control in combination with external room thermostat are field supply.  
(8) Only 1 Backup heater can be connected on one unit: 3 or 6\* or 9 kW  
(\*No 6Ti-model applicable). EKECBUCOIAF is needed to connect the backup heater to the main unit.

# The ideal boiler replacement gets extended

## Ideal to replace gas boilers


Houses built in the 90s often need a refurbishment to still look up-to-date.

In a renovation project, this is also important to consider changing your initial heating system.

Daikin Altherma 3 R MT come as a perfect replacement in such houses, where a leaving water temperature of 65 °C is sufficient. Easy to install, you can even leave the recent radiators installed!

## Suitable for medium sized new buildings

With a capacity range going from 8 to 12 class, Daikin Altherma 3 R MT also fit in medium sized new buildings.

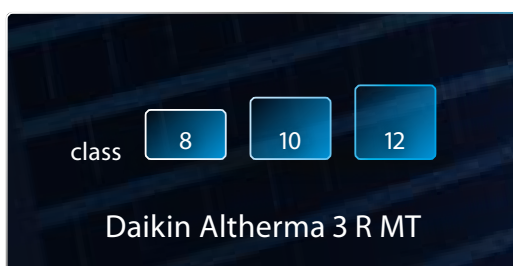

## Daikin Altherma 3 R MT offers multiple possibilities to adapt to your customers needs

- ✓ A leaving water temperature up to 65 °C makes it **a suitable choice for refurbishments**
- ✓ **Best seasonal efficiencies** providing the highest savings on running costs
- ✓ Perfect fit for **new buildings**, as well as for low energy houses



### Refrigerant split version

Daikin Altherma 3 range presents a new addition to the family – refrigerant split version for medium temperature heat pump.

Daikin Altherma 3 R MT relies on a compressor and a refrigerant to transfer the energy from the air to the water. The Refrigerant split unit provides cooling next to heating and domestic hot water.

### Better fit with hydrosplit versions?

The Daikin Altherma 3 solutions for replacment do come also in hydrosplit versions, 3 H MT and 3 H HT. More information can be found here:



# The Quintessence of heat pump

meeting modern society's expectations



## Made in Europe, for Europe

European weather can be tough sometimes. That's why we designed the Daikin Altherma 3 R MT.

Heating capacities are also maintained high by low ambient temperature thanks to genuine Daikin technology.

As the market leader, Daikin is always striving to make the most reliable and efficient heat pumps possible. Daikin developed the Bluevolution technology to achieve higher and greener performance. This technology is now part of all our heat pumps. Its single fan reduces the noise level and its black front grille makes the unit fit into any environment.

All these dedicated components were developed in-house to make the quintessence of heat pump unique.

**Superior performance, renewable energy use, design and acoustic comfort. This is what the Quintessence of heat pump is all about.**

## BLUEvolution

The Bluevolution technology combines a specifically developed compressor and the R-32 refrigerant. Daikin is one of the pioneers in the world to launch heat pumps equipped with R-32. With a lower Global Warming Potential (GWP), the R-32 is equivalent in power to standard refrigerants, but achieves higher energy efficiency and lower CO<sub>2</sub> emissions.


Easy to recover and re-use, R-32 is the perfect solution to attain the new European CO<sub>2</sub> emission targets.

**R-32**

## Timeless design and space-saving installation

Aside from the acoustic comfort, design is a decisive point nowadays. Specific attention was paid to making the outdoor unit blend in with your home.

The black front grille stretches horizontally making the fan inside invisible. The mat grey casing reflects the colour of the wall behind for more discretion. When first launched, this unit received two design awards in 2019. This award winning design has been continued in the new models.

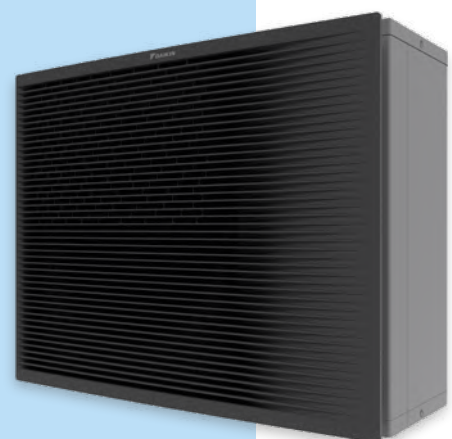





## Silence rhymes with comfort

The Quintessence of heat pump has been designed to reduce its acoustic level and meet the expectations of today's society.

In standard sound mode, the unit produces a sound pressure of 38 dBA at 3 metres, so somewhere between birds chirping and the inside of a library.

The unit also offers greater flexibility by having a low sound mode that reduces the sound pressure at 3 metres to 35 dBA, representing a real reduction of half the sound level!

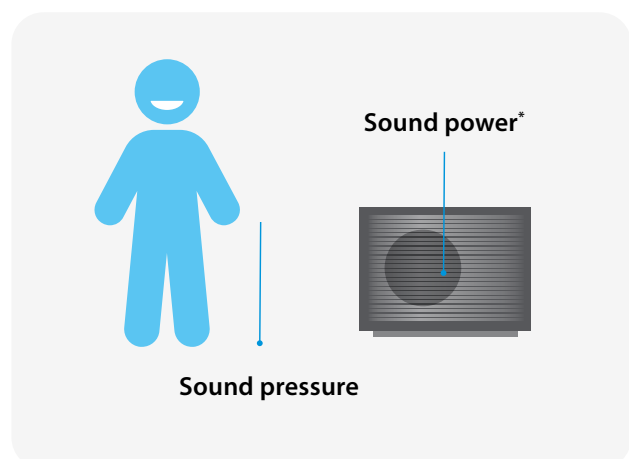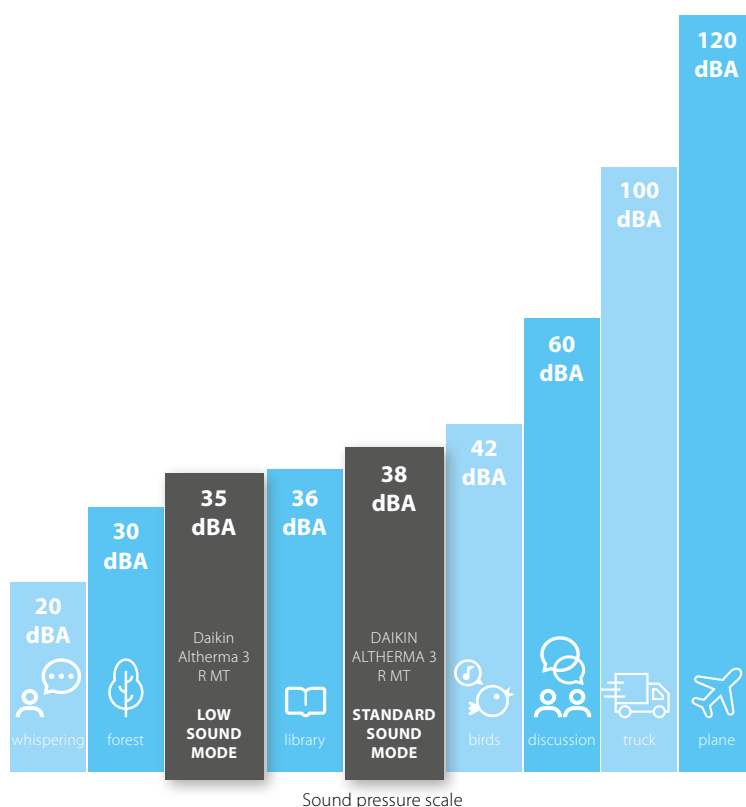

## The acoustic level can be evaluated in two ways

- › The **sound power** is generated by the unit itself, independently of distance and environment
- › The **sound pressure** is the sound perceived at a certain distance. The sound pressure is usually calculated at between 1 and 5 metres from the unit.

\* Erp sound power: Daikin Altherma 3 R MT: 56 dBA

# Innovation At the heart of our concerns

The Daikin Altherma 3 R MT is at top of low sound and heating performances thanks to dedicated developments. Several major components are designed to make this product reach the excellence such as a double injection compressor and a single fan even for large capacity units as well as a brand-new casing.

## A contemporary design casing

The black front grille made of horizontal lines is hiding the fan from view, reducing the perception of the sound produced by the unit.

The light grey casing is slightly reflecting the environment where the unit is installed, helping it to blend in in any decor.

This unique design already got design awards.



reddot design award  
winner 2019

## A single fan for all capacities

The single fan is slightly larger, replacing the usual double fan for high capacity units (classes 8-10-12).

The shape of the fan has also been reviewed to reduce the contact surface with air therefore lower the sound level by improving the air circulation.






## Compressor insulation and anti-vibration

To reduce the compressor sound power, several actions were taken in terms of absorption and insulation.

First, the compressor is surrounded by a 3-layer insulation made of air, insulation material and a metal box.

Regarding the absorption, the unit benefits from a double sound reduction by using rubber pads between the bottom plate and the vibration plate under the compressor.

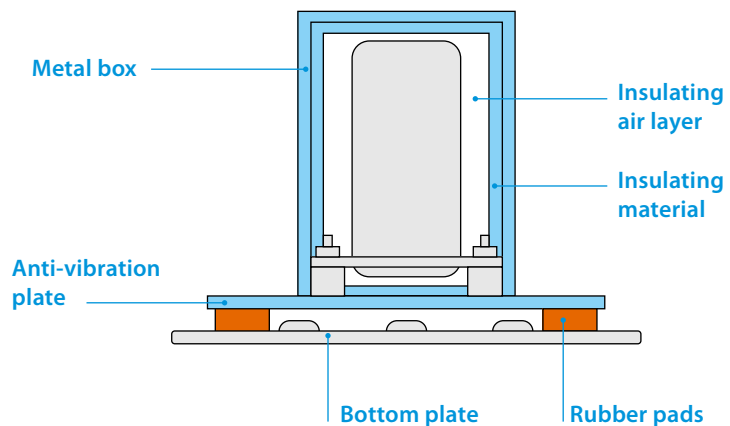

## New double injection compressor

To make this product unique, Daikin Europe cooperated with Daikin Japan to develop top notch components. Daikin Altherma 3 R MT is available in classes 8-10-12 delivers up to 65 °C leaving water temperature.

## Impressive performance

In line with our other heat pump models optimized for replacement, the Daikin Altherma 3 R MT reaches the best performances illustrated in the energy labels:




# One solution, multiple combinations

The Quintessence range can be combined with three different indoor units to connect to the outdoor unit, offering specific features to ensure heating, cooling and domestic hot water in your home.

## Outdoor unit

The outdoor unit is available in 3 classes for 3 R MT: 8-10-12 kW

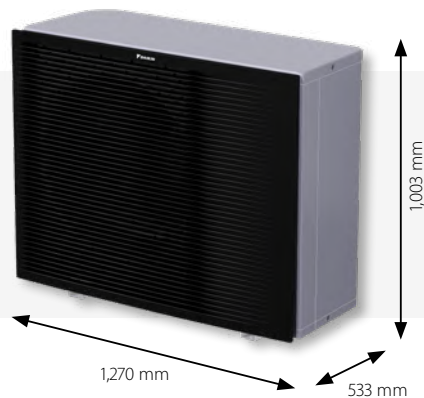

## Integrated DHW stainless steel tank model

This model is a compact unit with a small footprint of 595x625 mm. The unit is equipped with a tank of 180 or 230 L to answer your domestic hot water demand. Optionally, you can choose the cooling or the bizon functions.



## Integrated ECH<sub>2</sub>O DHW tank model

The ECH<sub>2</sub>O unit is equipped with a thermal DHW tank of 300 or 500 L that can be connected to thermal solar panels. Optionally, you can choose the cooling function.



## Wall mounted model

This model is the most compact unit but needs to be with a separate tank to deliver domestic hot water. Optionally, you can choose the cooling function.



See exact dimensions per model in the specification tables (p22-29).

# Get the best comfort

## with the best functionalities


Choose from the Daikin "Three Pluses" the functionality that best fits your customer's needs. The indoor units come in 3 possible versions: heating only, reversible and bizona, giving you the opportunity to tailor your Daikin heating system.

### + Heating only model

The heating only model is standard in the Daikin product range and is available for all three indoor units. This means that your heating system provides space heating and domestic hot water.

### + Reversible model

If cooling is needed, all three indoors have dedicated reversible models. Reversible means that the system can invert its way of working and provide cooling instead of heating. The cooling function requires a underfloor piping system or heat pump convectors.

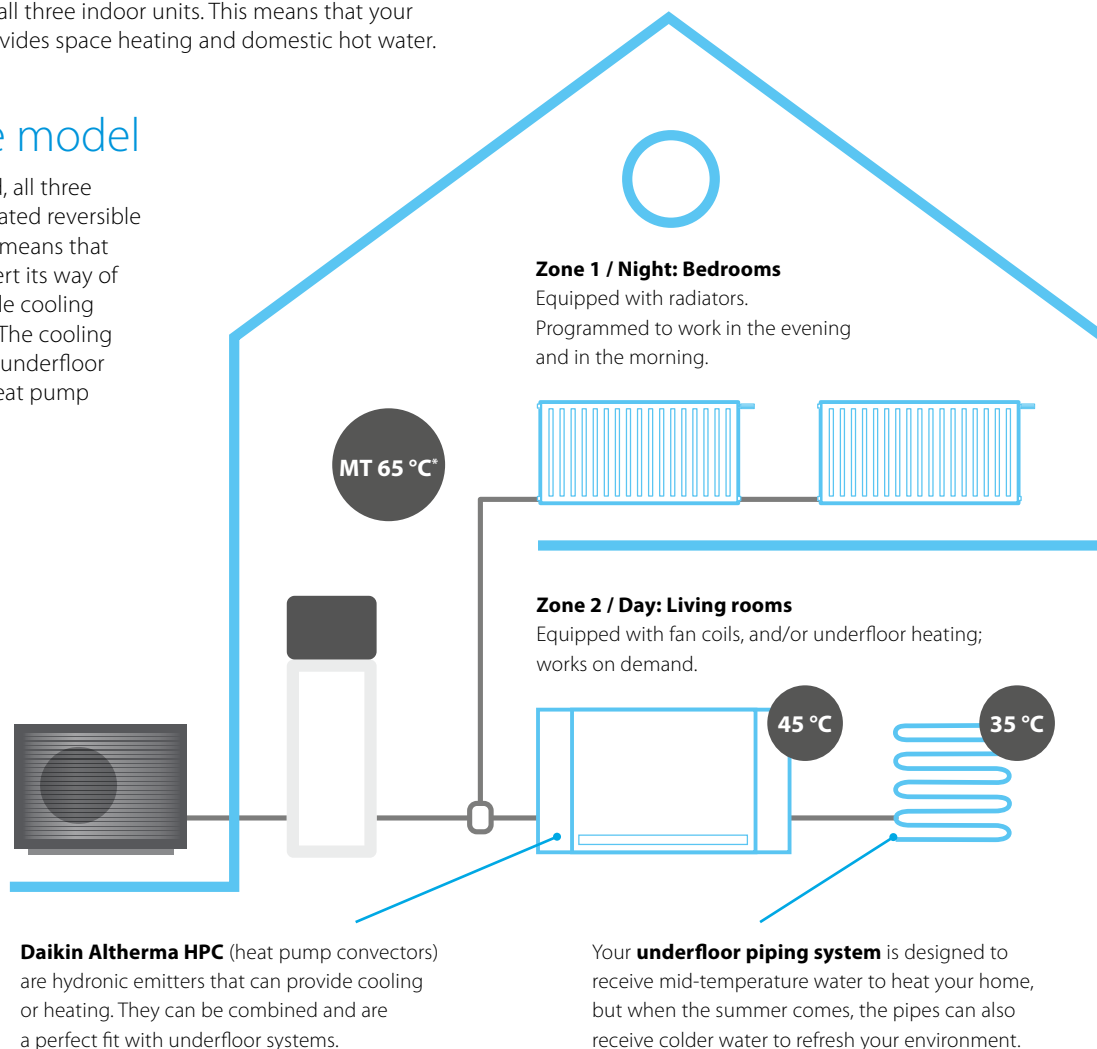

### + Bizona model

Only the DHW stainless steel tank model has a dedicated bizona model: you can choose two independent zones with different emitters that need a different temperature level in different rooms (example: underfloor system in the living room and radiators in the bedroom upstairs).

The 2 zones can also be managed independently: deactivate heating on the first floor during the day in order to reduce over consumption.

\* Daikin Altherma 3 R MT produces a LWT up to 65 °C (08-10-12 classes).




## Floor standing unit with integrated tank

### Why choose Daikin floor standing unit with integrated domestic hot water tank?

The Daikin Altherma 3 floor standing unit is the ideal system **to deliver heating, domestic hot water and cooling** for renovation or large new built.

#### All in one system to save installation space and time

- › A combined stainless steel domestic hot water tank of 180 or 230 L and heat pump ensures a faster installation compared to traditional systems.
- › Inclusion of all hydraulic components means no third party components are required.
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 625 mm
- › Integrated back-up heater choice of 6, 9 kW models are available
- › Dedicated bi-zone models allowing temperature monitoring for 2 zones.

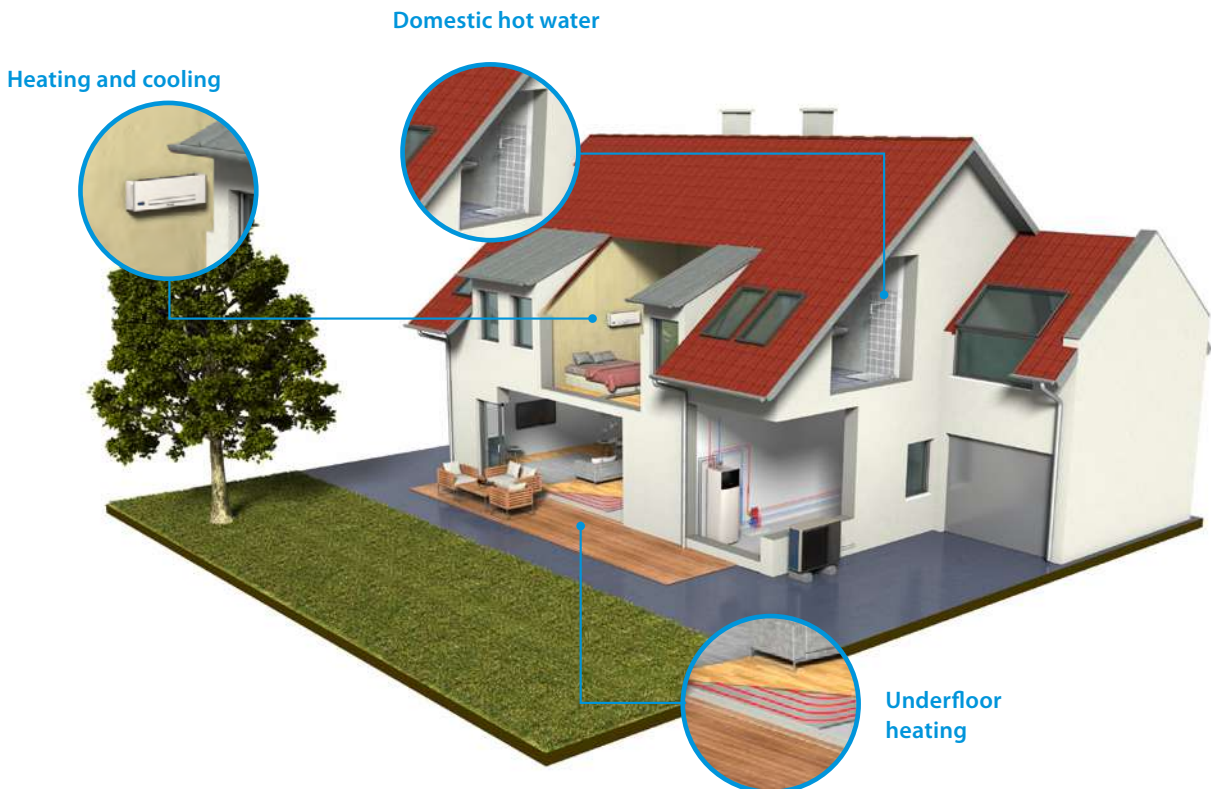

# All-in one design

## Reduces the installation footprint and height


Compared to the traditional split version for a wall mounted indoor unit and a separate domestic hot water tank, the integrated indoor unit greatly reduces the installation space required.

With a small footprint of 595 x 625 mm, the integrated indoor unit has a similar footprint when compared to other household appliances.

For installation projects, almost no side clearance is necessary as the piping is located at the top of the unit.

With an installation height of 1.65 m for an 180 L tank and 1.85 m for a 230 L tank, the required installation height is less than 2m.

The compactness of the integrated indoor unit is emphasised by its sleek design and modern look, easy blending in with other household appliances.

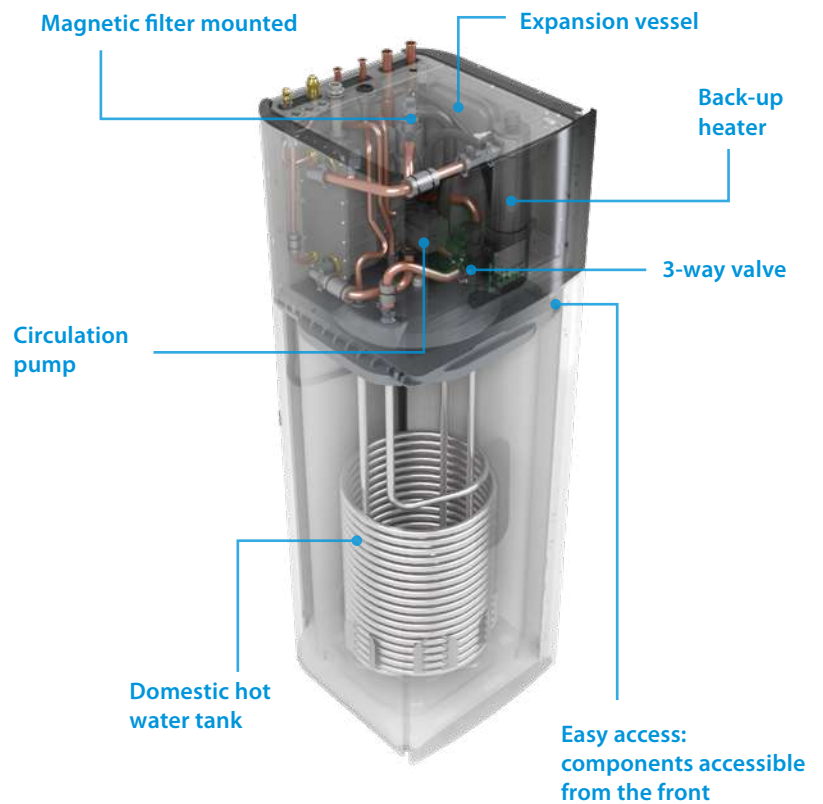

## Advanced user interface



### The Daikin Eye

The intuitive Daikin eye shows you in real time the status of your system.

Blue is perfect! Should the eye turn red, an error has occurred.

### Quick to configure

Log in and you'll be able to completely configure the unit via the new interface in less than 10 steps. You can even check if the unit is ready for use by running test cycles!

### Easy operation

Work super-fast with the new interface. It's super easy to use with just a few buttons and 2 navigational knobs.

### Beautiful design

The interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

## Integrated indoor unit



# Daikin Altherma 3 R MT

Floor standing air to water heat pump for heating and hot water, ideal for low energy houses

- › A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- › Energy efficient heating only system based on air to water heat pump technology
- › Quick configuration in 9 steps in a high resolution colour interface wizard
- › Inclusion of all hydraulic components means no third party components are required
- › The unit's sleek design blends in with other household appliances



- 011-1W0651
- 011-1W0652
- 011-1W0653
- 011-1W0654
- 011-1W0655
- 011-1W0656

up to **A+++** **A+** **65°C** **R-32**

More details and final information can be found by scanning or clicking the QR codes.



ELVH-E6V

ELVH-E9W

ERRA08-12EW1

Efficiency data				ELVH + ERRA		12S18E6V/9W + 08EW1		12S23E6V/9W + 08EW1		12S18E6V/9W + 10EW1		12S23E6V/9W + 10EW1		12S18E6V/9W + 12EW1		12S23E6V/9W + 12EW1		
Space heating	Average climate water outlet 55 °C	General	SCOP	3.42		134		3.43		138		3.53		138				
		Seasonal space heating eff. class	%	A++														
	Average climate water outlet 35 °C	General	SCOP	4.81		190		4.84		191		A+++						
		Seasonal space heating eff. class	%	A+++														
Domestic hot water heating	General	Declared load profile			L													
	Average climate	COP	dhw	2.8	3.05	2.8	3.05	2.8	3.05	2.8	3.05	2.8	3.05	2.8	3.05			
	Water heating energy efficiency class	η <sub>wh</sub> (water heating efficiency)	%	120	130	120	130	120	130	120	130	120	130	120	130			
				A+														
Indoor Unit				ELVH	12S18E6V/9W	12S23E6V/9W	12S18E6V/9W	12S23E6V/9W	12S18E6V/9W	12S23E6V/9W	12S18E6V/9W	12S23E6V/9W	12S18E6V/9W	12S23E6V/9W				
Casing	Colour	White + Black																
	Material	Precoated sheet metal																
Dimensions	Unit	HeightxWidthxDepth	mm	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634					
Weight	Unit	kg	120	129	120	129	120	129	120	129	120	129						
Tank	Water volume	l	180	230	180	230	180	230	180	230	180	230						
	Maximum water temperature	°C	70															
	Maximum water pressure	bar	10															
	Corrosion protection	Pickling																
Operation range	Heating	Ambient	Min.~Max.	°C									-25 ~ 25					
		Water side	Min.~Max.	°C									15 ~ 65					
	Domestic hot water	Ambient	Min.~Max.	°C									-25 ~ 35					
		Water side	Min.~Max.	°C									25 ~ 62					
Sound power level	Nom.	dBA	44															
Sound pressure level	Nom.	dBA	30															
Outdoor Unit				ERRA	08EW1	10EW1	12EW1											
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533														
Weight	Unit	kg	107															
Compressor	Quantity	1																
	Type	Hermetically sealed swing compressor																
Operation range	Heating	Min.~Max.	°CDB				-25 ~ 25											
	Cooling	Min.~Max.	°CDB				10 ~ 43											
	Domestic hot water	Min.~Max.	°CDB				-25 ~ 35											
Refrigerant	Type	R-32																
	GWP	675																
	Charge	kg	3.25															
	Charge	TCO <sub>2</sub> Eq	2.19															
	Control	Expansion valve																
LW(A) Sound power level (according to EN14825)	56																	
Sound pressure level (at 1 meter)	41.1																	
Power supply	Name/Phase/Frequency/Voltage	Hz/V					W1/3~/50 /400											
Current	Recommended fuses	A					16											

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R MT

Floor standing air to water heat pump for heating and hot water, ideal for low energy houses

- › A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- › Energy efficient heating only system based on air to water heat pump technology
- › Quick configuration in 9 steps in a high resolution colour interface wizard
- › Inclusion of all hydraulic components means no third party components are required
- › The unit's sleek design blends in with other household appliances



- 011-1W0651
- 011-1W0652
- 011-1W0653
- 011-1W0654
- 011-1W0655
- 011-1W0656



up to **A+++** **A** **65°C** **R-32**

More details and final information can be found by scanning or clicking the QR codes.



ELVH-E6V

ELVH-E9W

ERRA08-12EW1

Efficiency data				ELVH + ERRA		12S18E6V/9W + 08EV3	12S23E6V/9W + 08EV3	12S18E6V/9W + 10EV3	12S23E6V/9W + 10EV3	12S18E6V/9W + 12EV3	12S23E6V/9W + 12EV3
Space heating	Average climate water outlet 55 °C	General	SCOP	3.34		130		131		3.44	
		Seasonal space heating eff. class	A++		135						
	Average climate water outlet 35 °C	General	SCOP	4.69		184		4.71		186	
		Seasonal space heating eff. class	A+++								
Domestic hot water heating	General	Declared load profile		L							
	Average climate	COP	dhw	2.72	2.96	2.72	2.96	2.72	2.96	2.72	2.96
		η <sub>wh</sub> (water heating efficiency)	%	117	126	117	126	117	126	117	126
	Water heating energy efficiency class			A+							
Indoor Unit				ELVH	12S18E6V/9W	12S23E6V/9W	12S18E6V/9W	12S23E6V/9W	12S18E6V/9W	12S23E6V/9W	
Casing	Colour			White + Black							
	Material			Precoated sheet metal							
Dimensions	Unit	HeightxWidthxDepth	mm	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634	1,855x595x634	
Weight	Unit	kg		120	129	120	129	120	129	129	
Tank	Water volume	l		180	230	180	230	180	230	230	
	Maximum water temperature	°C				70					
	Maximum water pressure	bar				10					
	Corrosion protection					Pickling					
Operation range	Heating	Ambient	Min.~Max.	°C		-25 ~ 25					
		Water side	Min.~Max.	°C		15 ~ 65					
	Domestic hot water	Ambient	Min.~Max.	°C		-25 ~ 35					
		Water side	Min.~Max.	°C		25 ~ 62					
Sound power level	Nom.	dBA				44					
Sound pressure level	Nom.	dBA				30					
Outdoor Unit				ERRA	08EV3	10EV3	12EV3				
Dimensions	Unit	HeightxWidthxDepth	mm			1,003x1,270x533					
Weight	Unit	kg				107					
Compressor	Quantity					1					
	Type					Hermetically sealed swing compressor					
Operation range	Heating	Min.~Max.	°CDB		-25 ~ 25						
	Cooling	Min.~Max.	°CDB		10 ~ 43						
	Domestic hot water	Min.~Max.	°CDB		-25 ~ 35						
Refrigerant	Type					R-32					
	GWP					675					
	Charge	kg				3.25					
	Charge	TCO <sub>2</sub> Eq				2.19					
	Control					Expansion valve					
LW(A) Sound power level (according to EN14825)					54						
Sound pressure level (at 1 meter)	Nom.					40.6					
Power supply	Name/Phase/Frequency/Voltage	Hz/V				V3/1~/50 /230					
Current	Recommended fuses	A				32					

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R MT F

Floor standing air to water heat pump for **heating, cooling** and **hot water**, ideal for low energy houses

- › A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- › For hot water, heating and cooling
- › Quick configuration in 9 steps in a high resolution colour interface wizard
- › Inclusion of all hydraulic components means no third party components are required
- › The unit's sleek design blends in with other household appliances



- 011-1W0651
- 011-1W0652
- 011-1W0653
- 011-1W0654
- 011-1W0655
- 011-1W0656



up to

More details and final information can be found by scanning or clicking the QR codes.



ELVX-E6V

ELVX-E9W

ERRA08-12EW1

Efficiency data				ELVX + ERRA		12S18E6V/9W + 08EW1		12S23E6V/9W + 08EW1		12S18E6V/9W + 10EW1		12S23E6V/9W + 10EW1		12S18E6V/9W + 12EW1		12S23E6V/9W + 12EW1		
Space heating	Average climate water outlet 55 °C	General	SCOP	3.47		136		3.48		3.58		140						
			η <sub>s</sub> (Seasonal space heating efficiency)															
		Seasonal space heating eff. class	A++															
	Average climate water outlet 35 °C	General	SCOP	4.95		195		4.98		196								
		η <sub>s</sub> (Seasonal space heating efficiency)																
		Seasonal space heating eff. class	A+++															
Domestic hot water heating	General	Declared load profile		L														
	Average climate	COP	dhw	2.8	3.05	2.8	3.05	2.8	3.05	2.8	3.05							
		η <sub>wh</sub> (water heating efficiency)	%	120	130	120	130	120	130	120	130							
		Water heating energy efficiency class	A+															
Indoor Unit				ELVX	12S18E6V/9W	12S23E6V/9W	12S18E6V/9W	12S23E6V/9W	12S18E6V/9W	12S23E6V/9W								
Casing	Colour	White + Black																
	Material	Precoated sheet metal																
Dimensions	Unit	HeightxWidthxDepth	mm	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634									
Weight	Unit		kg	120	129	120	129	120	129									
Tank	Water volume		l	180	230	180	230	180	230									
	Maximum water temperature		°C	70														
	Maximum water pressure		bar	10														
	Corrosion protection			Pickling														
Operation range	Heating	Ambient	Min.~Max.	°C	-25 ~ 25													
		Water side	Min.~Max.	°C	15 ~ 65													
	Domestic hot water	Ambient	Min.~Max.	°C	-25 ~ 35													
		Water side	Min.~Max.	°C	25 ~ 62													
Sound power level	Nom.		dBA	44														
Sound pressure level	Nom.		dBA	30														
Outdoor Unit				ERRA	08EW1	10EW1		12EW1										
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533														
Weight	Unit		kg	107														
Compressor	Quantity			1														
	Type			Hermetically sealed swing compressor														
Operation range	Heating	Min.~Max.	°CDB	-25 ~ 25														
	Cooling	Min.~Max.	°CDB	10 ~ 43														
	Domestic hot water	Min.~Max.	°CDB	-25 ~ 35														
Refrigerant	Type			R-32														
	GWP			675														
	Charge		kg	3.25														
	Charge		TCO2Eq	2.19														
	Control			Expansion valve														
LW(A) Sound power level (according to EN14825)				56														
Sound pressure level (at 1 meter)	Nom.			41.1														
Power supply	Name/Phase/Frequency/Voltage		Hz/V	W1/3~/50 /400														
Current	Recommended fuses		A	16														

This product contains fluorinated greenhouse gases.



# Daikin Altherma 3 R MT F

Floor standing air to water heat pump for heating, cooling and hot water, ideal for low energy houses

- › A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- › For hot water, heating and cooling
- › Quick configuration in 9 steps in a high resolution colour interface wizard
- › Inclusion of all hydraulic components means no third party components are required
- › The unit's sleek design blends in with other household appliances



- 011-1W0651
- 011-1W0652
- 011-1W0653
- 011-1W0654
- 011-1W0655
- 011-1W0656



up to

More details and final information can be found by scanning or clicking the QR codes.



ELVX-E6V      ELVX-E9W      ERRA08-12EW1

Efficiency data				ELVX + ERRA		12S18E6V/9W + 08EV3	12S23E6V/9W + 08EV3	12S18E6V/9W + 10EV3	12S23E6V/9W + 10EV3	12S18E6V/9W + 12EV3	12S23E6V/9W + 12EV3
Space heating	Average climate water outlet 55 °C	General	SCOP	3.37		132		3.38		3.47	
		Seasonal space heating eff. class	A++		136						
	Average climate water outlet 35 °C	General	SCOP	4.79		188		4.82		190	
		General	Seasonal space heating eff. class	A+++							
Domestic hot water heating	Average climate	Declared load profile		L							
		COP	dhw	2.72	2.96	2.72	2.96	2.72	2.96	2.72	2.96
	η <sub>wh</sub> (water heating efficiency)	%	117	126	117	126	117	126	117	126	126
		Water heating energy efficiency class		A+							
Indoor Unit				ELVX	12S18E6V/9W	12S23E6V/9W	12S18E6V/9W	12S23E6V/9W	12S18E6V/9W	12S23E6V/9W	
Casing	Colour	White + Black									
	Material	Precoated sheet metal									
Dimensions	Unit	HeightxWidthxDepth	mm	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634		
Weight	Unit	kg		120	129	120	129	120	129		
Tank	Water volume	l		180	230	180	230	180	230		
	Maximum water temperature	°C		70							
	Maximum water pressure	bar		10							
	Corrosion protection			Pickling							
Operation range	Heating	Ambient	Min.~Max.	°C		-25 ~25					
		Water side	Min.~Max.	°C		15 ~65					
	Domestic hot water	Ambient	Min.~Max.	°C		-25 ~35					
		Water side	Min.~Max.	°C		25 ~62					
Sound power level	Nom.	dBA		44							
Sound pressure level	Nom.	dBA		30							
Outdoor Unit				ERRA	08EV3	10EV3	12EV3				
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533							
Weight	Unit	kg		107							
Compressor	Quantity			1							
	Type	Hermetically sealed swing compressor									
Operation range	Heating	Min.~Max.	°CDB		-25 ~ 25						
	Cooling	Min.~Max.	°CDB		10 ~ 43						
	Domestic hot water	Min.~Max.	°CDB		-25 ~ 35						
Refrigerant	Type	R-32									
	GWP	675									
	Charge	kg		3.25							
	Charge	TCO2Eq		2.19							
	Control	Expansion valve									
LW(A) Sound power level (according to EN14825)			54								
Sound pressure level (at 1 meter)	Nom.			40.6							
Power supply	Name/Phase/Frequency/Voltage	Hz/V		V3/1~/50 /230							
Current	Recommended fuses	A		32							

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R MT F

Floor standing unit integrated with different temperature zones management

- › A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- › Bi-zone allows temperature monitoring for 2 zones. Connect underfloor heating to radiators to optimise efficiency
- › Quick configuration in 9 steps in a high resolution colour interface wizard
- › Inclusion of all hydraulic components means no third party components are required
- › The unit's sleek design blends in with other household appliances



011-1W0651  
011-1W0652  
011-1W0653  
011-1W0654  
011-1W0655  
011-1W0656



More details and final information can be found by scanning or clicking the QR codes.

ELVZ-E6V

ELVX-E9W

ERRA08-12EW1

Efficiency data				ELVZ + ERRA		12S18E6V/9W + 08EW1	12S23E6V/9W + 08EW1	12S18E6V/9W + 10EW1	12S23E6V/9W + 10EW1	12S18E6V/9W + 12EW1	12S23E6V/9W + 12EW1
Space heating	Average climate water outlet 55 °C	General	SCOP			3.42		3.43		3.58	
			ηs (Seasonal space heating efficiency)			134		134		138	
	Average climate water outlet 35 °C	General	SCOP			4.81		4.84			
			ηs (Seasonal space heating efficiency)			190		191			
Domestic hot water heating	General	Declared load profile								A+++	
	Average climate	COP	dhw			2.8	3.05	2.8	3.05	2.8	3.05
		ηwh (water heating efficiency)	%			120	130	120	130	120	130
		Water heating energy efficiency class								A+	
Indoor Unit				ELVZ	12S18E6V/9W	12S23E6V/9W	12S18E6V/9W	12S23E6V/9W	12S18E6V/9W	12S23E6V/9W	
Casing	Colour			White + Black							
	Material			Precoated sheet metal							
Dimensions	Unit	HeightxWidthxDepth	mm	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634	1,855x595x634	
Weight	Unit		kg	133	141	133	141	133	141	141	
Tank	Water volume		l	180	230	180	230	180	230	230	
	Maximum water temperature		°C	70							
	Maximum water pressure		bar	10							
	Corrosion protection			Pickling							
Operation range	Heating	Ambient	Min.~Max.	°C							
		Water side	Min.~Max.	°C							
	Domestic hot water	Ambient	Min.~Max.	°C							
		Water side	Min.~Max.	°C							
Sound power level	Nom.		dBA	44							
Sound pressure level	Nom.		dBA	30							
Outdoor Unit				ERRA	08EW1	08EW1	10EW1	10EW1	12EW1	12EW1	
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533							
Weight	Unit		kg	107							
Compressor	Quantity			1							
	Type			Hermetically sealed swing compressor							
Operation range	Heating	Min.~Max.	°CDB	-25 ~ 25							
	Cooling	Min.~Max.	°CDB	10 ~ 43							
	Domestic hot water	Min.~Max.	°CDB	-25 ~ 35							
Refrigerant	Type			R-32							
	GWP			675							
	Charge		kg	3.25							
	Charge		TCO2Eq	2.19							
	Control			Expansion valve							
LW(A) Sound power level (according to EN14825)				56							
Sound pressure level (at 1 meter)	Nom.			41.1							
Power supply	Name/Phase/Frequency/Voltage		Hz/V	W1/3~/50 /400							
Current	Recommended fuses		A	16							

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R MT F

Floor standing unit integrated with different temperature zones management

- › A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- › Bi-zone allows temperature monitoring for 2 zones. Connect underfloor heating to radiators to optimise efficiency
- › Quick configuration in 9 steps in a high resolution colour interface wizard
- › Inclusion of all hydraulic components means no third party components are required
- › The unit's sleek design blends in with other household appliances



More details and final information can be found by scanning or clicking the QR codes.



				ELVZ-E6V		ELVX-E9W		ERRA08-12EW1									
Efficiency data				ELVZ + ERRA		12S18E6V/9W + 08EV3		12S23E6V/9W + 08EV3		12S18E6V/9W + 10EV3		12S23E6V/9W + 10EV3		12S18E6V/9W + 12EV3		12S23E6V/9W + 12EV3	
Space heating	Average climate water outlet 55 °C	General	SCOP	3.34		130		131		3.44		135					
			η <sub>s</sub> (Seasonal space heating efficiency)	A++													
	Average climate water outlet 35 °C	General	SCOP	4.69		4.71		4.71		4.71		4.71					
			η <sub>s</sub> (Seasonal space heating efficiency)	184		186		186		186		186					
Domestic hot water heating	General	Declared load profile		L													
		Average COP	dhw	2.72	2.96	2.72	2.96	2.72	2.96	2.72	2.96						
	Climate	General	η <sub>wh</sub> (water heating efficiency)	%	117	126	117	126	117	126	117	126					
			Water heating energy efficiency class		A+												
Indoor Unit				ELVZ	12S18E6V/9W	12S23E6V/9W	12S18E6V/9W	12S23E6V/9W	12S18E6V/9W	12S23E6V/9W							
Casing	Colour	White + Black															
	Material	Precoated sheet metal															
Dimensions	Unit	HeightxWidthxDepth	mm	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634	1,655x595x634	1,855x595x634								
Weight	Unit		kg	133	141	133	141	133	141								
Tank	Water volume		l	180	230	180	230	180	230								
	Maximum water temperature		°C	70													
	Maximum water pressure		bar	10													
	Corrosion protection			Pickling													
Operation range	Heating	Ambient	Min.~Max.	°C													
		Water side	Min.~Max.	°C													
	Domestic hot water	Ambient	Min.~Max.	°C													
		Water side	Min.~Max.	°C													
Sound power level	Nom.		dBA														
Sound pressure level	Nom.		dBA														
Outdoor Unit				ERRA	08EV3	08EV3	10EV3	10EV3	12EV3	12EV3							
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533													
Weight	Unit		kg	107													
Compressor	Quantity			1													
	Type			Hermetically sealed swing compressor													
Operation range	Heating	Min.~Max.	°CDB	-25 ~ 25													
	Cooling	Min.~Max.	°CDB	10 ~ 43													
	Domestic hot water	Min.~Max.	°CDB	-25 ~ 35													
Refrigerant	Type			R-32													
	GWP			675													
	Charge		kg	3.25													
	Charge		TCO2Eq	2.19													
	Control			Expansion valve													
LW(A) Sound power level (according to EN14825)				54													
Sound pressure level (at 1 meter)	Nom.			40.6													
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50 /230													
Current	Recommended fuses		A	32													

This product contains fluorinated greenhouse gases.

## Floor standing unit with integrated ECH<sub>2</sub>O tank

The Daikin Altherma high temperature split integrated ECH<sub>2</sub>O is renowned for its ability to maximise renewable energy sources to provide the ultimate comfort in heating, domestic hot water and cooling

### Intelligent storage management

- › The unit is 'Smart Grid' ready to take advantage of low energy tariffs and efficiently store thermal energy for space heating and domestic hot water
- › Continuous heating during defrost mode and use of stored heat for space heating (500 L tank only)
- › Electronic management of both heat pump and ECH<sub>2</sub>O thermal store maximises energy efficiency, as well as convenient heating and domestic hot water
- › Achieves the highest standards for water sanitation
- › Uses more renewable energy with solar connection

### Innovative and high-quality tank

- › Lightweight plastic tank
- › No corrosion, anode, scale or lime deposits
- › Contains impact resistant polypropylene inner and outer walls filled with high-grade insulation foam to reduce heat losses to a minimum

### Combinable with other heat sources

- › The bivalent option allows heat from other sources such as oil, gas or pellet-fired boilers to be stored in the solar system, further lowering energy consumption

## ECH<sub>2</sub>O



### Advanced user interface

#### The Daikin-Eye

The intuitive Daikin eye shows you in real time the status of your system. Blue is perfect! Should the eye turn red, an error has occurred.

#### Quick to configure

Log in and you'll be able to completely configure the unit in less than 10 steps. You can even check if the unit is ready for use by running test cycles!

#### Easy operation

The user interface works really fast thanks to its icon-based menus.

#### Beautiful design

The interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

## ECH<sub>2</sub>O thermal store range: additional hot water comfort

Combine your indoor unit with a thermal store to achieve the ultimate comfort at home.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options



Built for small and large homes, customers can choose between a pressureless and a pressurised hot water system.

### Pressureless (drain-back) solar system (ELSH\*, ELSX\*)

- › The solar collectors are only filled with water when sufficient heating is provided by the sun
- › The pumps in the control and pump unit switch on briefly and fill the collectors with storage tank water
- › After filling, water circulation is maintained by the remaining pump

### Pressurised solar system (ELSHB\*, ELSXB\*)

- › System is filled with heat transfer fluid with the correct amount of antifreeze to avoid freezing in winter
- › System is pressurised and sealed

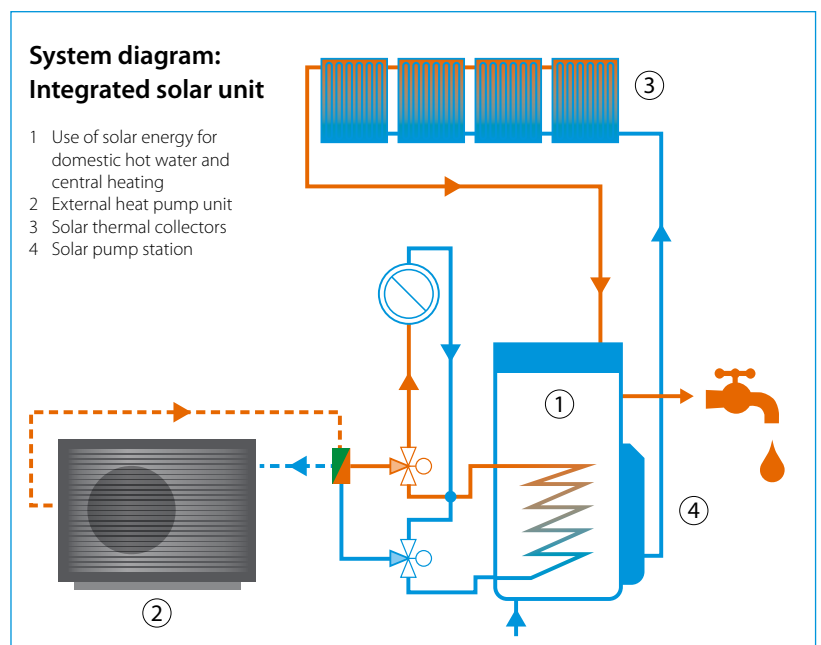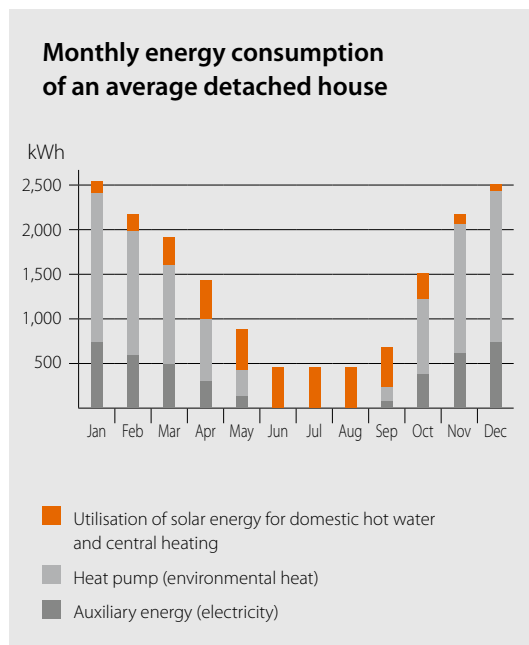

# Daikin Altherma 3 R MT ECH<sub>2</sub>O

Floor standing air-to-water heat pump for heating and hot water with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Quick configuration in 9 steps in a high resolution colour interface wizard
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection



011-1W0657  
011-1W0658

More details and final information can be found by scanning or clicking the QR codes.

up to

ELSH-E

ERRA08-12EW1

Efficiency data				ELSH + ERRA	12P30E + 08EW1	12P50E + 08EW1	12P30E + 10EW1	12P50E + 10EW1	12P30E + 12EW1	12P50E + 12EW1
Space heating	Average climate water outlet 55 °C	General	SCOP	3.42		3.43		3.53		
			η <sub>s</sub> (Seasonal space heating efficiency) %	134		138				
			Seasonal space heating eff. class	A++						
Domestic hot water	Average climate	General	SCOP	4.81		4.84		4.84		
			η <sub>wh</sub> (water heating efficiency) %	190		191				
			Water heating energy efficiency class	A+++						
Domestic hot water	Average climate	General	Declared load profile	L	XL	L	XL	L	XL	XL
			COP	2.83	3.29	2.83	3.29	2.83	3.29	
			η <sub>wh</sub> (water heating efficiency) %	119	136	119	136	119	136	
		Water heating energy efficiency class	A+							

Indoor Unit		ELSH	12P30E	12P50E	12P30E	12P50E	12P30E	12P50E	
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)							
	Material	Impact resistant polypropylene							
Dimensions	Unit	HeightxWidthxDepth	mm	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817
Weight	Unit	kg	76	91	76	91	76	91	
Tank	Water volume	l	294	477	294	477	294	477	
	Maximum water temperature	°C	85						
Operation range	Heating	Ambient	Min.~Max.	°C					-25 ~25
		Water side	Min.~Max.	°C					15 ~ 65
	Domestic hot water	Ambient	Min.~Max.	°C					-25 ~ 35
		Water side	Min.~Max.	°C					25 ~ 62
Sound power level	Nom.	dBA	44.7						
Sound pressure level	Nom.	dBA	36.8						

Outdoor Unit		ERRA	08EW1	10EW1	12EW1	
Dimensions	Unit	HeightxWidthxDepth	mm			1,003x1,270x533
Weight	Unit	kg	107			
Compressor	Quantity	1				
	Type	Hermetically sealed swing compressor				
Operation range	Heating	Min.~Max.	°CDB			-25 ~25
	Domestic hot water	Min.~Max.	°CDB			-25 ~35
Refrigerant	Type	R-32				
	GWP	675				
	Charge	kg	3.25			
	Charge	TCO <sub>2</sub> Eq	2.19			
	Control	Expansion valve				
LW(A) Sound power level (according to EN14825)	56					
Sound pressure level (at 1 meter)	41.1					
Power supply	Name/Phase/Frequency/Voltage	Hz/V				W1/3~/50 /400
Current	Recommended fuses	A				16

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R MT ECH<sub>2</sub>O

Floor standing air-to-water heat pump for heating and hot water with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Quick configuration in 9 steps in a high resolution colour interface wizard
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection



011-1W0657  
011-1W0658

More details and final information can be found by scanning or clicking the QR codes.



Efficiency data				ELSH + ERRA	12P30E + 08EV3	12P50E + 08EV3	12P30E + 10EV3	12P50E + 10EV3	12P30E + 12EV3	12P50E + 12EV3
Space heating	Average climate water outlet 55 °C	General	SCOP					3.44		
			ηs (Seasonal space heating efficiency)	%	130			131		135
			Seasonal space heating eff. class				A++			
	Average climate water outlet 35 °C	General	SCOP	4.69				4.71		
		ηs (Seasonal space heating efficiency)		184					186	
		Seasonal space heating eff. class				A+++				
Domestic hot water heating	General	Declared load profile		L	XL	L	XL	L	XL	
	Average climate	COP	dhw	2.75	3.19	2.75	3.19	2.75	3.19	
		ηwh (water heating efficiency)	%	116	132	116	132	116	132	
			Water heating energy efficiency class				A+			
Indoor Unit		ELSH		12P30E	12P50E	12P30E	12P50E	12P30E	12P50E	
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)								
	Material	Impact resistant polypropylene								
Dimensions	Unit	HeightxWidthxDepth	mm	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817	
Weight	Unit		kg	76	91	76	91	76	91	
Tank	Water volume		l	294	477	294	477	294	477	
	Maximum water temperature		°C	85						
Operation range	Heating	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
	Domestic hot water	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
Sound power level	Nom.		dBA	44.7						
Sound pressure level	Nom.		dBA	36.8						
Outdoor Unit		ERRA		08EV3	10EV3	12EV3				
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533						
Weight	Unit		kg	107						
Compressor	Quantity			1						
	Type			Hermetically sealed swing compressor						
Operation range	Heating	Min.~Max.	°CDB	-25 ~ 25						
	Domestic hot water	Min.~Max.	°CDB	-25 ~ 35						
Refrigerant	Type			R-32						
	GWP			675						
	Charge	kg		3.25						
	Charge	TCO2Eq		2.19						
	Control			Expansion valve						
LW(A) Sound power level (according to EN14825)				54						
Sound pressure level (at 1 meter)	Nom.			40.6						
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50 /230						
Current	Recommended fuses		A	32						

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R MT ECH<sub>2</sub>O

Floor standing air-to-water heat pump for **bivalent heating, cooling and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation



More details and final information can be found by scanning or clicking the QR codes.

up to

		ELSHB + ERA		12P30E + 08EW1	12P50E + 08EW1	12P30E + 10EW1	12P50E + 10EW1	12P30E + 12EW1	12P50E + 12EW1
Space heating	Average climate water outlet 55 °C	General	SCOP	3.42		3.43		3.53	
			ηs (Seasonal space heating efficiency)	134				138	
			Seasonal space heating eff. class	A++					
Domestic hot water heating	Average climate	General	SCOP	4.81		4.84			
			ηwh (water heating efficiency)	190		191			
			Water heating energy efficiency class	A+++					
	Declared load profile			L	XL	L	XL	L	XL
	Average climate		COP	2.83	3.29	2.83	3.29	2.83	3.29
			ηwh (water heating efficiency)	119	136	119	136	119	136
			Water heating energy efficiency class	A+					
Indoor Unit		ELSHB		12P30E	12P50E	12P30E	12P50E	12P30E	12P50E
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)							
	Material	Impact resistant polypropylene							
Dimensions	Unit	HeightxWidthxDepth	mm	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817
Weight	Unit		kg	76	91	76	91	76	91
Tank	Water volume		l	294	477	294	477	294	477
	Maximum water temperature		°C	85					
Operation range	Heating	Ambient	Min.–Max.	°C					
		Water side	Min.–Max.	°C					
	Domestic hot water	Ambient	Min.–Max.	°C					
		Water side	Min.–Max.	°C					
Sound power level	Nom.		dBA	44.7					
Sound pressure level	Nom.		dBA	36.8					
Outdoor Unit		ERRA		08EW1	10EW1	12EW1			
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533					
Weight	Unit		kg	107					
Compressor	Quantity			1					
	Type			Hermetically sealed swing compressor					
Operation range	Heating		Min.–Max.	°CDB					
	Domestic hot water		Min.–Max.	°CDB					
Refrigerant	Type			R-32					
	GWP			675					
	Charge		kg	3.25					
	Charge		TCO <sub>2</sub> Eq	2.19					
	Control			Expansion valve					
LW(A) Sound power level (according to EN14825)				56					
Sound pressure level (at 1 meter)	Nom.			41.1					
Power supply	Name/Phase/Frequency/Voltage		Hz/V	W1/3~/50 /400					
Current	Recommended fuses		A	16					

This product contains fluorinated greenhouse gases.



# Daikin Altherma 3 R MT ECH<sub>2</sub>O

Floor standing air-to-water heat pump for **bivalent heating, cooling and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation



011-1W0657  
011-1W0658

More details and final information can be found by scanning or clicking the QR codes.

ELSHB-E

ERRA08-12EV3

Efficiency data				ELSHB + ERRA	12P30E + 08EV3	12P50E + 08EV3	12P30E + 10EV3	12P50E + 10EV3	12P30E + 12EV3	12P50E + 12EV3
Space heating	Average climate water outlet 55 °C	General	SCOP					3.44		
			ηs (Seasonal space heating efficiency) %		130		131		135	
			Seasonal space heating eff. class				A++			
Average climate water outlet 35 °C	General	SCOP		4.69			4.71			
		ηs (Seasonal space heating efficiency) %			184			186		
		Seasonal space heating eff. class				A+++				
Domestic hot water heating	Average climate	General	Declared load profile	L	XL	L	XL	L	XL	
			COP	dhw	2.75	3.19	2.75	3.19	2.75	3.19
			ηwh (water heating efficiency) %		116	132	116	132	116	132
			Water heating energy efficiency class				A+			
Indoor Unit		ELSHB		12P30E	12P50E	12P30E	12P50E	12P30E	12P50E	
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)								
	Material	Impact resistant polypropylene								
Dimensions	Unit	HeightxWidthxDepth	mm	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817	
Weight	Unit		kg	76	91	76	91	76	91	
Tank	Water volume		l	294	477	294	477	294	477	
	Maximum water temperature		°C	85						
Operation range	Heating	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
	Domestic hot water	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
Sound power level	Nom.		dBA	44.7						
Sound pressure level	Nom.		dBA	36.8						
Outdoor Unit		ERRA		08EV3	10EV3	12EV3				
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533						
Weight	Unit		kg	107						
Compressor	Quantity			1						
	Type			Hermetically sealed swing compressor						
Operation range	Heating	Min.~Max.	°CDB	-25 ~ 25						
	Domestic hot water	Min.~Max.	°CDB	-25 ~ 35						
Refrigerant	Type			R-32						
	GWP			675						
	Charge		kg	3.25						
	Charge		TCO2Eq	2.19						
LW(A) Sound power level (according to EN14825)	Nom.			Expansion valve						
				54						
Sound pressure level (at 1 meter)	Nom.			40.6						
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50 /230						
Current	Recommended fuses		A	32						

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R MT ECH<sub>2</sub>O

Floor standing air-to-water heat pump for **heating, cooling** and **hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Quick configuration in 9 steps in a high resolution colour interface wizard
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection



011-1W0657  
011-1W0658

More details and final information can be found by scanning or clicking the QR codes.

up to

		ELSX+ ERRA		12P30E + 08EW1	12P50E + 08EW1	12P30E + 10EW1	12P50E + 10EW1	12P30E + 10EW1	12P50E + 10EW1	
<b>Efficiency data</b>	Space heating	Average climate water outlet 55 °C	General	SCOP	3.47		3.48		3.48	
				ηs (Seasonal space heating efficiency)	136		136			
		Seasonal space heating eff. class	A++							
	Average climate water outlet 35 °C	General	SCOP	4.95		4.98				
		ηs (Seasonal space heating efficiency)	195		196					
	Seasonal space heating eff. class	A+++								
Domestic hot water heating	General	Declared load profile			L	XL	L	XL	L	XL
	Average climate	COP	dhw		2.83	3.29	2.83	3.29	2.83	3.29
		ηwh (water heating efficiency)	%		119	136	119	136	119	136
		Water heating energy efficiency class	A+							
<b>Indoor Unit</b>		<b>ELSX</b>	<b>12P30E</b>	<b>12P50E</b>	<b>12P30E</b>	<b>12P50E</b>	<b>12P30E</b>	<b>12P50E</b>	<b>12P50E</b>	
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)								
	Material	Impact resistant polypropylene								
Dimensions	Unit	HeightxWidthxDepth	mm	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817	
Weight	Unit	kg		76	91	76	91	76	91	
Tank	Water volume	l		294	477	294	477	294	477	
	Maximum water temperature	°C		85						
Operation range	Heating	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
	Domestic hot water	Ambient	Min.~Max.	°C						
		Water side	Min.~Max.	°C						
Sound power level	Nom.	dBA	44.7							
Sound pressure level	Nom.	dBA	36.8							
<b>Outdoor Unit</b>		<b>ERRA</b>	<b>08EW1</b>	<b>10EW1</b>		<b>12EW1</b>				
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533						
Weight	Unit	kg	107							
Compressor	Quantity	1								
	Type	Hermetically sealed swing compressor								
Operation range	Heating	Min.~Max.	°CDB							
	Domestic hot water	Min.~Max.	°CDB							
Refrigerant	Type	R-32								
	GWP	675								
	Charge	kg	3.25							
	Charge	TCO2Eq	2.19							
	Control	Expansion valve								
LW(A) Sound power level (according to EN14825)			56							
Sound pressure level (at 1 meter)	Nom.		41.1							
Power supply	Name/Phase/Frequency/Voltage	Hz/V	W1/3~/50 /400							
Current	Recommended fuses	A	16							

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R MT ECH<sub>2</sub>O

Floor standing air-to-water heat pump for heating, cooling and hot water with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Quick configuration in 9 steps in a high resolution colour interface wizard
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection



011-1W0657  
011-1W0658

up to

More details and final information can be found by scanning or clicking the QR codes.

ELSX-E

ERRA08-12EV3

Efficiency data				ELSX+ ERRA	12P30E + 08EV3	12P50E + 08EV3	12P30E + 10EV3	12P50E + 10EV3	12P30E + 12EV3	12P50E + 12EV3
Space heating	Average climate water outlet 55 °C	General	SCOP	3.37		3.38		3.47		
			ηs (Seasonal space % heating efficiency)	132				136		
			Seasonal space heating eff. class			A++				
Domestic hot water heating	Average climate water outlet 35 °C	General	SCOP	4.79				4.82		
			ηs (Seasonal space % heating efficiency)	188				190		
			Seasonal space heating eff. class			A+++				
Domestic hot water heating	Average climate	General	Declared load profile	L	XL	L	XL	L	XL	XL
			COP	2.75	3.19	2.75	3.19	2.75	3.19	3.19
			ηwh (water heating efficiency)	%	116	132	116	132	116	132
		Water heating energy efficiency class			A+					

Indoor Unit		ELSX	12P30E	12P50E	12P30E	12P50E	12P30E	12P50E	
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)							
	Material	Impact resistant polypropylene							
Dimensions	Unit	HeightxWidthxDepth	mm	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817
Weight	Unit	kg	76	91	76	91	76	91	
Tank	Water volume	l	294	477	294	477	294	477	
	Maximum water temperature	°C	85						
Operation range	Heating	Ambient	Min.~Max.	°C					-25 ~25
		Water side	Min.~Max.	°C					15 ~65
	Domestic hot water	Ambient	Min.~Max.	°C					-25 ~35
		Water side	Min.~Max.	°C					25 ~62
Sound power level	Nom.	dBA	44.7						
Sound pressure level	Nom.	dBA	36.8						

Outdoor Unit		ERRA	08EV3	10EV3	12EV3	
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533		
Weight	Unit	kg	107			
Compressor	Quantity	1				
	Type	Hermetically sealed swing compressor				
Operation range	Heating	Min.~Max.	°CDB			-25 ~25
	Domestic hot water	Min.~Max.	°CDB			-25 ~35
Refrigerant	Type	R-32				
	GWP	675				
	Charge	kg	3.25			
	Charge	TCO2Eq	2.19			
	Control	Expansion valve				
LW(A) Sound power level (according to EN14825)		54				
Sound pressure level (at 1 meter)	Nom.	40.6				
Power supply	Name/Phase/Frequency/Voltage	Hz/V				V3/1~/50 /230
Current	Recommended fuses	A				32

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R MT ECH<sub>2</sub>O

Floor standing air-to-water heat pump for **bivalent heating, cooling and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation



More details and final information can be found by scanning or clicking the QR codes.

up to

ELSXB-E ERRA08-12EW1

Efficiency data				ELSXB+ ERRA	12P30E + 08EW1	12P50E + 08EW1	12P30E + 10EW1	12P50E + 10EW1	12P30E + 10EW1	12P50E + 10EW1
Space heating	Average climate water outlet 55 °C	General	SCOP	3.47		3.48		3.48		
			η <sub>s</sub> (Seasonal space heating efficiency) %	136						
			Seasonal space heating eff. class	A++						
Domestic hot water heating	Average climate	General	SCOP	4.95		4.98				
			η <sub>s</sub> (Seasonal space heating efficiency) %	195		196				
			Seasonal space heating eff. class	A+++						
Domestic hot water heating	Average climate	General	Declared load profile	L	XL	L	XL	L	XL	
			COP	2.83	3.29	2.83	3.29	2.83	3.29	
			η <sub>wh</sub> (water heating efficiency) %	119	136	119	136	119	136	
Water heating energy efficiency class			A+							

Indoor Unit		ELSXB	12P30E	12P50E	12P30E	12P50E	12P30E	12P50E	
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)							
	Material	Impact resistant polypropylene							
Dimensions	Unit	HeightxWidthxDepth	mm	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817
Weight	Unit	kg	76	91	76	91	76	91	
Tank	Water volume	l	294	477	294	477	294	477	
	Maximum water temperature	°C	85						
Operation range	Heating	Ambient	Min.~Max.	°C					
		Water side	Min.~Max.	°C					
	Domestic hot water	Ambient	Min.~Max.	°C					
		Water side	Min.~Max.	°C					
Sound power level	Nom.	dBA	44.7						
Sound pressure level	Nom.	dBA	36.8						

Outdoor Unit		ERRA	08EW1	10EW1	12EW1
Dimensions	Unit	HeightxWidthxDepth	mm		
Weight	Unit	kg	1,003x1,270x533		
Compressor	Quantity	1			
	Type	Hermetically sealed swing compressor			
Operation range	Heating	Min.~Max.	°CDB		
	Domestic hot water	Min.~Max.	°CDB		
Refrigerant	Type	R-32			
	GWP	675			
	Charge	kg	3.25		
	Charge	TCO <sub>2</sub> Eq	2.19		
	Control	Expansion valve			
LW(A) Sound power level (according to EN14825)	56				
Sound pressure level (at 1 meter)	41.1				
Power supply	Name/Phase/Frequency/Voltage	Hz/V			
Current	Recommended fuses	A			

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 R MT ECH<sub>2</sub>O

Floor standing air-to-water heat pump for **bivalent heating, cooling and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation



011-1W0657  
011-1W0658

up to

More details and final information can be found by scanning or clicking the QR codes.

ELSXB-E

ERRA08-12EV3

Efficiency data				ELSXB+ ERRA	12P30E + 08EV3	12P50E + 08EV3	12P30E + 10EV3	12P50E + 10EV3	12P30E + 12EV3	12P50E + 12EV3	
Space heating	Average climate water outlet 55 °C	General	SCOP	3.37		3.38		3.47			
			ηs (Seasonal space % heating efficiency)	132		136					
			Seasonal space heating eff. class	A++							
Domestic hot water heating	Average climate water outlet 35 °C	General	SCOP	4.79		4.82		4.82			
			ηs (Seasonal space % heating efficiency)	188		190					
			Seasonal space heating eff. class	A+++							
Domestic hot water heating	Average climate	General	Declared load profile	L	XL	L	XL	L	XL	XL	
			COP	2.75	3.19	2.75	3.19	2.75	3.19	3.19	
			ηwh (water heating efficiency)	%	116	132	116	132	116	132	
			Water heating energy efficiency class	A+							

Indoor Unit		ELSXB	12P30E	12P50E	12P30E	12P50E	12P30E	12P50E	
Casing	Colour	Traffic white (RAL9016) / Traffic black (RAL9017)							
	Material	Impact resistant polypropylene							
Dimensions	Unit	HeightxWidthxDepth	mm	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817	1,893x594x680	1,910x792x817
Weight	Unit	kg	76	91	76	91	76	91	
Tank	Water volume	l	294	477	294	477	294	477	
	Maximum water temperature	°C	85						
Operation range	Heating	Ambient	Min.~Max.	°C					-25 ~25
		Water side	Min.~Max.	°C					15 ~65
	Domestic hot water	Ambient	Min.~Max.	°C					-25 ~35
		Water side	Min.~Max.	°C					25 ~62
Sound power level	Nom.	dBA	44.7						
Sound pressure level	Nom.	dBA	36.8						

Outdoor Unit		ERRA	08EV3	10EV3	12EV3	
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533		
Weight	Unit	kg	107			
Compressor	Quantity	1				
	Type	Hermetically sealed swing compressor				
Operation range	Heating	Min.~Max.	°CDB			-25 ~25
	Domestic hot water	Min.~Max.	°CDB			-25 ~35
Refrigerant	Type	R-32				
	GWP	675				
	Charge	kg	3.25			
	Charge	TCO2Eq	2.19			
	Control	Expansion valve				
LW(A) Sound power level (according to EN14825)	54					
Sound pressure level (at 1 meter)	40.6					
Power supply	Name/Phase/Frequency/Voltage	Hz/V				V3/1~/50 /230
Current	Recommended fuses	A				32

This product contains fluorinated greenhouse gases.

# Wall mounted unit




## Why choose Daikin wall mounted unit?

The Daikin Altherma 3 split wall mounted unit offers heating and cooling with high flexibility for a quick and easy installation, with an optional connection to deliver domestic hot water.

## High flexibility for installation and domestic hot water connection

- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required
- › The unit's sleek design blends in with other household appliances
- › Combine with a stainless steel or ECH<sub>2</sub>O thermal store

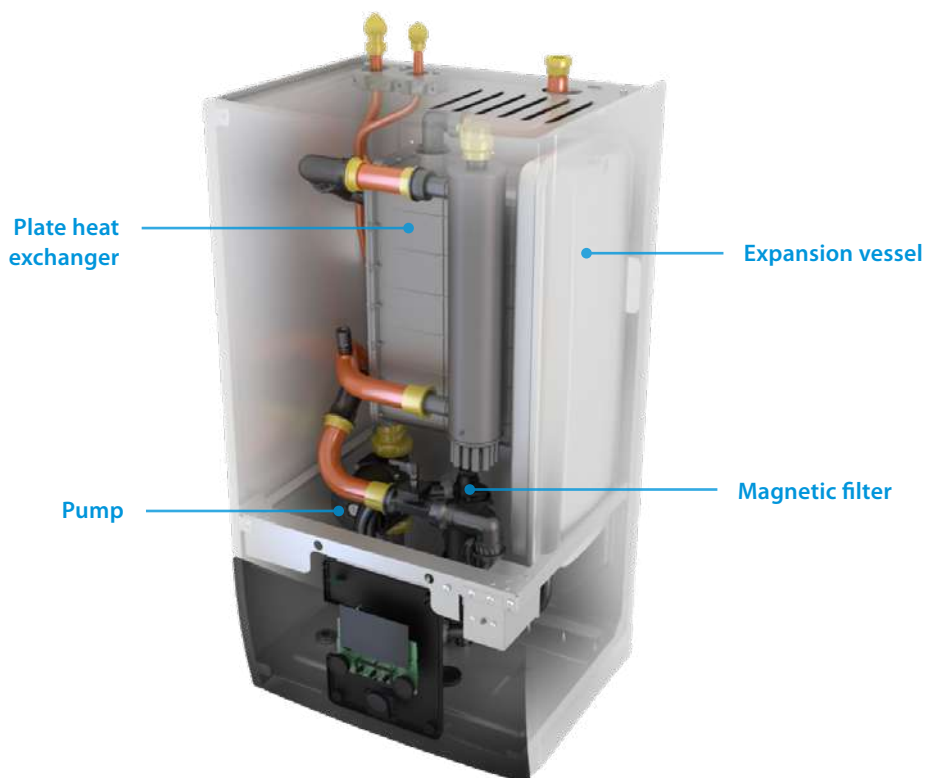

## Flexibility in providing domestic hot water

If the end user requires hot water and installation height is limited, a separate stainless steel tank provides the required installation flexibility.

ECH<sub>2</sub>O thermal store range: additional hot water comfort

Combine your wall mounted unit with a thermal store for additional hot water comfort.


- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: with high tapping performance
- › Fit for future possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build on the unit combined with cascade principle offers flexible installation options



## Flexibility in providing space heating

The wall mounted unit is the perfect choice in case the end user is looking for space heating or cooling while domestic hot water is provided by another system.

Example of installation with a stainless steel domestic hot water tank.

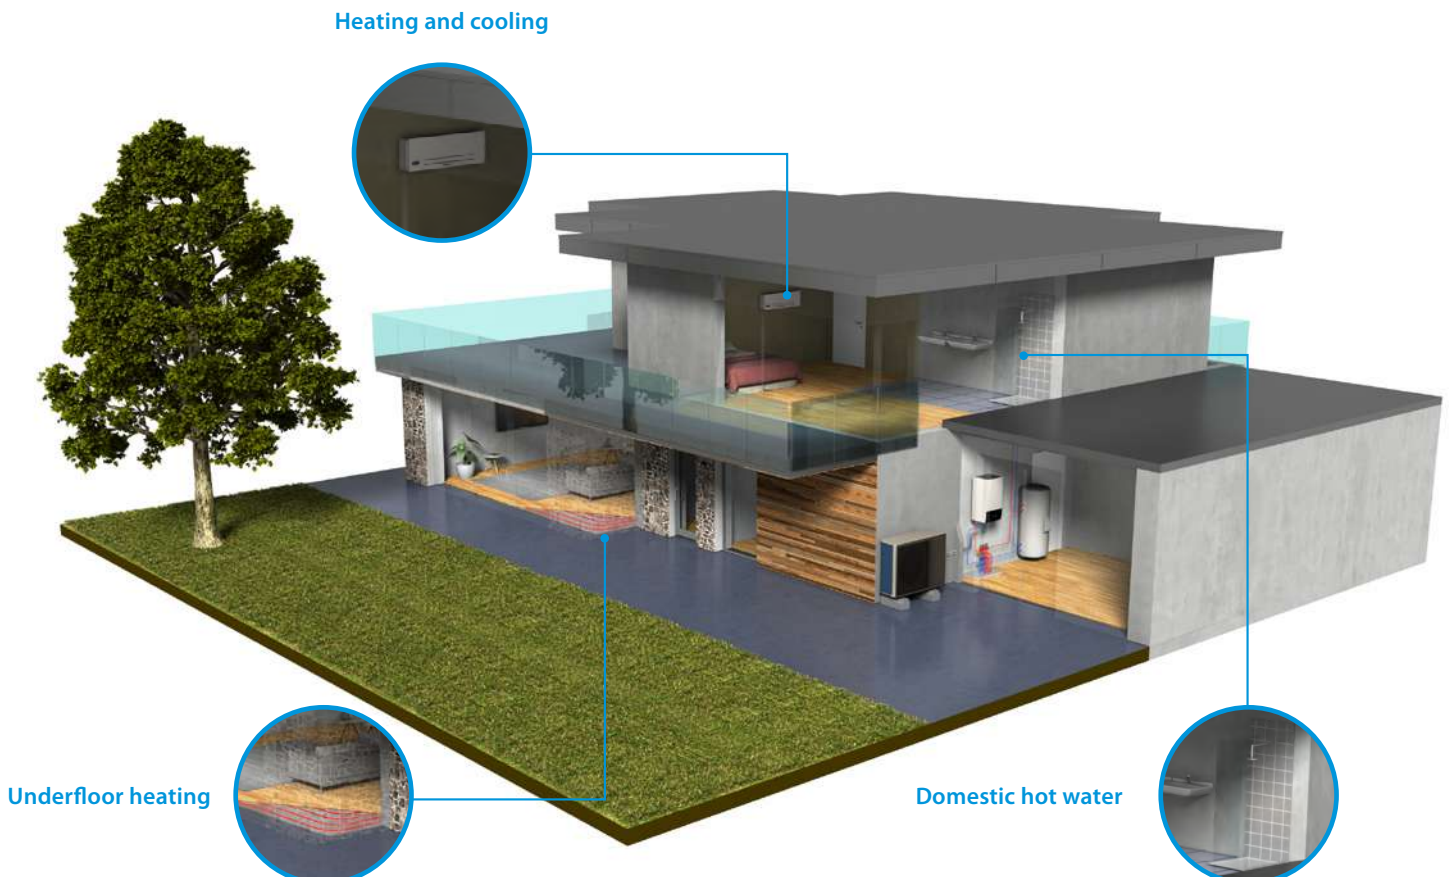

# Daikin Altherma 3 R MT W

Wall mounted **heating only** air to water heat pump

- › Quick configuration in 9 steps in a high resolution colour interface wizard
- › Compact dimensions allows for small installation space, as almost no side clearances are required.
- › Combine with a stainless steel tank or ECH<sub>2</sub>O thermal store.
- › Inclusion of all hydraulic components means no third party components are required
- › The unit's sleek design blends in with other household appliances



up to



011-1W0651  
011-1W0653  
011-1W0655

More details and final information can be found by scanning or clicking the QR codes.



ELVH-E6V

ELVH-E9W

ERRA08-12EW1

ERRA08-12EV3

Efficiency data				ELBH + ERRA	12E6V/9W + 08EW1	12E6V/9W + 08EV3	12E6V/9W + 10EW1	12E6V/9W + 10EV3	12E6V/9W + 12EW1	12E6V/9W + 12EV3
Space heating	Average climate water outlet 55 °C	General	SCOP		3.42	3.42	3.42	3.42	3.42	3.42
			ηs (Seasonal space heating efficiency) %		134	130	134	131	138	135
	Average climate water outlet 35 °C	General	SCOP		4.81	4.69	4.84	4.71	4.84	4.71
			ηs (Seasonal space heating efficiency) %		190	184	191	186	191	186
			Seasonal space heating eff. class	A++	A++	A++	A++	A++	A++	
			Seasonal space heating eff. class	A+++	A+++	A+++	A+++	A+++	A+++	
Indoor Unit				ELBH	12E6V	12E9W	12E6V	12E9W	12E6V	12E9W
Casing	Colour	White + Black								
	Material	Resin, sheet metal								
Dimensions	Unit	HeightxWidthxDepth	mm	840x440x390						
Weight	Unit			kg	48.5					
Operation range	Heating	Ambient	Min.~Max.	°C	-25 ~ 25					
			Water side	Min.~Max.	°C	15 ~ 65				
	Domestic hot water	Ambient	Min.~Max.	°C	-25 ~ 35					
			Water side	Min.~Max.	°C	25 ~ 62				
Sound power level	Nom.			dBA	44					
Sound pressure level	Nom.			dBA	30					
Outdoor Unit				ERRA	08EW1	08EV3	10EW1	10EV3	12EW1	12EV3
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533						
Weight	Unit			kg	107					
Compressor	Quantity	1								
	Type	Hermetically sealed swing compressor								
Operation range	Heating	Min.~Max.		°CDB	-25 ~ 25					
	Domestic hot water	Min.~Max.		°CDB	-25 ~ 35					
Refrigerant	Type	R-32								
	GWP	675								
	Charge			kg	3.25					
	Charge			TCO2Eq	2.19					
				Expansion valve						
LW(A) Sound power level (according to EN14825)					56	54	56	54	56	54
Sound pressure level (at 1 meter)	Nom.				41.1	40.6	41.1	40.6	41.1	40.6
Power supply	Name/Phase/Frequency/Voltage			Hz/V	W1/3~/50 /400	V3/1~/50 /230	W1/3~/50 /400	V3/1~/50 /230	W1/3~/50 /400	V3/1~/50 /230
Current	Recommended fuses			A	16	32	16	32	16	32

This product contains fluorinated greenhouse gases.




# Daikin Altherma 3 R MT W

Wall mounted **reversible** air to water heat pump for heating and cooling

- › Quick configuration in 9 steps in a high resolution colour interface wizard
- › Compact dimensions allows for small installation space, as almost no side clearances are required.
- › Combine with a stainless steel tank or ECH<sub>2</sub>O thermal store.
- › Inclusion of all hydraulic components means no third party components are required
- › The unit's sleek design blends in with other household appliances



up to



More details and final information can be found by scanning or clicking the QR codes.



ELVX-E6V

ELVX-E9W

ERRA08-12EW1

ERRA08-12EV3

Efficiency data				ELBX + ERRA	12E6V/9W + 08EW1	12E6V/9W + 08EV3	12E6V/9W + 10EW1	12E6V/9W + 10EV3	12E6V/9W + 12EW1	12E6V/9W + 12EV3	
Space heating	Average climate water outlet 55 °C	General	SCOP	3.47	3.37	3.48	3.38	3.58	3.47		
			ηs (Seasonal space heating efficiency) %	136	132	136	132	140	136		
	Seasonal space heating eff. class			A++							
	Average climate water outlet 35 °C	General	SCOP	4.95	4.79	4.98	4.82	4.98	4.82		
ηs (Seasonal space heating efficiency) %			195	188	196	190	196	190			
Seasonal space heating eff. class			A+++								
Indoor Unit				ELBX	12E6V	12E9W	12E6V	12E9W	12E6V	12E9W	
Casing	Colour	White + Black									
	Material	Resin, sheet metal									
Dimensions	Unit	HeightxWidthxDepth	mm	840x440x390							
Weight	Unit		kg	48.5							
Operation range	Heating	Ambient	Min.~Max.	°C	-25 ~25						
		Water side	Min.~Max.	°C	15 ~65						
	Domestic hot water	Ambient	Min.~Max.	°C	-25 ~35						
		Water side	Min.~Max.	°C	25 ~62						
Sound power level	Nom.		dBA	44							
Sound pressure level	Nom.		dBA	30							
Outdoor Unit				ERRA	08EW1	08EV3	10EW1	10EV3	12EW1	12EV3	
Dimensions	Unit	HeightxWidthxDepth	mm	1,003x1,270x533							
Weight	Unit		kg	107							
Compressor	Quantity	1									
	Type	Hermetically sealed swing compressor									
Operation range	Heating	Min.~Max.	°CDB	-25 ~ 25							
	Domestic hot water	Min.~Max.	°CDB	-25 ~ 35							
Refrigerant	Type	R-32									
	GWP	675									
	Charge	kg	3.25								
	Charge	TCO2Eq	2.19								
	Control	Expansion valve									
LW(A) Sound power level (according to EN14825)				56	54	56	54	56	54		
Sound pressure level (at 1 meter)	Nom.			41.1	40.6	41.1	40.6	41.1	40.6		
Power supply	Name/Phase/Frequency/Voltage	Hz/V		W1/3~/50 /400	V3/1~/50 /230	W1/3~/50 /400	V3/1~/50 /230	W1/3~/50 /400	V3/1~/50 /230		
Current	Recommended fuses	A		16	32	16	32	16	32		

This product contains fluorinated greenhouse gases.

# Combination table and options

H/O  
3 R MT  
ELVH12S18E6V  
ELVH12S18E9W  
ELVH12S23E6V  
ELVH12S23E9W

Type	Description	Material name	
Outdoor unit		ERRA08EV3/W1	⊙
		ERRA10EV3/W1	⊙
		ERRA12EV3/W1	⊙
Controller	Madoka wired room thermostat	BRC1HHDK/S/W	⊙
	Wireless room thermostats	EKRTRB	⊙
	Wired digital thermostat	EKRRTWA	⊙
	WLAN module	BRP069A71	⊙
	Wireless room by room control	Daikin Home Controls (pages 272-275)	⊙
	LAN module	BRP069A62	⊙
	WLAN cartridge	BRP069A78	⊙ (1)
	Wired digital thermostat	EKWCTRD1V3	⊙
	Wired analog thermostat	EKWCTRAN1V3	⊙
	Wired underfloor heating base station	EKWUFHTA1V3	⊙
	Universal centralized controller	EKCC8-W, DCOM-LT/IO, LT/MB	⊙
Domestic hot water	Stainless steel tank	EKHWS(P)(U)150D3V3	
		EKHWS(P)(U)180D3V3	
		EKHWS(P)(U)200D3V3	
		EKHWS(P)(U)250D3V3	
		EKHWS(P)(U)300D3V3	
	Polypropylene tank	EKHWP300B	
		EKHWP500B	
		EKHWP300PB	
		EKHWP500PB	
	Third party tank kit	EKHY3PART	
EKHY3PART2			
Sensors	External sensor for EKRTRB room thermostat	EKRTETS	⊙
	High voltage smart grid relay kit	EKRELSG	⊙
	Remote indoor temperature sensor	KRCS01-1	⊙ (6)
	Remote outdoor temperature sensor	EKRSCA1	⊙ (6)
	Generic Bizone kit (PCB only)	EKMIKPOA	⊙
	Generic Bizone kit	EKMIKPHA	⊙
Other options	Digital I/O PCB	EKRPIHBA	⊙ (7)
	Demand PCB	EKRPIAHT	⊙
	PC USB cable	EKPCCAB4	⊙
	Conversion kit H/O to reversible for floor standing	EKHVCONV4	⊙
	Conversion kit H/O to reversible for wall mounted	EKHBCONV	
	Booster heater kit	EKBH3SD	
ECH <sub>2</sub> O options	Inline BUH - connection kit	EKECBUCO2AF	
	Inline BUH - 3kW, for *3V (1N~, 230 V, 3 kW)	EKECBUAF3V	
	Inline BUH - 6kW, for *6V (1N~, 230 V, 6 kW)	EKECBUAF6V	
	Inline BUH - 9kW, for *9WN (3N~, 400 V, 9 kW)	EKECBUAF9W	
	Caleffi sludge and magnetite separator SAS1	156021	
	Biv Connector Kit	EKECBIVCO2AF	
	DB connector Kit	EKECDBCO2AF	
	Solar kit HT incl. pump station	EKSRRPS4A	
Daikin Home Controls	Room thermostat	EKRCTRD12BA	⊙
	Room thermostat 2	EKRCTRD13BA	⊙
	Room sensor	EKRSEND11BA	⊙
	Access point	EKRACPUR1PA	⊙
	Radiator thermostat	EKRRTVTR2BA	⊙
	Floor Heating Controller	EKRUFHT61V3	⊙
	Actuator	EKWCVATR1V3	⊙
	Basic IO Box	EKRIBDI1V3	⊙
	Multi IO Box	EKRMBEVI1V3	⊙
Daikin Home Hub	EKRHH	⊙	

(1) Included in accessory bag.  
 (2) Dedicated connection kit: EKEPRHLT3HX.  
 (3) Dedicated connection kit: ETBH: EKEPRHLT5H / ETBX: EKEPRHLT5X.  
 (4) EKHY3PART can be used if you have a tank in which you can insert the thermostat.  
 (5) EKHY3PART2 can be used if you have a tank in which you can't insert a thermostat.  
 (6) Only one sensor can be connected: indoor or outdoor.  
 (7) Additional relays to allow bivalent control in combination with external room thermostat are field supply.

(8) Only 1 Backup heater can be connected on one unit: 3 or 6\* or 9 kW (\*No 6T1-model applicable). EKECBUCO2AF is needed to connect the backup heater to the main unit.  
 (9) Only bivalent models.  
 (10) Only needed for 300 models. 500 models do not need DB connector kit to install DB solar system.  
 (11) Models EKHWSU150DV3, EKHWSU180DV3, EKHWSU200DV3, EKHWSU250DV3 and EKHWSU300DV3 are not available for the UK.

Floor standing integrated tank		Floor standing integrated ECH <sub>2</sub> O	Wall mounted	
Reversible	Bizone		H/O	Reversible
3 R MT	3 R MT	3 R MT	3 R MT	3 R MT
ELVX12S18E6V	ELVZ12S18E6V	ELSH(B)12P30E		
ELVX12S18E9W	ELVZ12S18E9W	ELSH(B)12P50E		
ELVX12S23E6V	ELVZ12S23E6V	ELSX(B)12P30E	ELBH12E6V	ELBX12E6V
ELVX12S23E9W	ELVZ12S23E9W	ELSX(B)12P50E	ELBH12E9W	ELBX12E9W
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
● (1)	● (1)	● (1)	● (1)	● (1)
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
			● (11)	● (11)
			● (11)	● (11)
			● (11)	● (11)
			● (11)	● (11)
			● (11)	● (11)
			● (11)	● (11)
			● (2)	● (2)
			● (3)	● (3)
			● (2)	● (2)
			● (3)	● (3)
			● (4)	● (4)
			● (5)	● (5)
●	●	●	●	●
●	●	●	●	●
● (6)	● (6)	● (6)	● (6)	● (6)
● (6)	● (6)	● (6)	● (6)	● (6)
●		●	●	●
●		●	●	●
● (7)	● (7)	●	● (7)	● (7)
●	●	●	●	●
●	●	●	●	●
	●		●	
		●		
		● (8)		
		● (8)		
		● (8)		
		●		
		● (9)		
		● (10)		
		●		
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●

# Daikin Altherma R HT



## Why choose a Daikin Altherma high temperature split?

The Daikin Altherma high temperature split is the perfect heating solution to upgrade an old heating and hot water system to achieve more cost savings and energy efficiency, without replacing the existing piping and radiators.

### ✓ Comfort

#### Best for renovation projects

Air-to-water high temperature heat pumps are ideal for renovations and replacing old boilers. Daikin Altherma high temperature split's compact design requires minimal installation space and integrates seamlessly with your existing piping and radiators. Minimal installation ensures you can enjoy the energy efficiency of a heat pump without having to replace your entire system.

- › Easy replacement: reuse existing piping/radiators
- › Reduced installation time
- › Limited installation space needed as the indoor unit and domestic hot water tank can be stacked together
- › No need to change existing radiators and piping as water temperatures can be increased up to 80 °C for heating and domestic hot water use



Whether your customer wants only domestic hot water or the advantage of solar energy, Daikin offers a wide range of options, including:

#### Stainless steel domestic hot water tank

The domestic hot water tank can be stacked on top of the indoor unit to save space, or installed next to each other if space is available.

- › Available in 200 or 250 litres
- › Efficient temperature heating: from 10 °C – 50 °C in only 60 minutes\*

\*Test completed with a 16 kW outdoor unit at ambient temperature of 7 °C for a 200 litre tank.



#### ECH<sub>2</sub>O thermal store: hot water savings with solar energy

Combine the Daikin Altherma heat pump with a thermal store to reduce energy costs by taking advantage of the sun's renewable energy. Built for small and large homes, customers can choose from a pressureless or pressurised hot water system.



## ✓ Energy efficiency


### Powered by renewable energy

Powered by **65% renewable energy** extracted from the air and 35% electricity, our Daikin Altherma high temperature heat pump provides heating and hot water with A+ energy efficiency.

## ✓ Reliability

The Daikin Altherma high temperature split optimises its technology to deliver reliable year-round comfort, even in the most extreme climates.


- › 11-15 kW capacities
- › Low running costs and optimum comfort at even the coldest outdoor temperatures, thanks to the unique cascade compressor approach
- › Works with existing high temperature radiators up to 80 °C without an additional backup heater

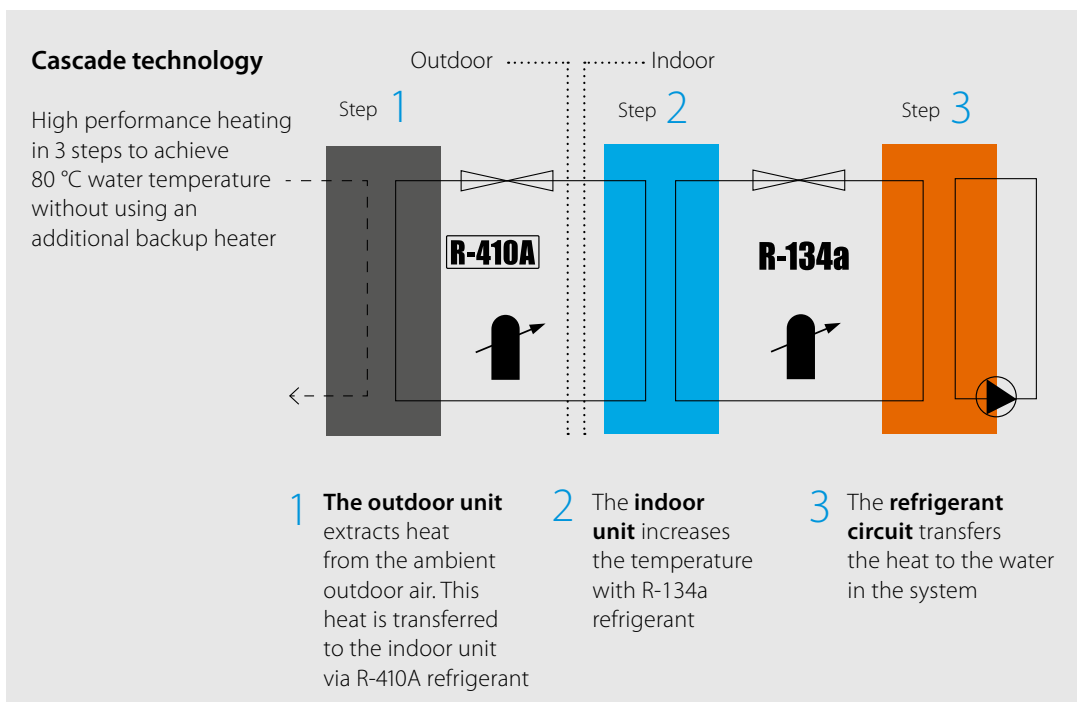



# Daikin Altherma R HT

Floor standing **heating only** air to water heat pump combinable **with existing radiators**

- › Energy efficient heating only system based on air to water heat pump technology
- › Single phase floor standing indoor unit up to 16kW
- › Three phase floor standing indoor unit up to 16kW
- › High temperature application: up to 80 °C without electric heater
- › Easy replacement of existing boiler, without changing heating pipes
- › Combinable with high temperature radiators
- › Low energy bills and low CO<sub>2</sub> emissions
- › Inverter controlled scroll compressor



More details and final information can be found by scanning or clicking the QR codes.









Efficiency data				EKHBRD + ERRQ/ERSQ										
				011ADV17 + ERRQ011AV1	011ADV17 + ERSQ011AY1	014ADV17 + ERRQ014AV1	014ADV17 + ERSQ014AY1	016ADV17 + ER(R/S) Q016AV1	011ADY17 + ERRQ011AY1	011ADY17 + ERSQ011AY1	014ADY17 + ERRQ014AY1	014ADY17 + ERSQ014AY1	016ADY17 + ER(R/S) Q016AY1	
Heating capacity	Nom.	kW		11.3 (1)/11.0 (2) / 11.2 (3)		14.5 (1)/14.0 (2) / 14.4 (3)		16.0 (1)/16.0 (2) / 16.0 (3)	11.3 (1)/11.0 (2) / 11.2 (3)		14.5 (1)/14.0 (2) / 14.4 (3)		16.0 (1)/16.0 (2) / 16.0 (3)	
Power input	Heating	Nom.	kW		3.80 (1)/4.40 (2) / 2.67 (3)	3.87 (1)/4.40 (2) / 2.67 (3)	5.02 (1)/5.65 (2) / 3.87 (3)	5.09 (1)/5.65 (2) / 3.87 (3)	5.86 (1)/6.65 (2) / 4.31 (3)	3.80 (1)/4.40 (2) / 2.67 (3)	3.87 (1)/4.40 (2) / 2.67 (3)	5.02 (1)/5.65 (2) / 3.87 (3)	5.09 (1)/5.65 (2) / 3.87 (3)	5.86 (1)/6.65 (2) / 4.31 (3)
COP				2.97 (1)/2.50 (2) / 4.20 (3)	2.92 (1)/2.50 (2) / 4.20 (3)	2.89 (1)/2.48 (2) / 3.72 (3)	2.85 (1)/2.48 (2) / 3.72 (3)	2.73 (1)/2.41 (2) / 3.72 (3)	2.97 (1)/2.50 (2) / 4.20 (3)	2.92 (1)/2.50 (2) / 4.20 (3)	2.89 (1)/2.48 (2) / 3.72 (3)	2.85 (1)/2.48 (2) / 3.72 (3)	2.73 (1)/2.41 (2) / 3.72 (3)	
Space heating	Average climate water outlet 55 °C	General	SCOP	2.96		2.98		3.01	2.96		2.98		3.01	
		ηs (Seasonal space heating efficiency)		115		116		117	115		116		117	
	Seasonal space heating eff. class		A+											
	Average climate water outlet 35 °C	General	SCOP	2.70		2.81		2.88	2.70		2.81		2.88	
ηs (Seasonal space heating efficiency)		105		110		112	105		110		112			
Seasonal space heating eff. class		C		B		C		B						

Indoor Unit				EKHBRD	011ADV17	014ADV17	016ADV17	011ADY17	014ADY17	016ADY17
Casing	Colour	Metallic grey								
	Material	Precoated sheet metal								
Dimensions	Unit	HeightxWidthxDepth	mm		705x600x695					
Weight	Unit	kg		144			147			
Operation range	Heating	Ambient	Min. ~ Max.	°C						
		Water side	Min. ~ Max.	°C						
	Domestic hot water	Ambient	Min. ~ Max.	°CDB						
		Water side	Min. ~ Max.	°C						
Refrigerant	Type	R-134a								
	Charge	kg		2.60						
	Charge	TCO:Eq		3.718						
Sound pressure level	Nom.	dBA		43 (4)/46 (5)	45 (4)/46 (5)	46 (4)/46 (5)	45 (4)	43 (4)/46 (5)	45 (4)/46 (5)	46 (4)/46 (5)
	Night quiet mode	Level 1		40 (4)		43 (4)		40 (4)		43 (4)

Outdoor Unit				ERRQ-011AV1	ERSQ-011AV1	ERRQ-014AV1	ERSQ-014AV1	ERRQ-011AY1	ERSQ-011AY1	ERRQ-014AY1	ERSQ-014AY1	ERRQ/ERSQ 016AV1
Dimensions	Unit	HeightxWidthxDepth	mm		1,345x900x320							
Weight	Unit	kg		120								
Compressor	Quantity	1										
	Type	Hermetically sealed scroll compressor										
Operation range	Heating	Min. ~ Max.	°CWB									
	Domestic hot water	Min. ~ Max.	°CDB									
Refrigerant	Type	R-410A										
	GWP	2,087.5										
	Charge	kg		4.50								
	Charge	TCO:Eq		9.40								
Control	Expansion valve (electronic type)											
Sound power level	Heating	Nom.	dBA		68	69	71	68	69	71		
Sound pressure level	Heating	Nom.	dBA		52	53	55	52	53	55		
Power supply	Name/Phase/Frequency/Voltage	Hz/V		V/1 ~ /50/220-440				Y1/3 ~ /50/380-415				
Current	Recommended fuses	A		25			16					

(1)EW 55 °C; LW 65 °C; Dt 10 °C; ambient conditions: 7 °CDB/6 °CWB | (2)EW 70 °C; LW 80 °C; Dt 10 °C; ambient conditions: 7 °CDB/6 °CWB | (3)EW 30 °C; LW 35 °C; Dt 5 °C; ambient conditions: 7 °CDB/6 °CWB | (4)EW 55 °C; LW 65 °C; Dt 10 °C; ambient conditions: 7 °CDB/6 °CWB | (5)EW 70 °C; LW 80 °C; Dt 10 °C; ambient conditions: 7 °CDB/6 °CWB | This product contains fluorinated greenhouse gases.

# Options

	Type	Material name
Controllers	Remote user interface	EKRUAHTB
	 Remote user interface	EKRUAHTB
	Room thermostat (wired)	EKRTWA
	 Room thermostat (wired)	EKRTWA
	Room thermostat (wireless)	EKRTR1
Adapter	Centralised controller kit	EKCC-W
	 Centralised controller kit	EKCC-W
	DCOM gateway	DCOM-LT/IO
Adapter	 DCOM gateway	DCOM-LT/IO
	DCOM gateway	DCOM-LT/MB
Adapter	Demand PCB	EKR1AHTA
	 Demand PCB	EKR1AHTA
Adapter	Digital I/O PCB	EKR1HBAA
	 Digital I/O PCB	EKR1HBAA
Back-up heater	Back-up heater for HT 1 ~	EKBUHAA6V3
	Back-up heater for HT 3 ~	EKBUHAA6W1
	Bottom plate heater	EKBPHTH16A
Installation	UK tank kit	EKUHWHTA
	Stand alone kit	EKFMAHTB
Sensor	External sensor	EKRTETS
Valve	Refrigerant stop valves	EKRSHHTA
Others	Compatibility kit 1	EKMKHT1A
	Compatibility kit 2	EKMKHT2A



# New generation of domestic water heat pumps




## Why choose Daikin Altherma domestic hot water heat pump?

### How does it work?

The system is made of a singly indoor unit that extracts energy from the air to provide domestic hot water. The unit collects up to 60% of its energy in the air, while the rest is provided by electricity.

This heat pump relies on a compressor and a refrigerant to transfer the energy from the air to the water, heating the water up to your needs and delivering it into your house.

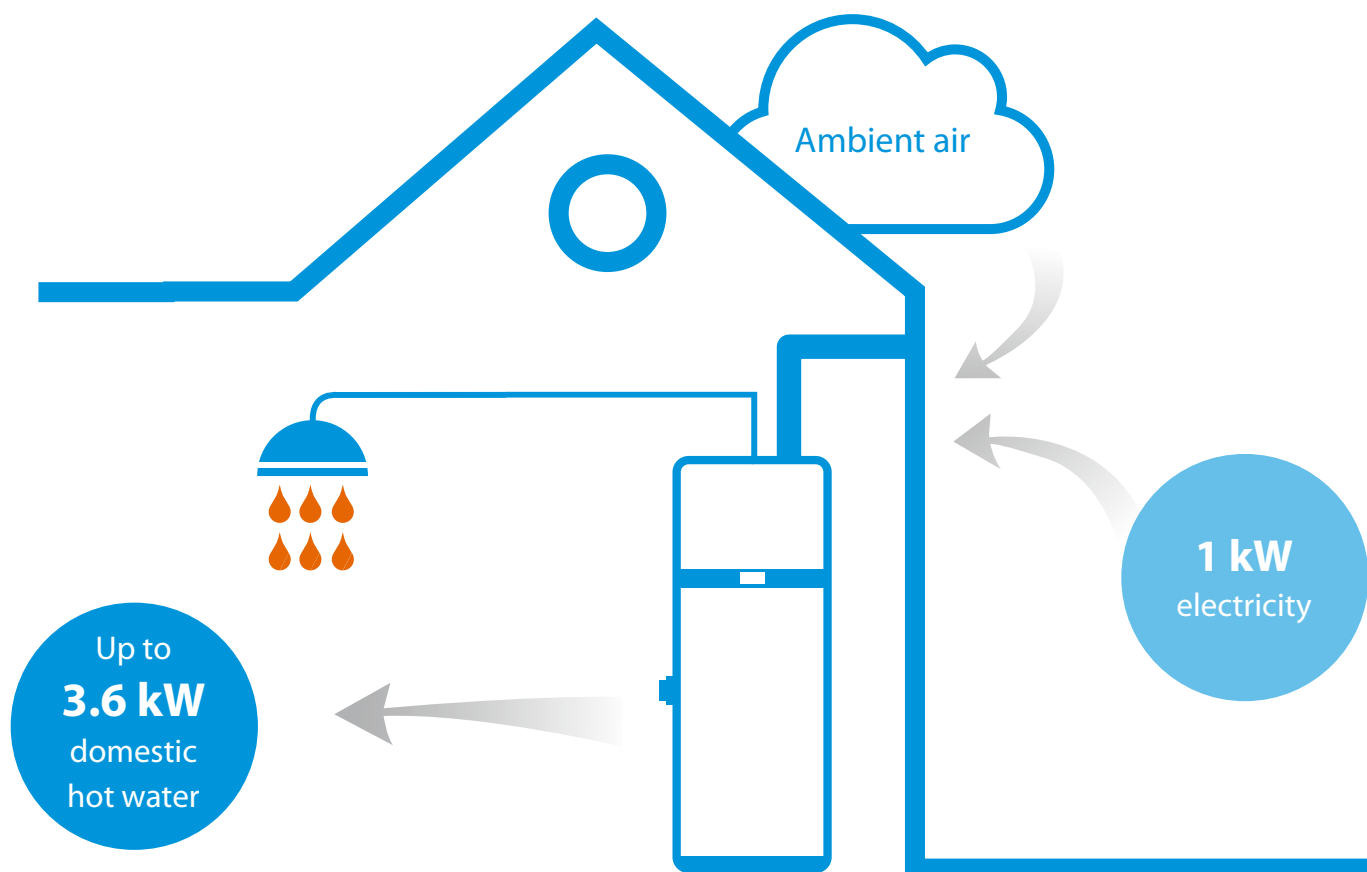







## Remarkably quiet

With a sound power of 51dB(A) indoor, and 44dB(A) outdoor, it is one of the most silent domestic hot water heat pumps.

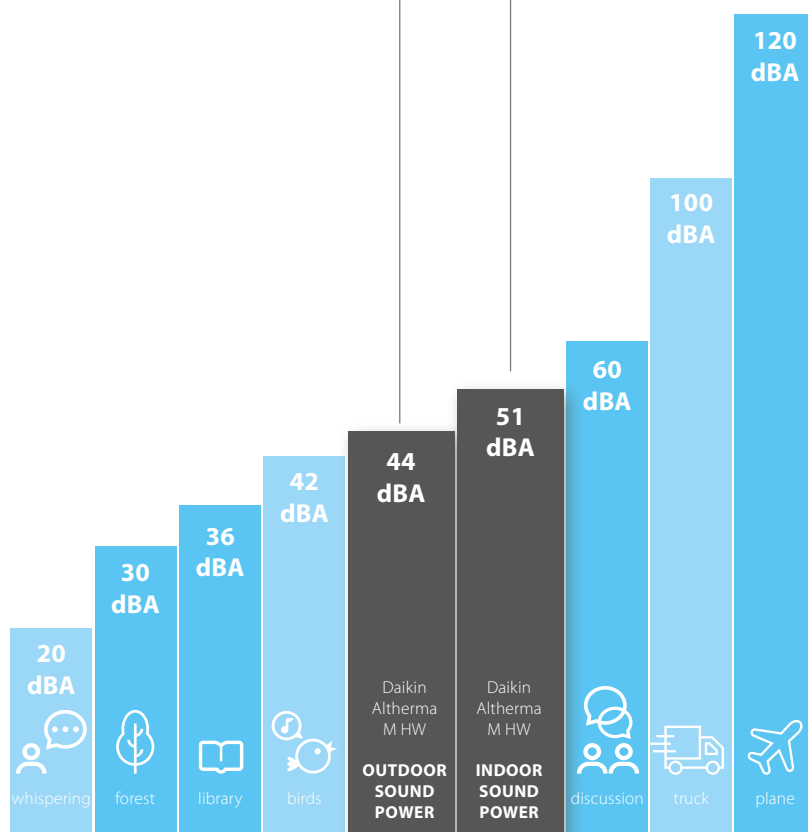


## The acoustic level can be evaluated in two ways

- › The **sound power** is generated by the unit itself, independently of distance and environment
- › The **sound pressure** is the sound perceived at a certain distance. The sound pressure is usually calculated at between 1 and 5 metres from the unit.

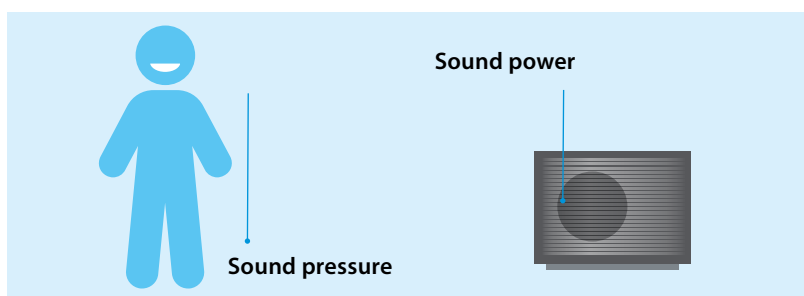


# Product range

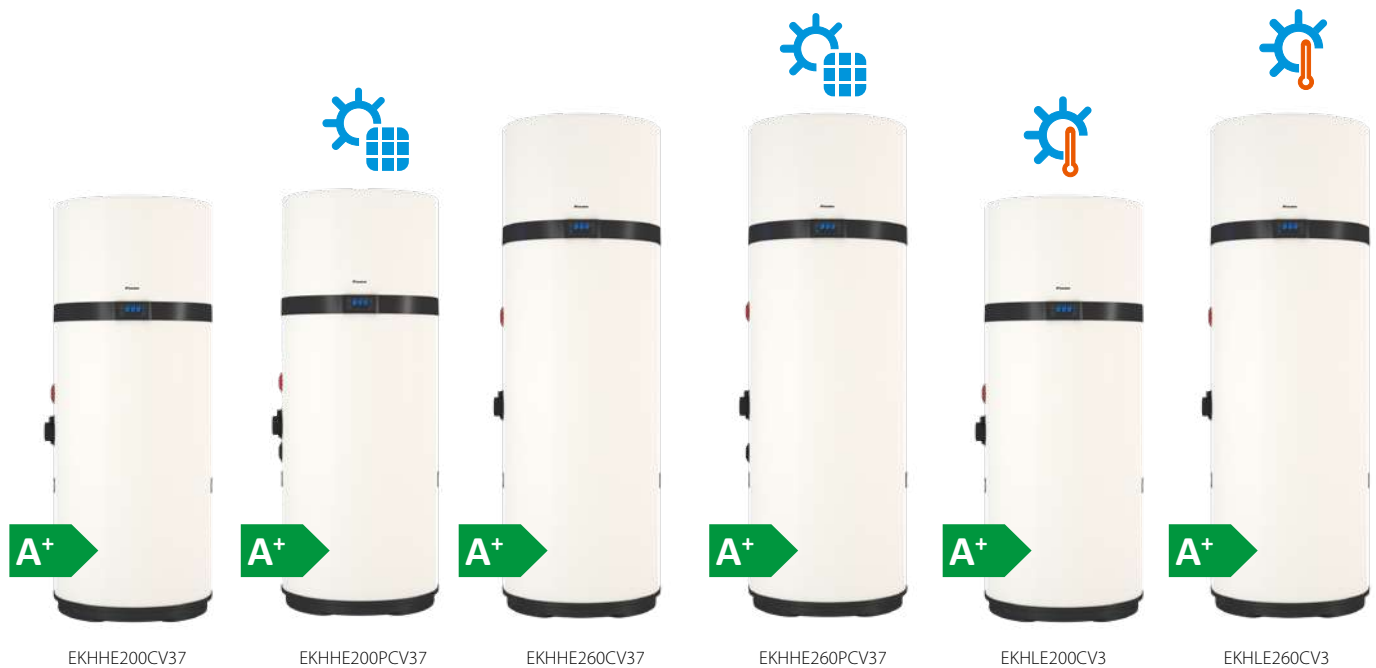

These models are connectable to solar thermal or another auxiliary source, thanks to an extra coil, support the heat up of domestic hot water.



High temperature models are dedicated for warm climate conditions.

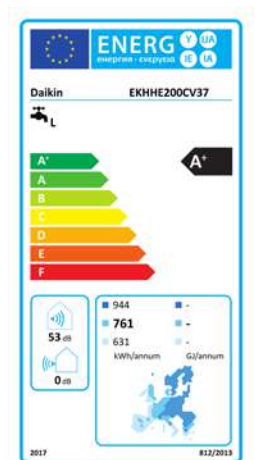

## Features

Daikin Altherma M HW is an air-water heat pump for the production of domestic hot water, storage in an enamelled steel tank, with condenser having an external jacket to guarantee top safety and hygiene.

- › Maximum temperature of 62 °C from renewable energy with heat pump alone or through a heating element (up to 75 °C)
- › Programmable digital interface with TOUCH keys
- › Integration through Solar Thermal energy (-PCV37 model)
- › Integration with Photovoltaic Solar system

# Intuitive controls

## A very simple and intuitive display

- › White backlit LEDs to control temperature and features
- › **Red** backlit LEDs for alarm warnings
- › The 4 side TOUCH keys turn Daikin Altherma M HW on/off (⏻); keys to browse through the MENU (SET) and increase (+) or decrease (-) settings

**Eco mode**  
**Renewable energy only**  
Daikin Altherma M HW only works in heat pump mode. The additional heater turns on as a support only if the outdoor temperature is outside the operating range (setpoint 62 °C).

**Fan mode**  
**Air recirculation only**  
Daikin Altherma M HW only works in ventilation mode. The heat pump and additional heater are off.

**Electric mode**  
**Electrical energy only**  
Daikin Altherma M HW only works with the additional heater. Set point can be up to 75 °C.

**Auto mode**  
**Renewable energy as the preferred option**  
Daikin Altherma M HW works in heat pump mode by default. The additional heater turns on as a support only if the tank temperature increase is too slow (>4 °C/30 min). Or the outdoor temperature is outside the operating range (setpoint 62 °C).

**Boost mode**  
**Combined use of renewable and electrical energy**  
Daikin Altherma M HW simultaneously operates as a heat pump and with the additional heater. Setpoint can be up to 75 °C.

## Specifications



Type	Volume (l)	Capacity	Dimensions (mm)	Optimisation from Photovoltaic	Integrated Solar Thermal Control	Legionella Control Sanitisation	Time slot-based operation	OFF PEAK feature	Defrosting on	Holiday Mode
EKHHE-CV37	200		628 x 628 x 1,607	•	-	•	•	•	•	•
	260		628 x 628 x 1,892	•	-	•	•	•	•	•
EKHHE-PCV37	200		628 x 628 x 1,607	•	•	•	•	•	•	•
	260		628 x 628 x 1,892	•	•	•	•	•	•	•
EKHLE-CV3	200		628 x 628 x 1,607	•	-	•	•	•	-	•
	260		628 x 628 x 1,892	•	-	•	•	•	-	•

# Installation

Daikin Altherma M HW can be installed in any room, including non-heated ones like garages and laundry rooms, and does not require any special work, except for the holes for the air intake and exhaust pipes.



## Some installation methods

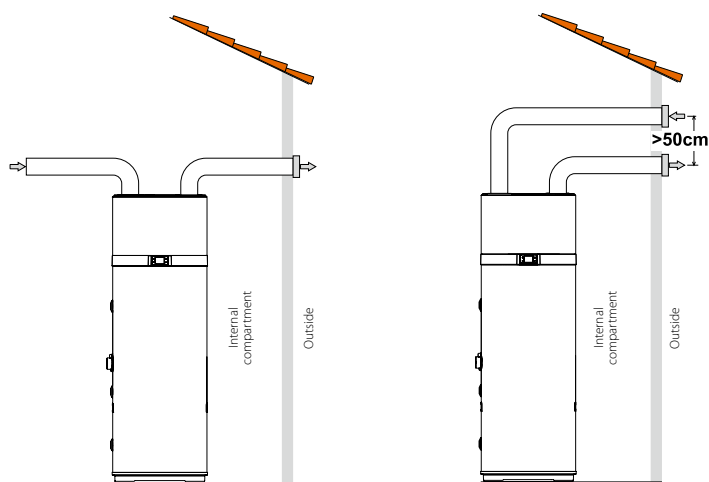


Fig. 1 - Example of air discharge connection

Fig. 2 - Example of air discharge connection

The heat pump requires suitable air ventilation. A suggested method for a designated air duct is provided in Fig. 1. Plus, it is essential to guarantee suitable ventilation in the room where the appliance is installed.

An alternative solution is provided in the picture on the right (Fig. 2): it involves additional ducting that draws air from outdoors, rather than directly from indoors.

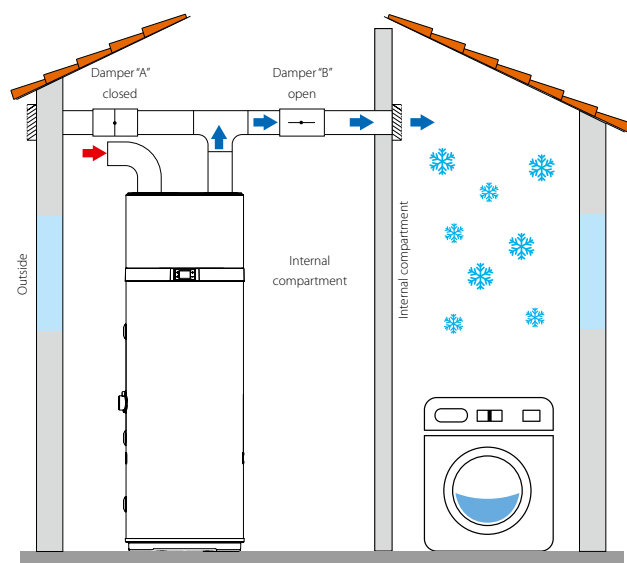


Fig. 3 - Example of installation in summer

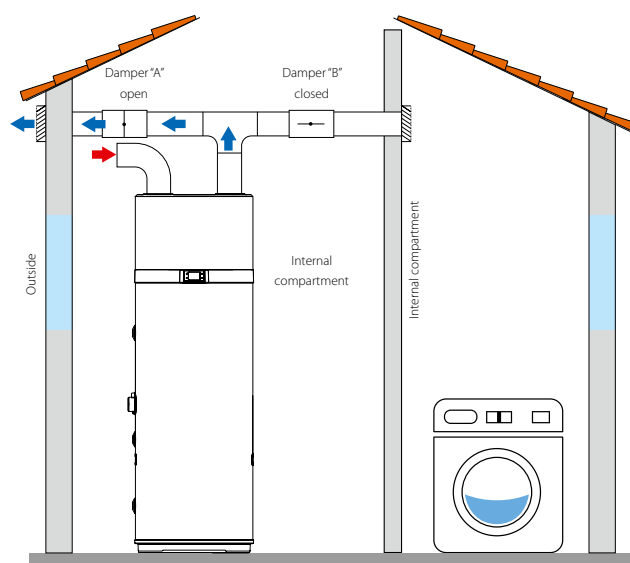


Fig. 4 - Example of installation in winter

One of the unique features of heat-pump heating systems is the fact that these units considerably reduce the temperature of the air, which is usually ejected outdoors. As well as being colder than the air in the room, the ejected air is also completely dehumidified, which is why the airflow can be conveyed back into the home to cool specific areas or rooms in summer. Installation involves doubling the exhaust pipe, on which two dampers ("A" and "B") are applied to convey the airflow either outside (fig. 3) or inside the house (fig. 4).

# Daikin Altherma M HW Second Generation

- › Available in floor standing (200-260 L)
- › Compact modern design
- › Anti-legionella cycle
- › Scheduled operation
- › Integrated solar thermal control (EKHHE-PCV37)
- › Suitable for warm climate (EKHLE-CV3)



More details and final information can be found by scanning or clicking the QR codes.



EKHHE-CV37



EKHHE-PCV37



EKHLE-CV3

Indoor unit			EK	HHE200CV37	HHE260CV37	HHE200PCV37	HHE260PCV37	HLE200CV3	HLE260CV3
Heat up time	Max.		hh:mm	06:27	09:29	06:27	09:29	07:16	09:44
COP				3.23	3.37	3.23	3.37	4.32	4.32
Domestic hot water	Output	Nom	kW	1.34	1.25	1.34	1.25	1.60	
Equivalent hot water	Max		l	247	340	241	335	247	340
Dimensions	Unit	Height	mm	1,607	1,892	1,607	1,892	1,607	1,892
		Diameter	mm	Top: 621, Bottom: 628					
Weight	Unit	Empty	kg	85	97	96	106	86	98
Installation place				Indoor					
IP class				IP24					
Refrigerant	Type			R-134a					
	GWP			1,430					
	Charge		TCO2Eq	1.43					
Heat pump	Charge		kg	1					
	Casing	Colour		White					
	Defrost method			Hot gas					
Automatic defrost start			°C	-5					
System pressure	Max.		bar	7					
Operation range	Ambient	Min.	°CDB	-7					
		Max.	°CDB	4					
Power supply	Phase			1					
	Frequency		Hz	50					
	Voltage		V	230					
	Maximum running current		A	8.5					
Tank	Integrated heating element power	Nom.	kW	1.5					
	Casing	Material		Enamelled steel					
Installation	Solar thermal connection possible			-	-	Yes	Yes	-	-
Standing heat loss		W	63	71	63	71	63	70	
Power supply	Phase			1					
	Frequency		Hz	50					
	Voltage		V	230					
Domestic hot water heating	General	Declared load profile		L	XL	L	XL	L	XL
		Water heating energy efficiency class		A+					
		Thermostat temperature setting	°C	55					
	Average climate	AEC (Annual electricity consumption)	kWh	761	1,210	761	1,210	883	1,315
		η <sub>wh</sub> (water heating efficiency)	%	135	138	135	138	116	127
Cold climate	AEC (Annual electricity consumption)	kWh	944	1,496	944	1,496	883	1,315	
Warm climate	AEC (Annual electricity consumption)	kWh	631	1,046	631	1,046	883	1,315	
Sound power level	Domestic hot water heating		dBA	53	51	53	51	52	

This product contains fluorinated greenhouse gases.

# Daikin Altherma 3 GEO

Top performance even in coldest climate



The Daikin Altherma ground source heat pump uses geothermal energy and Daikin's inverter heat pump technology to deliver heating and hot water in all climates.



## Space heating

During winter



## Space cooling

Active cooling with high efficiency



## Domestic hot water production

Integrated 180 L stainless steel tank



Leaving water temperature up to 65 °C, so the unit can work with underfloor heating, heat pump convectors but also with radiators.



## Renovation and new build

Suitable for renovation: thanks to a high water temperature of 65 °C output, the unit fits with classic radiators.

Suitable for new build: the Daikin Altherma 3 GEO is also combinable with fan coils and underfloor piping.

### BLUEEVOLUTION

Bluevolution technology using R-32, environmentally friendly refrigerant with a lower GWP, reducing its CO<sub>2</sub> equivalent by 70% compared to its predecessor R-410A.



## Electricity savings

The continuous inverter operation allows a high modulation range down to 0.85kW, avoiding the unit to use more electricity to stop and start.



Daikin Altherma HPC provides heating or cooling for living rooms.

An 80-100 metre borehole in the ground creates a constant inlet temperature.


# Care for peace of mind



The Daikin Altherma 3 GEO is designed to perform the best efficiencies in what matter the most: quietness and connectivity.




Extremely quiet operation

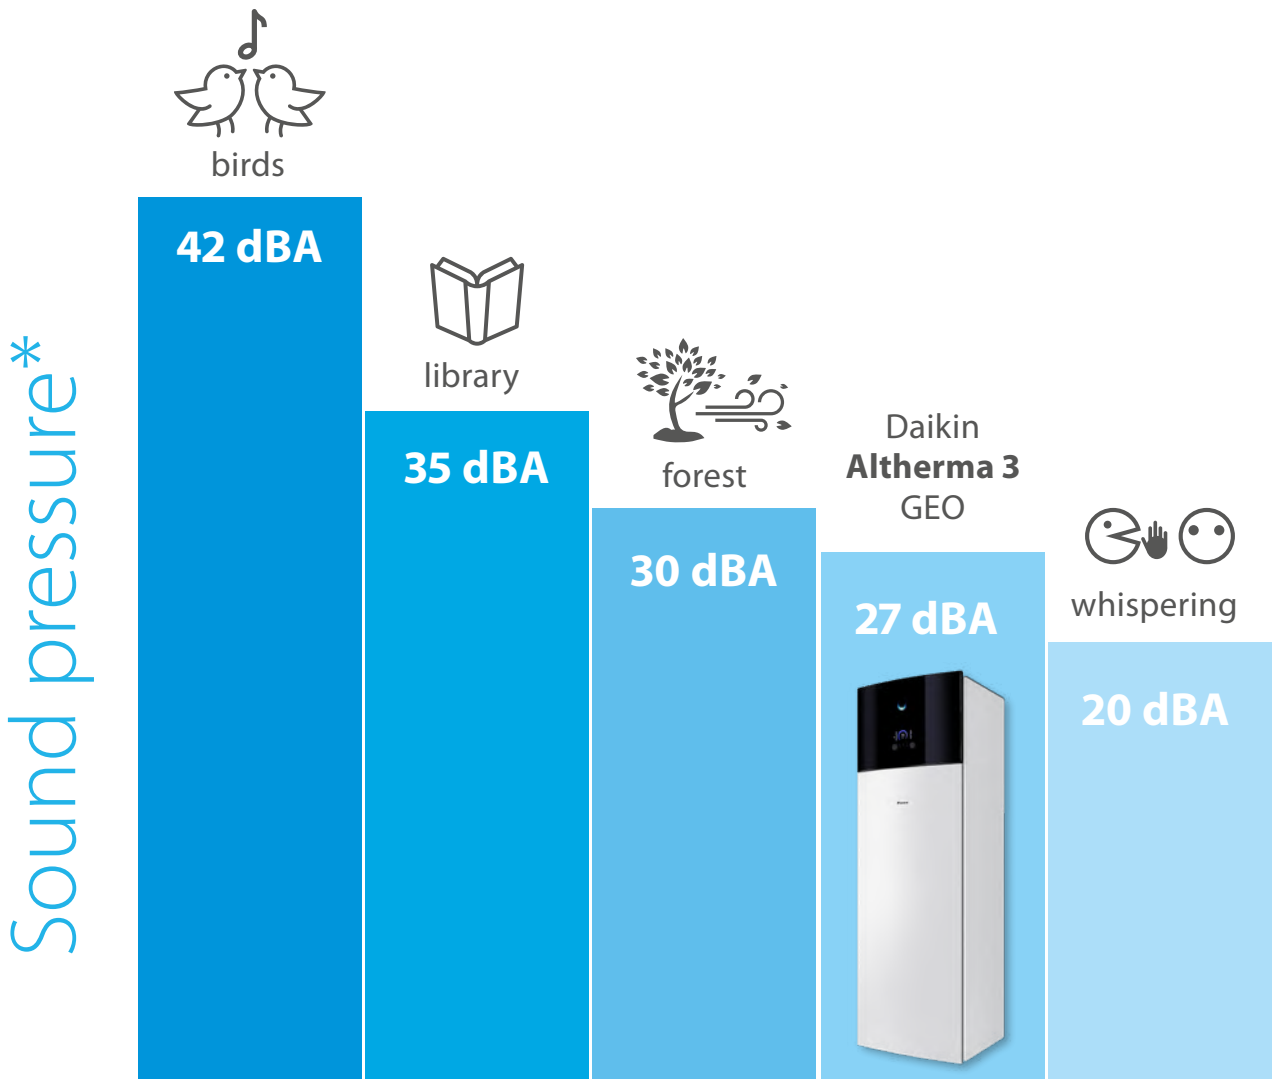

\*at 1 meter.



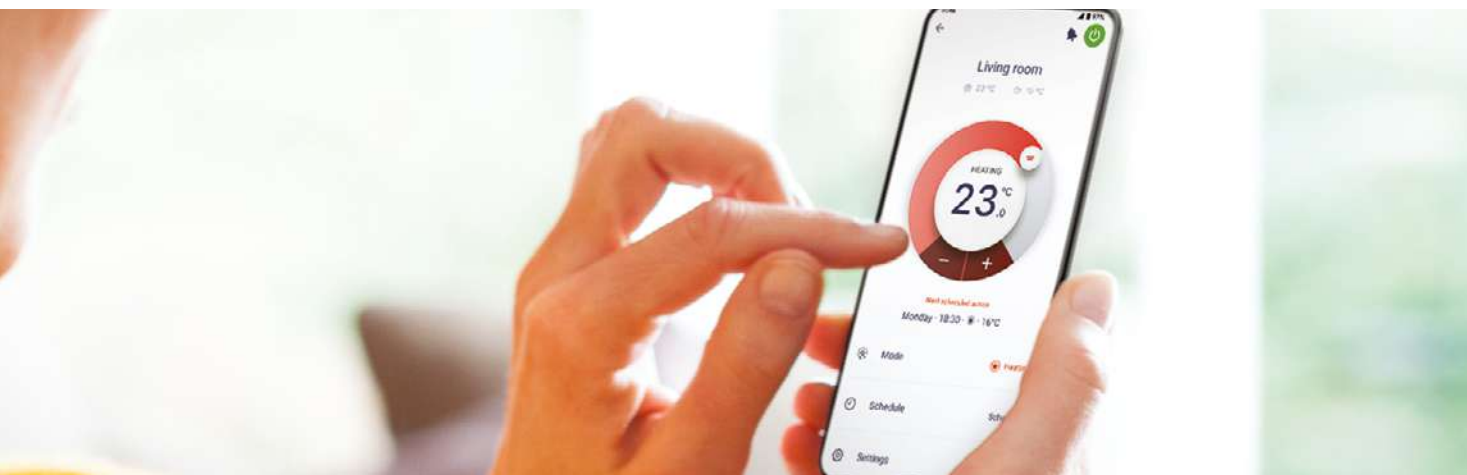


## Built-in connectivity

Control your home climate from any place, at any time



## Onecta App


Always in control. Control your climate from any place, at any time.



Control



Monitor



Schedule



Monitor the status of your heating system



Control the operation mode and set temperature



Schedule the set temperature and operation mode



Control your heating system with your voice

## Madoka wired remote controller for Daikin Altherma

A new generation of user interface, designed and intuitive.

- ✓ Intuitive control with a premium design
- ✓ Three colors to match any interior design
- ✓ Easily set operation parameters



BRC1HHDW



BRC1HHDS



BRC1HHDK



# Groundbreaking innovation

Quick and easy installation thanks to factory-fitted piping on top of the unit, pre-cabled electrical connections and reduced overall weight.

All pipe connections on top, paired in and out



Standard electrical connections pre-cabled



Can easily be installed in confined spaces thanks to a small footprint and integrated handles



# Advanced user interface

## The Daikin Eye

The intuitive Daikin eye shows you in real time the status of your system.



### Blue

When the Daikin Eye indicates a blue colour, it means the heat pump is functioning properly. The Daikin Eye will flash on and off when it's running on stand by mode.



### Red

When the Daikin Eye indicates a red colour, it means the heat pump is out of commission and requires a maintenance check.



## Quick to configure

Log in and you'll be able to completely configure the unit via the new user interface in 9 steps. You can even check if the unit is ready for use by running test cycles. You can upload the settings on a USB stick and download it directly into the unit.

## Easy operation

Work super-fast with the new user interface. It's easy to use with just a few buttons and 2 navigational knobs.

## Beautiful design

The user interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.



1,891 mm

597 mm

Removable compressor module, reducing the overall weight by 70 kg



# Daikin Altherma 3 GEO

Ground source heat pump for heating, cooling & hot water

- › Top-level seasonal efficiency thanks to our inverter heat pump technology providing the highest savings on running costs
- › Delivering temperatures up to 65 °C at high efficiency, the R-32 Daikin Altherma 3 GEO is suitable for underfloor heating/cooling, fan coils and radiators
- › Integrated indoor unit: all-in-one floor standing unit including the stainless steel domestic hot water tank saves space and installation time
- › The unit has a similar footprint when compared to other household appliances
- › Reversible heat pump, allowing heating and cooling



up to



011-1W0337  
011-1W0338

More details and final information can be found by scanning or clicking the QR codes.



EGSAH-D9W



EGSAX-D9W

Indoor Unit				EGSA	H06D9W	X06D9W	H10D9W	X10D9W	
Heating capacity	Min.						0.85		
	Nom.				3.35			5.49	
	Max.				7.98			9.55	
Power input	Nom.				0.74			1.17	
	COP				4.51			4.70	
Space heating	Average climate water outlet 55°C	General	ηs (Seasonal space heating efficiency)	%	141	143	152	154	
			Seasonal space heating eff. class		A++		A+++		
	Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency)	%	195	199	197	200	
			Seasonal space heating eff. class		A+++				
Domestic hot water heating	General	Declared load profile					L		
	Average climate	ηwh (water heating efficiency)		%			117		
		Water heating energy efficiency class					A+		
Space cooling	Medium temperature application	General	SEER		-	15	-	15	
			Pdesign	kW	-	8	-	8	
	Low temperature application	General	SEER		-	14	-	14	
			Pdesign	kW	-	8	-	8	
Casing	Colour	White or Silver-grey							
	Material	Precoated sheet metal							
Dimensions	Unit	HeightxWidthxDepth		mm	1,891x597x666				
Weight	Unit	kg							
Tank	Water volume		l						
	Insulation	Heat loss		kWh/24h	1.20				
	Corrosion protection		Pickling						
Operation range	Installation space		Min. ~ Max.		°C				
	Brine side		Min. ~ Max.		°C				
	Heating	Water side		Min. ~ Max.		°C			
		Domestic hot water		Min. ~ Max.		°C			
Refrigerant	Type		R-32						
	GWP		675						
	Charge		kg						
	Charge		TCO <sub>2</sub> Eq						
Sound power level	Nom.				39		41		
Sound pressure level at 1 meter	Nom.				27		29		
Power supply	Name/Phase/Frequency/Voltage				3 ~ /50/400 or 1 ~ /50/230				
Current	Recommended fuses				3P 16A or 1P 32A				

This product contains fluorinated greenhouse gases.

# Options

	Type	Material name
<b>Controls</b>	Remote user interface	BRCT1HHD/DAK/S/W
	Room thermostat (wired)	EKRTWA
	Room thermostat (wireless)	EKRTRB
	Cascade control	EKCC8-W
	Gateway	DCOM-LT/IO
<b>Adapter</b>	Demand PCB	EKRP1AHTA
	Digital I/O PCB	EKRP1HBAA
<b>Sensor</b>	Remote indoor sensor	KRCS01-1
	External sensor	EKRTETS
	Reduce power limitation sensor	EKCSSENS
<b>Others</b>	PC cable	EKPCCAB4
	Ground source filling kit	KGSFILL2
	Separate power supply BUH	EKGSPOWCAB
	Magnetic filter Fernox	K.FERNOXTF1
	Magnetic filter Fernox	K.FERNOXTF1FL

# Daikin Altherma

Hybrid heat pump



## Why choose a Daikin Altherma Hybrid heat pump?

The Daikin Altherma Hybrid heat pump is the ideal solution to replace your old gas boiler.


### Comfort

#### Heating

A Daikin Altherma Hybrid heat pump automatically determines the most economic and energy efficient heating combination.

- › **Heat pump operation:** the best available technology for optimising running costs at moderate outdoor temperatures
- › **Hybrid operation:** both the gas boiler and heat pump operate simultaneously to deliver the ultimate comfort for your customer
- › **Gas operation:** when outdoor temperatures drastically drop, the unit will automatically switch to gas operation mode


Illustration of an average European climate

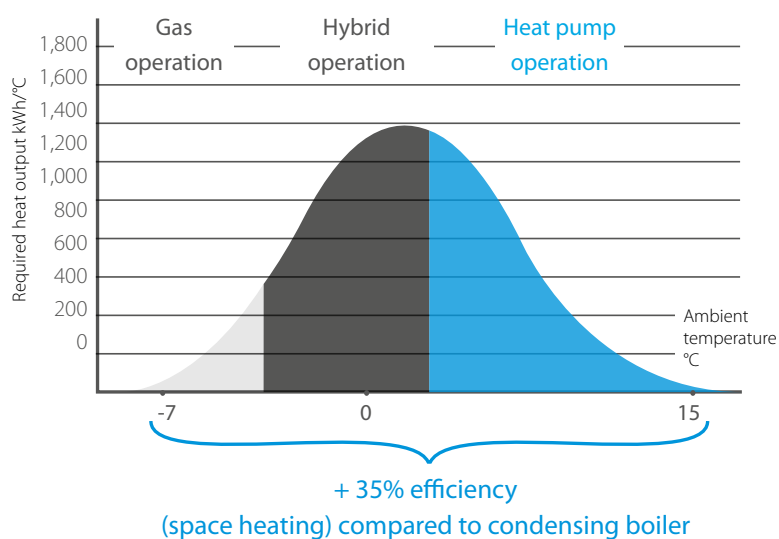

- › Heat load: 14 kW
- › 70% heat pump output
- › 30% gas boiler output

Heat load = the capacity of the space heating system required to maintain comfortable indoor temperatures at any time

Required heat output = heat load x n° of occurring hours per year

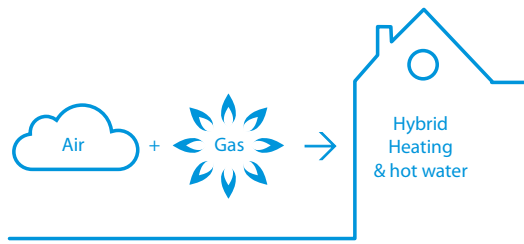

### Hot water

The gas condensing boiler's dual heat exchanger increases hot water efficiency by up to 15% when compared with traditional gas boilers.

### Cooling

Incorporate cooling for a total solution that provides all year round comfort.

### Quick and easy installation

As the heat pump indoor unit and gas condensing boiler are delivered as separate units, they are easier to handle, operate and install.

### Investment benefits

- › Combines with existing radiators; reducing the cost and disruption of installations
- › Coverage of heat loads up to 27 kW makes this unit ideal for renovation applications
- › Possible to connect to photovoltaic solar panels to optimise self-consumption of the electricity produced



## ✓ Energy efficiency

### The ideal combination

Depending on the outdoor temperature, energy prices and the internal heat load, the Daikin Altherma Hybrid heat pump smartly chooses between the heat pump and/or the gas boiler, possibly in simultaneous operation, and always selects the most economic operation mode.

### Supported by renewable energy

When working in heat pump mode, the system is powered by renewable energy extracted from the air and can achieve up to **A++ energy efficiency**.

### Hot water produced with gas condensing technology

Unique dual heat exchanger increases efficiency up to 15% compared to traditional gas boilers.

- › Cold tap water flows directly into the heat exchanger
- › Optimal and continuous condensing of the flue gases during domestic hot water preparation

## ✓ Reliability


- › Low investment cost with no need to replace existing piping and radiators
- › Low running costs for heating and domestic hot water
- › Compact dimensions
- › Ideal for renovation applications
- › Easy and fast installation



## Case study

Replacing a gas boiler with a Daikin Altherma Hybrid heat pump means saving on running costs for both space heating and domestic hot water supply.

A running costs comparison is made below based on parameters for a typical Belgian winter. As a result of the Hybrid principle, the most cost-efficient operation will be used no matter the ambient outdoor temperature.

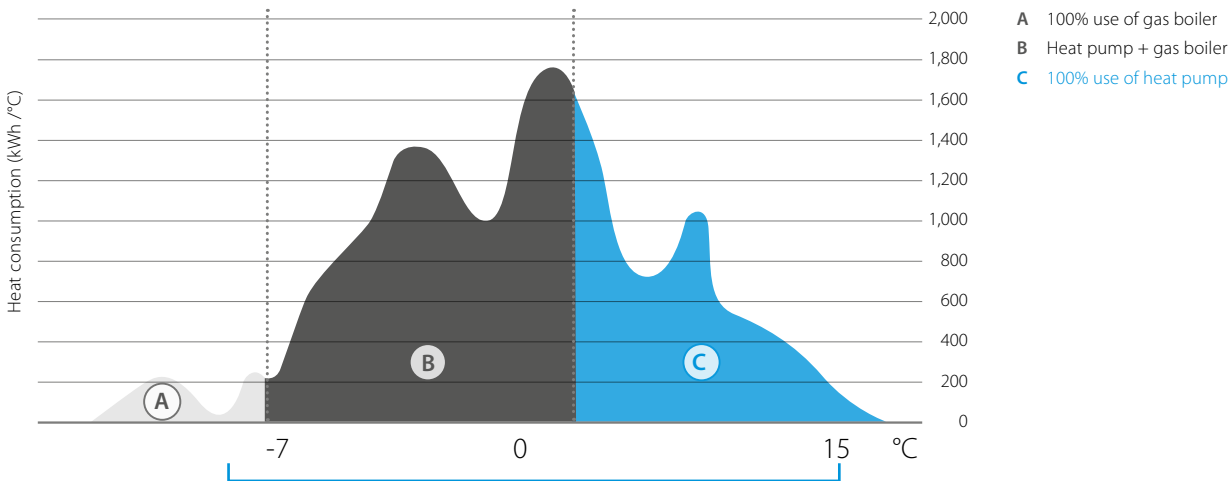

+35% efficiency (space heating) compared to existing condensing gas boiler

	Daikin altherma Hybrid heat pump	New gas condensing boiler	Existing gas condensing boiler
<b>Space heating</b>			
Energy supplied by HP	12,800 kWh		
HP efficiency	3.64 Scop		
Energy supplied by gas boiler	6,700 kWh	19,500 kWh	19,500 kWh
Space heating efficiency	90%	90%	75%
Running costs	1,220 €	1,520 €	1,820 €
<b>DHW HEATING</b>			
Energy supplied by gas boiler*	3,000 kWh	3,000 kWh	3,000 kWh
DHW heating efficiency*	90%	80%	65%
Running costs*	230 €	260 €	320 €
<b>TOTAL</b>			
Running costs	1,450 €	1,780 €	2,140 €

### Conditions

Heat load	16 kW
Design temperature	-8 °C
Space heating off temperature	16 °C
Maximum water temperature	60 °C
Minimum water temperature	38 °C
Gas price	0.070 €/kWh
Electricity price (day)	0.237 €/kWh
Electricity price (night)	0.152 €/kWh
Total space heating requirement	19,500 kWh
Total DHW heating requirement (4 persons)	3,000 kWh

\* for combi-boiler, no separate domestic hot water tank

→ Yearly savings:  
for space heating and domestic hot water

-19% versus new gas condensing boiler

330 €/year

-32% versus existing gas condensing boiler

690 €/year



# Daikin Altherma R Hybrid

Hybrid technology combining condensing gas and air to water heat pump for heating and hot water

- › Heating only + heating and cooling models
- › Depending on outdoor temperature, energy prices and internal heat load, Daikin Altherma Hybrid heat pump always selects the most economical mode to operate
- › Low investment cost: no need to replace the existing radiators (up to 80 °C) and pipe work
- › Provides sufficient heat in renovation applications as all heat loads are covered up to 32 kW
- › Easy and fast installation thanks to the compact dimensions and quick interconnections



011-1W0313  
011-1W0314



More details and final information can be found by scanning or clicking the QR codes.



Efficiency data				EHYHBH05AV32 + EVLQ05CV3	EHYHBH08AV32 + EVLQ08CV3	EHYHBX08AV3 + EVLQ08CV3
Space heating	Average climate water outlet 55 °C	General	SCOP	3.28	3.24	3.29
		Declared load profile	η <sub>s</sub> (Seasonal space heating efficiency)	128	127	129
Domestic hot water heating	Average climate	General	Declared load profile	A++		
		η <sub>wh</sub> (water heating efficiency)		XL		
		Nom.	Water heating energy efficiency class	A		
Cooling capacity	Nom.		kW	-	-	6.86 (1)/5.36 (2)
Power input	Heating	Nom.	kW	0.870 (1)/1.13 (2)	1.66 (1)/2.01 (2)	1.66 (1)/2.01 (2)
	Cooling	Nom.	kW	-	-	2.01 (1)/2.34 (2)
COP				5.04 (1)/3.58 (2)	4.45 (1)/3.42 (2)	4.45 (1)/3.42 (2)
EER				-	-	3.42 (1)/2.29 (2)

Indoor unit (Hydrobox & Boiler)				EHYHBH05AV32	EHYHBH08AV32	EHYHBX08AV3	EHYKOMB33AA2	EHYKOMB33AA3	
Central heating	Heat input Q <sub>n</sub> (net calorific value)	Nom	Min/Max	-				6.20/7.60/7.60/22.10/27/27	
	Output P <sub>h</sub> at 80/60 °C	Min/Nom		-				6.70/8.20/8.20/21.80/26.60/26.60	
	Efficiency	Net calorific value	%	-				98/107	
	Operation range	Min/Max	°C	-				15/80	
Domestic hot water	Output	Min/Nom		-				7.60/32.70	
	Water flow	Rate	Nom	-				9/15	
	Operation range	Min/Max	°C	-				40/65	
Gas	Connection	Diameter	mm	-				15	
	Consumption (G20)	Min/Max	m <sup>3</sup> /h	-				0.78/3.39	
	Consumption (G25)	Min/Max	m <sup>3</sup> /h	-				0.90/3.93	
	Consumption (G31)	Min/Max	m <sup>3</sup> /h	-				0.30/1.29	
Supply air	Connection		mm	-				100	
	Concentric			-				1	
Flue gas Casing	Connection		mm	-				60	
	Colour			White				White - RAL9010	
Dimensions	Material			Precoated sheet metal				Precoated sheet metal	
	Unit	HeightxWidthxDepth	Casing	902x450x164				710x450x240	
Weight	Unit	Empty	kg	30	31.20				
Power supply	Phase/Frequency/Voltage		Hz/V	-				1 ~ /50/230	
Electrical power consumption	Max.		W	-				55	
	Standby		W	-				2	
Operation range	Heating	Ambient	Min. ~ Max.	-25 ~ 25				-	
		Water side	Min. ~ Max.	25 ~ 55				-	
	Cooling	Ambient	Min. ~ Max.	°CDB				10 ~ 43	
		Water side	Min. ~ Max.	°C				5 ~ 22	

Outdoor unit				EVLQ05CV3	EVLQ08CV3
Dimensions	Unit	HeightxWidthxDepth	mm	735x832x307	
Weight	Unit		kg	54	56
Compressor	Quantity			1	
	Type			Hermetically sealed swing compressor	
Operation range	Heating	Min. ~ Max.	°CWB	-25 ~ 25	
				R-410A	
Refrigerant	Type			2,088	
	GWP			2,088	
	Charge		kg	1.50	1.60
	Charge		TCO <sub>2</sub> -Eq	3	3.30
Sound power level	Heating	Nom.	dBA	61	62
	Heating	Nom.	dBA	48	49
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1 ~ /50/230	
Current	Recommended fuses		A	16	20

(1) Ta DB/WB 7 °C/6 °C - LWC 35 °C (DT = 5 °C) (2) Condition: Ta DB/WB 7 °C/6 °C - LWC 45 °C (DT=5 °C) (3) Cooling Ta 35 °C - LWE 18 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 35 °C (DT = 5 °C). (4) Cooling Ta 35 °C - LWE 7 °C (DT = 5 °C); heating Ta DB/WB 7 °C/6 °C - LWC 45 °C (DT = 5 °C). This product contains fluorinated greenhouse gases.

# Daikin Altherma R Hybrid

+ multi



The Daikin Altherma Hybrid heat pump can also be combined with an air-to-air multi system to provide optimal cooling. Easily installed and managed via an app on a smartphone or tablet, the Daikin Altherma Hybrid heat pump + multi is an all-in-one system for heating, cooling and hot water purposes.

## → Multi features

- ✓ Equipped with Bluevolution technology
- ✓ 3, 4 and 5 ports for multi outdoor units
- ✓ Combinable with different Split & Sky Air indoor units:  
One port can be used for hot water production







Control with Onecta App



**BLUEvolution**



# Options

		Type	Material name	
Controllers		LAN adapter	BRP069A62	
		LAN adapter + PV solar connection	BRP069A61	
		Remote user interface (DE, FR, NL, IT)	EKRUCBL1	
		Remote user interface (EN, ES, EL, PT)	EKRUCBL3	
		Remote user interface (EN, SV, NO, FI)	EKRUCBL2	
		Remote user interface (EN, TR, PL, RO)	EKRUCBL4	
		Remote user interface (DE, CS, SL, SK)	EKRUCBL5	
		Remote user interface (EN, HR, HU, BG)	EKRUCBL6	
		Remote user interface (EN, DE, RU, DA)	EKRUCBL7	
		Simplified user interface	EKRUCBSB	
		Room thermostat (wired)	EKRTWA	
			Room thermostat (wireless)	EKRTRB
			Heat meter (EHYHBH* only)	K.HEATMET
			DCOM gateway	DCOM-LT/IO
				DCOM gateway
Drain		Drain pan for reversible H/B	EKHYDP1	
Installation		Cover plate 35	EKHY093467	
		Installation jig	EKHYMNT1	
Sensor		External sensor	EKRTETS	
Valve		Valve kit for connection to 3rd party tank with built-in thermostat	EKHY3PART2	
		Valve kit for connection to 3rd party tank with sensor pocket	EKHY3PART	
Propane set		Propane set	EKHY075787	

Type	Material name
Adapter Flex-Fixed PP 100	EKFGP6316
Adapter Flex-Fixed PP 130	EKFGS0252
Chimney Connection 60/100	EKFGP4678
Chimney Connection 60/100	EKFGP4678
Chimney Connection 80/125	EKFGP4828
Chimney Connection 60/10 Air Intake Dn. 80 C83	EKFGV1101
Chimney Top PP 100 incl. Flue Pipe	EKFGP5497
Chimney Top PP 130 incl. Flue Pipe	EKFGP5197
Concentric connection Ø 80/125	EKHY090717
Connector Flex-Flex PP 100	EKFGP6325
Connector Flex-Flex PP 130	EKFGP6366
Connector Flex-Flex PP 80	EKFGP6324
Connection set 60/10-60 Flue/Air intake Dn. 80 C53	EKFGV1102
Eccentric connection Ø 80	EKHY090707
Elbow PP/ALU 80/125 90°	EKFGP4810
Elbow PP/GLV 60/100 30°	EKFGP4664
Elbow PP/GLV 60/100 45°	EKFGP4661
Elbow PP/GLV 60/100 90°	EKFGP4660
Elbow PP/GLV 80/125 30°	EKFGP4814
Elbow PP MB-AIR 80 90°	EKFGW4085
Elbow PP BM-AIR 80 45°	EKFGW4086
Extension Flex PP 100 l=10 M	EKFGP6346
Extension Flex PP 100 l=15 M	EKFGP6349
Extension Flex PP 100 l=25 M	EKFGP6347
Extension Flex PP 130 l=30 M	EKFGS0250
Extension Flex PP 80 l=10 M	EKFGP6340
Extension Flex PP 80 l=15 M	EKFGP6344
Extension Flex PP 80 l=25 M	EKFGP6341
Extension Flex PP 80 l=50 M	EKFGP6342
Extension PP 60 x 500	EKFGP5461
Extension PP/GLV 60/100 x 1,000 mm	EKFGP4652
Extension PP/GLV 60/100 x 500 mm	EKFGP4651
Extension PP/GLV 80/125 x 10,000 mm	EKFGP4802
Extension PP/GLV 80/125 x 500 mm	EKFGP4801
Extension P BM-Air 80 x 500	EKFGW4001
Extension P BM-Air 80 x 1,000	EKFGW4002
Extension P BM-Air 80 x 2,000	EKFGW4004
Filling loop set	EKFL1AA
Flex 100-60 + Support Elbow	EKFGP6354
Flex 130-60 + Support Elbow	EKFGS0257
Flex Kit PP Dn.60-80	EKFGP1856
Flex Kit PP Dn.8	EKFGP2520
Flue Deflector 60 (UK Only)	EKFGP1295
Flue gas non-return flap	EKFGF1A
Gas conversion kit from G20 to G25	EKPS076227
Inspection Elbow Plus PP/ALU 80/125 90° EPDM	EKFGP4820
Meas. Tee with Inspection Panel PP/GLV 60/100	EKFGP4667
Plume Management Kit 60 (UK Only)	EKFGP1294
PMK Elbow 60 45° (2 pcs) (UK Only)	EKFGP1285
PMK Elbow 60 90° (UK Only)	EKFGP1284
PMK Extension 60 l=1,000 incl. breaket (UK Only)	EKFGP1286
Roof Terminal PP/GLV 60/100 AR460	EKFGP6837
Roof Terminal PP/GLV 80/125 AR300 Ral-9011	EKFGP6864
Spacer PP 80-100	EKFGP6333
Support Breaket Top Inox Dn.100	EKFGP6337
Support Breaket Top Inox Dn.130	EKFGP6353
Tee Flex 100 Boiler Connection set 1	EKFGP6368
Tee Flex 130 Boiler Connection set 1	EKFGP6215
Thermistor recirculator	EKTH2
Wall Bracket Dn.100	EKFGP4481
Wall Bracket Dn.100	EKFGP4631
Wall Terminal Kit low profile PP/GLV 60/100	EKFGP1293
Wall Terminal Kit low profile PP/GLV 60/100	EKFGP2977
Wall Terminal Kit PP/GLV 60/100	EKFGP2978
Wall Terminal Kit PP/GLV 60/100	EKFGP1292
Wall Terminal Kit PP/GLV 80/125	EKFGW6359
Wall Terminal Kit low profile PP/GLV 60/100 (UK only)	EKFGP1299
Weather Slate Flat Alu 60/100	EKFGP6940
Weather Slate Flat Alu 60/100 0°-15°	EKFGP1296
Weather Slate Flat Alu 80/125	EKFGW5333
Weather Slate Flat Alu 80/125 0°-15°	EKFGP1297
Weather Slate Steep Pb/GLV 60/100 18°-22°	EKFGS0518
Weather Slate Steep Pb/GLV 60/100 23°-27°	EKFGS0519
Weather Slate Steep Pb/GLV 60/100 43°-47°	EKFGS0523
Weather Slate Steep Pb/GLV 60/100 48°-52°	EKFGS0524
Weather Slate Steep Pb/GLV 60/100 53°-57°	EKFGS0525
Weather Slate Steep Pb/GLV 80/125 18°-22°	EKFGT6300
Weather Slate Steep Pb/GLV 80/125 23°-27°	EKFGT6301
Weather Slate Steep Pb/GLV 80/125 43°-47°	EKFGT6305
Weather Slate Steep Pb/GLV 80/125 48°-52°	EKFGT6306
Weather Slate Steep Pb/GLV 80/125 53°-57°	EKFGT6307
Weather Slate Steep PF 60/100 25°-45°	EKFGP7910
Weather Slate Steep PF 80/125 25°-45° Ral-9011	EKFGP7909
Elbow PP 60/100 90° + MP Generic	DR90ELBO60100AA
Wall term Mugro STD 60/100 Telescopic	DRWTER60100AA

Flue gas connections



# Daikin Altherma H Hybrid

The best of 2 worlds

## Heat pump



H<sub>2</sub>O

## Condensing boiler



### Environmentally friendly

- › Reduced environmental impact thanks to the usage of **R-32 refrigerant**
- › Outdoor unit with **sealed refrigerant circuit**, which greatly reduces the risk of refrigerant leakage



### Easy & Quick installation

All hydraulics components are outside.



### No F-gas licence required

Only water connections between outdoor and indoor unit. Therefore no F-gas certification is needed for the installer.

### Safety in every conditions

The unit can work down to -15 °C outside thanks to multiple freeze-up protections




### Flexible installation

Compact indoor unit can be installed in a cupboard.



### Condensing technology

The condensing technology uses optimum fuel efficiency, with reduced emissions of NOx and CO, to ensure high cost savings and environmentally-friendly operation.



### Plug & play


No need of other parts, the pump group is integrated inside.

## BLUEEVOLUTION

The Bluevolution technology combines very high efficient compressors developed by Daikin with the future of refrigerants: R-32.

# Installation possibilities

The Daikin Altherma H Hybrid is made of an outdoor unit of 4 kW

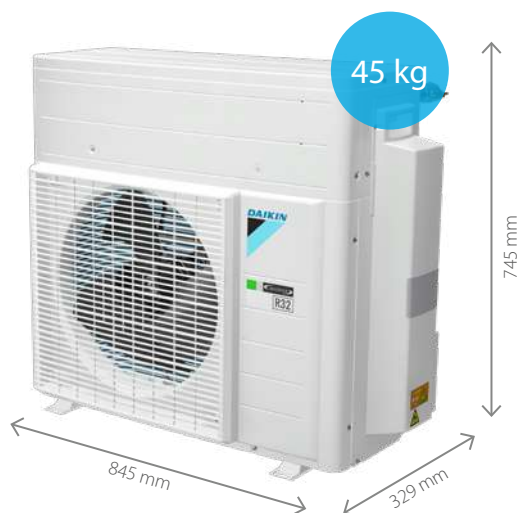

The Daikin Altherma H Hybrid is made of a boiler of 28 or 32 kW



**For more domestic hot water production, you can combine the Daikin Altherma H Hybrid with multiple tank options:**

## Pressureless tanks with solar support

Connect your unit to a ECH<sub>2</sub>O thermal store and take advantage of the energy of the sun.



## Pressurized tanks

Connect your unit with our full range of stainless steel tanks to answer all needs.



# Controllers

## EKRUHML1/2

### Control

- › Manage space heating and domestic hot water and among others, booster mode
- › User-friendly remote control with contemporary design
- › Easy to use with direct accessibility to all main functions

### Comfort

- › An additional user interface can include a room thermostat in the space to be heated
- › Easy commissioning: intuitive interface for advanced menu settings



## Onecta App

The Onecta App is a multifaceted programme that allows customers to control and monitor the status of their heating system.


Control your heating system with your voice



# Applications


## 1. Standard Hybrid operation

With this application, the system works in a perfect balance between the gas boiler and the heat pump to provide space heating and domestic hot water. Here, the boiler is able to heat directly the water without a tank.

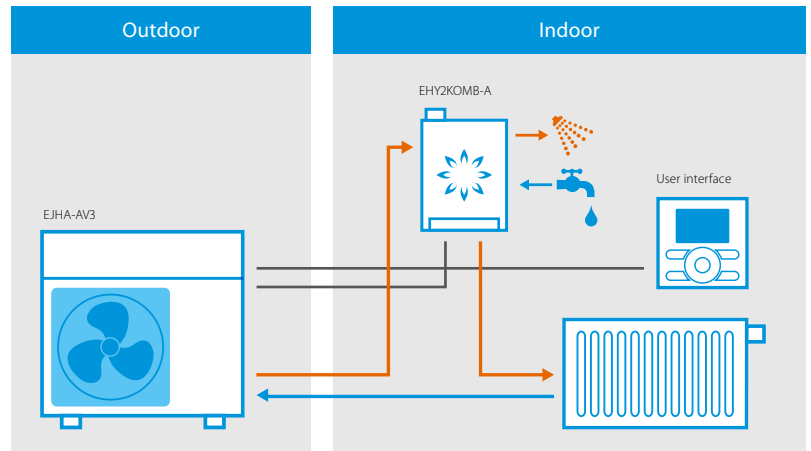


### 1.1 Standard Hybrid operation with a tank

In this application, a domestic hot water tank can be added if the system needs to provide high quantity of domestic hot water produced either by the heat pump or by the boiler.

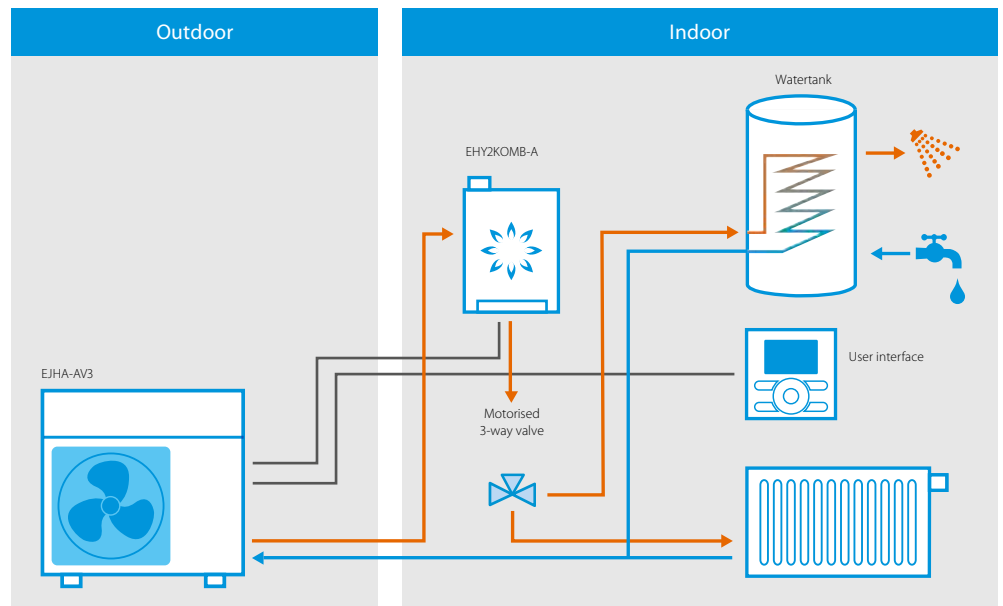

## 2. Add-on operation

Daikin Altherma H Hybrid outdoor unit can be combined with an existing boiler. In such application, the system works in bivalent operation, meaning that this is strictly the heat pump or the boiler that is providing the required heat while in the standard applications, both can work at the same time.

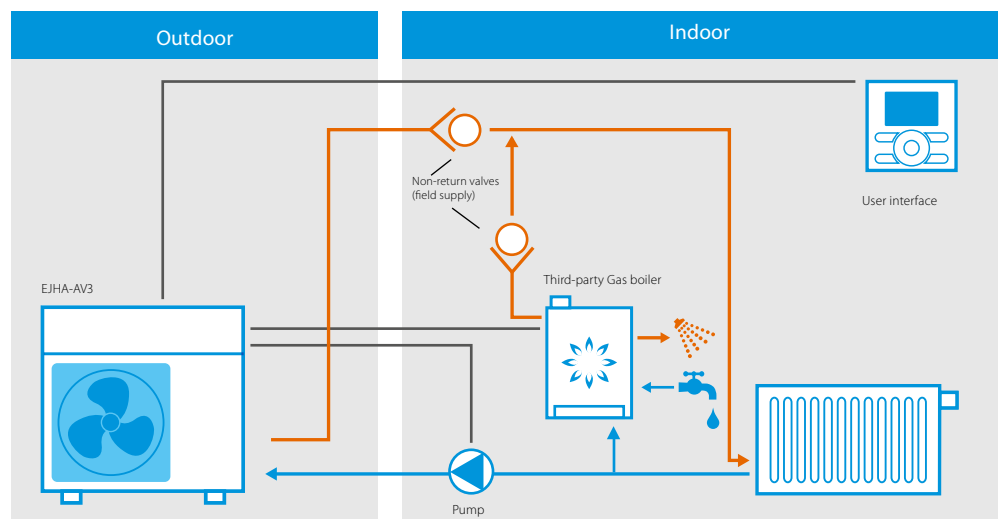



# Daikin Altherma H Hybrid

Hybrid technology combining condensing gas and air to water heat pump for **heating and hot water**

- › Heating only models
- › Depending on outdoor temperature, energy prices and internal heat load, the Daikin Altherma H Hybrid always selects the most economical mode to operate
- › Low investment cost: no need to replace the existing radiators (up to 80 °C) and pipe work
- › Provides sufficient heat in renovation applications as all heat loads are covered up to 32 kW
- › Easy and fast installation thanks to the compact dimensions and water connections



More details and final information can be found by scanning or clicking the QR codes.



EHY2KOMB-A












EJHA-AV3



Efficiency data				EHY2KOMB28AA + EJHA04AAV3		EHY2KOMB32AA + EJHA04AAV3		
Heating capacity	Nom.		kW			3.83 (1)		
Power input	Heating	Nom.	kW			0.85 (1)		
COP						4.49 (1)		
Space heating	Average climate water outlet 55 °C	General	SCOP	3.26		3.28		
			ηs (Seasonal space heating efficiency)			128		
	Seasonal space heating eff. class					A++		
	Average climate water outlet 35 °C	General	SCOP	4.14		4.15		
ηs (Seasonal space heating efficiency)					163			
Seasonal space heating eff. class					A++			
Domestic hot water heating	General	Declared load profile				XL		
	Average climate	ηwh (water heating efficiency)				87		
		Water heating energy efficiency class				A		
Indoor unit				EHY2KOMB28AA		EHY2KOMB32AA		
Central heating	Heat input Qn (net calorific value)	Nom	Min/Max	7.10/23.70		7.60/27		
	Output Pn at 80/60 °C	Nom		23.10		26.60		
	Efficiency	Net calorific value 80/60		98		99		
	Efficiency	Net calorific value 37/30 (30%)				108		
	Operation range	Min/Max				30/90		
Domestic hot water	Output	Min/Nom		7.10/29.10		7.60/32.70		
	Water flow	Rate 40/10 °C		12.50		15		
	Operation range	Min/Max				40/65		
Gas	Connection	Diameter		15				
	Consumption (G20)	Min/Max		0.74/3.02		0.79/3.39		
	Consumption (G31)	Min/Max		0.28/1.15		0.30/1.29		
Supply air	Connection			100				
	Concentric			1				
Flue gas	Connection		mm		60			
Casing	Colour				White - RAL9010			
	Material				Precoated sheet metal			
Dimensions	Unit	HxWxD	Casing	mm		650x450x240		
Weight	Unit	Empty		kg		33		
Power supply	Phase/Frequency/Voltage			Hz/V		1 ~ /50/230		
Electrical power consumption	Max.			W		110		
	Standby			W		2		
Outdoor unit				EJHA04AAV3				
Dimensions	Unit	HxWxD		mm		745x845x329		
Weight	Unit		kg		45			
	Quantity				1			
Compressor	Type				Hermetically sealed swing compressor			
	Operation range		Heating		Min. ~ Max.		°CWB	
Refrigerant	Type				-14 ~ 25		R-32	
	GWP				675			
	Charge		kg		0.56			
	Charge		TCO <sub>2</sub> Eq		0.38			
	Sound power level		Heating		Nom.		dB(A)	
Sound pressure level		Heating		Nom.		dB(A)		
Power supply	Name/Phase/Frequency/Voltage			Hz/V		V3/1 ~ /50/220-240		
Current	Recommended fuses			A		20		

(1) Ta DB/WB 7 °C/6 °C - LWC 35 °C (DT = 5 °C).  
This product contains fluorinated greenhouse gases.

# Options - system












Group	Description	Material name	Pair Hybrid	Add-on Hybrid
Controllers	 User interface: English – Dutch – Italian – French	EKRUHML1	•	•
	User interface: English – Dutch – Italian – German	EKRUHML2	•	•
	 Gateway 1: I/O version	DCOM-LT/IO <sup>(2)</sup>	•	•
	 Gateway 2: Modbus version	DCOM-LT/MB <sup>(2)</sup>	•	•
	 LAN + PV Solar	BRP069A61	•	•
	LAN only	BRP069A62	•	•
	 Wired room thermostat	EKRTWA	•	
	 Wireless room thermostat	EKRTRB	•	
	 External room sensor	EKRTETS <sup>(4)</sup>	•	
	<b>Sensor</b>	Remote outdoor sensor	EKRSCA1 <sup>(3)</sup>	•
Other	 Thermistor kit for pressurised tanks & 3rd party tank	EKTH3	•	
	Bottom plate heater (dedicated type)	EKBPH04JH	•	•
	Ball valves	EKBALLV1	•	•
	Add-on: pump	EKADDONJH		•
	Add-on: cable + 2 non-return valves	EKADDONJH2		•
	PC USB cable	EKPCCAB(4)	•	
	 Connection kit for 3 <sup>rd</sup> party tank	EKHY3PART	•	
	Connection kit for pressureless tank	EKEPHYHT35H	•	
	Freeze protection valve for field piping	AFVALVEHY2	•	•

(2) Compatible with EKRUHML user interface.

(3) Only 1 sensor can be connected: indoor OR outdoor sensor.

(4) Can only be used in combination with the wireless room thermostat EKRTRB.

# Options - boiler

Accessory		Sales region	Material name			
Boiler options		IT, ES, CZ, GR, PL, PT	EKFJM1A	•		
		IT, ES, CZ, GR, PL, PT	EKFJL1A		•	
		FR, BE	EKFJM2A	•		
		FR, BE	EKFJL2A		•	
		DE	EKFJM6A	•		
		DE	EKFJL6A		•	
		IT, ES, CZ, GR, PL, PT	EKVK4A	•	•	
		DE	EKVK6A	•	•	
	Filling loop set		All	EKFL1A	•	•
	Solar water heater connection set (cable + probe sensor)		All	EKSH1A	•	•
Concentric connection Ø 80/125		All	EKH-Y090717	•	•	
Eccentric connection Ø 80		All	EKH-Y090707	•	•	
Dongle set (wireless connection from PC to boiler)		All	EKDS1A	•	•	
Cover plates		All	EKCP1A	•	•	
		All	EKH-Y093467 <sup>(1)</sup>	•	•	
Propane sets (G31)		All	EKH-Y075787		•	
		All	EKPS075867	•		
Conversion kits (G25)		DE, BE, FR	EKPS076217	•		
		DE, BE, FR	EKPS076227		•	

(1) Cannot be used in combination with B-packs.

Type	Material name
Adapter Flex-Fixed PP 100	EKFGP6316
Adapter Flex-Fixed PP 130	EKFGS0252
Chimney Connection 60/100	EKFGP4678
Chimney Connection 60/100	EKFGP4678
Chimney Connection 80/125	EKFGP4828
Chimney Connection 60/10 Air Intake Dn. 80 C83	EKFGV1101
Chimney Top PP 100 incl. Flue Pipe	EKFGP5497
Chimney Top PP 130 incl. Flue Pipe	EKFGP5197
Concentric connection Ø 80/125	EKH-Y090717
Connector Flex-Flex PP 100	EKFGP6325
Connector Flex-Flex PP 130	EKFGP6366
Connector Flex-Flex PP 80	EKFGP6324
Connection set 60/10-60 Flue/Air intake Dn. 80 C53	EKFGV1102
Eccentric connection Ø 80	EKH-Y090707
Elbow PP/ALU 80/125 90°	EKFGP4810
Elbow PP/GLV 60/100 30°	EKFGP4664
Elbow PP/GLV 60/100 45°	EKFGP4661
Elbow PP/GLV 60/100 90°	EKFGP4660
Elbow PP/GLV 80/125 30°	EKFGP4814
Elbow PP MB-AIR 80 90°	EKFGW4085
Elbow PP BM-AIR 80 45°	EKFGW4086
Extension Flex PP 100 l=10 M	EKFGP6346
Extension Flex PP 100 l=15 M	EKFGP6349
Extension Flex PP 100 l=25 M	EKFGP6347
Extension Flex PP 130 l=30 M	EKFGS0250
Extension Flex PP 80 l=10 M	EKFGP6340
Extension Flex PP 80 l=15 M	EKFGP6344
Extension Flex PP 80 l=25 M	EKFGP6341
Extension Flex PP 80 l=50 M	EKFGP6342
Extension PP 60 x 500	EKFGP5461
Extension PP/GLV 60/100 x 1,000 mm	EKFGP4652
Extension PP/GLV 60/100 x 500 mm	EKFGP4651
Extension PP/GLV 80/125 x 10,000 mm	EKFGP4802
Extension PP/GLV 80/125 x 500 mm	EKFGP4801
Extension P BM-Air 80 x 500	EKFGW4001
Extension P BM-Air 80 x 1,000	EKFGW4002
Extension P BM-Air 80 x 2,000	EKFGW4004
Filling loop set	EKFL1AA
Flex 100-60 + Support Elbow	EKFGP6354
Flex 130-60 + Support Elbow	EKFGS0257
Flex Kit PP Dn.60-80	EKFGP1856
Flex Kit PP Dn.8	EKFGP2520
Flue Deflector 60 (UK Only)	EKFGP1295
Flue gas non-return flap	EKFGF1A
Gas conversion kit from G20 to G25	EKPS076227

Flue gas connections

Type	Material name
Inspection Elbow Plus PP/ALU 80/125 90° EPDM	EKFGP4820
Meas. Tee with Inspection Panel PP/GLV 60/100	EKFGP4667
Plume Managment Kit 60 (UK Only)	EKFGP1294
PMK Elbow 60 45° (2 pcs) (UK Only)	EKFGP1285
PMK Elbow 60 90° (UK Only)	EKFGP1284
PMK Extension 60 l=1,000 incl. breaket (UK Only)	EKFGP1286
Roof Terminal PP/GLV 60/100 AR460	EKFGP6837
Roof Terminal PP/GLV 80/125 AR300 Ral-9011	EKFGP6864
Spacer PP 80-100	EKFGP6333
Support Breaket Top Inox Dn.100	EKFGP6337
Support Breaket Top Inox Dn.130	EKFGP6353
Tee Flex 100 Boiler Connection set 1	EKFGP6368
Tee Flex 130 Boiler Connection set 1	EKFGP6215
Thermistor recirculator	EK TH2
Wall Bracket Dn.100	EKFGP4481
Wall Bracket Dn.100	EKFGP4631
Wall Terminal Kit low profile PP/GLV 60/100	EKFGP1293
Wall Terminal Kit low profile PP/GLV 60/100	EKFGP297 7
Wall Terminal Kit PP/GLV 60/100	EKFGP2978
Wall Terminal Kit PP/GLV 60/100	EKFGP1292
Wall Terminal Kit PP/GLV 80/125	EKFGW6359
Wall Terminal Kit low profile PP/GLV 60/100 (UK only)	EKFGP1299
Weather Slate Flat Alu 60/100	EKFGP6940
Weather Slate Flat Alu 60/100 0°-15°	EKFGP1296
Weather Slate Flat Alu 80/125	EKFGW5333
Weather Slate Flat Alu 80/125 0°-15°	EKFGP1297
Weather Slate Steep Pb/GLV 60/100 18°-22°	EKFGS0518
Weather Slate Steep Pb/GLV 60/100 23°-27°	EKFGS0519
Weather Slate Steep Pb/GLV 60/100 43°-47°	EKFGS0523
Weather Slate Steep Pb/GLV 60/100 48°-52°	EKFGS0524
Weather Slate Steep Pb/GLV 60/100 53°-57°	EKFGS0525
Weather Slate Steep Pb/GLV 80/125 18°-22°	EKFGT6300
Weather Slate Steep Pb/GLV 80/125 23°-27°	EKFGT6301
Weather Slate Steep Pb/GLV 80/125 43°-47°	EKFGT6305
Weather Slate Steep Pb/GLV 80/125 48°-52°	EKFGT6306
Weather Slate Steep Pb/GLV 80/125 53°-57°	EKFGT6307
Weather Slate Steep PF 60/100 25°-45°	EKFGP7910
Weather Slate Steep PF 80/125 25°-45° Ral-9011	EKFGP7909
Elbow PP 60/100 90° + MP Generic	DR90ELBO60100AA
Wall term Mugro STD 60/100 Telescopic	DRWTERT60100AA

Flue gas connections

# Boilers

Condensing boilers	236
Gas condensing boilers	238
Daikin Altherma 3 C Gas (D2C/TND*)	238
Daikin Altherma 3 C Gas (D2CNL)	244
Daikin Altherma C Gas W	246
Flue-gas evacuation system	248



# Condensing boilers

## Why choose a condensing boiler?

Daikin's gas or oil condensing boilers are the best option for individual that plan to replace an existing boiler with a more energy efficient and cost-saving alternative. Our wall mounted boilers provide end users with reliable performance and efficient heating and hot water.

### ✓ Comfort

Daikin's gas condensing boilers deliver the ultimate in comfort. Optimal heating ensures seamless operation to deliver reliable year-round heating, even in extreme weather conditions. Instant hot water is possible with our combi range, but also possible with a separate thermal store featuring the ECH<sub>2</sub>O tank.

### ✓ Energy efficiency

#### Condensing technology

Using latent heat in the flue gas, our condensing technology achieves 109% more energy efficiency by using renewable energy to produce hot water.

#### Condensing technology

Premix Technology incorporates a modulation fan to perfectly combine combustion air and fuel before it reaches the burner (air/gas mixer), to ensure a high efficiency combustion.

With the combustion of 1 m<sup>3</sup> natural gas, 1.7 kg of water vapour is released in the flue gas as latent heat. Instead of being disposed through the flue, the water vapour containing latent heat is then recirculated, and subsequently reheated by a uniquely designed exchanger.


Condensation forms as a result of the water vapour being cooled to a temperature just below dew point, and subsequently drained via a siphon. The condensing technology uses optimum fuel efficiency, with reduced emissions of NO<sub>x</sub> and CO, to ensure high cost savings and environmentally-friendly operation.



## ✓ Flexibility

### Easy installation and service

All parts are accessible from the front and are low maintenance. The flue gas installation can be adapted to all kinds of configuration thanks to its flexibility.

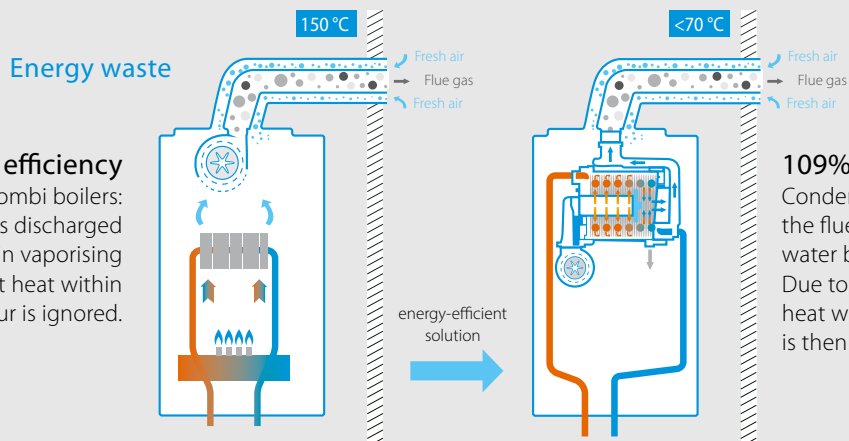

### 93% efficiency

Conventional combi boilers: Water vapour is discharged through the flue in vaporising phase and latent heat within the water vapour is ignored.

### 109% efficiency

Condensing combi boilers: the flue gas collides with influent water before being discharged. Due to this occurrence, latent heat within the water vapour is then released.

# Daikin Altherma 3 C Gas (D2C/TND\*)

Wall mounted gas condensing boiler

## Why choose the Daikin gas condensing boiler?

### Low weight

27 kg

### Connectivity/Cloud Service

Always in control, no matter where you are.

### Easy installation and service

All parts are accessible from the front. The gas-adaptive combustion system (Lambda Gx) means lower maintenance and installation time in a minimalist space. The Lambda Gx is compatible with wall mounted and floor standing units.

### Solar thermal connection

Usable in combination with solar thermal store (renewable energy)

- › Combi boiler: solar preheating
- › Heating only boiler: solar controller input



### Flexible in use

Thanks to IPX5D standard and its compact dimensions, it's possible to install in nearly all room conditions, such as kitchen cupboards, bathroom, utility room, heating room, balcony (in-wall kit).

### Modulation 1:8

Capacity adapts to required heat of 4 to 28 kW and 5 to 35 kW.

### Daikin eye

Monitor the operating status of your combi boiler with the Daikin Eye.

### Unique interface


- › Stylish interface appeals to all end-users
- › State-of-the-art technology meets user-friendly design
- › The side details and convex front panel deliver an integrated view

### Most compact

12, 18, 24 kW: 400 x 255 x 580 mm  
28, 35 kW: 450 x 288 x 666 mm

## ✓ High modulation rate

The opportunity to adjust the burner power ensures the seamless and continuous operation of the device. Smooth functioning of the system means increased comfort, a low risk for system failure and the ability to neutralise harmful substance emissions that may occur during ignition. Modulation is also automatically provided by the electronic control.

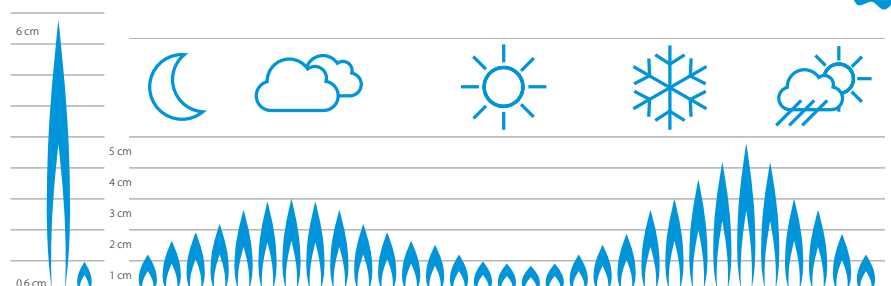






## ✓ Lambda Gx: automatic gas adaptation system

With the Lambda GX, the correct combination of air and gas is regulated to achieve efficient combustion, which leads to higher cost savings and less installation and adjustment effort. With Lambda Gx, you have the advantage that you need no other parts like a gas cover to change from natural gas (NG) to liquid gas (LPG).

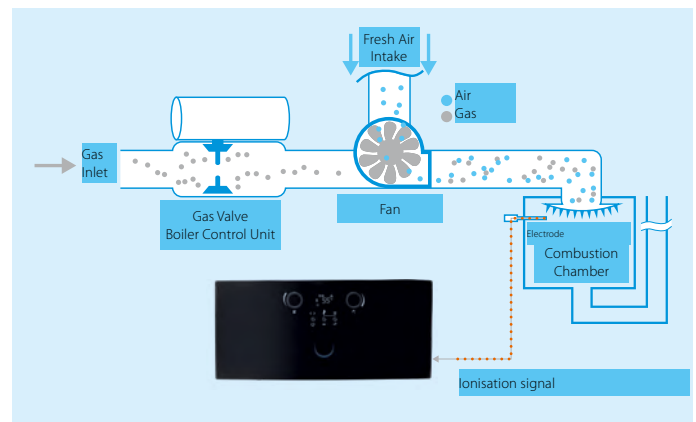

## ✓ Daikin Eye

You can monitor the operating status of your combi boiler with the Daikin Eye.

**Blue**

When the Daikin Eye indicates a blue colour, it means the boiler is functioning properly. The Daikin Eye will flash on and off when it's running on stand by mode.

**Red**

When the Daikin Eye indicates a red colour, it means the boiler is out of commission and requires a maintenance check.

## ✓ Product features

### Flue Adapter 60/100

- › Factory mounted
- › Compatible with top adapters/elbows of different flue gas manufacturers
- › With measurement holes for air and flue gas

### Heat Exchanger

- › Daikin design
- › Material: Aluminium
- › Modulation:  
12-18-24 kW (1:4 - 1:6 - 1:8)  
28-35 kW (1:4 - 1:7)

### Expansion Vessel

- › Integrated
- › 12-18-24 kW: 8 liters  
28-35 kW: 10 liters

### Gas Valve

- › Less maintenance needed
- › Automatic gas adaptive system
- › No additional parts/tools for changing from NG to LPG

### Domestic Hot Water Plate Heat Exchanger

Increased number of plates to provide

faster hot water production at high efficiency including warm start function.

### Pump & Return Hydroblock

- › Includes filter and flow restrictor
- › Air vent, drain tap and Internal bypass
- › Low energy pump

### Fan

- › Wide modulation range
- › Low noise

## ✓ Small gas condensing combi boiler

Heating only: 12-18 kW  
Combi: 24 kW

Combi: 28-35 kW

Occupies only  
**0.06 m<sup>3</sup>**

**27 kg**

**37 kg**

590 mm

690 mm

256 mm

400 mm

295 mm


440 mm



reddot award 2018  
winner


### Easy installation & maintenance

The small and lightweight combi boiler guarantees fast installation, minimal maintenance and a flexible system to adapt to various rooms.

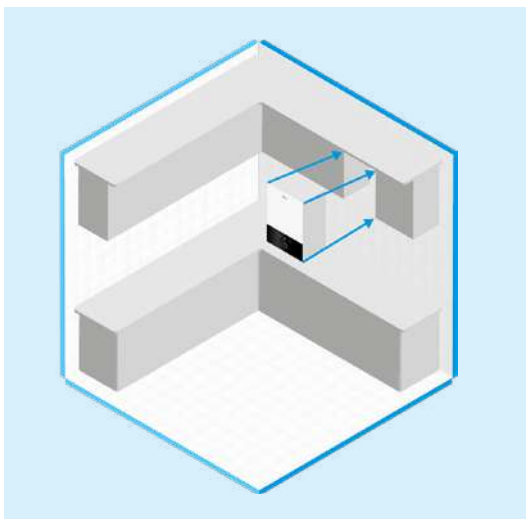

### High energy class


Energy Class A adheres to European ERP Standards.

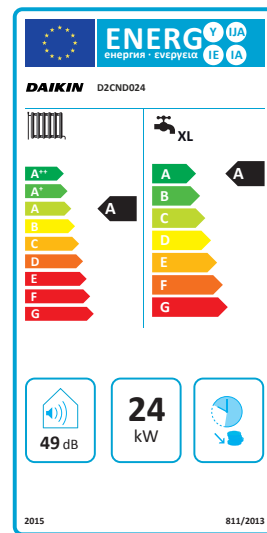

### Silence

Sound power: 49 db(A): The sound power is the sound level heard when you are close to the unit. The sound level is similar to a dishwasher operating in an adjacent room.

Sound Pressure: 39 db(A): The sound pressure is the sound level heard when you are standing 1 meter from the unit. The sound level is akin to the quiet environment of a library.

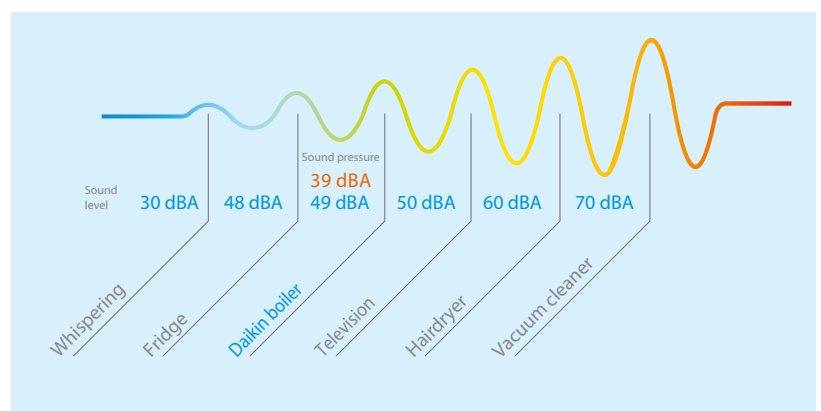



## Best for your home with compact dimensions



### Capacity

T-Model: 12-18-24-28-35 kW.  
C-Model: 24-28-35 kW.



### Compact size

Measuring only 0.06 m<sup>3</sup>, this slim, state-of-the-art design combines power with aesthetics.



### Modulation

The device can drop down to 3 kW with a modulation ratio of 1:8. This ensures minimal energy is consumed during start/stop operations.



### High energy class

Efficiency class according to EU Ecodesign Lot1 (A).



### Full condensation

Latent heat from the flue gas is obtained and added to the system, leading to both increased efficiency and energy savings.



### Lambda Gx system

Superior combustion technology delivers unparalleled efficiency and energy savings.



### Comfort mode

The DK combi boiler is designed to provide optimal comfort levels.



### Premix combustion

Achieves an efficient combustion process by creating the perfect combination of air and gas before it reaches the burner.



### Electrical Protection

Safe combi boiler with a protection class of IP5D.



### Lcd display

Eye-catching and user-friendly design.



### Efficiency

Achieves up to 109% efficiency with full condensation.



### Double heat exchanger

The device uses a Daikin-specific main exchanger equipped with in-house technology and a stainless steel domestic water exchanger.



### Frequency controlled pump

The frequency control monitors power consumption to boost efficiency and save energy.



### Easy maintenance

Details in design allows for easy maintenance.



### Quiet

Delivers a very low sound level that reflects the new EU standards.



### Onecta App

Control your indoor unit from any location via app (optional LAN adapter).



### Thermo regulation

The device runs the system based on data obtained from the outside temperature sensor and room thermostat.

# Daikin Altherma 3 C Gas

Supremely compact gas condensing boiler providing heating and hot water

- › Very compact unit and flexible in use: possible to install in nearly all room conditions (inside the house as well as outside) thanks to freeze protection for water piping
- › Easy to service: all parts are accessible by only removing the front panel
- › High heating efficiency up to 109%
- › High modulating range 1:8: the capacity is adapted based on the required heat load of the house from 3 to 24 kW and 5 to 35 kW
- › Combine it with solar heating for even better energy efficiency
- › C-model: The combi model means that the boiler has a plate heat exchanger to provide instant domestic hot water
- › T-model (tank): The tank model means that the boiler does not have a plate heat exchanger. Domestic hot water is provided by an external storage tank heated by the boiler
- › A1 model means that the filling loop is internal
- › A4 model means that the filling loop is external



up to

More details and final information can be found by scanning or clicking the QR codes.



D2CND-A1A
















D2CND-A4A



D2TND-A4A

Indoor unit				D2	TND012A4A	TND018A4A	TND024A4A	TND028A4A	TND035A4A	CND024A1A	CND028A4A	CND035A1A		
Central heating	Heat input Qn (net calorific value)	Nom	Min/Max	kW	2.90/11.20	2.90/17	2.90/23.50	4.80/27	4.80/34	2.90/23.5	4.80/27	4.80/34		
	Heat input Qn (gross calorific value)	Nom	Min/Max	kW	3.20/12.40	3.20/18.90	3.20/26.10	5.30/30	5.30/37.80	3.20/26.10	5.30/30	5.30/37.80		
	Output Pn at 80/60 °C	Min/Nom		kW	2.80/10.90	2.80/16.60	2.80/22.80	4.60/26.30	4.60/33.20	2.80/22.80	4.60/26.30	4.60/33.20		
	Output Pnc at 50/30 °C	Min/Nom		kW	3.10/12	3.10/18	3.10/24	5.20/28.20	5.20/35	3.10/24	5.20/28.20	5.20/35		
	Water pressure (PMS)	Max		bar	3									
	Water temperature	Max		°C	100									
	Efficiency	Net calorific value		%	98.60	98.20	97.90	98.20		97.90	-	-		
	Operation range	Min/Max		°C	30/80									
	Piping connections					19 (3/4") Male								
	Domestic hot water	Heat input (net calorific value) Qnw	Nom	Min/Max	kW	2.90/11.20	2.90/17	2.90/23.50	4.80/29.50	4.80/34	2.90/23.50	4.80/29.50	4.80/34	
Heat input (gross calorific value) Qnw		Nom	Min/Max	kW	3.20/12.40	3.20/18.10	3.20/26.10	5.30/32.70	5.30/37.70	3.20/26.10	5.30/32.70	5.30/37.70		
Domestic hot water threshold				L/min	-				2.50		2			
Temperature		Factory setting		°C	50									
Operation range		Min/Max		°C	35/60									
Gas connection diameter				mm	19 (3/4") Male									
Gas	Consumption (G20)	Min/Max		m <sup>3</sup> /h	0.31/1.18	0.31/1.80	0.31/2.48	0.511/2.89	0.511/3.63	0.31/2.48	0.511/2.89	0.511/3.63		
	Consumption (G25)	Min/Max		m <sup>3</sup> /h	0.36/1.38	0.36/2.09	0.36/2.89	0.59/3.32	0.59/4.19	0.36/2.89	0.59/3.32	0.59/4.19		
	Consumption (G31)	Min/Max		m <sup>3</sup> /h	0.12/0.46	0.12/0.69		0.20/1.10	0.20/1.38	0.12/0.96	0.20/1.10	0.20/1.38		
Supply air	Connection			mm	100									
	Concentric				Yes									
Flue gas	Connection			mm	60									
	Space heating	General	ηs (Seasonal space heating efficiency)	%	93									
Domestic hot water heating	General	Seasonal space heating eff. class			A									
		Declared load profile			-									
		ηwh (water heating efficiency)	%	-										
Casing	Colour	Titanium White (RAL9003)												
		Material		Sheet metal				Powder painted galvanised steel plate		Sheet metal		Powder painted galvanised steel plate		
Dimensions	Unit	HeightxWidth x Depth	Casing	mm	590x400x256				690x440x295		590x400x256		690x440x295	
Weight	Unit	Empty		kg	27				36		27		37	
Power supply	Phase/Frequency/Voltage			Hz/V	1 ~ /50/230				1 ~ /50/230		1 ~ /50/230		1 ~ /50/230	
Electrical power consumption	Max.			W	86				92		86		92	
	Standby			W	3.50				2.70		3.50		2.70	

# Options

Category		Description	Material Nr
Controllers		Outdoor sensor	150042
		Solar Temperature Sensor	DRSLRTESENSAA
		Daikin OT+ room thermostat	DOTROOMTHEAA
		Communication gateway	DRGATEWAYAA
System control - Cascade		Cascade Controller (E8.5064 V1)	DRCASCACONTAA
		Zone Controller (E8.1124)	DRZONECCONTAA
		CoCo OT-CAN Adapter	DRCOCOADPTRAA
		Lago CAN BUS room thermostat	DRCBROOMTHEAA
		Flow temperature sensor (Cascade)	DRFLWTESENSAA
		Outdoor temperature sensor (Cascade)	DRODRTESENSAA
		Storage Tank Temperature Sensor (Cascade)	DRSTKTESENSAA
Flue gas		Connector Elbow PP 60/100 + MP(0 mm)	DRMEEA60100BA
		Twin Box Adapter 80/80 + MP(0 mm)	DRDECOP8080BA
		Vert. Conn. 60/100-80/125 + MP(0 mm)	DRDECO80125BA
Mechanical		Cover plate (12-18-24 kW)	DRCOVERPLATAA
		Cover plate (28-35 kW)	DRCOVERPLA2AA
		Antifreezing set	DRANTIFREEZAB
Valve kit		Valve Kit C1 - 90° valves	DRVALVEKIC1AA
		Valve Kit C2 - 90° valves	DRVALVEKIC2AA
		Valve Kit T1 - 90° valves	DRVALVEKIT1AA
		Valve Kit T2 - 90° valves	DRVALVEKIT2AA
Pump Groups & Other		Seperator for mud and magnetit	SAS1 156021
		Seperator for mud and magnetit	IT.DEFANG-TP
		Seperator for mud and magnetit	IT-DEFANG-OT
		Unmixed Pump Group	DRUPUMPGRUPAA
		Mixed Pump Group	DRMPUMPGRUPAA
For service		Service box	DRSERVCBOX1AA - 5020177



# Daikin Altherma 3 C Gas (D2CNL)

Base model - Wall mounted gas condensing boiler

The new gas condensing boiler D2CNL-A1A integrates what is essential: neat design, ease of use and installation to provide heating and hot water.

## Neat design

The product enjoys the black and white design DNA introduced with the third generation of Daikin Altherma products. Its dimensions and weight make it one of the most compact product of its category.

## All-in-one comfort

The product provides space heating and instantaneous domestic hot water without tank, both with an A energy label.



## As simple as A+B

The product is really simple to control via its interface. It is also very easy to install and service since all parts are available from the front.

# Daikin Altherma 3 C Gas

Supremely compact gas condensing wall mounted boiler  
providing heating and hot water

- › Easy to service: all parts are accessible by only removing the front panel
- › Very compact unit and flexible in use: possible to install in nearly all room conditions (inside the house as well as outside) thanks to freeze protection for water piping



D2CNL-A1A







More details and final information can be found by scanning or clicking the QR codes.



D2CNL-A1A



Indoor unit		D2		CNL024A1A	
Central heating	Heat input Qn (net calorific value)	Nom	Min/Max	kW	4/23.50
	Heat input Qn (gross calorific value)	Nom	Min/Max	kW	4.40/26.10
	Output Pn at 80/60°C	Min/Nom		kW	3.80/22.80
	Output Pnc at 50/30°C	Min/Nom		kW	4.40/24
	Water pressure (PMS)	Max		bar	3
	Water temperature	Max		°C	100
	Operation range	Min/Max		°C	30/80
Domestic hot water	Heat input (net calorific value) Qnw	Nom	Min/Max	kW	4/25.50
	Heat input (gross calorific value) Qnw	Nom	Min/Max	kW	4.40/28.30
	Domestic hot water threshold			L/min	2.30
	Temperature	Factory setting		°C	50
	Operation range	Min/Max		°C	35/60
Gas	Consumption (G20)	Min/Max		m <sup>3</sup> /h	0.40/2.50
Supply air	Connection			mm	100
	Concentric				Yes
Flue gas	Connection			mm	60
Space heating	General	Seasonal space heating efficiency class			A
		$\eta_{s}$ (Seasonal space heating efficiency)		%	93
Domestic hot water heating	General	Declared load profile			XL
		Water heating energy efficiency class			A
		$\eta_{wh}$ (water heating efficiency)		%	87
Casing	Colour				Titanium White (Ral9003)
	Material				Powder painted galvanised steel plate
Dimensions	Unit	HxWxD	Casing	mm	590x400x256
Weight	Unit	Empty		kg	27
Power supply	Phase/Frequency/Voltage			Hz/V	1 ~ /50/230
Electrical power consumption	Max.			W	100
	Standby			W	3

Category	Description	Material Nr
Valve Kit	 Valve Kit for Combi Boiler	DRVALVEKIC1AA
Wall Rack	 Wall Rack for small boilers	DRWALLRACK1AA
Cover Plate	 Bottom cover plate	DRCOVERPLATAA
Flue Gas	 Connector Elbow PP 60/100	DRMEEA60100BA
	 Twin Box Adapter 80/80	DRDECOP8080BA
	 Vert. Conn. 60/100-80/125	DRDECO80125BA

# Daikin Altherma C Gas W

High efficiency gas condensing boiler for heating and hot water

- › High efficiency gas condensing boiler
- › Top efficiency gas condensing boiler thanks to labyrinth fin heat exchanger for improved heat exchange
- › Low running costs for both heating and hot water thanks to new dual heat exchanger
- › Maximum heating comfort and domestic hot water when it is most needed
- › Quick, easy and compact installation thanks to our optional pre-assembled B-pack, containing all auxiliary components



More details and final information can be found by scanning or clicking the QR codes.



EHOBG-A



EHOB-AH



EKOMBG-A



EKOMB-AH



Indoor unit		EHOB			G12A	G18A	12AH	18AH	42AH
Central heating	Heat input Qn (net calorific value)	Nom	Min/Max	kW	3.80/12.50	5.60/18.70	3.50/11.80	5.60/18.70	7.80/42.50
	Heat input Qn (gross calorific value)	Nom	Min/Max	kW	4.20/13.90	6.20/20.80	3.90/13.10	6.20/20.80	8.70/47.20
	Output Pn at 80/60 °C	Min/Nom		kW	-/12.20	-/18.20	3.40/11.50	5.40/17.80	7.70/40.90
	Output Pnc at 50/30 °C	Min/Nom		kW		-/-	3.80/12	5.90/18.70	8.50/42.20
	Water pressure (PMS)	Max		bar	3				
	Water temperature	Max		°C	90				
Gas	Operation range	Min/Max		°C	30/90				
	Connection	Diameter		mm	15				
Supply air	Consumption (G20)	Min/Max		m³/h	0.36/1.30	0.58/1.94	0.36/1.22	0.55/1.94	0.81/4.41
	Consumption (G25)	Min/Max		m³/h	0.42/1.50	0.67/2.25	0.42/1.42	0.64/2.25	0.94/5.10
	Consumption (G31)	Min/Max		m³/h	0.14/0.49	0.22/0.74	0.14/0.47	0.21/0.74	0.31/1.68
Flue gas	Concentric			mm	60/100				
	Connection			mm	60				
Space heating	General	ηs (Seasonal space heating efficiency)			92		91		
		Seasonal space heating eff. class			A		A		
Casing	Colour	White - RAL9010							
	Material	Precoated sheet metal							
Dimensions	Unit	HeightxWidthxDepth	Casing	mm	590x450x240				710x450x240
Weight	Unit	Empty		kg	30				36
Power supply	Phase/Frequency/Voltage			Hz/V	1 / 50 / 230				
Electrical power consumption	Max.			W	80				135
	Standby			W	2				4

Indoor unit		EKOMB			22AH	28AH	33AH	G22A	G28A	G33A
Central heating	Heat input Qn (net calorific value)	Nom	Min/Max	kW	5.60/18.70	7.10/23.70	7.20/27.30	5.50/23.30	7.10/29.10	7.60/32.70
	Heat input Qn (gross calorific value)	Nom	Min/Max	kW	6.20/20.80	7.90/26.30	8/30.30	6.10/25.90	7.90/32.30	8.40/36.30
	Output Pn at 80/60 °C	Min/Nom		kW	-/17.80	-/22.80	-/26.30	-/22.70	-/28.40	-/32.10
	Water pressure (PMS)	Max		bar	3					
Domestic hot water	Water temperature	Max		°C	90					
	Heat input (net calorific value) Qnw	Nom	Min/Max	kW	5.60/22.10	7.10/28	7.20/32.70	5.50/23.30	7.10/29.10	7.60/32.70
	Heat input (gross calorific value) Qnw	Nom	Min/Max	kW	6.20/24.60	7.90/31.10	8/36.30	6.10/25.90	7.90/32.30	8.40/36.30
	Domestic hot water threshold			L/min	2					2
	Temperature	Factory setting		°C	60					
	Operation range	Min/Max		°C	40/65					
Gas	Connection	Diameter		mm	15					
	Consumption (G20)	Min/Max		m³/h	0.58/2.29	0.74/2.91	0.75/3.39	0.58/2.42	0.74/3.02	0.79/3.39
Supply air	Consumption (G25)	Min/Max		m³/h	0.67/2.65	0.85/3.26	0.86/3.93	0.62/2.82	0.84/3.46	0.89/3.92
	Consumption (G31)	Min/Max		m³/h	0.22/0.87	0.28/1.11	0.28/1.29	0.21/0.94	0.29/1.19	0.30/1.29
Flue gas	Concentric			mm	60/100					
	Connection			mm	60					
Space heating	General	ηs (Seasonal space heating efficiency)			91	92	93	91	92	93
		Seasonal space heating eff. class			A					
Domestic hot water heating	General	Declared load profile			L		XL	L		XL
		ηwh (water heating efficiency)			78		81	90		84
	Water heating energy efficiency class			A						
	Colour	White - RAL9010								
Casing	Material	Precoated sheet metal								
	Unit	HeightxWidth x Depth	Casing	mm	590x450x240	650x450x240	710x450x240	590x450x240	650x450x240	710x450x240
Weight	Unit	Empty		kg	30	33	36	30	33	36
Power supply	Phase/Frequency/Voltage			Hz/V	1 ~ /50/230					
Electrical power consumption	Max.			W	80					
	Standby			W	2					

(1) Setpoint 40 °C (2) Setpoint 60 °C



# Options

Type	Material name	Condensing boilers									
		EKOMB*					EHOB*				
		Combi 22kW TOP Grade	Combi 22kW HIGH Grade	Combi 28kW TOP Grade	Combi 28kW HIGH Grade	Combi 33kW	H/O 12kW	H/O 18 kW	H/O 42kW		
<b>Controllers</b>	Rf-wlan converter	EKRFLAN1A	•	•	•	•	•	•	•	•	•
	Dongle set	EKDS1A	•	•	•	•	•	•	•	•	•
<b>Installation</b>	Cover plate 35	EKCP1A	•	•	•	•	•	•	•	•	•
	Solar water heater connection set	EKSH1A	•	•	•	•	•	•	•	•	•
<b>Sensor</b>	Outdoor sensor	EKOSK1A	•	•	•	•	•	•	•	•	•
<b>Valve</b>	Valve kit (IT, ES, CZ, GR, PL, PT)	EKVK4A	•	•	•	•	•	•	•	•	•
	Valve kit (DE)	EKVK5A						•	•		
	Valve kit (DE)	EKVK6A	•	•	•	•	•				
	Valve kit 3-way	EK3WV1A	•	•	•	•	•	•	•	•	•
<b>B-pack</b>	B-pack for combi (IT, ES, CZ, GR, PL, PT)	EKFJS1A	•	•					•	•	
	B-pack for combi (IT, ES, CZ, GR, PL, PT)	EKFJM1A			•	•					
	B-pack for combi (IT, ES, CZ, GR, PL, PT)	EKFJL1A						•			•
	B-pack for combi (FR, BE)	EKFJS2A	•	•							
	B-pack for combi (FR, BE)	EKFJM2A			•	•					
	B-pack for combi (FR, BE)	EKFJL2A						•			•
	B-pack for combi (UK)	EKFJS3A	•	•							
	B-pack for combi (UK)	EKFJM3A			•	•					
	B-pack for combi (UK)	EKFJL3A						•			
	B-pack for combi (DE)	EKFJS4A							•	•	
	B-pack for combi (DE)	EKFJS6A	•	•							
	B-pack for combi (DE)	EKFJM6A			•	•					
	B-pack for combi (DE)	EKFJL6A							•		
<b>Propane set</b>		EKHV075787	•								
		EKPS075867					•	•			•
		EKPS075877	•								
		EKPS075917							•		
<b>Conversion set</b>		EKPS076197							•		
		EKPS076207	•							•	
		EKPS076217		•	•					•	
		EKPS076227		•					•		•
<b>Flue gas</b>	Flue gas non return flap (flue gas cascade)	EKFGF1A	•	•	•	•	•	•	•	•	•
	Horizontal straight flue terminal (low profile) (UK)	EKFGP1A	•		•			•			
<b>Others</b>	Concentric connection (Ø 80/125)	EKHV090717									
	Eccentric connection (Ø 80)	EKHV090707									
	Adaptor set concentric 60/100	EKAS1A	•	•	•	•	•				

# Flue-gas evacuation system

## Hybrid heat pump



Daikin Altherma Hybrid

## Wall mounted gas condensing boilers




Daikin Altherma C Gas W



Daikin Altherma 3 C Gas W

# Overview of Daikin Altherma C Gas W and Daikin Altherma R/H Hybrid

Your guarantee of proper operation, especially in terms of the noise level of our heat generators, depends on the use of our own brand of flue-gas evacuation systems. All our condensing gas- and oil-fired boilers are optimized and adjusted for this use.

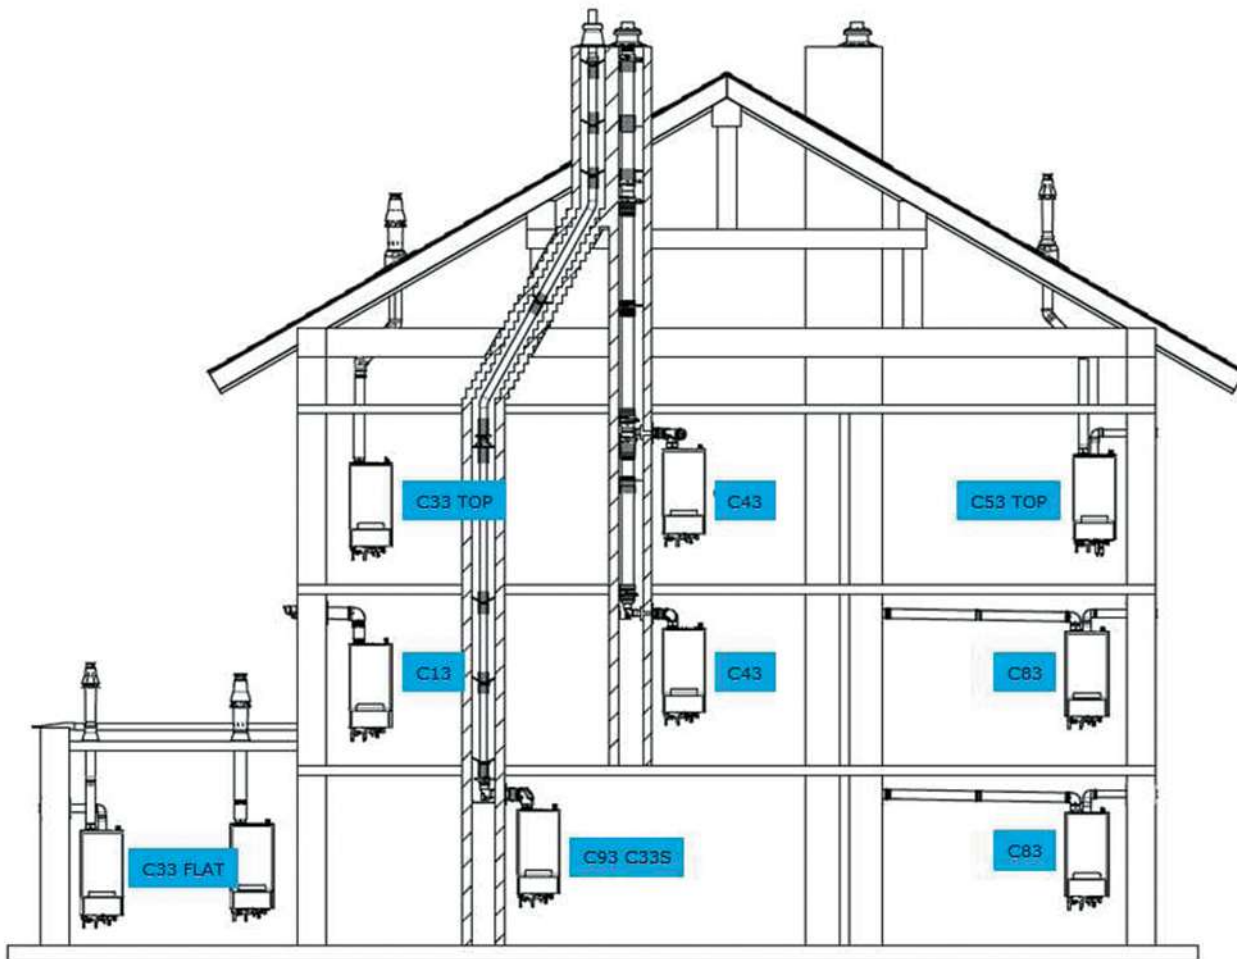

**1-8** Variants for Daikin Altherma C Gas W and Daikin Altherma R/H Hybrid

**CA** Air (combustion) inlet

**FG** Flue gas

**RV** Ventilation

**B<sub>xx</sub>** Type CEN/TR1749:2009 for operation dependent on ambient air

**C<sub>xx</sub>** Type CEN/TR1749:2009 for suction operation

**a** Variant for suction connection (flue gas/concentric air inlet)

**b** Variant for partial suction connection (flue gas/separated air inlet)


**c** Variant for connection dependent on ambient air

**d** Ventilated vertical flue ducts with fire-resistance duration of 90 minutes (30 minutes for low-rise buildings). Respect the locally applicable standards!

**e** Ventilation opening (1 x 150 cm<sup>2</sup> or 2 x 75 cm<sup>2</sup>)

**f** Ventilation (150 cm<sup>2</sup>)

- › All flue-gas ducts approved for condensing operation can be installed – an adapter may be needed
- › Requirements according to EN 14471: Temperature class T 120, pressure class P1, condensate consistence class W, corrosion-resistance class 2

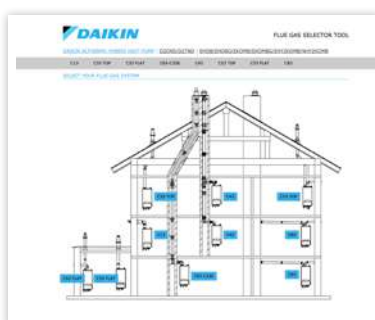


## Selection tool

You can determine the optimal solution for your projects using the software for selecting smoke-evacuation accessories.

You can specify suitable flue-gas accessories (obligatory and necessary), depending on the products selected and the installation configurations.

You can also opt to make your selection online using our tool at <http://fluegas.daikin.eu>

## Overview of Daikin Altherma C Gas W and Daikin Altherma R/H Hybrid

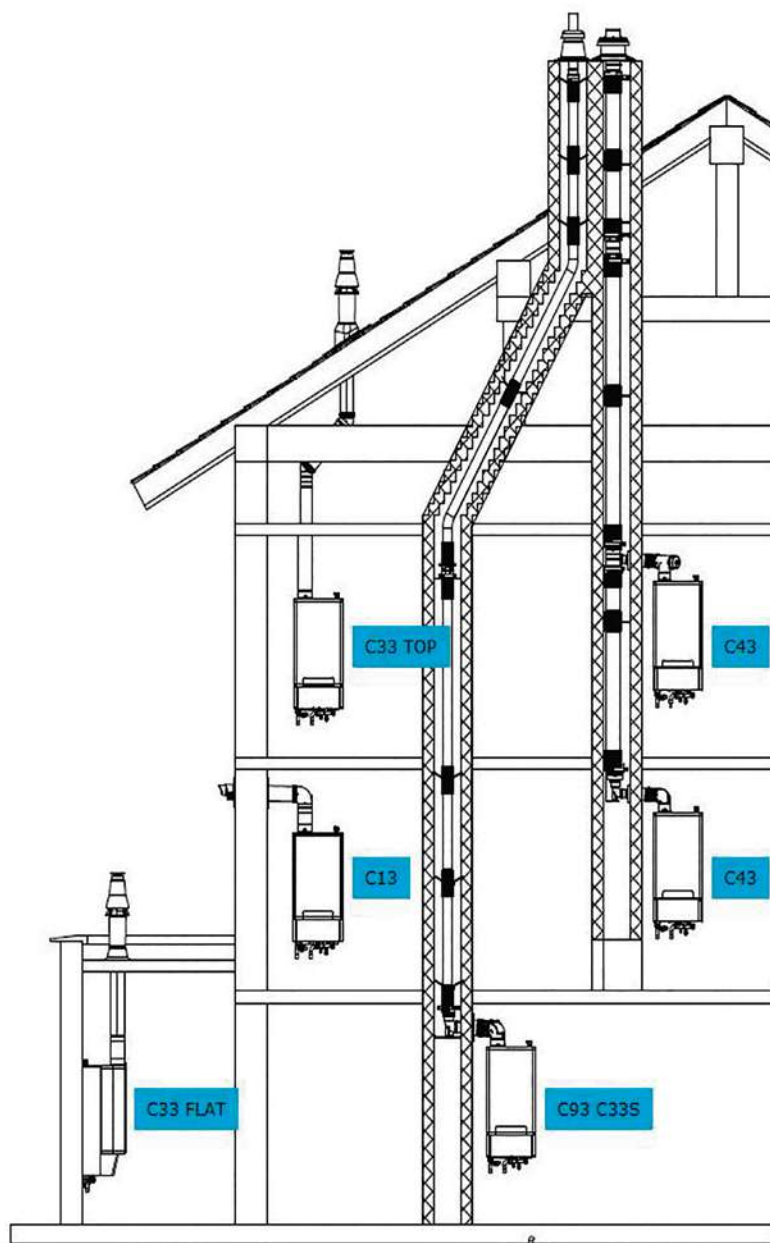


### Selection tool

You can determine the optimal solution for your projects using the software for selecting smoke-evacuation accessories.

You can specify suitable flue-gas accessories (obligatory and necessary), depending on the products selected and the installation configurations.

You can also opt to make your selection online using our tool at <http://fluegas.daikin.eu>

## Overview of Daikin Altherma 3 C Gas W

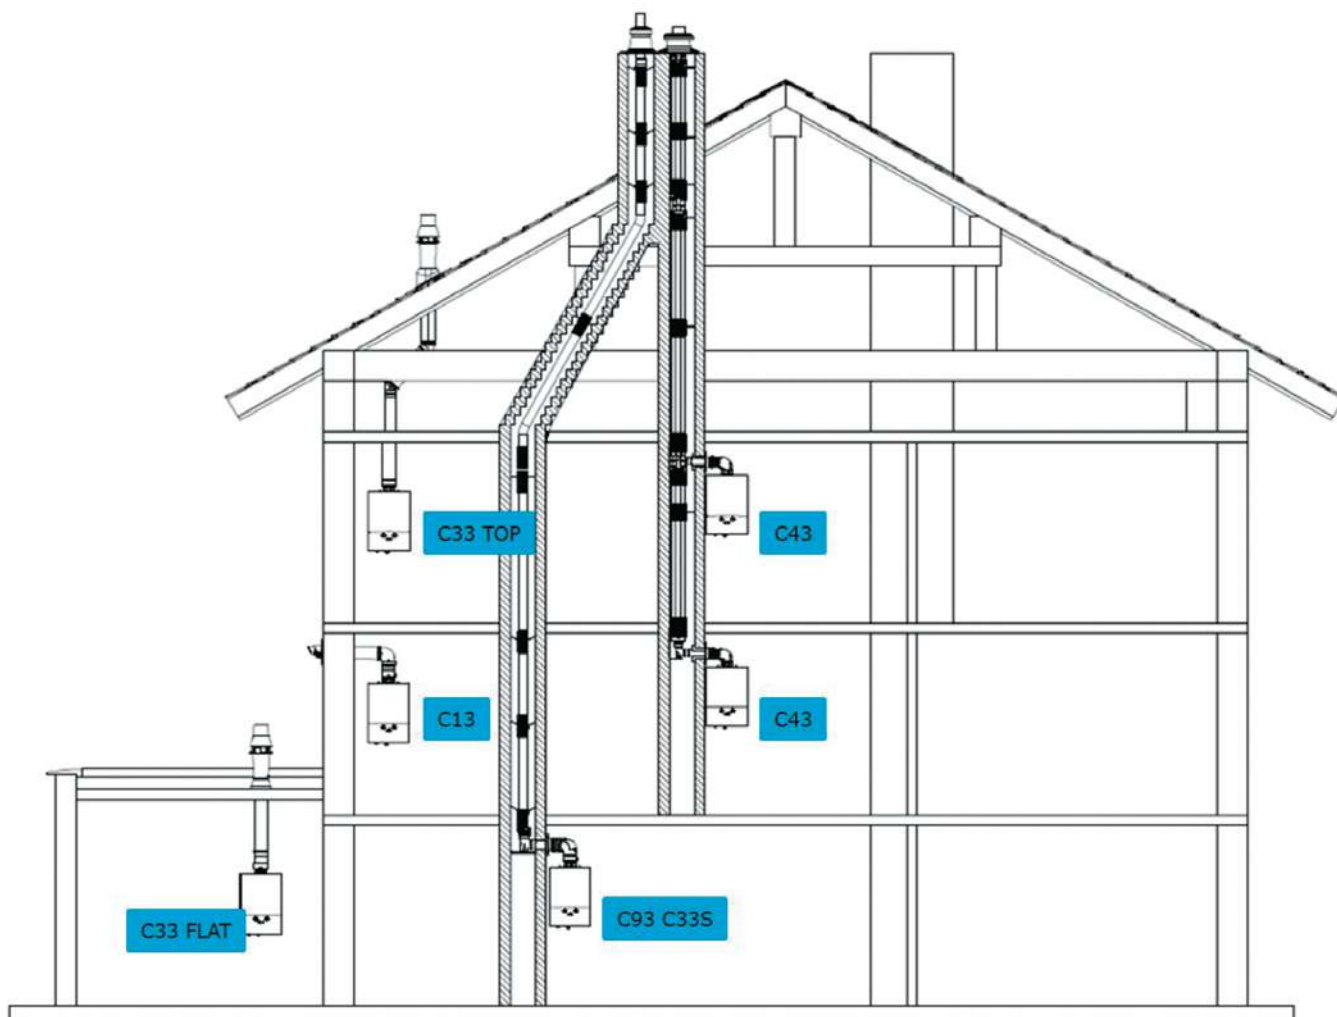

### Selection tool

You can determine the optimal solution for your projects using the software for selecting smoke-evacuation accessories.


You can specify suitable flue-gas accessories (obligatory and necessary), depending on the products selected and the installation configurations.

You can also opt to make your selection online using our tool at <http://fluegas.daikin.eu>




P. 256

## Decentralised

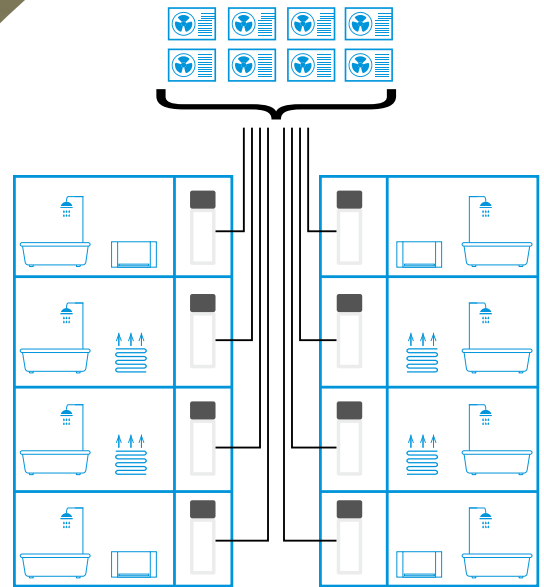

## Centralised

P. 257

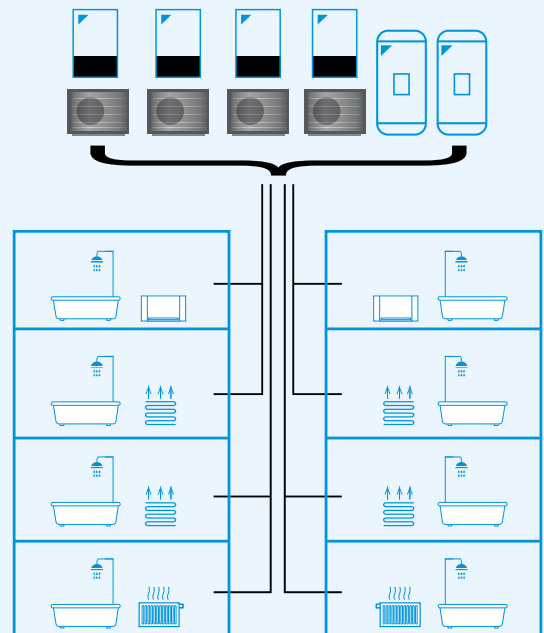

# Daikin solutions for collective buildings

Thanks to a wide range of individual heat pumps, Daikin has always been present in collective buildings with decentralised solutions.


With the long lasting Daikin Altherma Flex Type series, a central solution for hot water production is also part of the portfolio.


Recently, Daikin Altherma 3 WS was launched: a dedicated water loop solution for high-rise buildings.

In that way, Daikin provides multiple flexible solutions for collective buildings.

# Semi-centralised: Water loop

P. 258

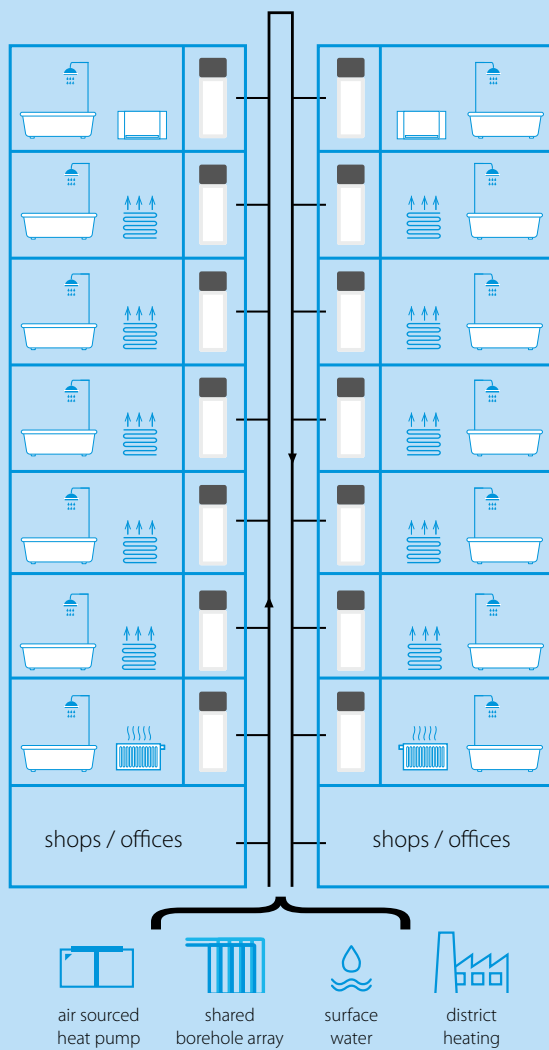

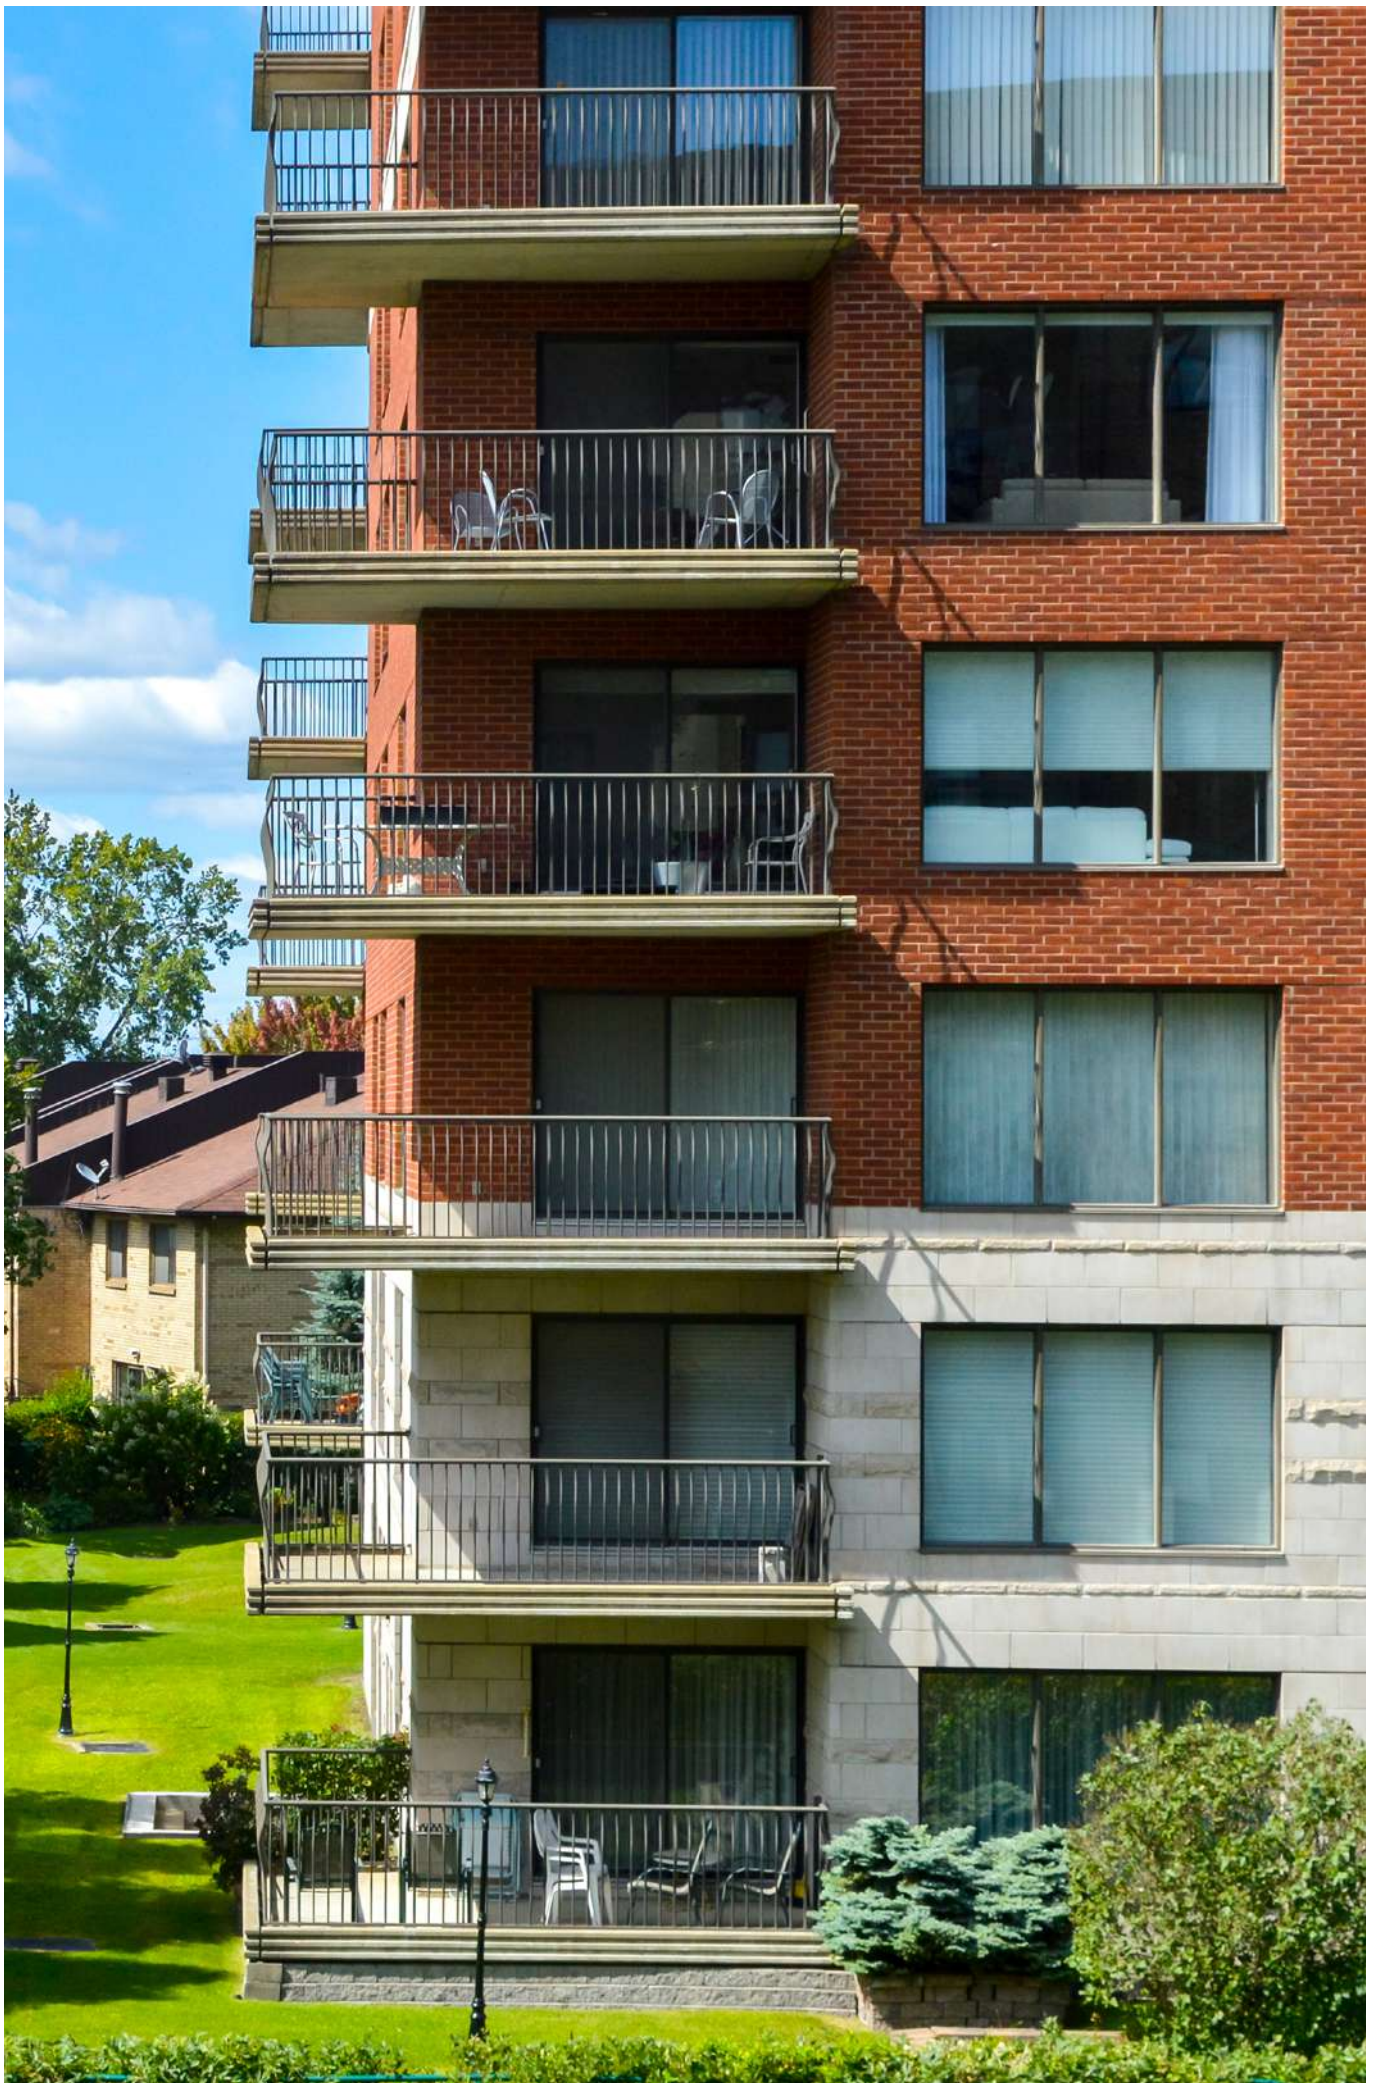



# Collective solutions

Decentralised solutions	256
Centralised solutions	257
Water loop	258
Daikin Altherma 3 WS	258



Check out our collective solutions on:  
[https://collectivehousing.daikin.eu/  
en-GB/high-rise](https://collectivehousing.daikin.eu/en-GB/high-rise)



# Decentralised solutions

In a decentralised set-up, each apartment of the building is equipped with an individual heat pump. The end customer has total control over it's system and consumption. The outdoor unit is often installed on the balcony, or on the roof.

## A large choice of Daikin solutions

Thanks to a wide range of heat pumps, Daikin is able to provide multiple solutions decentralised applications in apartments buildings.

In each apartment, an individual product is installed: air-to-water split heat pump, a hybrid heat pump...

### Inside the apartment:

In decentralised solutions, only an indoor unit can be found inside the apartment. Usually installed in a technical or utility room, it takes as much as space as other household appliances such as a washing machine.

It allows the end-user to totally control its energy consumption and answers its needs in the most efficient way, whether it is for space heating, cooling or domestic hot water.

### Outside the apartment:

The heat pump outdoor unit can be installed in different locations in order to save as much space as possible.

For example, on a balcony:



Or on the roof:





Centralised applications integrate a central source of energy for heating and hot water. Cascade solution is a type of centralised system in which one outdoor unit supplies energy to multiple apartments. Each apartment still includes an indoor unit as control center.

## ✓ Another purpose for Daikin high capacity heat pumps

In a cascade solution, one larger capacity outdoor unit provides energy to multiple apartments. This larger outdoor unit ranges from 11 to 18 kW class, compared to individual heat pumps up to 8 kW. Each outdoor unit is connected to the other in order to form a central source of energy that is suitable for a total of up to 50 kW. Specific rules apply for the installation of such a system.

### Applicable units

- Daikin Altherma 3 H HT + wall mounted indoor unit
- Daikin Altherma 3 R + wall mounted indoor unit
- Daikin Altherma 3 M monobloc
- Daikin Altherma Flex HT for DHW production only

### Hydrosplit connection

With Daikin Altherma 3 H HT, you only get water connections to install the outdoor and the indoor units.

The unit is available in class 14, 16 and 18 kW and delivers a LWT up to 70°C, fitting with radiators.



### Refrigerant connection

Daikin Altherma 3 R refrigerant split unit is available in class 11, 14 and 16 and delivers a LWT under 60°C.

The possibility to run low LWT allows for further energy saving by using underfloor heating or heat pump convectors as heating or cooling emitters.



### Monobloc

Daikin Altherma 3 M also runs low LWT under 60°C. The monobloc has the extra advantage to save space inside: indeed no indoor unit is necessary if the domestic hot water tank is installed in the communal space.



### Cascade controller

Daikin provides a universal centralised controller for cascade EKCC8-W to be used in combination with the gateway DCOM-LT/IO.

The DCOM gateway is an interface for the BMS integration. It offers:

- Modbus communication including the compatibility with EKCC8-W for sequencing applications
- Voltage control
- Modbus control

# Water loop solution Daikin Altherma 3 WS



**Daikin Altherma 3 WS for Collective Housing provides an innovative approach to reducing the carbon footprint of apartment buildings. Individual heat pumps deliver economical heating, hot water and optional cooling for each apartment connected via a central water loop. So use of renewable energy is optimised and heat losses in distribution are minimised, improving the environmental performance of the apartment building.**

The number of people living in urban areas is continuously increasing in the recent years. Multi-family dwellings in Europe are a good portion of the European building stock. Especially if we consider that, in 2018, 46.0 % of the EU-27 population lived in flats. (\*) Therefore, apartment buildings are among the most relevant contributors to the energy consumption and CO<sub>2</sub> emissions of the EU building sector.

As a consequence, the higher demand for living space makes the collective building sector grow in the future cities. Building sector plays a significant role for the energy consumption as it represents 40% of energy used in the EU.

New European Directives are driving the efficiency of modern buildings in order to reach future goals. In this perspective, heat pumps play a key role to achieve these goals not only in single dwellings but also in multi-family apartment buildings.

Daikin, the innovation leader for more than 90 years, takes the challenge in multi-family apartment building to apply full renewable solutions based on in-house heat pump technology. From low to high-rise apartment buildings, from individual to centralised heating systems, from retrofit to new built Daikin has the units, the experience and the solution for you.

(\*) [https://ec.europa.eu/eurostat/statistics-explained/index.php?title=Living\\_conditions\\_in\\_Europe\\_-\\_housing\\_quality](https://ec.europa.eu/eurostat/statistics-explained/index.php?title=Living_conditions_in_Europe_-_housing_quality)

# Efficiency and environmental performance all in one


## Individual heat pumps connected to a central loop

This innovative system consists of a network of heat pumps connected to a common central water loop. In each apartment is a Daikin Altherma 3 WS unit - a high-efficiency water-to-water heat pump with integrated domestic hot water (DHW) tank.

The heat pump in each apartment works independently, but is connected to a common central water loop to form a communal system. The central water loop must be maintained between +10°C and below +30°C. Thanks to this wide temperature range, the central water loop can be warmed/or cooled via several different means:

- › Ground or air source heat pump
- › Shared ground array, borehole or thermal piles
- › Surface water source such as a river, canal or seawater
- › District heat network
- › Waste heat recovery

This offers the designer full flexibility to select the most appropriate form of renewable energy available to the site: ground, water or air

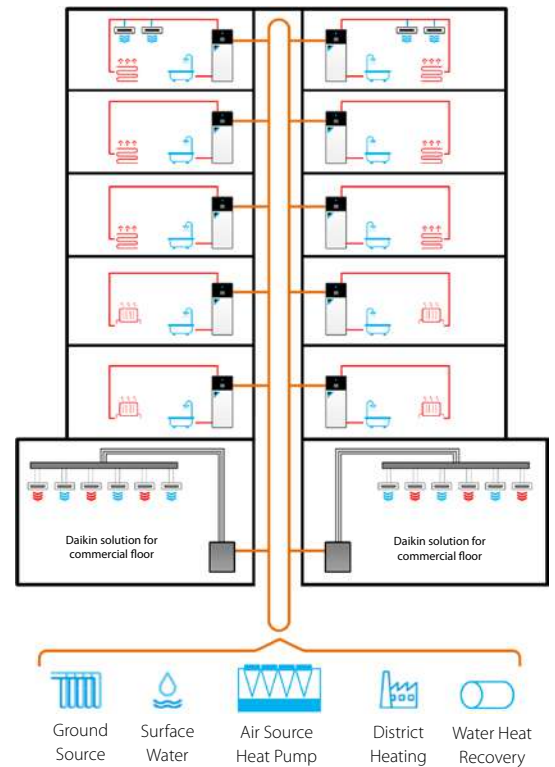

## Low ambient temperatures for minimal heat loss

This highly efficient heat pump network can provide economical heating, hot water and optional cooling for an entire apartment building at relatively low ambient water temperatures.

Compared with the high distribution losses that occur in typical communal heating systems - which lead to overheated buildings and wasted energy - the low ambient loop means that heat losses are reduced by more than 90%. Hence it is a much more economical solution, that reduces the carbon footprint of the entire building.

### Key system advantages:

- › Utilises renewable (or recovered) energy
- › Low carbon heat pump solution delivers significant CO<sub>2</sub> reductions over traditional systems
- › Low carbon solution helps reduce carbon offset payments
- › Energy centre not required, saving valuable space
- › Heating, hot water & cooling via a 2 pipe network offers capital savings over a traditional 4 pipe solution
- › Intuitive user controls and internet connectivity as standard
- › In-apartment heat pump has integrated back up heater, so heating & hot water is maintained in any eventuality.
- › Simplified connection with water loop thanks to the embedded pressure independent control, for automatic flow from the heat pump
- › Pressure rating of 16 bar (water loop side) to simplify installation in high-rise buildings: no need of pressure brakers up to 20 floors

# Designed to suit modern living



## Optimised for comfort

With a leaving water temperature up to 65°C and high efficiencies, the Daikin Altherma 3 WS is designed to ensure the lowest running costs and highest comfort levels for each apartment.



## Versatility by design

Daikin Altherma 3 WS is highly versatile and works with various heat emitters, such as radiators, underfloor heating, heat pump convectors or fan coil units for maximum design flexibility.




## All in one integrated model

The floor standing indoor unit with integrated DHW tank has a minimal footprint, utilising as little floorspace as possible.



## Delivering decarbonisation

Compared with a typical Combined Heat & Power (CHP) and boiler system often used in apartments, the Daikin Altherma 3 WS system delivers a reduction in carbon emissions of 143 tonnes.<sup>1</sup>

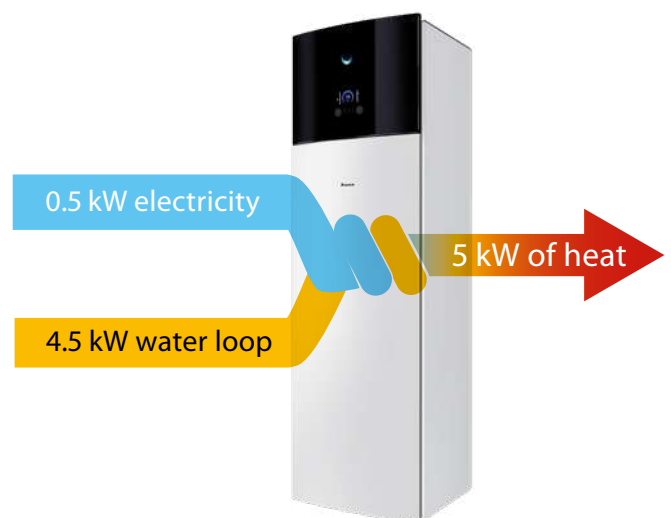




## Reduction in capital costs

With a low temperature water loop connected to a heat pump chiller on the roof or in the plant rooms, plus a Daikin Altherma 3 WS unit in each apartment linked to Daikin heat pump convectors or fan coil units, the total system will deliver lower carbon emissions compared with a typical heating system. This could reduce a developer's carbon offset payments, so delivering a low carbon heating and cooling system makes both excellent environmental and economic sense.

## BLUEVOLUTION

Heat pump technology reduces carbon emissions compared with any traditional fossil fuel heating system. But the Daikin Altherma 3 WS goes further to reduce the Global Warming Potential (GWP) of system, as it features Daikin's Bluevolution technology which uses R-32 refrigerant. R-32 has a lower GWP than other refrigerants typically used in heat pump systems - and less refrigerant is required too - so it's more environmentally friendly overall.

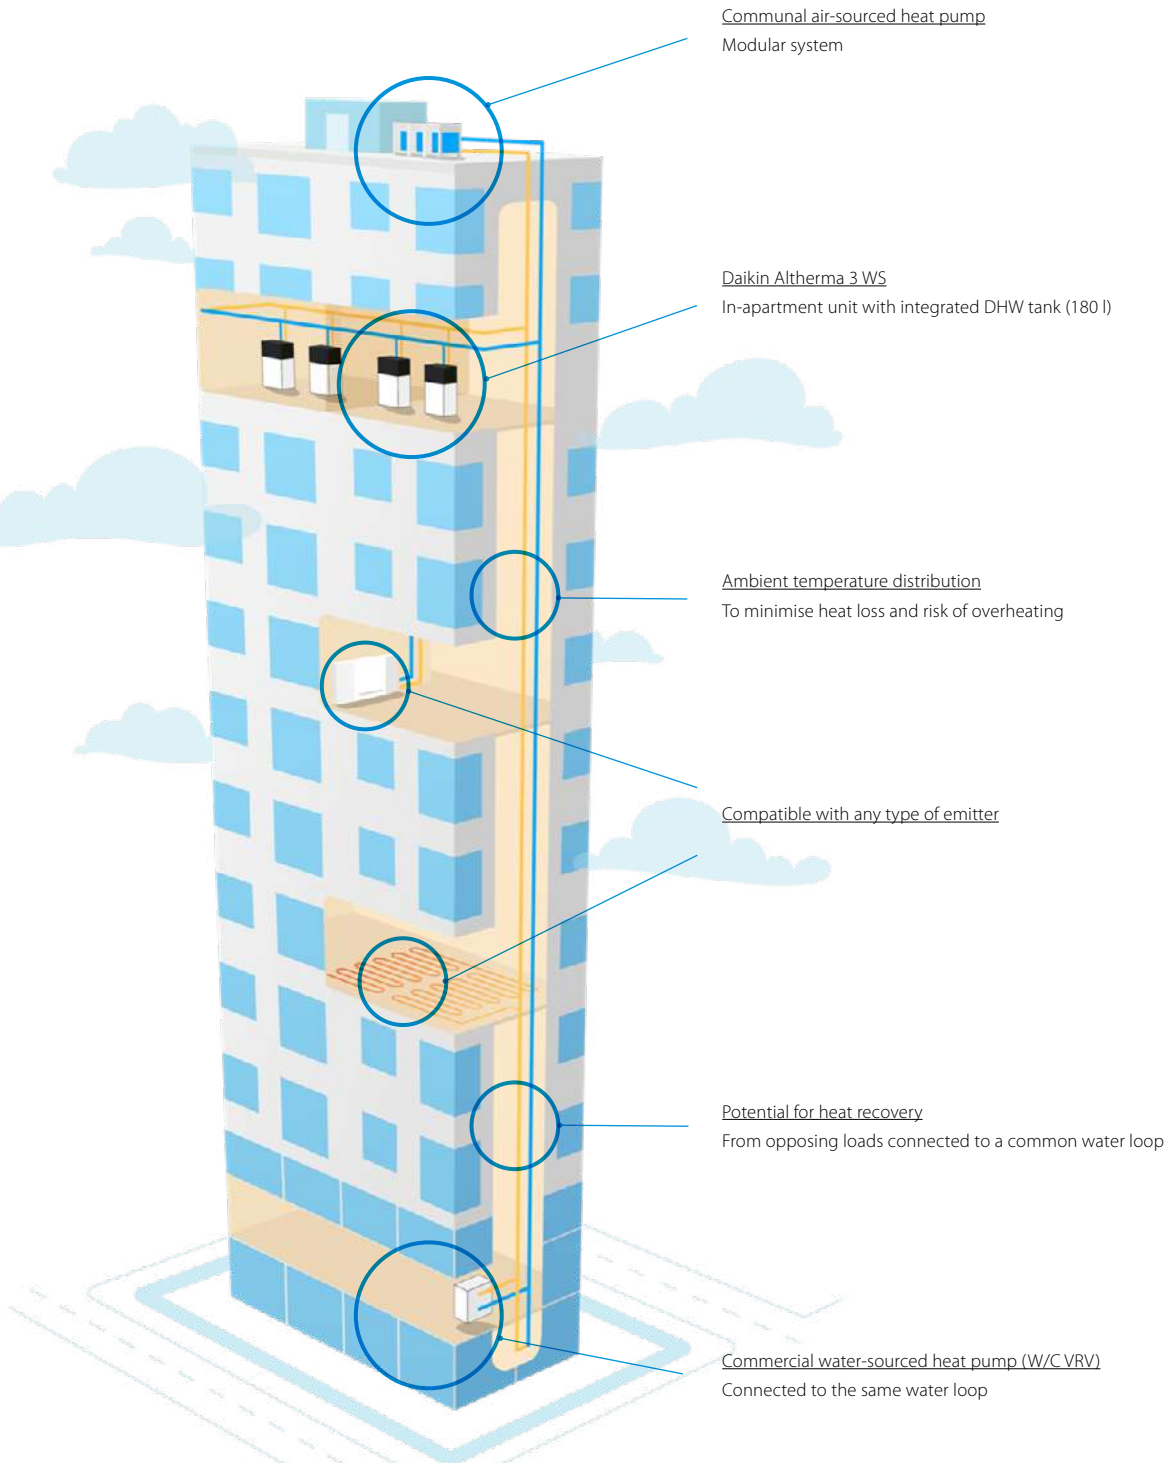


<sup>1</sup> Based on a block of 277 apartments with a Combined Heat & Power (CHP) system and Heat Interface Units (HIU) with CHP thermal efficiency of 48% and electrical efficiency of 32%, 60% CHP / 40% boiler, compared with a Heat Pump with a SCOP of 3.7 based on SAP2012

# Caring for customers' peace of mind

Daikin Altherma 3 WS promises almost silent operation, thanks to a specially designed swing compressor module, which limits vibrations and is sound insulated, to minimise noise levels.



## Exceptionally quiet operation

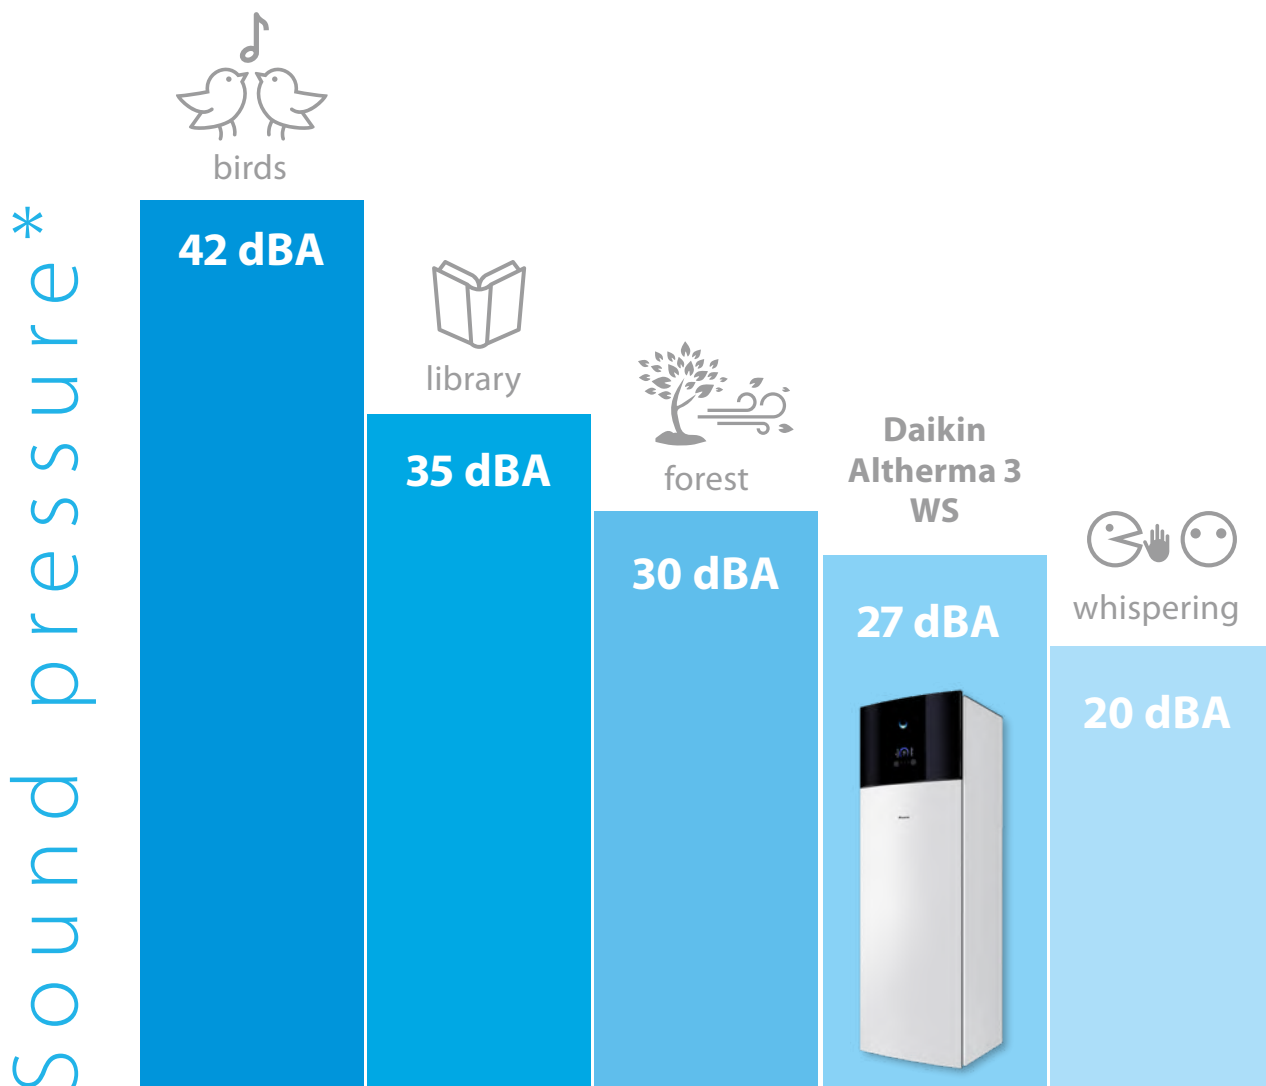

\*at 1 meter.



Daikin offers a range of control options, so residents can enjoy full control of their heating system, anywhere, at any time.



## Smart control

Daikin' smart control offers the end user full control of the heating and hot water system, as well as saving money on energy bills, thanks to Daikin's modulating room control logic.

## Madoka for heating

Increase end user energy savings even further, with the elegant Madoka controller. Madoka ensures a more stable room temperature, by adjusting the water temperatures depending on room temperature requirement, as well as reducing on/off cycling times.



BRC1HHDW



BRC1HHDS





BRC1HHDK




- ✓ Sleek and elegant design
- ✓ Match any interior scheme
- ✓ Easy to use with intuitive controls



## Onecta app

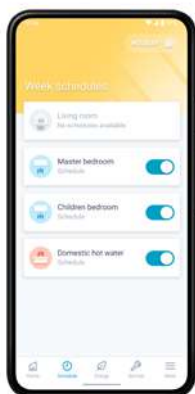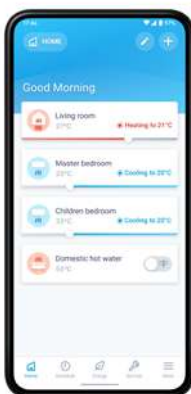The Onecta app is a smart phone app that allows end users to monitor and control their heating system, whenever and wherever they wish.



-  Monitor the status of the heating system
-  Control the operation mode and set temperature
-  Schedule the set temperature and operation mode

# Quick and easy installation



Each apartment unit consists of a sealed R-32 low GWP heat pump, a highly insulated, integrated DHW tank and an electrical back up heater, so no F-gas qualifications are required to install and service the unit. Installation and servicing are quick and easy too, thanks to a small footprint, factory-fitted piping on top of the unit, and a swappable hydro module.




All pipe connections on top, paired in and out

Standard electrical connections pre-cabled



Removable compressor module reduces the overall weight by 70 kg

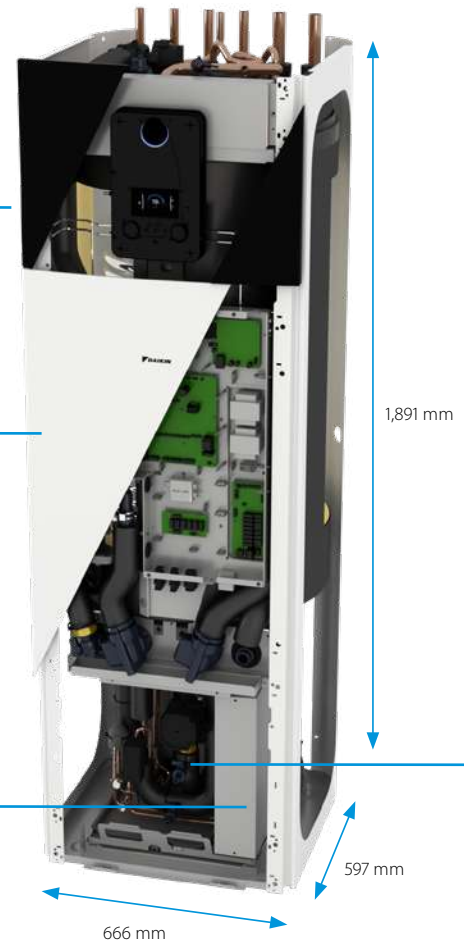

# Intuitive interface

## The Daikin Eye

The intuitive Daikin Eye shows in real time the status of the system.



### Blue:

When the Daikin Eye indicates a blue colour, it means the boiler is functioning properly. The Daikin Eye will flash on and off when it's running on stand by mode.



### Red:

When the Daikin Eye indicates a red colour, it means the boiler is out of commission and requires a maintenance check.



## Quick to configure

Log in and you'll be able to completely configure the unit via the new user interface in 9 steps. You can even check if the unit is ready for use by running test cycles. You can upload the settings on an USB stick and download it directly into the unit, or via the cloud.


## Easy operation

Work super-fast with the new user interface. It's easy to use with just a few buttons and two navigational knobs.

## Beautiful design

The user interface is especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

Can be installed easily in confined spaces thanks to a small footprint and integrated handles



16 bar pressure rating of all hydraulic components on water loop side, to best fit high-rise buildings

Factory fitted pressure independent control valve for flow regulation from the common water loop (design flow: 9.6 L/min)




## A complete package from Daikin

The beauty of the Daikin Altherma 3 WS system is that each in-apartment heat pump can connect to a wide variety of heat emitters and controls, all of which can be provided as a complete package by Daikin. This ensures seamless integration and consistency of the heating solution within each apartment.

Similarly, the communal water loop can be powered by range of different heat pump solutions. And once again, Daikin can offer a wide range of water source heat pumps, 2 and 4 pipe air source heat pumps, in an even wider range of configurations, to provide the central energy source for the collective heating system.

So for a highly efficient system that reduces the carbon footprint and offset payments of your apartment building, Daikin has the total solution.

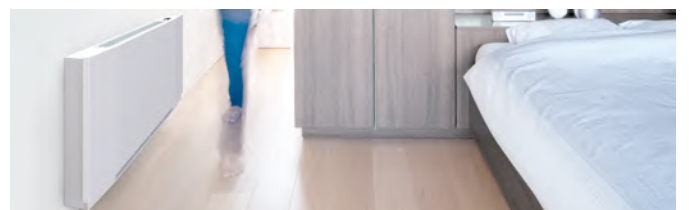

## EWSA(H/X)-D9W for Collective Housing

More details and final information can be found by scanning or clicking the QR codes.



EWSAH-D9W



EWSAX-D9W

Indoor Unit	EWSA			H06D9W	X06D9W	
B0/W35	Heating capacity	Nom.	kW		6.44	
	Power input	Max.	kW		1.67	
	COP				3.85	
W10/W35	Heating capacity	Nom.	kW		6.13	
	Power input	Nom.	kW		1.15	
	COP				5.33	
W10/W55	Heating capacity	Nom.	kW		5.61	
	Power input	Nom.	kW		1.72	
	COP				3.27	
W20 / W35	Heating capacity	Nom.	kW		6.17	
	Power input	Nom.	kW		0.82	
	COP				7.49	
W20 / W55	Heating capacity	Nom.	kW		6.30	
	Power input	Nom.	kW		1.48	
	COP				4.26	
W25 / W35	Heating capacity	Nom.	kW		5.80	
	Power input	Nom.	kW		0.6	
	COP				9.62	
W25 / W55	Heating capacity	Nom.	kW		6.36	
	Power input	Nom.	kW		1.35	
	COP				4.71	
Space heating according to EN14825 and EN14511:2018	Average climate Water in 10°C Water out 55°C	ηs (Seasonal space heating efficiency)	%	158	162	
		Efficiency class			A+++	
		sCOP		4.15	4.24	
	Average climate Water in 10°C Water out 35°C	ηs (Seasonal space heating efficiency)	%	253	260	
	Efficiency class			A+++		
	sCOP		6.51	6.70		
Space heating according to real application conditions	Average climate water in 20°C water out 35 °C (fixed)	Average space heating efficiency	%		360.4	
		Average COP			9.21	
Space cooling W30 / W7	Cooling capacity	Nom.	kW	-	5.81	
	Power input	Nom.	kW	-	1.38	
	EER			-	4.21	
Space cooling W30 / W18	Cooling capacity	Nom.	kW	-	6.11	
	Power input	Nom.	kW	-	1.21	
	EER			-	5.07	
Domestic hot water	General	Declared load profile			L	
	Average climate	ηwh	%		115	
		Efficiency class			A+	
Casing	Colour				White + Black	
	Material				Precoated sheet metal	
Dimensions	Unit	HeightxWidthxDepth	mm		1,891x597x666	
Weight	Unit		kg		222	
Hot water tank	Material				Stainless steel (EN 14521)	
	Water volume		l		180	
	Insulation	Heat loss	kWh/24h		1.2	
	Corrosion protection				Pickling	
Operation range	Installation space	Min. ~ Max.	°C		5/35	
	Water inlet	Min. ~ Max.	°C		-10/+30	
	Heating	Water side	Min. ~ Max.	°C		5/65
	Domestic hot water	Water side	Min. ~ Max.	°C		25/60
Refrigerant	Type				R-32	
	GWP				675	
	Charge		kg		1.70	
	Charge		TCO <sub>2</sub> Eq		1.15	
Water loop side	Pressure rating		bar		16	
Design flow rate	Independent control valve		l/min		9.6	
Sound power level	Nom.		dBA		39.0	
Sound pressure level at 1 meter	Nom.		dBA		27.0	
Power supply	Name/Phase/Frequency/Voltage		Hz/V		3 ~ /50/400 or 1 ~ /50/230	
Current	Recommended fuses		A		3P 16A or 1P 32A	

This product contains fluorinated greenhouse gases.

## Accessories

Type	Description	Product name	Note
Controller	Madoka wired room thermostat	BRC1HHDK/S/W	
	Wireless room thermostat	EKRTR1	
	Wired digital thermostat	EKRTWA	
	LAN Adapter	BRP069A61	Equivalent of BRP069A61 built-in.
	Daikin Altherma Modbus Gateway	DCOM-LT/MB-IO	
Sensors	Remote indoor sensor	KRCS01-1	
	External sensor for EKRTWB	EKRTETS	Can only be used in combination with the wireless room thermostat EKRTWB
	Current sensor	EKCSSENS	
Heat pump convector	Floor standing / wall mounted / concealed	FWXV/T/M*	Multi combination (quantity, depends on capacity class). EKVKHPC needs to be installed mandatory on heat pump convector (exception: LT - H/O)
	Digital I/O PCB	EKR1HBA	Additional relays to allow bivalent control in combination with external room thermostat are field supply.
	Demand PCB	EKR1AHTA	
Other options	Power cable for back-up heater	EKGSPWCAB	
	Fernox magnetic filter 1"	K.FERNOXTF1	
	Fernox magnetic filter 1" and F1 inhibitor fluid (500ml)	K.FERNOXTF1FL	
	G3 kit 8 liter	EKUHWG3DS	For UK, mandatory combination. Recommended option.
	G3 kit 18 liter	EKUHWG3D	For UK, mandatory combination. Alternative to EKUHWG3DS.

P. 275

**Stainless steel tanks**



P. 272

**Thermal stores**



**PERIPH**

## Daikin Eco-system

Daikin is a one-stop-shop for heating by providing all equipments from the heat generators to the peripherals.


Domestic hot water tanks and thermal stores with solar panels are official combinations in our energy label website.

Heating systems are never complete without emitters, that's why Daikin provides all the underfloor heating accessories as well as heat pump convectors. The floor standing convector can optionally be equipped with an indoor air quality feature, allowing fresh air to enter the room when the CO<sub>2</sub> level is too high, thanks to a ventilation system.

Recently, Daikin partnered up with Duco to add a range of residential ventilation units (CHR) that synergize with the convector range.

Since indoor air quality is a key topic for Daikin, the air purifier range was also extended to provide end-users with best air possible.

P. 305

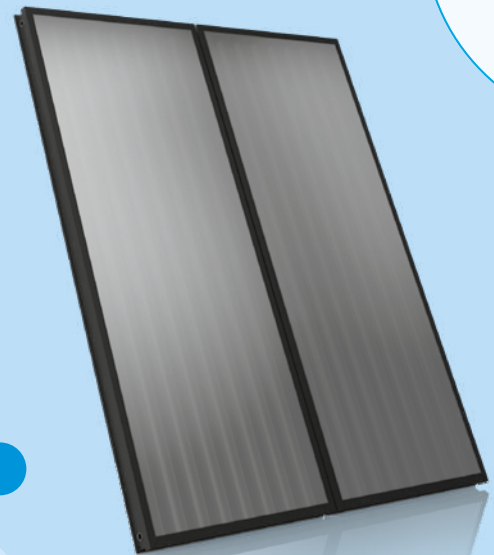

**Thermal solar panels and accessories**

## Wired room thermostats

P. 279



P. 284

## Onecta app



HERALS

## Heat pump convectors and underfloor heating

P. 296







# Tanks

Thermal stores and tanks

272

# Thermal stores and tanks

Hot water heating installation solutions



## Why choose a Daikin Altherma ST Thermal store or domestic hot water tank?

Whether you only need hot water or you want to combine your hot water with solar systems, we offer you the best solutions to the highest levels of comfort, energy efficiency and reliability.



Thermal store



Stainless steel tank



### Domestic hot water tanks

#### Stainless steel tanks

##### Comfort

- › EKHTS-AC: available in 200 and 260 L in stainless steel
- › EKHWS(P)(U)-D: available in 150, 180, 200, 250 and 300 litres in stainless steel

##### Efficiency

- › High-quality insulation keeps heat loss to a minimum
- › Efficient temperature heating: from 10 °C to 50 °C in only 60 minutes
- › Available as an integrated solution or separate tank

##### Reliability

- › At necessary intervals, the unit can heat up water up to 60 °C to prevent the risk of bacteria growth



# The ECH<sub>2</sub>O thermal store range

## ECH<sub>2</sub>O thermal store: additional hot water comfort

Combine your monobloc with a thermal store to achieve the ultimate comfort at home.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options


Built for small and large homes, customers can choose between a pressureless and a pressurised hot water system.

## Efficiency


- › Fit for the future: maximise renewable energy sources
- › Intelligent Heat Storage Management: ensures continuous heating during defrost mode, and uses stored heat for space heating
- › High-quality insulation keeps heat loss to a minimum

## Reliability

- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no water loss through the safety valve



Drain-back solar system



Pressurised solar system


### Pressureless (drain-back) solar system

- › The solar collectors are only filled with water when sufficient heating is provided by the sun
- › The pumps in the control and pump unit switch on briefly and fill the collectors with storage tank water
- › After filling, water circulation is maintained by the remaining pump

### Pressurised solar system

- › System is filled with heat transfer fluid with the correct amount of antifreeze to avoid freezing in winter
- › System is pressurised and sealed


### Monthly energy consumption of an average detached house

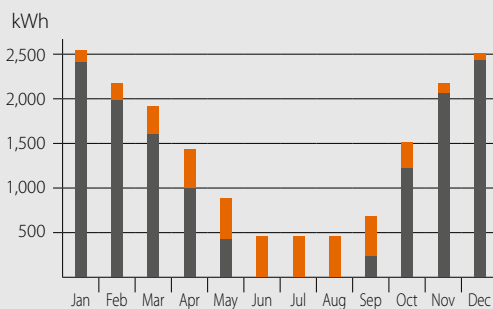

- Utilisation of solar energy for domestic hot water and central heating
- Heat pump (environmental heat)
- Auxiliary energy (electricity)

### System diagram: Integrated solar unit

- 1 Use of solar energy for domestic hot water and central heating
- 2 External heat pump unit
- 3 Solar thermal collectors
- 4 Solar pump station

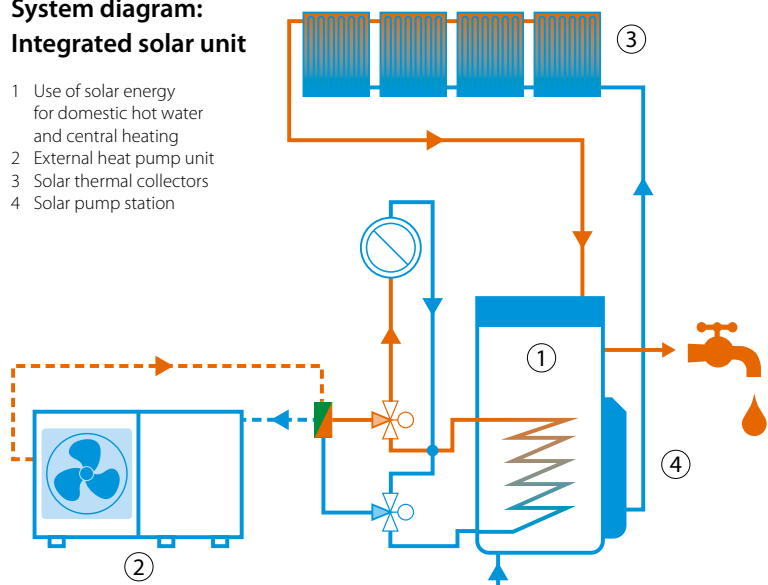

# Thermal store

## Plastic domestic hot water tank with solar support

- › Tank designed for connection with pressurised thermal solar system
- › Tank designed for connection with drainback thermal solar system
- › Available in 300 and 500 liters
- › Large hot water storage tank to provide domestic hot water at any time
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › Space heating support possible (500 L tank only)



More details and final information can be found by scanning or clicking the QR codes.



EKHP-B



EKHP-PB

Accessory			EKHP	300B	500B	300PB	500PB	54419B	
Casing	Colour		Traffic white (RAL9016) / Dark grey (RAL7011)						
	Material		Impact resistant polypropylene						
Dimensions	Unit	Width	mm	595	790	595		790	
		Depth	mm	615	790	615		790	
	Height	mm	1,646	1,658	1,646		1,658		
Weight	Unit	Empty	kg	53	76	56	82	71	
		Water volume	L	294	477	294		477	
Tank	Material			Polypropylene					
	Maximum water temperature		°C	85					
	Insulation	Heat loss	kWh/24h	1.50	1.70	1.50		1.70	
	Energy efficiency class			B					
		Standing heat loss	W	64	72	64		72	
		Storage volume	L	290	393	290		393	
Heat exchanger	Domestic hot water	Quantity		1					
		Tube material		Stainless steel (DIN 1.4404)					
		Face area	m <sup>2</sup>	5.60	5.80	5.60	5.90	5.80	
		Internal coil volume	L	27.80	28.90	27.80	29	28.90	
	Charging	Operating pressure	bar	10					
		Quantity		1					
		Tube material		Stainless steel (DIN 1.4404)					
		Face area	m <sup>2</sup>	2.66	3.70	2.66	3.70	1.95	
		Internal coil volume	L	12.90	18.10	12.90	18.10	10	
		Operating pressure	bar	6					
Auxiliary solar heating	Tube material		-	Stainless steel (DIN 1.4404)	-	Stainless steel (DIN 1.4404)			
	Face area	m <sup>2</sup>	-	0.76	-	0.76			
	Internal coil volume	L	-	3.90	-	3.90			
	Operating pressure	bar	-	3	-	3			

# Domestic hot water tank

Stainless steel domestic hot water tank

- > EKHTS-AC: available in 200 and 260 litres
- > EKHWS(P)(U)-D: available in 150, 180, 200, 250 and 300 litres
- > Stainless steel domestic hot water tank



More details and final information can be found by scanning or clicking the QR codes.



EKHTS-AC



EKHWSU-D3V3



EKHWS-P-D3V3



EKHWS-D3V3

Accessory		EKHTS			200AC		260AC			
Casing	Colour	Metallic grey								
	Material	Galvanised steel (precoated sheet metal)								
Dimensions	Unit	Height	Integrated on indoor unit	mm	2,010		2,285			
		Width			600					
	Depth	695								
	Height	1,470		1,745						
Weight	Unit	Empty	kg	70		78				
	Tank	Water volume	L	200		260				
Tank	Material	Stainless steel (EN 1.4521)								
	Maximum water temperature	°C		75		75				
	Insulation	Heat loss	kWh/24h	12		15				
	Energy efficiency class	B								
	Standing heat loss	W		50		63				
	Storage volume	L		200		260				
Heat exchanger	Quantity	1								
	Tube material	Duplex steel (EN 1.4162)								
	Face area	m <sup>2</sup>		1.560		1.560				
	Internal coil volume	L		7.50		7.50				
Accessory		EKHWS(P)(U)			150D3V3	180D3V3	200D3V3	250D3V3	300D3V3	
Casing	Colour	Neutral white								
	Material	Epoxy coated steel / Epoxy-coated mild steel								
Dimensions	Unit	Height	Tank	mm	1,000	1,164	1,264	1,535	1,745	
	Unit	Empty	kg	45		50		58		63
Weight	Tank	Water volume	L	145		174		192		242
	Material	Stainless steel (EN 1.4521)								
Tank	Maximum water temperature	°C		75		75				
	Insulation	Heat loss	kWh/24h	1.10		1.20		1.30		1.40
	Energy efficiency class	B								
	Standing heat loss	W		45		50		55		60
	Storage volume	L		145		174		192		242
	Heat exchanger	Domestic hot water	Quantity	1						
Tube material		Stainless steel (EN 1.4521)								
Face area		m <sup>2</sup>		1.050		1.400		1.800		2.100
Internal coil volume		L		4.90		6.50		8.20		10.00
Operating pressure		bar		10		10			10	
Booster heater	Capacity	kW		3		3			3	
Power supply	Phase/Frequency/Voltage	Hz/V		1 ~ /50/230		1 ~ /50/230			1 ~ /50/230	



# Controllers


Wired remote controller	279
Individual room controllers	282
Onecta App	284

# Controls

With Daikin controllers, you're in full control of your Daikin heat pump. The wired controller range features easy-to-use thermostats to control the temperature of different rooms. The intuitive Daikin apps offer even more features to help schedule and manage the energy consumption of your units.

## Onecta App

Requires WLAN Module (BRP069A71), WLAN cartridge (BRP069A78) or LAN Adapters (BRP069A61/2)

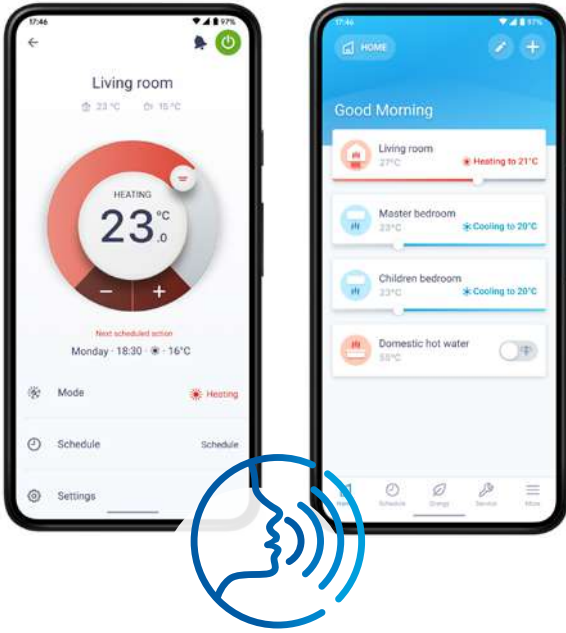

## Wired remote controller

Madoka



## Wired digital thermostat

EKWCTRDI1V3



## Wired analog thermostat


EKWCTRAN1V3

## Combination table



			BRC1HHDW/S/K	EKRUCB*	EKRUHML*	DOTROOMTHEAA
Daikin Altherma 3 H HT (F/W)	14-16-18 kW	EPRA14-18D7 + ETV/B*-E7	•			
Daikin Altherma 3 H HT ECH2O	14-16-18 kW	EPRA14-18E + ETS*-E7	•			
Daikin Altherma 3 H MT (F/W)	8-10-12 kW	EPRA08-12E + ETV/B*-E	•			
Daikin Altherma 3 H MT (ECH2O)	8-10-12 kW	EPRA08-12E + ETS*-E	•			
Daikin Altherma 3 R (F/W)	4-6-8kW	ERGA-E* + EHV/B*-E	•			
Daikin Altherma 3 R ECH2O	4-6-8kW	ERGA-E* + EHS*-E	•			
Daikin Altherma 3 R (F/W)	11-14-16 kW	ERLA-D* + EBV/B*-D	•			
Daikin Altherma 3 R ECH2O	11-14-16 kW	ERLA-D* + EBS*-D	•			
Daikin Altherma R HT	11-14-16 kW	EKHBRD-ADV/Y17 + ER(R/S)Q-AV/Y1				
Daikin Altherma 3 M	4-6-8-9-11-14-16 kW	E(B/D)LA-E/D*	•			
Daikin Altherma R Hybrid	5-8 kW	EVLQ-CV3		•		
Daikin Altherma H Hybrid	4 kW	EJHA-AV3			•	
Daikin Altherma 3 GEO	6-10 kW	EGSA(H/X)-D9W	•			
Daikin Altherma 3 C Gas W	12-35 kW	D2CND-A1A/A4A				•



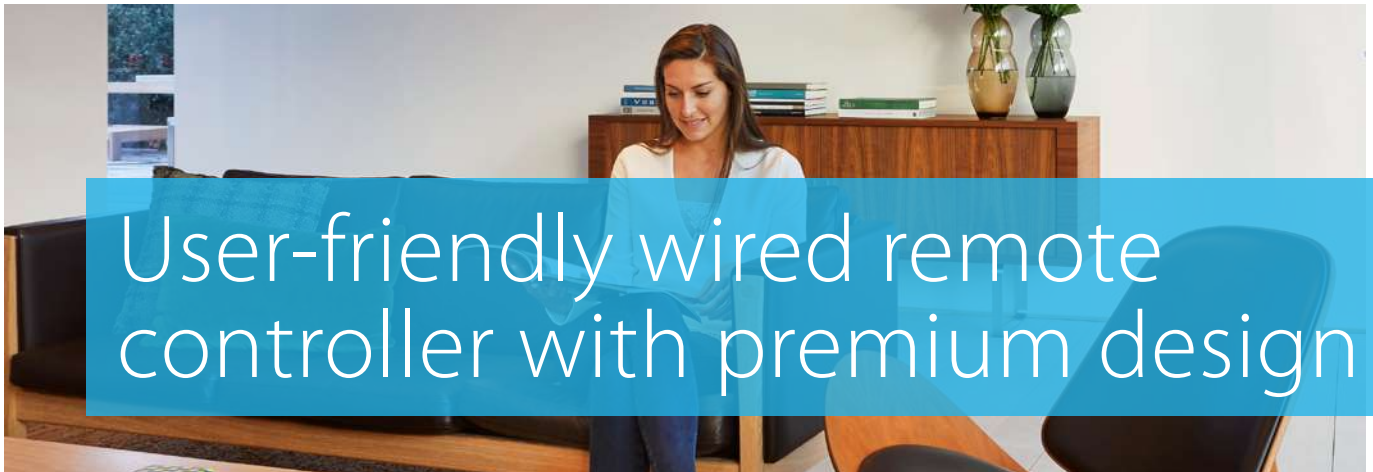

# User-friendly wired remote controller with premium design

Madoka. The beauty of simplicity

# Madoka



**Black**  
RAL 9005 (matt)  
BRC1HHDK

### Madoka combines refinement and simplicity

- > Sleek and elegant design
- > Intuitive touch-button control
- > Three colours to match any interior
- > Compact: measures only 85 x 85 mm



**White**  
RAL9003 (glossy)  
BRC1HHDW

### Easy update via Bluetooth

It is strongly recommended to make sure that the user interface is up to date. To update the software or check if updates are available, all you need is a mobile device and the Madoka Assistant app. The app is available on Google Play and in the App Store.



**Silver**  
RAL 9006 (metallic)  
BRC1HHDS

### Award-winning design

Madoka received an IF Design Award and Reddot Product Design Award for its innovative design. These awards represent two of the most prestigious and largest design competitions in the world.



reddot award 2018  
winner



# Wired remote controller



## For Daikin Altherma 3 heat pumps

A new generation of user interfaces: redesigned and intuitive

### Intuitive control with a premium design

The smooth curves of the Madoka controller offer a sleek, refined shape which is distinguished by its striking blue circular display. Presenting a clear visual reference with large, easy-to-read numbers, the controller features are accessed through three touch buttons, which combine intuitive control with easy adjustability for an enhanced user experience.

### Three colours to match any interior design

Whatever your interior design, Madoka will fit in. Silver will stand out in any home decor, while Black is a perfect match for darker, stylish interiors. White offers a sleek, modern look.

### Easily set operation parameters

Setting and finetuning your controller is simple and helps you attain higher energy savings and more comfort. The system enables you to select the space operation mode (heating, cooling or automatic), set the desired room temperature and control the domestic hot water temperature.

## Wired remote control for heating

### EKRUCB

#### Control

- › Manage space heating, cooling, domestic hot water and booster mode
- › User-friendly remote control with contemporary design
- › Easy to use with direct access to all main functions

#### Comfort


- › An additional user interface can be configured to include a room thermostat in the space
- › Easy commissioning: intuitive interface for advanced menu settings

#### General features

Several languages available depending on the model, including English, German, Dutch, Spanish, Italian, French, Greek, Russian, etc.

#### Applicable Daikin units

- › Daikin Altherma R Hybrid
- › Daikin Altherma GEO

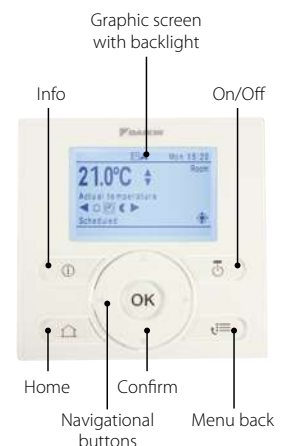



# Personalize your heating schedule

Create your own climate with Home Controls that can be adjusted to your lifestyle.

- › Combine up to 80 Daikin Home Controls accessories in as many as 25 rooms on the Daikin Altherma.
- › All accessories added to the same room will be automatically grouped together and follow the same schedule.
- › Change the device name and room name anytime you want.
- › Create schedules for heating (in rooms with radiators or underfloor heating) and cooling (in rooms with underfloor cooling).
- › Use boost function to heat up rooms quickly.
- › Invite other members of your household to control their comfort with the Onecta app.



				BRC1HHDW/S/K	EKRUCB <sup>1)</sup>	EKRUHL <sup>1)</sup>	EKWCTRD1V3	EKWCTRAN1V3
Casing	Colour			Black / White / Silver	White	White	-	-
	Operation LED	Colour			Blue status indicator	Green	Green	-
Dimensions	Unit	Height	mm	85	120	120	86	86
		Width	mm	85	120	120	86	86
		Depth	mm	25	12	12	31	29
	Packed unit	Height	mm	50	-	-	-	-
		Width	mm	217	-	-	-	-
		Depth	mm	161	-	-	-	-
Weight	Unit	kg		0.11	-	-	-	-
	Packed unit	kg		0.317	-	-	-	-
Packing	Material			Cardboard	-	-	-	-
	Weight	kg		0.085	-	-	-	-
LCD	Type			100 x 150 dots	-	-	-	-
	Dimensions	Height	mm	40.70	46	46	-	-
		Width	mm	28	72	72	-	-
	Back light	Colour			White	White	White	-
Ambient temperature	Operation	Min.	°C	-10	-	-	-	-
		Max.	°C	50	-	-	-	-
	Storage	Min.	°C	-20	-	-	-	-
		Max.	°C	70	-	-	-	-
Relative humidity	%		95	-	-	-	-	
Backup for power failure			Yes (the clock will keep functioning for period not exceeding 48 hours)	-	-	-	-	
Control systems	Class of temperature control			VI	VI	VI	-	-
	Contribution to seasonal space heating efficiency	%		4	4	4	-	-
Wiring connections	Type of wires			Sheathed vinyl cord or cable	-	-	-	-
	Size	mm <sup>2</sup>		0.75 - 1.25	-	-	-	-
	For connection with indoor	Quantity	Remark	2	-	-	-	-
	Wiring length	Max.	m	500	500	500	-	-

# Individual wired room controllers

For the temperature adjustment of heating and cooling systems



## General features

- › Improve the energy efficiency of the home
- › Universally deployable and scalable
- › Easy and intuitive installation, operation and maintenance
- › Cost-effective and convenient for the end-user

## System components



### Base station EKWUFHTA1V3

The Daikin Wired Base Station is the central connection unit of a room-by-room temperature control for the surface temperature adjustment of heating and cooling systems.



### Wired analog thermostat EKWCTAN1V3

An optimum price-performance ratio is offered for rooms where only temperature control is desired, without the comfort function of the display variant.



### Wired digital thermostat EKWCTRD1V3

The desired room temperature can be set comfortably via a rotary control with rotary-push action and soft ratchet. The well-structured and language-neutral symbols of the display clearly indicate all settings.



### Valve actuator EKWCVATR1V3

The Daikin Valve Actuator is a thermoelectric valve drive used to open and close valves on heating circuit distributors of concealed heating and cooling systems.

## Accessory list


With the help of an electronic room-by-room control system, users can regulate the temperature individually in each room. In addition to the warmth output of the actual heating surfaces, the room temperature control system also takes all other heat sources into account, such as sunshine, warmth from lights or people, and other sources of warmth, such as a fireplace or a tiled stove. On the basis of a continuous comparison of the target and current temperatures, the room temperature control system opens and closes the individual heating circuits by way of electrical valve actuators.

## Applicable Daikin units

Combinable with all Daikin Altherma units.

# Individual wireless room controllers

Our individual wireless room controllers allow for a total flexibility in heating your home.

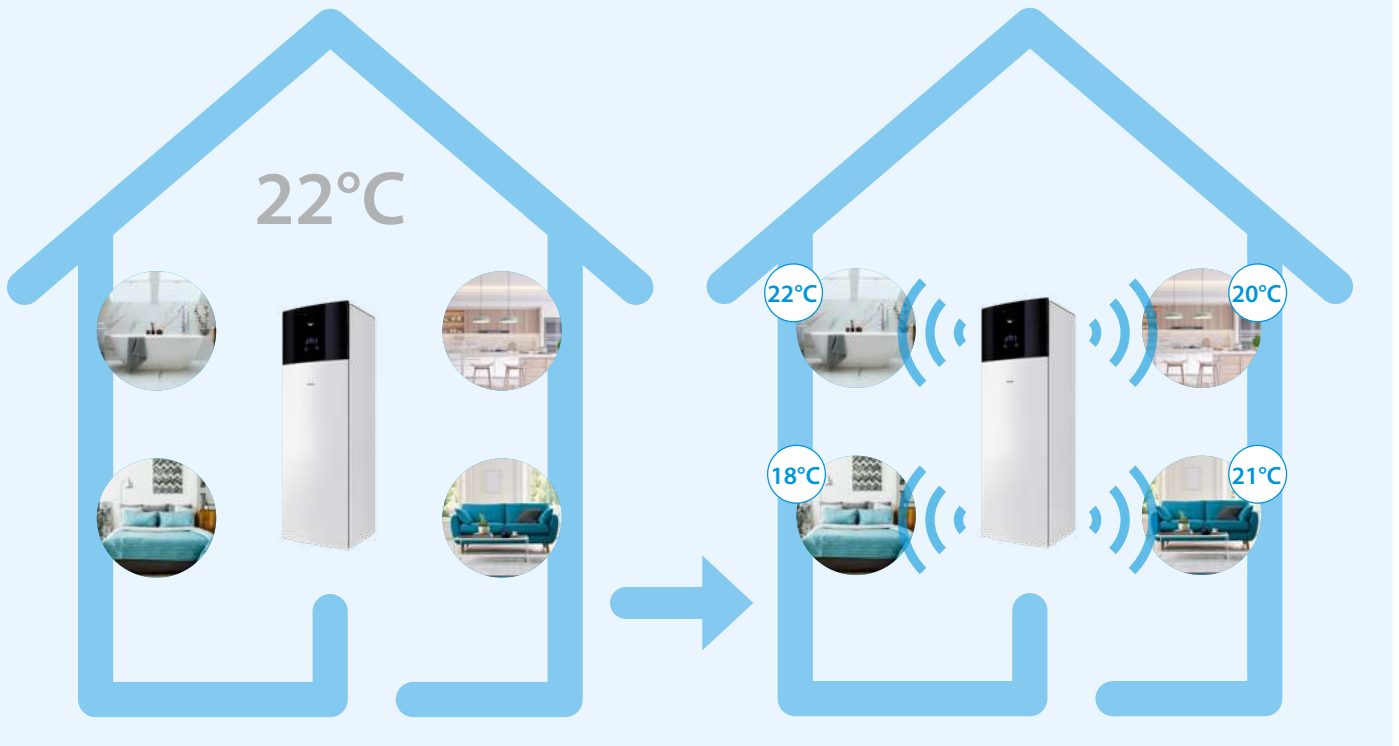

## ✓ Personalize your heating schedule

A traditional heating system allows you to control the temperature in only one room. With Daikin Home Controls you can choose the perfect temperature for each area separately.

## ✓ Wireless control for a better flexibility

**Get rid of cables and have control from anywhere you are, thanks to the Onecta app.**

Our wireless range of controllers makes your life easier. As soon as they are installed, you can program or control each room temperature from the intuitive app.



# Always in control

onecta

Jump into a fully connected system!


With Onecta app, you have an overview of all rooms temperatures. You can manage them individually, at home or remotely.



Room overview



Individual room overview

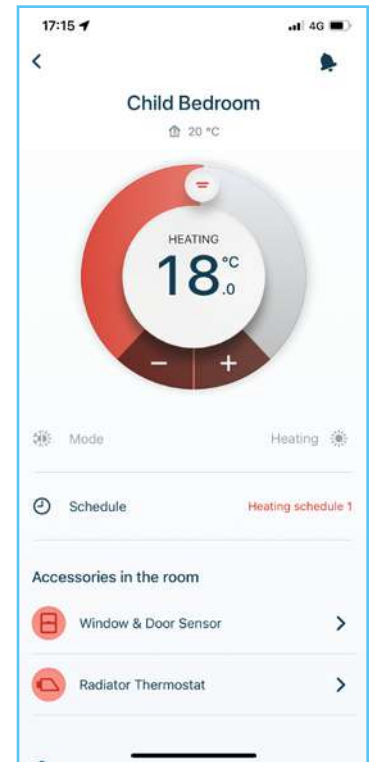



## Portfolio overview



The access point connects all Daikin Home Controls accessories with the cloud

- The radiator thermostats open or close the radiator valves of each room to control its heating demand
- Easy to mount without having to drain any water (suitable for radiators with a thread size of M30 x 1.5)

**Access point**  
EKRACPUR1PA (EU)  
EKRACPUR1PU (UK)



EKRRVATR2BA (EU)  
EKRRVATU1BA (UK)

The multi (for reversible systems) or basic (for heating only systems) IO box connects your Daikin Home Controls eco system to the Daikin Altherma.



**IO Box**  
EKRSBD11V3(H/O)  
EKRMIBE1V3

**Floor heating controller**  
EKRUFFT61V3





**Actuators per zone**  
EKWCVATR1V3

Measure and control the room temperature in combination with radiator thermostats or the floor heating controller




**Room thermostat or sensor**  
EKRCTRD12BA  
EKRCTRD13BA  
EKRSEND11BA



The floor heating controllers in combination with the actuators enables room by room control for rooms heated and/or cooled by underfloor heating.

# Portfolio overview

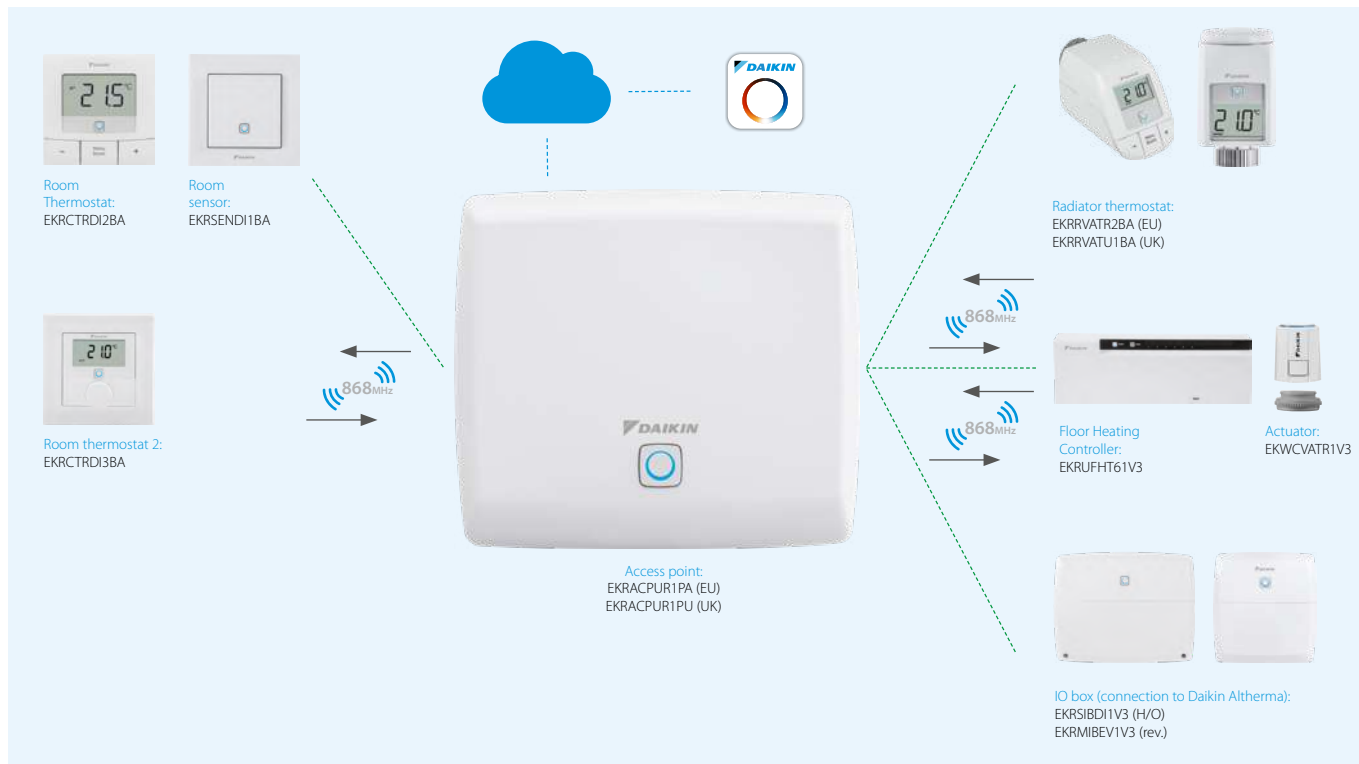

# Combination table

	Outdoor unit		Indoor unit	
Air-to-water heat pump	Daikin Altherma 3 H MT 08-10-12 kW	EPRA-EV3/W1	Floor standing	ETVH/X/Z16-E7
			ECH2O	ETSH(B)/X(B)16-E7
	Daikin Altherma 3 H HT 14-16-18 kW	EPRA-DV3/W1(7)	Wall mounted	ETBH/X16-E7
			Floor standing	ETVH/X/Z12-E
	Daikin Altherma 3 R 04-06-08 kW	ERGA-EV(7)(H)(A)	ECH2O	ETSH(B)/X(B)12-P-E
			Wall mounted	ETBH/X12-E
	Daikin Altherma 3 R 11-14-16 kW	ERLA-DV3/W1	Floor standing	EHVH/X/Z-E
			ECH2O	EHSX(X)(B)-E
	Daikin Altherma 3 R MT 08-10-12 kW	ERRA-EV3/W1	Wall mounted	EBHX(X)-E
			Floor standing	EBVH(X)/Z-D
Daikin Altherma 3 M 09-11-14-16 kW	EBLA-D	ECH2O	EBSH(B)/X(B)-D	
		Wall mounted	EBBH/EBBX-D	
Daikin Altherma 3 M 04-06-08 kW	EDLA-E	Floor standing	ELVH(X)/Z-E	
		Wall mounted	ELSH(B)/X(B)-E	
Daikin Altherma 3 R	ERLA03DV	Wall mounted	ELBH(X)-E	
Hybrid heat pump	Daikin Altherma R Hybrid	EVLQ-CV3	Floor standing	EHFH/Z03-S18D3V
			Wall mounted	EHYH8H-AV32
	Daikin Altherma H Hybrid	EJHA-AV3	Boiler	EHYKOMB33AA2/3
Ground and water source heat pump	Daikin Altherma 3 GEO			EHY2KOMB28/32A A
				EGSAH(X)-(U)E9W
	Daikin Altherma 3 WS			EGSAH(X)-(U)D9W
				EWSAH(X)-(U)E3V
			EWSAH(X)-(U)D9W	

# Onecta App

Now available with voice control

The Onecta App is for those who live their life on the go and who want to manage their heating system from their smartphone.




# onecta


## Voice control

To provide users with even more comfort and ease, the Onecta App now offers voice control. This hands-free feature cuts down on clicks to manage units faster than ever before.

Cross-functional and multilingual, voice control pairs well with any smart device, including Google Assistant and Amazon Alexa.

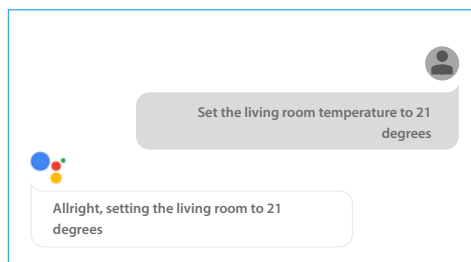


Example of using the voice control via Google Assistant

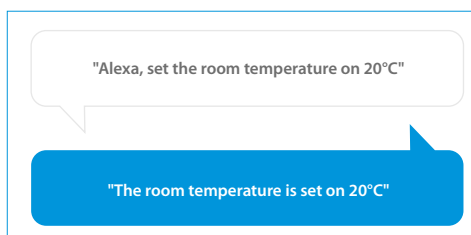

Example of using the voice control via Amazon Alexa




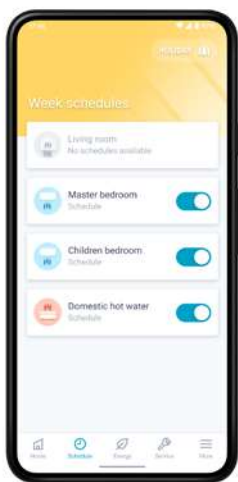

## Schedule

Set up a programme outlining when the system should operate, and create up to six actions per day.

- Schedule room temperature and operation mode
- Enable holiday mode to save costs

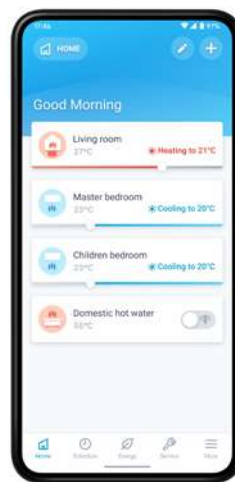

## Control

Customise the system to fit your lifestyle and year-round comfort levels.

- Change room and domestic hot water temperature
- Turn on powerful mode to boost hot water production




## Monitor

Receive a thorough overview of how the system is performing and how much energy it consumes.

- Check the status of the heating system
- Access energy consumption graphs (day, week, month)

Function availability depends on the system type, configuration and operation mode. The app functionality is only available if both the Daikin system and the app have a reliable internet connection.

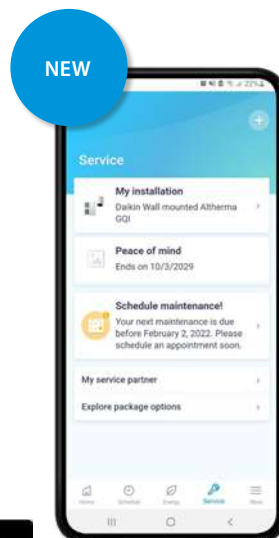

## Service - Warranty registration

- › Register your unit and enjoy the benefits of Stand By Me (*extended warranty, Worry-free maintenance, Convenient follow-up*)
- › Consult service partner information
- › Purchase an extended warranty or get a check-up for your units

Scan the QR code to download the app now





# Heating & cooling emitters

Daikin Altherma UFH	290
Daikin Altherma HPC floor standing	296
Daikin Altherma HPC wall mounted	298
Daikin Altherma HPC concealed	299

# Daikin Altherma UFH

## Underfloor heating

# Your comfortable climate, day after day

### Desired temperature at any time of year

Our heating systems make for a comfortable home. Heat generators such as an air-water heat pump use regenerative environmental energy as a heat source and so reduce energy consumption and keep costs to a minimum. But what about air conditioning of the rooms in summer? Very few residential buildings have air conditioning for a pleasant and comfortable temperature even on hot summer days and nights. That's changing now. With a heating system that not only provides comfortable warmth in winter, but also gentle cooling in summer throughout the entire building. And all this with very economical operation and no additional purchase costs.

### Regenerative heating in winter, gentle cooling in summer

The Daikin heat pump really comes into its own when combined with a Daikin underfloor heating system. For cooling, the heat pump process is simply reversed, i.e. heat is extracted from the building and released into the environment. The room is cooled mainly by the underfloor heating system. The large surface makes for a very pleasant and draught-free room climate. Invisible and noiseless, even in cooling mode.

### Clever combination: Underfloor heating and convector fan

A convector fan is used in rooms without underfloor heating to handle the dual functions of heating and cooling. It is the ideal complement to the Daikin heat pump if not all rooms have underfloor heating. Its very quiet operation means it can even be used in bedrooms. The integrated electronic room temperature control unit ensures an optimal climate in every room.

### Maximum comfort and maximum savings – all-inclusive

With the existing or optionally available cooling function of the Daikin air-water heat pump, you can enjoy both heating and cooling in rooms with underfloor heating without any further outlay or investment. The operating costs for this additional comfort are also low.

### Daikin Altherma ST solar thermal system: Minimizes energy costs

The integration of a solar system, which additionally contributes heating in winter from free solar energy, offers maximum living comfort with minimal energy costs.

Areas of application:	System temperatures 35 °C - 45 °C			System temperatures 55 °C - 70 °C		Option
	Monopex	Monopex cut	Monopex Industrial	System 70	System 70 Industrial	Heat pump convector
New building	•			(•)*		•
Modernisation with additional height						•
Modernisation without additional height		•				•
Underfloor heating combined with radiator				•	•	•
Heating and cooling (in combination with heat pump)	•	•	•			•
Wall heating						
Large areas			•		•	
Heat generators						
Boilers	•	•	•	•	•	•
Heat pump (low-temperature heating)	•	•	•			•

\* If system temperature of the heat generator requires 55 °C - 70 °C in the flow line



### Monopex

The underfloor heating for low system temperatures. Ideal in combination with heat pumps.

- › Monopex 14 for floor structures with system or tacker panel, wall heating and the Daikin milling system
- › Monopex 16 (for France) for floor installation with system or tacker panels
- › Monopex 17 for floor installation with system or tacker panels
- › Monopex 20 for commercial and industrial surfaces



### Clip rail for wall heating

Clip rail combined with Monopex 14 for wall heating.

**Systems:** Monopex 14



### Protect system plate

The Protect system plate consists of a nub plate with an additional surface protection layer made of deep-drawn polystyrene to protect the heating pipe during installation.

**Systems:** Monopex



### Tacker system

The Daikin tacker panel for underfloor heating pipes is available as a folding panel and roller track with laminated, high-strength film, and is ideal for laying heating pipes over large surfaces (e.g. commercial buildings).

**Systems:** Monopex



### RMV heating circuit distributor

Heating circuit manifold in stainless steel. For all Daikin underfloor heating and radiator connection systems.



### RMX heating circuit manifold

Heating circuit manifold made of heat-stabilised, glass fiber reinforced polyamide. For all Daikin underfloor heating and radiator connection systems.



### Room controller

The room thermostat ensures convenient and individual control of the room temperature and impresses with its flat design and construction. Versions:

#### Wireless version

- › Wireless without battery

#### Wired version

- › LED display:
  - Heating/cooling (red/blue)
- › Read all status messages



### Basic module with integrated power pack and clock module

- › Basic module with integrated power pack to supply the control unit (wireless and wired) plus optional clock module
- › Optimal interface to Daikin heat generators



### Clock module to supplement basic module:

- › 2 reduction times for heating circuits
- › Pump stopping time
- › Removable from the basic module for easy operation



### Daikin Altherma HPC heat pump convector

- › Slim design
- › Heating and cooling
- › Integrated electronic room temperature controller with timer
- › Very quiet and compact
- › Also suitable for bedrooms
- › Ideal in buildings with underfloor heating and radiators

Segmentation 1	Segmentation 2	Segmentation 3	Description	Product Name	Material Name	
<b>Piping</b>						
UFH heating pipes	PEHD-Xc	Single pipe	MONOPEX® ø14 X 2 DD - 120	EMOPX14120AA	EMOPX14120A	
			MONOPEX® ø14 X 2 DD - 240	EMOPX14240AA	EMOPX14240A	
			MONOPEX® ø14 X 2 DD - 600	EMOPX14600AA	EMOPX14600A	
			MONOPEX® ø17 X 2 DD - 120	EMOPX17120AA	EMOPX17120A	
			MONOPEX® ø17 X 2 DD - 240	EMOPX17240AA	EMOPX17240A	
			MONOPEX® ø17 X 2 DD - 600	EMOPX17600AA	EMOPX17600A	
			MONOPEX ø20 X 2 DD - 400	EMOPX20400AA	EMOPX20400A	
<b>Floorplates</b>						
Wet system Floorplates	Napplates	Diagonal With insulation	Protect Integral 27-2	EPROTECTIN272AA	EPROTECTIN272A	
			Protect 11	EPROTECT11AA	EPROTECT11A	
	Tacker	Tacker System	Tackerplate	ETACKERPLATEAA	ETACKERPLATEA	
			Tackerplate roll	ETACKERPLATERAA	ETACKERPLATERA	
Pipe accessories	Protection Pipe		Protection pipe 16/21	EPROTEPIP1621AA	EPROTEPIP1621A	
			Protection pipe 19/25	EPROTEPIP1925AA	EPROTEPIP1925A	
			Protection pipe 23/28	EPROTEPIP2328AA	EPROTEPIP2328A	
<b>Wall/side-strips</b>						
Installation accessory	Plate accessories	Wall/side-strips	Side-strip for screed floor RDS	ESIDESTRIPRDSAA	ESIDESTRIPRDSA	
			Closing cord floating screed floor RDS (in knob plate)	ESEALLINERDSAA	ESEALLINERDSA	
			Side-strip for concrete floor RDS-I	ESIDESTRPRDSIAA	ESIDESTRPRDSIA	
			Extension joint profile - carton	EXPANSIOJOICAA	EXPANSIOJOICA	
			Extension joint profile - PP or PE	EXPANSIOJOIPEAA	EXPANSIOJOIPEA	
	<b>Screed Material</b>					
		Screed		Screed Estrolith H2000	ESCREDEST2000AA	ESCREDEST2000A
				Screed Temporex	ESCREDEMPREXAA	ESCREDEMPREXA
				Screed Estrotherm S	ESCREDESTROSAA	ESCREDESTROSA
		Plate accessories	Primer	Surface primer 3,5kg	ESURFPRIMER35AA	ESCREDESTROSA
Surface primer 15kg				ESURFPRIMER15AA	ESURFPRIMER35A	
In pipe protection fluid			Freeze and corrosion protection	EFREZCOPROTECAA	EFREZCOPROTECA	
<b>Accessories</b>						
Tacker accessories	Tacker installation	System tacker STAC (tacker gun)	ESYSTACERSTACAA	ESYSTACERSTACA		
	Tacker nail	Tacker nail TN40	ETACKERNAIL40AA	ETACKERNAIL40A		
		Tacker nail TN60	ETACKERNAIL60AA	ETACKERNAIL60A		
Wall system accessories	Tape	Tape KB50	ETAPEKB50AA	ETAPEKB50A		
	Cliprail	Cliprail	ECLIPRAILAA	ECLIPRAILA		
	Cliprail accessories	Cliprail nail	ECLIPRAILNAILAA	ECLIPRAILNAILA		
		Cliprail plug	ECLIPRAILPLUGAA	ECLIPRAILPLUGA		
		Pipe clips	Pipe clips (Monopex 17/20)	EPIPECLIPMOPXAA	EPIPECLIPMOPXA	
Accessory	Manual pipe handling	Pipe clips (DUO25)	EPIPECLIPDUOAA	EPIPECLIPDUOA		
		Pipe fixation for steel frame	EPIPEFIXSTEELAA	EPIPEFIXSTEELA		
		Pipe damage recoverator	EPIPEDAMGERECAA	EPIPEDAMGERECA		
		Combined pipe cutter and stripping pilers RAZ1	EPIPCUTSTRAZ1AA	EPIPCUTSTRAZ1A		
	Pipe accessories	PE Foil	Pipe cutter	EPIPECUTTERAA	EPIPECUTTERA	
			PE Foil, 0,2 mm, 5 cm Raster	EPEFOILRASTERAA	EPEFOILRASTERA	
		<b>Pipe rolling machine</b>				
		Pipe roll out	Pipe rolling machine 1 (Service)	915038	915038	
Pipe rolling machine 2 (Service)	915039		915039			
Pipe rolling machine 3 (Service)	915040		915040			
<b>Pipe bend</b>						
Pipe bend	Pipe bend for 14-18	EPIPEBEND1418AA	EPIPEBEND1418A			
	Pipe bend for 20-22	EPIPEBEND2022AA	EPIPEBEND2022A			

UFH collector							
Collector	RMV/RMX collector	RMV collector (Stainless steel)	RMV 2	ECOLLECTRMV2AA	ECOLLECTRMV2A		
			RMV 3	ECOLLECTRMV3AA	ECOLLECTRMV3A		
			RMV 4	ECOLLECTRMV4AA	ECOLLECTRMV4A		
			RMV 5	ECOLLECTRMV5AA	ECOLLECTRMV5A		
			RMV 6	ECOLLECTRMV6AA	ECOLLECTRMV6A		
			RMV 7	ECOLLECTRMV7AA	ECOLLECTRMV7A		
			RMV 8	ECOLLECTRMV8AA	ECOLLECTRMV8A		
			RMV 9	ECOLLECTRMV9AA	ECOLLECTRMV9A		
			RMV 10	ECOLLECTRMV10AA	ECOLLECTRMV10A		
			RMV 11	ECOLLECTRMV11AA	ECOLLECTRMV11A		
			RMV 12	ECOLLECTRMV12AA	ECOLLECTRMV12A		
			RMX Collector (Plastic)	RMX 2	ECOLLECTRMX2AA	ECOLLECTRMX2A	
		RMX 3		ECOLLECTRMX3AA	ECOLLECTRMX3A		
		RMX 4		ECOLLECTRMX4AA	ECOLLECTRMX4A		
		RMX 5		ECOLLECTRMX5AA	ECOLLECTRMX5A		
		RMX 6		ECOLLECTRMX6AA	ECOLLECTRMX6A		
		RMX 7		ECOLLECTRMX7AA	ECOLLECTRMX7A		
		RMX 8		ECOLLECTRMX8AA	ECOLLECTRMX8A		
		RMX 9		ECOLLECTRMX9AA	ECOLLECTRMX9A		
		RMX 10		ECOLLECTRMX10AA	ECOLLECTRMX10A		
		RMX 11		ECOLLECTRMX11AA	ECOLLECTRMX11A		
		RMX 12		ECOLLECTRMX12AA	ECOLLECTRMX12A		
		<b>UFH collector Accessories</b>					
		Collector acc	HKV	Collector acc	Extension 1 zone	EXTENSIONZONEAA	EXTENSIONZONEA
	Flow sensor DMR RMX				EFLOSENDRMRMXAA	EFLOSENDRMRMXA	
	COUPLING NIPPLE 3/4" EUROCONE SKU				ECLUTCHNIPSKUAA	ECLUTCHNIPSKUA	
	Shut off valve				ESHUTOFVALVEAA	ESHUTOFVALVEA	
AlPex coupling	EAIPEXCOUPLINAA				EAIPEXCOUPLINA		
Set ring	HKV	Set ring	Set ring DUO 17	ESERIMOPXDU17AA	ESERIMOPXDU17A		
			Set ring Monopex 14 x 2,2	ESERIMOPX14AA	ESERIMOPX14A		
			Set ring Monopex 16 x 2,2	ESERIMOPX1622AA	ESERIMOPX1622A		
			Set ring Monopex 17	ESERIMOPX17AA	ESERIMOPX17A		
			Set ring DUO 25	ESERIMOPXDU25AA	ESERIMOPXDU25A		
			Set ring Monopex 16 x 1,5	ESERIMOPX1615AA	ESERIMOPX1615A		
			Set ring Monopex 20	ESERIMOPX20AA	ESERIMOPX20A		
Collector acc	Connection set ASH1	ECONECSETASH1AA	ECONECSETASH1A				
Set ring	Shut of for set ring	ESETRINGSHTOFAA	ESETRINGSHTOFA				
Calorimeter		Combi box	Calorimeter	ECALORIMETERAA	ECALORIMETERA		
		Combi box	Combi box	ECOMBIBOXAA	ECOMBIBOXA		
<b>Wall Box</b>							
	RMV/RMX	In wall collector box	In wall until RMX4/RMV3 (HKV compatible)	EIWRX4RV3AA	EIWRX4RV3A		
			In wall until RMX7/RMV6 (HKV compatible)	EIWRX7RV6AA	EIWRX7RV6A		
			In wall until RMX10/RMV9 (HKV compatible)	EIWRX10RV9AA	EIWRX10RV9A		
			In wall until RMX14/RMV13 (HKV compatible)	EIWRX14RV13AA	EIWRX14RV13A		
			In wall until RMX14/RMV13 + calorimeter (HKV compatible)	EIWRX14RV13CLAA	EIWRX14RV13CLA		
	HKV/RMX/RMV	On wall collector box	On-wall until HKV7/RMX7/RMV6	EOWHV7RX7RV6AA	EOWHV7RX7RV6A		
			On-wall until HKV10/RMX10/RMV9	EOWH10RX10R9AA	EOWH10RX10R9A		
			On-wall until HKV14/RMX14/RMV12	EOWH14RX14R12AA	EOWH14RX14R12A		
			On-wall until HKV14/RMX14/RMV12 + calorimeter	EOWH14R14R12CAA	EOWH14R14R12CA		
<b>Console</b>							
		Fixation console	Fixation console STK 40 for WEK40	EFCSTK40WEK40AA	EFCSTK40WEK40A		
			Fixation console STK 45 for WEK45	EFCSTK45WEK45AA	EFCSTK45WEK45A		
<b>Controllers</b>							
Controllers		Wired controllers	Base module UFH-BM	EKW175137	EKW175137		
			Clock module UFH-UM	EKW175138	EKW175138		
			Controller module, wire UFH-RMD2	EKW175141	EKW175141		
			Controller module, wire UFH-RMD6	EKW175140	EKW175140		
			Room controller, wire UFH-RD	EKW175139	EKW175139		
		Wireless controllers	Rocon UFH wireless UFH-RT	175142	175142		
			Base station 6 channels wireless UFH-RMF6A	175143	175143		
			2 channels extra wireless UFH-RMF2A	175144	175144		
		Actuators	Valve actuator RMV/RMX/HKV	EKWCVATR1V3	EKWCVATR1V3		
	Base station/Thermostat	Base station 10 zones	EKWUFHTA1V3	EKWUFHTA1V3			
		Digital thermostat 230V	EKWCTRD1V3	EKWCTRD1V3			
		Analog thermostat 230V	EKWCTRAN1V3	EKWCTRAN1V3			

# Heat pump convectors

## Daikin Altherma HPC

### What is

a heat pump convector?


Daikin Altherma HPC provides both cooling and heating. The system is compatible with underfloor piping and radiators in a multi-zoning installation, or can replace radiators in combination with low temperature heat pumps. The unit is suited for use in bedrooms and living rooms thanks to its silent operation.

### How does it work?

The way a heat pump convector works is similar to a radiator, as both use convection to heat a room. A radiator creates convection by running water through its pipes. With a heat pump convector, the convection process is faster because there is a small fan behind it, speeding up the heating cycle.


A heat pump convector creates the same room temperature as a traditional radiator, but with lower water temperatures inside the radiator, which in the long run contributes to direct energy savings for end users.

- › Optimized for newly built houses.
- › Can be set at low water temperature (35 °C) which makes it ideal for heat pump applications.

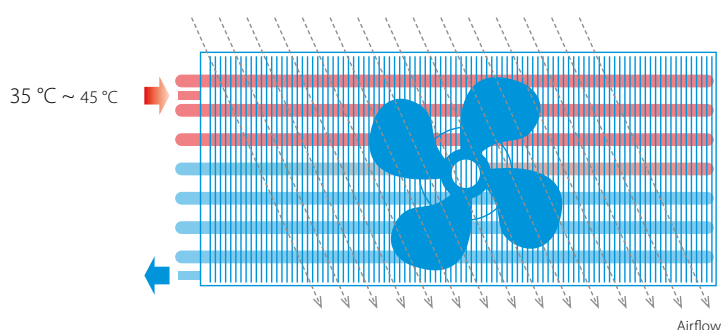

### Modulated airflow

When there is less heating demand, the unit modulates its airflow to slow down the fan rate, and in the process, lowers the operational sound. A standard ON/OFF fan running simultaneously at full speed can increase sound pressure.

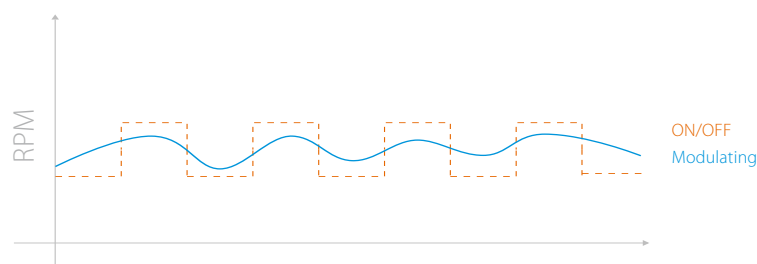

### DC Inverter

Daikin Altherma HPC uses the latest technologies to consume less electricity down to 3W of standby power input.



# Natural symbiosis

with heat pumps

By running on low temperature, Daikin Altherma heat pump convectors naturally fit with Daikin heat pumps. The heat pump convector range is made of 3 models:

- 1 Floor standing model with indoor air quality control (optional)
- 2 Wall mounted model with remote control
- 3 Concealed model hidden in the ceiling or wall



# Daikin Altherma HPC Floor standing model



The floor standing heat pump convector impresses with its low sound operations, and its slim design that received the RedDot Award 2020. Next to heating and cooling, the unit can also provide indoor air quality control.

## Why Indoor Air Quality Matters

Indoor Air Quality (IAQ) refers to the air quality in a building or structure, breathed in every day by the building's occupants.

When planning new residential buildings, schools, offices or light commercial buildings, many things must be considered. Besides structural factors, there are also the topics of heating, cooling and something often neglected: indoor air quality.



Did you know that the indoor air we breathe, whether at home, at the office, or in a hotel room could in fact be much more polluted than the air outside?

- > 90% of our lives is spent indoors
- > Indoor air quality can be 2 to 5 times worse than outdoor air quality because of pollutants, such as pollen, bacteria, etc.



## How does Daikin Altherma HPC ensure a healthy and comfortable indoor air quality?

When a pollutant level of indoor air is reached, the IAQ sensor opens a damper, which allows fresh air to come in. The incoming fresh air is immediately heated or cooled (depending on the demand) by the heat pump convector. In this way the indoor air remains of good quality while comfort is ensured.

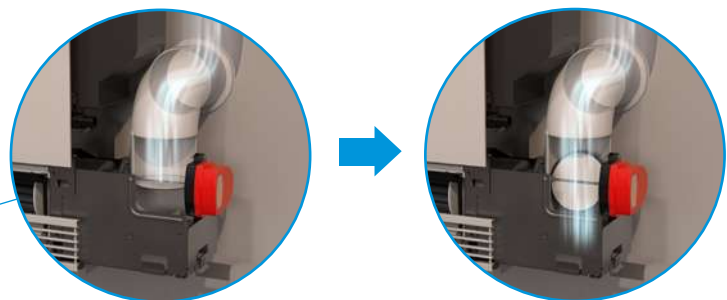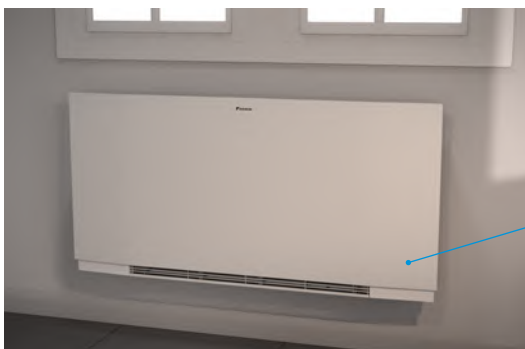




## Slim design



The floor standing Daikin Altherma HPC has a depth of only 135 mm that fits any house or apartment. Its optimised design was rewarded with the Reddot Design Award 2020.

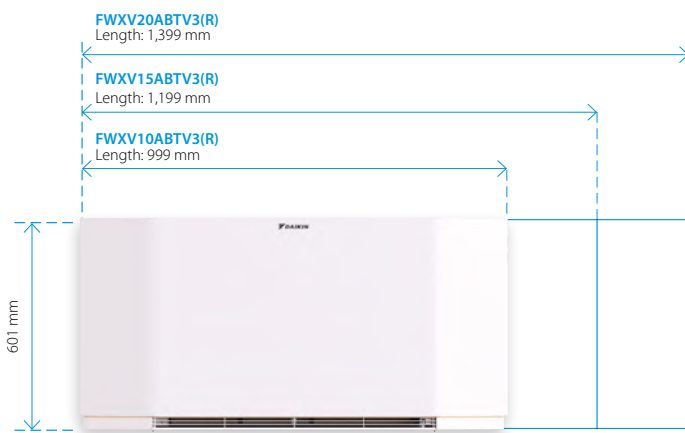


## Fast and high capacity

The Daikin Altherma HPC combines the advantages of residential underfloor heating and radiators. It delivers high-capacity heating or cooling faster and can be set at ultra-low temperatures (35/30 °C regime).



## Discreet

As the unit reaches its set point, a continuous modulating fan gradually reduces its speed and creates less noise. For the wall mounted and concealed units, the sound pressure measures 25dB(A) at 1m when the fan is on low-speed setting. Even lower sound pressure in super-silent mode (night mode).

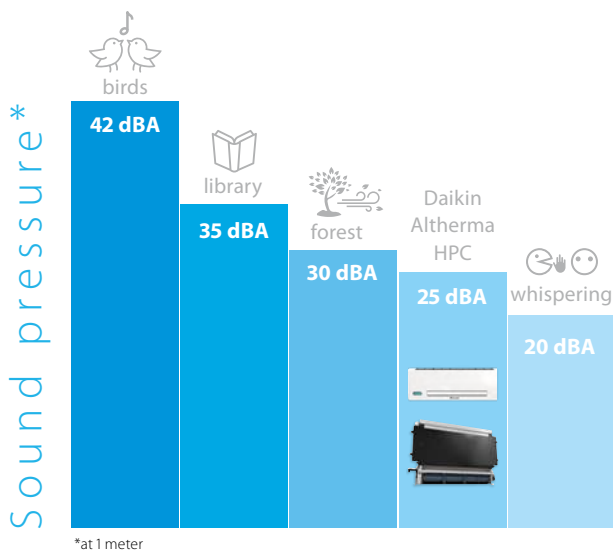

## Controls

Daikin offers a wide variety of controllers that are functional and have a great design.

### EKRTCTRL1



- > Built-in controller
- > Fully modulating
- > Multicolor display

### EKRTCTRL2



- > Built-in controller
- > 4 speed settings

### EKWHCTRL1



- > Wall controller
- > Fully modulating
- > In combination with EKWHCTRL0

### EKPCBO



- > Built-in controller
- > ON/OFF
- > In combination with external thermostats

### EKWHCTRL1A



- > Wall controller
- > Fully modulating
- > In combination with EKWHCTRL0
- > Includes indoor air quality sensor




# Wall-mounted model

Thanks to its slim design, our wall-mounted unit blends in with your interior discreetly while helping you save valuable floor space.

## Slim design

Daikin Altherma HPC is a compact unit made of a design metal casing including all valves.

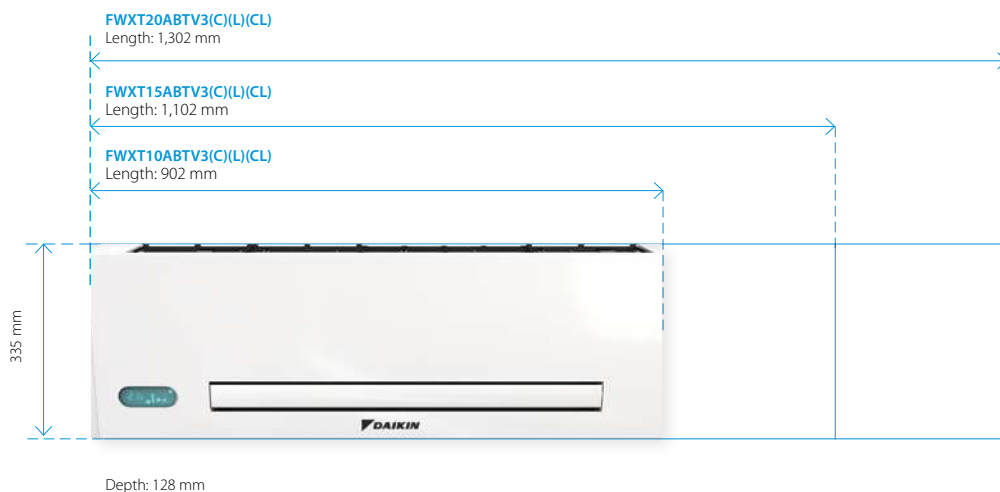

## Controls

Choice of:

- > Fully modulating controller allowing for remote control of the unit.
- > Infrared remote controller and on-board touch panel.

### EKWHCTRL1



- > Wall controller
- > Fully modulating
- > For models FWXT-ABTV3(L)

### Infrared remote controller



- > Remote
- > Fully modulating
- > For models FWXT-ABTV3(C)(L)

## Compactness



1

### Slim depth

The depth of 128 mm is an outstanding technical achievement that ensures a perfect fit in any home.

2

### More space for valves

Ease of installation: the space for hydraulic valves is wide and easily accessible.

3


### Modulated airflow

When there is less heating demand, the unit modulates its airflow to slow down the fan rate, and in the process, lowers the operational sound.



Forget about your heating or cooling installation altogether: our concealed model vanishes into the wall or ceiling for visual comfort while preserving its unique heating and cooling capabilities.

## Slim design

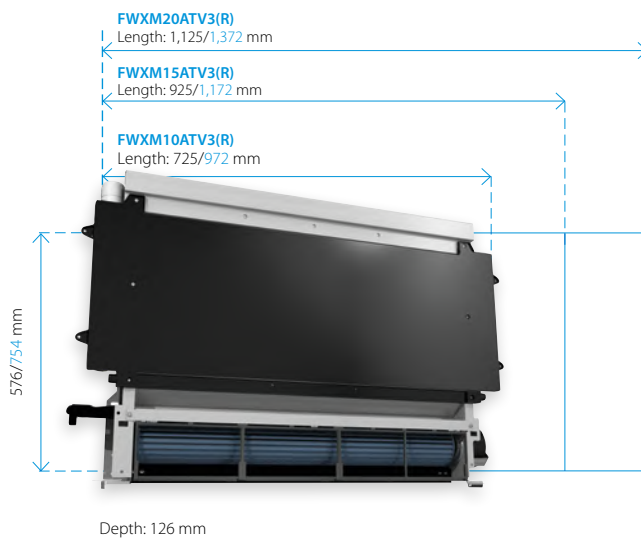

Blue dimensions are for the front cover.

## Controls

### EKWHCTRL1




- > Wall controller
- > Fully modulating
- > In combination with EKWHCTRL0

## Flexible installation

Daikin Altherma HPC can be installed in four different ways, allowing you to install it in almost all conditions. The unit can be positioned horizontally or vertically. For horizontal, in-ceiling installation, three different possibilities are offered:

- > Horizontal cover panel and vertical grille for air outlet
- > Horizontal intake grille and vertical grille for air outlet
- > Horizontal intake and outlet grilles

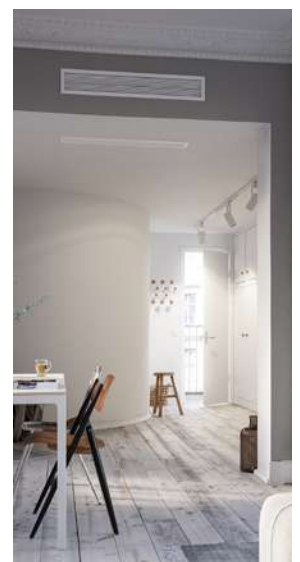

## Heat pump convectors - FWXV-ABTV3(R)

More details and final information can be found by scanning or clicking the QR codes.



FWXV-ATV3



FWXV-ATV3R

Indoor unit				FWXV10ABTV3(R)	FWXV15ABTV3(R)	FWXV20ABTV3(R)	
Cooling capacity at 7/12 °C	Min.		kW	0.78	1.10	1.13	
	Med.		kW	1.11	1.65	1.98	
	Max.		kW	1.62	2.64	2.99	
Sensible cooling capacity at 7/12 °C	Min.		kW	0.58	0.82	0.85	
	Med.		kW	0.71	1.15	1.55	
	Max.		kW	1.25	1.91	2.33	
Heating capacity at 45/40 °C	Min.		kW	0.87	1.12	1.11	
	Med.		kW	1.27	1.83	2.32	
	Max.		kW	1.96	2.86	3.50	
Power input	Min.		W	6	7	8	
	Med.		W	10	13	15	
	Max.		W	19	25	31	
Fan speed	Min.		RPM		720		
	Med.		RPM		1,220		
	Max.		RPM		1,700		
Casing	Colour			White, RAL 9003			
	Material			Metal sheet			
Dimensions	Unit	Height	mm		601		
		Width	mm	999	1,199	1,399	
		Depth	mm		135		
	Packed unit	Height	mm		690		
		Width	mm	1,230	1,430	1,630	
		Depth	mm		210		
Weight	Unit		kg	20	23	26	
	Packed unit		kg	21	24	27	
Packing	Material			Carton			
	Weight		kg		1		
Heat exchanger	Quantity			1			
	Internal coil volume		l	0.80	1.13	1.46	
		Max Operating pressure		bar	10		
Water circuit	Piping connections diameter		inch	3/4" male			
	Piping material			Copper			
	Heating - Water pressure drop at 45/40 °C	Min.		kPa	7	9	8
		Med.		kPa	8	14	15
		Max.		kPa	11	23	22
	Cooling - Water pressure drop at 7/12 °C	Min.		kPa	7	9	8
		Med.		kPa	8	14	15
		Max.		kPa	11	23	22
	Heating - Water flow rate at 45/40 °C	Min.		kg/h	150	193	191
		Med.		kg/h	218	315	399
		Max.		kg/h	337	492	602
	Cooling - Water flow rate at 7/12 °C	Min.		kg/h	134	189	194
		Med.		kg/h	191	284	341
		Max.		kg/h	279	454	514
Sound power level	Pressure	Heating/Max.		bar	10		
			Min.	dBA	40	42	43
	Med.	dBA	47	49	50		
	Max.	dBA	56	57	58		
Operation range	Heating	Water side	Min.	°C	30		
			Max.	°C	85		
	Cooling	Water side	Min.	°C	5		
			Max.	°C	18		
	Indoor installation	Ambient	Min.	°CDB	0		
			Max.	°CDB	45		
Control systems	Infrared remote control			no			
	On-board control			yes			
Electrical specifications				FWXV10ABTV3(R)	FWXV15ABTV3(R)	FWXV20ABTV3(R)	
Power supply	Phase			1			
	Frequency		Hz	50			
	Voltage		V	230			
Electrical power consumption	Max.		W	19	25	31	
	Standby		W	3	4	5	
Current	Maximum running current		A	0.15	0.21	0.27	

More details and final information can be found by scanning or clicking the QR codes.



FWXT-ATV3



FWXT-ATV3C



FWXT-ATV3L



FWXT-ATV3CL

Indoor unit				FWXT10ABTV3(C)(L)(CL)	FWXT15ABTV3(C)(L)(CL)	FWXT20ABTV3(C)(L)(CL)	
Cooling capacity at 7/12 °C	Min.		kW	0.49	0.62	0.70	
	Med.		kW	0.88	1.08	1.21	
	Max.		kW	1.24	1.61	1.94	
Sensible cooling capacity at 7/12 °C	Min.		kW	0.37	0.52	0.57	
	Med.		kW	0.70	0.86	1.02	
	Max.		kW	0.98	1.27	1.52	
Heating capacity at 45/40 °C	Min.		kW	0.55	0.79	0.74	
	Med.		kW	1	1.36	1.55	
	Max.		kW	1.50	2.01	2.13	
Power input	Min.		W	5			
	Mid.		W	8	9	10	
	Max.		W	19	20	29	
Fan speed	Min.		RPM		680		
	Med.		RPM		1,100		
	Max.		RPM		1,500		
Casing	Colour			White, RAL 9003			
	Material			Metal sheet			
Dimensions	Unit	Height	mm	335			
		Width	mm	902	1,102	1,302	
		Depth	mm	128			
	Packed unit	Height	mm	490			
		Width	mm	1,030	1,230	1,430	
		Depth	mm	210			
Weight	Unit		kg	14	16	19	
	Packed unit		kg	15	17	20	
Packing	Material			Carton			
	Weight		kg	1			
Heat exchanger	Quantity			1			
	Internal coil volume		l	0.50	0.61	0.77	
		Max Operating pressure		bar	10		
Water circuit	Piping connections diameter		inch	3/4" male			
	Piping material			Copper			
	Heating - Water pressure drop at 45/40 °C	Min.		kPa	5.10	4.81	6
		Med.		kPa	12	6.30	6.40
		Max.		kPa	16.30	7.20	8.10
	Cooling - Water pressure drop at 7/12 °C	Min.		kPa	4.80	4.70	5.50
		Med.		kPa	10.50	5.60	5.40
		Max.		kPa	11.70	5.10	5.30
	Heating - Water flow rate at 45/40 °C	Min.		kg/h	100	140	150
		Med.		kg/h	170	240	300
		Max.		kg/h	260	350	420
	Cooling - Water flow rate at 7/12 °C	Min.		kg/h	80	110	120
		Med.		kg/h	150	190	210
Max.			kg/h	210	280	330	
Sound power level	Pressure	Heating/Max.	bar	10			
		Min.	dBA	35	36	37	
		Med.	dBA	46	47	48	
Operation range	Heating	Water side	Min.	°C	30		
			Max.	°C	85		
	Cooling	Water side	Min.	°C	5		
			Max.	°C	18		
	Indoor installation	Ambient	Min.	°CDB	0		
			Max.	°CDB	45		
Control systems	Infrared remote control			yes for -C models			
	On-board control			yes			
Electrical specifications				FWXT10ABTV3(C)(L)(CL)	FWXT15ABTV3(C)(L)(CL)	FWXT20ABTV3(C)(L)(CL)	
Power supply	Phase			1			
	Frequency		Hz	50			
	Voltage		V	230			
Electrical power consumption	Max.		W	19	20	29	
	Standby		W	3	4	5	
Current	Maximum running current		A	0.16	0.18	0.24	

## Heat pump convectors - FWXM-ATV3(R)

More details and final information can be found by scanning or clicking the QR codes.



FWXM-ATV3



FWXM-ATV3R

Indoor unit				FWXM10ATV3(R)	FWXM15ATV3(R)	FWXM20ATV3(R)	
Cooling capacity at 7/12 °C	Min.		kW	0.75	1.15	1.32	
	Med.		kW	1.36	2.08	2.39	
	Max.		kW	2.12	2.81	3.30	
Sensible cooling capacity at 7/12 °C	Min.		kW	0.59	0.83	1.02	
	Med.		kW	1.07	1.51	1.84	
	Max.		kW	1.72	2.11	2.71	
Heating capacity at 45/40 °C	Min.		kW	0.82	1.20	1.47	
	Med.		kW	1.53	2.16	2.59	
	Max.		kW	2.21	3.02	3.81	
Power input	Min.		W	4	6	5	
	Med.		W	8	11	11	
	Max.		W	19	20	29	
Fan speed	Min.		RPM	680			
	Med.		RPM	1,100			
	Max.		RPM	1,500			
Casing	Material			No casing			
Dimensions	Unit	Height	mm	576			
		Width	mm	725	925	1,125	
		Depth	mm	126			
	Packed unit	Height	mm	690			
		Width	mm	830	1,030	1,230	
		Depth	mm	210			
Weight	Unit		kg	12	15	18	
	Packed unit		kg	13	16	19	
Packing	Material			Carton			
	Weight			kg			
Heat exchanger	Quantity			1	1	1	
	Internal coil volume		l	0.80	1.13	1.46	
		Max Operating pressure		bar	10		
Water circuit	Piping connections diameter			inch			
	Piping material			3/4" male Copper			
	Heating - Water pressure drop at 45/40 °C	Min.		kPa	1.50	2.70	3
		Med.		kPa	4.30	9.30	8.90
		Max.		kPa	1.90	19.10	21.20
	Cooling - Water pressure drop at 7/12 °C	Min.		kPa	1.90	2.70	2.50
		Med.		kPa	4.30	9.90	8.80
		Max.		kPa	8.20	17.10	18
	Heating - Water flow rate at 45/40 °C	Min.		kg/h	141	206	253
		Med.		kg/h	263	372	445
		Max.		kg/h	380	519	655
	Cooling - Water flow rate at 7/12 °C	Min.		kg/h	129	198	227
		Med.		kg/h	234	358	411
Max.			kg/h	365	483	568	
Sound power level	Pressure			bar			
	Heating/Max.			10			
	Min.		dBA	35	36	36	
		Med.	dBA	45	46	47	
		Max.	dBA	53	54	55	
Operation range	Heating	Water side	Min.	°C	30		
			Max.	°C	85		
	Cooling	Water side	Min.	°C	5		
			Max.	°C	18		
	Indoor installation	Ambient	Min.	°CDB	0		
			Max.	°CDB	45		
Control systems	Infrared remote control			no			
	On-board control			no			
Electrical specifications				FWXM10ATV3(R)	FWXM15ATV3(R)	FWXM20ATV3(R)	
Power supply	Phase			1			
	Frequency			Hz			
	Voltage			V			
Electrical power consumption	Max.			19	20	29	
	Standby			3	4	5	
Current	Maximum running current			0.16	0.18	0.26	



FWXV10ABTV3(R)	FWXT10ABTV3(C)(L)(CL)	FWXM10ATV3(R)	FWXM15ATV3(R)	FWXM20ATV3(R)
FWXV15ABTV3(R)	FWXT15ABTV3(C)(L)(CL)			
FWXV20ABTV3(R)	FWXT20ABTV3(C)(L)(CL)			

Description	Picture	Material name				
On-board electronic control SMART TOUCH with PID full modulating fan and thermostat		EKRTCTRL1	●			
On-board electronic control SMART TOUCH 4 speeds with thermostat		EKRTCTRL2	●			
On-board 4 speeds control switch to be combined with Daikin compatible thermostats		EKPCB0	●		●	●
On board 4 speeds control box to be combine with 4 speed thermostats		EKPCB4S	●		●	●
On board 1-10V control box to be combine with 1-10V thermostats		EKPCB10	●		●	●
On-board controller for EKWHCTRL1		EKWHCTRL0	●		●	●
SMART LCD wall controller with temperature probe, white casing		EKWHCTRL1	●	● (excl. FWXT-ABTV3(C/CL))	●	●
SMART LCD wall controller with temperature probe, white casing, including indoor air quality sensor		EKWHCTRL1A	●			
IR remote control				Standard (only FWXT-ABTV3(C/CL))		
Fresh air damper kit		EKFCD80	●			
Aesthetical feet		EKFA	●			
Motorised 2-way valve (FWXV/M)		EK2VK0	●		●	●
Motorised 2-way valve (FWXT)		EKT2VK0		●		
Motorised 3-way valve (FWXV/M)		EK3VK1	●		●	●
Motorised 3-way valve (FWXT)		EKT3VK1		●		
L-bow 90 °C		EKEUR90	●		●	●
Extension piece		EKDIST	●		●	●
Condensate collector tray for horizontal installation		EKM10COH	●			
		EKM15COH	●			
		EKM20COH	●			
Metal casing		EKM10CS			●	
		EKM15CS				●
		EKM20CS				
Front cover for ceiling installation		EKM10CH			●	
		EKM15CH				●
		EKM20CH				
Front cover for wall installation		EKM10CV			●	
		EKM15CV				●
		EKM20CV				
Air intake fitting		EKM10DH			●	
		EKM15DH				●
		EKM20DH				
90 °C exhaust bend (Horizontal)		EKM10D90			●	
		EKM15D90				●
		EKM20D90				
Telescopic air flow duct		EKM10DT			●	
		EKM15DT				●
		EKM20DT				
Aluminum air intake grille with straight airflow		EKM10IS			●	
		EKM15IS				●
		EKM20IS				
Straight airflow vent		EKM10SV			●	
		EKM15SV				●
		EKM20SV				
Aluminum air intake grille with curved airflow		EKM10IC			●	
		EKM15IC				●
		EKM20IC				
Aluminum air outlet grille with curved airflow		EKM10CA			●	
		EKM15CA				●
		EKM20CA				



# Daikin Altherma ST - Solar heating systems

Solar panels for pressurised use and Drain-back system	312
Solar panel - pressurised system	314
Solar panels - drain-back system	316
Solar collector	319
Pump station	319

# Daikin Altherma ST

## Maximising renewable energy



## Why choose a Daikin Altherma ST solar panel?

Daikin's solar panels are designed to complement a variety of heating systems to garner more renewable energy to deliver hot water to your home.

# ECH<sub>2</sub>O

### ✓ Comfort

- › Flexible solar system for pressureless (drain-back) and pressurised solar systems
- › Hot tap water and heating support generated by solar energy
- › Highly efficient flat solar panels that are available in 3 installation options:
  - On roof
  - In-roof
  - Flat roof

### ✓ Energy efficiency


**ECH<sub>2</sub>O thermal store range:**  
Hot water savings with solar energy

Reduce your energy costs by taking advantage of the sun's renewable energy with our solar hot water systems. Built for small and large homes, individuals can choose between a pressureless or pressurised hot water system.

### ✓ Reliability

#### Keymark Certificate

- › Daikin's solar collectors have been awarded the Solar Keymark certification. Recognised across Europe, the Keymark for solar thermal products helps users select quality solar collectors. In most European countries this certification is mandatory for the products to be eligible for subsidies

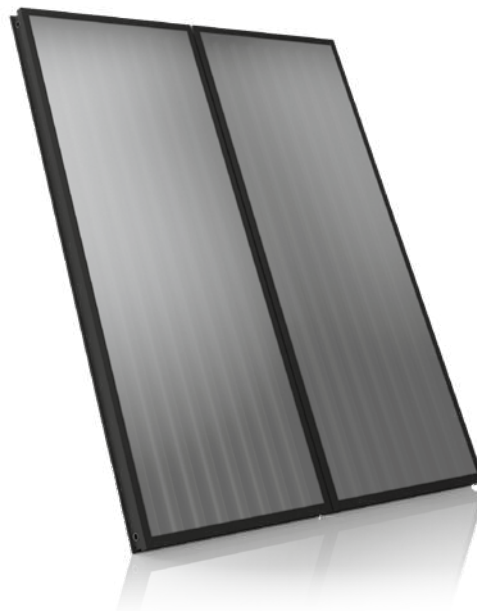

011-751016 F




## The Drain-Back solar system

### ✓ How is it working?

- › Starting the pump station engages the filling of the primary network and ensures the energy transfer from the solar collectors to the thermal store.
- › Whenever the pump station stops working, the water contained in the collectors goes down back to the thermal store
- › The air intake allowing the draining is ensured by an orifice always placed out of water (at atmospheric pressure)
- › Thanks to this unique way of working, no safety devices, safety valves, expansion vessels, anti-return valve or glycol are necessary

### ✓ Advantages

- › 0% glycol: the liquid carrying the heat is only the water inside the system
- › Self-working system with the pump station modulations depending the temperatures inside the collectors and the thermal store
- › Automatic management of the defrost mode and avoidance of overheating mode
- › No commissioning on the solar system, no replacement of the heat-carrying liquid



## The pressurised solar system

### ✓ How is it working?

- › The heat-carrying liquid is mixed with glycol to avoid freezing in the solar collectors system
- › Whenever the solar collectors reach an useful temperature level, the system provides a continuous supply of energy
- › The energy from the collectors is returned to the thermal store thanks to the coil


### ✓ Advantages

#### **Monovalent**

- › The solar system is used as first heating source and can be coupled with a wall mounted boiler. The cold water is first pre-heated in the thermal store and the boiler can provide additional heat instantaneously if needed

#### **Bivalent**

- › The solar system integrates a backup heater. The domestic hot water is directly produced in the thermal store. The additional heater ensures the back-up in case of low sunshine



Material list for standard solar panel systems for hot water preparation and heating support EKS21P

Solar panel  
EKS21P



Number of solar panels Type of installation Article	Type	Order No.	2		3		4		5	
			On-roof Quantity	In-roof Quantity	On-roof Quantity	In-roof Quantity	On-roof Quantity	In-roof Quantity	On-roof Quantity	In-roof Quantity
Solar panel	EKS21P	16 20 12-RTX	2	2	3	3	4	4	5	5
Solar panel connection	FIX-VBP	16 20 16-RTX	1	1	2	2	3	3	4	4
Installation rail for individual solar panel	FIX MP 100	16 20 66	2	2	3	3	4	4	5	5
On-roof installation kit for one solar panel <sup>DB+P)</sup> (2 roof hooks per kit)	FIX-ADDP	16 20 85	4 <sup>2)</sup>	0	6 <sup>2)</sup>	0	8 <sup>2)</sup>	0	10 <sup>2)</sup>	0
In-roof installation package, basic storage for two solar panel	IB EKS21P	16 20 17	0	1	0	1	0	1	0	1
In-roof installation package, additional storage for central solar panel	IE EKS21P	16 20 18	0	0	0	1	0	2	0	3

Material list standard solar panels with Drain-back system



Type of installation	Type	Order No.	On-roof Quantity	In-roof Quantity
Control and pump unit	RPS 4	EKS RPS4A	1	1
Support for connecting pipe solar panel	TS	16 42 45	1	1
Connection pipe solar panel	CON 15	16 47 32	1	1
Roof penetration pack solar panel on-roof	EKSRCAP EKSRCRP	EKSRCAP anthracite EKSRCRP red	1	0
Installation accessories, solar panel in-roof	RCIP	16 20 37-RTX	0	1

Nominal volume, complete system

Number of solar panels	2	3	4	5
Connecting line 15 m	DN 16	DN 16	DN 20	DN 20
Nominal system volume (L)	20.2	21.5	22.8	24.1

Material list solar panels with pressurised system <sup>1)</sup>



Number of solar panels Article	Type	Order No.	up to 2 Quantity	up to 3 Quantity	4 to 5 Quantity
Controller	EKSDSR1A	EKSDSR1A	1	1	1
Pressure station solar panel	EKS RDS2A	EKS RDS2A	1	1	1
Solar panel pressurised solar line DN16 15 m	CON 15P16	16 20 73	1	1	0
Solar panel pressurised solar connection kit DN16	CON CP16	16 20 75	1	1	0
Solar panel pressurised solar line DN20 15 m	CON 15P20	16 20 74	0	0	1
Solar panel pressurised solar connection kit DN20	CON CP20	16 20 76	0	0	1
Solar panel expansion vessel 12 L *	MAG S12	16 20 70	1	0	0
Solar panel expansion vessel 25 L *	MAG S 25	16 20 50	0	1	0
Solar panel expansion vessel 35 L *	MAG S 35	16 20 51	0	0	1
Installation material solar panel with pressure system <sup>1)</sup>	RCP	EKS RCP	1	1	1



Drain-back system



Pressurised system

- DB) Only required for installations with drain-back system.
- P) Only required for pressurised installations.
- \* Standard recommendation, after detailed expansion vessel calculation, other expansion vessels may be necessary.
- 1) The roof penetration for on-roof and flat roof installation is to be provided by the customer. The solar fluid must be ordered separately.
- 2) The number of roof hooks must be checked if necessary (see installation instructions ADM).

Material list for standard solar panel systems for hot water preparation and heating support EKS26P

Solar panel  
EKS26P



Number of solar panels Type of installation / Article	Type	Order No.	2		3		4		5		5		5	
			On-roof Quantity	In-roof Quantity	Flat roof Quantity	On-roof Quantity	In-roof Quantity	Flat roof Quantity	On-roof Quantity	In-roof Quantity	Flat roof Quantity	On-roof Quantity	In-roof Quantity	Flat roof Quantity
Solar panel	EKS26P	EKS26P	2	2	2	3	3	3	4	4	4	5	5	5
Solar panel connection	FIX-VBP	16 20 16 - RTX	1	1	1	2	2	2	3	3	3	4	4	4
Mounting rail single collector	FIX MP 130	16 20 67	2	2	2	3	3	3	4	4	4	5	5	5
On-roof installation pack for one solar panel <sup>(DB+P)</sup> (2 roof hooks per kit)	FIX-ADDP	16 20 85	4 <sup>2)</sup>	0	0	6 <sup>2)</sup>	0	0	8 <sup>2)</sup>	0	0	10 <sup>2)</sup>	0	0
In-roof installation kit, basic flashing for two solar panels	IB V26P	16 20 19	0	1	0	0	1	0	0	1	0	0	1	0
In-roof installation pack, additional flashing for central solar panel	IE V26P	16 20 20	0	0	0	0	1	0	0	2	0	0	3	0
Flat-roof frame, basic pack for two solar panels	FB V26P	16 20 58	0	0	1	0	0	1	0	0	1	0	0	1
Flat-roof frame, expansion pack additional solar panel	FE V26P	16 20 59	0	0	0	0	0	1	0	0	2	0	0	3

Material list standard solar panels with Drain-back system



Number of solar panels Installation type / Article	Type	Order No.	On-roof Quantity	In-roof Quantity	Flat roof Quantity
Control and pump unit	EKS26P4A	EKS26P4A	1	1	1
Additional support troughs for connecting pipe solar panel	TS	16 42 45	1	1	1
Connection pipe solar panel	CON 15	16 47 32	1	1	1
Roof penetration pack solar panel on-roof	EKS26CAP EKS26CRP	EKS26CAP Anthracite EKS26CAP Red	1	0	0
Installation accessories, solar panel in-roof	RCIP	16 20 37-RTX	0	1	0
Roof penetration pack solar panel flat roof	RCFP	16 20 38-RTX	0	0	1

Material list solar panels with pressurised system <sup>1)</sup>



Number of solar panels Installation type / Article	Type	Order No.	up to 2 Quantity	up to 3 Quantity	4 to 5 Quantity	Nominal volume, complete system				
						Number of solar panels	2	3	4	5
Controller	EKS26SR1A	EKS26SR1A	1	1	1	Connecting line 15 m	DN 16	DN 16	DN 20	DN 20
Pressure station solar panel	EKS26RDS2A	EKS26RDS2A	1	1	1	Nominal volume entire system (L)	21	22.7	24.4	26.1
Solar panel pressurised solar line DN16 15 m	CON 15P16	16 20 73	1	1	0					
Solar panel pressurised solar connection kit DN16	CON CP16	16 20 75	1	1	0					
Solar panel pressurised solar line DN20 15 m	CON 15P20	16 20 74	0	0	1					
Solar panel pressurised solar connection kit DN20	CON CP20	16 20 76	0	0	1					
Solar panel expansion vessel 12 L *	MAG S12	16 20 70	1	0	0					
Solar panel expansion vessel 25 L *	MAG S 25	16 20 50	0	1	0					
Solar panel expansion vessel 35 L *	MAG S 35	16 20 51	0	0	1					
Installation material solar panel with pressure system <sup>1)</sup>	RCP	EKS26RCP	1	1	1					

Material list for standard solar panel systems for hot water preparation and heating support EKSH26P

Solar panel  
H26 P



Number of solar panels Type of installation Article	Type	Order No.	1		2		3		4		5	
			On-roof Quantity	Flat roof Quantity	On-roof Quantity	Flat roof Quantity	On-roof Quantity	Flat roof Quantity	On-roof Quantity	Flat roof Quantity		
Solar panel	EKSH26P	EKSH26P	1	1	2	2	3	3	4	4	5	5
Solar panel connection	FIX-VBP	16 20 16 - RTX	0	0	1	1	2	2	3	3	4	4
Installation rail guide for individual solar panel	FIX MP 200	16 20 68	1	1	2	2	3	3	4	4	5	5
On-roof installation pack for one solar panel <sup>P)</sup> (4 roof hooks per kit)	FIX-ADDP	16 20 85	2 <sup>2)</sup>	0	4 <sup>2)</sup>	0	6 <sup>2)</sup>	0	8 <sup>2)</sup>	0	10 <sup>2)</sup>	0
Flat roof support frame basic kit for one solar panel	FB H26P	16 20 60	0	1	0	1	0	1	0	1	0	1
Flat roof trestle Extension pack for one additional solar panel	FE H26P	16 20 61	0	0	0	1	0	2	0	3	0	4



Nominal volume, complete system				
Number of solar panels	2	3	4	5
Connecting line 15 m	DN 16	DN 16	DN 20	DN 20
Nominal volume system (L)	21.6	23.9	26	28.1

Material list solar panels with pressurised system <sup>1)</sup>



Pressurised system

Number of solar panels Installation type / Article	Type	Order No.	Quantity	
			up to 3	4 to 5
Pressurised thermal store	EKHWP500PB	EKHWP500PB	1	1
Controller	EKSDSR1A	EKSDSR1A	1	1
Pressure station solar panel	EKSRDS2A	EKSRDS2A	1	1
Solar panel pressurised solar line DN16 15 m	CON 15P16	16 20 73	1	0
Solar panel pressurised solar connection kit DN16	CON CP16	16 20 75	1	0
Solar panel pressurised solar line DN20 15 m	CON 15P20	16 20 74	0	1
Solar panel pressurised solar connection kit DN20	CON CP20	16 20 76	0	1
Solar panel expansion vessel 12 L *	MAG S12	16 20 70	0	0
Solar panel expansion vessel 25 L *	MAG S 25	16 20 50	1	0
Solar panel expansion vessel 35 L *	MAG S 35	16 20 51	0	1
Installation material solar panel with pressure system <sup>1)</sup>	RCP	EKSRCP	1	1

- P) Only required for pressurised installations.
- \* Standard recommendation, after detailed expansion vessel calculation, other expansion vessels may be necessary.
- 1) The roof penetration for on-roof and flat roof installation is to be provided by the customer. The solar fluid must be ordered separately.
- 2) The number of roof hooks must be checked if necessary (see installation instructions ADM).



## Solar panel - Overview EKS26P - standard vertical model

List of materials for solar components that connect several storage tanks






Total number of storage tanks Article	Type	Order No.	2 Quantity	3 Quantity
Solar panel storage tank extension kit	CON SX	16 01 20	1	1
Solar panel storage tank extension kit 2	CON SXE	16 01 21	0	1

## Solar panels for pressurised use and Drain-back system










**High-efficiency flat solar panels**

Stable watertight solar panel frame made of black anodised aluminium, highly special coating and safety glass, low-reflection, efficient heat insulation of the solar panel back plane with mineral wool. The minimum efficiency of the solar panel is more than 525kWh/m<sup>2</sup> per year (location: Würzburg, Germany). Suitable for drain-back and pressurised systems.

	Article	Type	Order No.
High-efficiency flat solar panel EKS21P	 (2,000 x 1,006 x 85 mm), solar panel area 1.79 m <sup>2</sup> , Weight 35kg, water content 1.3 l. Max. 6 bar.	EKS21P	EKS21P
High-efficiency flat solar panel EKS26P	(2,000 x 1,300 x 85 mm), solar panel area 2.35 m <sup>2</sup> , Weight 42kg, water content 1.7 l. Max. 6 bar.	EKS26P	EKS26P
High-efficiency flat solar panel EKSH26P	 (1,300 x 2,000 x 85 mm), solar panel area 2.35 m <sup>2</sup> , Weight 42kg, water content 2.1 l. Max. 6 bar.	EKSH26P	EKSH26P
Solar panel connection	 Installation profile connector, expansion joints and double clamping blocks.	FIX-VBP	16 20 16-RTX
Installation profile rail for EKS21P	 Consisting of installation profile rails and solar panel securing clips.	FIX MP 100	16 20 66
Installation profile rail for EKS26P	 Consisting of installation profile rails and solar panel securing clips.	FIX MP 130	16 20 67
Installation profile rail for EKSH26P	 Consisting of installation profile rails and solar panel securing clips.	FIX MP 200	16 20 68
Support for connecting pipe solar panel	 Support troughs (5 in number, length, in each case, 1.3 m) for support of the solar panel plastic connection lines in Drain-Back.	TS	16 42 45
On-roof installation pack slate	 4 roof hooks for flat roofing, e.g. slate, for one solar panel.	FIX ADS	16 47 23
On-roof installation pack MULTI	 2 height-adjustable roof hooks for drain-back and pressure system, including mounting materials.	FIX-ADDP	16 20 85
Roof holder for corrugated covering	 4 holders including fixing material for one solar panel.	FIX-WD	16 47 03-RTX
Roof holder for welded sheet metal covering	 4 holders including fixing material for one solar panel. Note: for on-roof installation only.	FIX-BD	16 47 04-RTX












## Solar panels for pressurised use and Drain-back system



		Article	Type	Order No.
Basic in-roof assembly package EKS21P		Basic flashing for two solar panels, duct set including installation material. Minimum roof gradient 15°.	IB V21P	16 20 17
Extension kit in-roof mounting EKS21P		Additional package for an additional solar panel, duct set including installation material. Minimum roof gradient 15°.	IE V21P	16 20 18
Basic in-roof mounting pack EKS26P		Basic flashing for two solar panels, duct set including installation material. Minimum roof gradient 15°.	IB V26P	16 20 19
Expansion in-roof mounting pack EKS26P		Additional package for an additional solar panel, duct set including installation material. Minimum roof gradient 15°.	IE V26P	16 20 20
In-roof covering slate supplementary pack		30 layer pieces for flat coverings, e.g. slate (per basic in-roof pack you will need one supplementary pack).	FIX-IES	16 46 16-RTX
Basic pack flat-roof frame for mounting of two EKS26P solar panels on flat roofs		Pre-assembled system for simple and rapid installation, adjustable gradient (30° to 60°). Suitable for wind load zone WLZ 2 (only to a limited extent for WLZ 3).	FB V26P	16 20 58
Extension pack flat-roof frame for one additional EKS26P solar panel		Extension for FB V26P.	FE V26P	16 20 59
Basic pack flat-roof frame for mounting of one EKSH26P collector on flat roofs		Pre-assembled system for simple and rapid installation, adjustable gradient (30° to 60°). Suitable for wind load zone WLZ 2 (only to a limited extent for WLZ 3).	FB H26P	16 20 60
Extension pack flat-roof frame for one additional EKSH26P solar panel		Extension for FB H26P.	FE H26P	16 20 61
Disassembly tools ducts drain-back system			FIX LP	16 20 29-RTX








# Solar panel - pressurised system



	Article	Type	Order No.
<b>Controller</b>	 <p>Temperature-difference regulator for the solar panel with pressure system. Regulator with graphic display for representation of hydraulic schematics and yield balances, for example. Including return flow and storage tank temperature sensor and housing for wall mounting.</p>	EKSDSR1A	EKSDSR1A
<b>Pressure station</b>	 <p>Consists of: Pipe connection <math>\varnothing</math> 22 mm including pipe compression fittings and support sleeves (5x), flow measurement unit with 2 x KFE cock, integrated air separator, ball-cocks with integrated back-flow prevention, Grundfos Solar 25-65 pump, safety group with pressure gauge, including insulation and installation accessories.</p>	EKSRDS2A	EKSRDS2A
<b>Fill and drain connection</b>	 <p>For RPS3 and tanks from 2013 onwards, for easy filling and emptying through the fill and drain valve.</p>	KFE BA	16 52 15
<b>Solar panel pressurised solar line DN 16</b>	 <p>15 m thermally-insulated stainless steel corrugated pipe line for solar panel pressurised systems with inserted sensor line nominal size DN 16. For systems of up to 3 solar panels and a line length of up to 25 m. Without connection fittings.</p>	CON 15P16	16 20 73
<b>Solar panel pressurised solar connection kit DN 16</b>	 <p>All necessary fittings for connecting the pressurised solar line DN 16. Required together with CON 15P16.</p>	CON CP16	16 20 75
<b>Solar panel pressurised solar connection kit DN 16</b>	 <p>Fittings for connecting two pressurised solar lines DN 16.</p>	CON XP16	16 20 71
<b>Solar panel pressurised solar line DN 20</b>	 <p>15 m thermally-insulated stainless steel corrugated pipe line for solar panel pressurised systems with inserted sensor line nominal size DN 20. For systems up to 5 solar panels and a line length of up to 25 m. Without connection fittings.</p>	CON 15P20	16 20 74
<b>Pressurised solar connection kit DN 20</b>	 <p>All necessary fittings for connecting the pressurised solar line DN 20. Always required together with CON 15P20.</p>	CON CP20	16 20 76
<b>Solar panel pressurised solar connection kit DN 20</b>	 <p>Fittings for connecting the pressurised solar line DN 20.</p>	CON P20	16 20 72
<b>Installation material solar panel pressurised system</b>	 <p>Connection fittings for pressurised systems and solar panel installation material, consisting of installation material for solar panel and connection pipe, 2 m UV-proof thermal insulation for the outer area, connection fittings and panel temperature sensor. The roof penetration must be provided to the customer.</p>	RCP	EKSRCP
<b>Solar panel row connection for the solar panel with pressure system</b>	 <p>Connection kit for connecting two rows of solar panels in parallel. Consisting of solar panel installation material, equipotential bonding terminals, end caps, connection elbows and 1 m thermally-insulated piping.</p>	CON LCP	16 20 45








# Solar panel - pressurised system












		Article	Type	Order No.
Expansion vessel 12 L with connection block		For solar panels with pressure systems of max. 2 x EKS21P - solar panels.	MAG S12	16 20 70
Expansion vessel 25 L with connection block		For solar panels with pressure systems of max. 3 solar panels.	MAG S 25	16 20 50
Expansion vessel 35 L with connection block		For solar panels with pressure systems of max. 5 solar panels.	MAG S 35	16 20 51-RTX
GLYCOL CORACON SOL 5F		20 L can of pre-mixed solar fluid, functional range up to -28 °C.	CORACON SOL 5F	16 20 52-RTX
Fill and draining valve				16 41 17
GLYCOL CORACON SOL 5		1 L of solar fluid concentrate for extension of the frost range. With 20 L of solar fluid with 1 L additive, the use range extends down to -33 °C. For 20 L of solar fluid with 2x 1 L of additive, the functional range is extended to -38 °C.	CORACON SOL 5	16 20 53
Circulation lance		For energetically-optimised incorporation of the domestic hot water circulation in the hot water connection of the warm-water storage tank.	ZKL	16 51 13
Thermostatic mixer as scalding protector		Thermal safety device for the domestic water pipe. Setting range 35-60 °C.	VTA32	15 60 15
Screw connection kit 1"		For connection of the scald protection VTA32.		15 60 16
Thermostatic regulator 230V		With capillary tube temperature sensor, setting range 35-85 °C.	SCS-TR	16 41 30
3-way switching valve 1" male		With motor drive 230V, switchover time 6 sec.	3 W-UV	15 60 34

## Solar panels - drain-back system






	Article	Type	Order No.
<b>EKS RPS4 regulation and pump unit</b>	 <p>Ready to plug in unit (230V), with digital differential temperature regulation, return and storage tank temperature sensors, high-efficiency circulation pump.</p> <p>INFO: The flow sensor (FLS 20), included in the supply, provides more effective operation of the EKS RPS4. In addition to direct calculation of the heat output, the sensor allows modulation of the operating pump and thus an additional saving in electrical energy.</p>	EKS RPS4	EKS RPS4A
<b>Additional pump set RPS4</b>			164243
<b>Fill and tap connection solar panel with drain-back system</b>		For easy filling of solar panels with drain-back system from 2013 onwards through the solar flow connector.	KFE DB BA 16 52 16
<b>Burner blocking contact connection cable</b>	 <p>For RPS2, RPS3, RPS3 M, RPS3 25M.</p>	BSKK	16 41 10-RTX
<b>Solar panel FlowGuard solar flow regulator</b>	 <p>With solar flow indicator 2-16 l/min.</p>	FLG	16 41 02-RTX
<b>Connection tube solar panel</b>	 <p>Ready to connect connection line 15 m between solar panel and pump station, consisting of thermally-insulated flow and return line with integrated sensor cable.</p>	CON 15	16 47 32
<b>Connection tube solar panel</b>	 <p>Ready to connect connection line 20 m between solar panel and pump station, consisting of thermally-insulated flow and return line with integrated sensor cable.</p>	CON 20	16 47 33
<b>Solar panel solar flow sensor 100</b>	 <p>Sensor for expanding RPS3 25M control system, enables heat yield metering in large installations. Measuring range up to 100 l/min.</p>	FLS 100	16 41 03-RTX
<b>Extension</b>	 <p>For connecting a collector array (EKSV21P, EKSV26P, EKSH26P) to the on-site rigid copper connection pipes when using roof penetration box kits EKSRCAP, EKSRCRP, RCIP, RCFP.</p>	CON X20 25M	16 42 31

# Solar panels - drain-back system

	Article	Type	Order No.										
Extension connection tube solar panel	 <p>Ready to plug in including installation material and connection fittings L = 2.5 m L = 5.0 m L = 10.0 m</p> <p>Maximum possible length of the connection pipe:</p> <table border="1"> <thead> <tr> <th>Number of solar panels</th> <th>Max. length</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>45 m</td> </tr> <tr> <td>3</td> <td>30 m</td> </tr> <tr> <td>4</td> <td>17 m</td> </tr> <tr> <td>5</td> <td>15 m</td> </tr> </tbody> </table>	Number of solar panels	Max. length	2	45 m	3	30 m	4	17 m	5	15 m	CON X 25 CON X 50 CON X 100	16 42 61 16 42 62 16 42 63
		Number of solar panels	Max. length										
2	45 m												
3	30 m												
4	17 m												
5	15 m												
Extension of the inflow pipe	 <p>UV-resistant thermally-insulated, length = 8 m, including cable connecting fitting for the solar panel sensor line.</p>	CON XV 80	16 42 64										
On-roof roof penetration, anthracite		<p>Roof penetration pack with connection fittings and solar panel installation material, consisting of anthracite roof penetration, installation material for solar panel and connection pipe, 2 m UV-proof heat insulation for the outer area, connection fittings with detaching tools and panel temperature sensor.</p>	EKSRCAP	EKSRCAP									
On-roof roof penetration, tile red		<p>Roof penetration pack with connection fittings and solar panel installation material, consisting of tile red roof penetration, installation material for solar panel and connection pipe, 2 m UV-proof heat insulation for the outer area, connection fittings with detaching tools and panel temperature sensor.</p>	EKSRCRP	EKSRCRP									
Solar panel panel row connection		<p>Connection kit for connecting two rows of solar panels one above the other. Consisting of solar panel installation material, equipotential bonding terminals, end caps, connection elbows and 1 m thermally-insulated piping.</p>	CON RVP	16 20 35-RTX									
Installation material, solar panel in-roof		<p>Ready to plug in including installation material and connection fittings.</p>	RCIP	16 20 37-RTX									
Roof penetration, flat roof		<p>Roof penetration pack with connection fittings and solar panel installation material, consisting of flat-roof roof penetration, installation material for solar panel and connection pipe, 8.5 m UV-proof heat insulation for the outer area, connection fittings with detaching tools and panel temperature sensor.</p>	RCFP	16 20 38-RTX									
Roof penetration flat-roof for alternate side solar panel connection		<p>Flat roof penetration with screw connections and blind plugs for penetration openings which are not used.</p>	CON FE	16 47 09									
Solar panel boiler extension kit		<p>Connection kit for the connection of two warm-water storage tanks, consisting of drain-back connection tube and lead supply line.</p>	CON SX	16 01 20									

## Solar panels - drain-back system



	Article	Type	Order No.
<b>Solar panel storage tank extension kit 2</b>	 <p>Connection kit for the connection of additional warm-water storage tanks, consisting of drain-back connection tube and lead supply line.</p>	CON SXE	16 01 21
<b>Circulation lance</b>	 <p>For energetically-optimised incorporation of the tap-water circulation in the hot water connection of the warm-water storage tank.</p>	ZKL	16 51 13
<b>Thermostatic mixer as scalding protector</b>	<p>Thermal safety device for the warm-water pipe. Setting range 35-60 °C.</p>	VTA32	15 60 15
<b>Screw connection kit 1"</b>	<p>For connection of the scald protection VTA32.</p>		15 60 16
<b>Thermostatic regulator 230V</b>	<p>With capillary tube temperature sensor, setting range 35-85 °C.</p>	SCS-TR	16 41 30
<b>3-way switching valve 1" male</b>	 <p>With motor drive 230V, switch-over time 6 sec.</p>	3 W-UV	15 60 34
<b>Collector connector (connect B)</b>			164201-RTX
<b>Connector 18/18</b>			164233-RTX
<b>Connector 15/15</b>			164234-RTX
<b>Plug-in coupling for RPS4 22/15</b>			164237-RTX



# Solar collector

Thermal solar collector for hot water production

- › Solar collectors can produce up to 70% of the energy needed for hot water production - a major cost saving
- › Horizontal solar collector for domestic hot water production
- › Vertical solar collector for domestic hot water production
- › High efficiency collectors transfer all the short-wave solar radiation into heat as a result of their highly selective coating
- › Easy to install on roof tiles
- › Can be used for drain-back and pressurised applications


More details and final information can be found by scanning or clicking the QR codes.



EKSV-P



EKSH-P

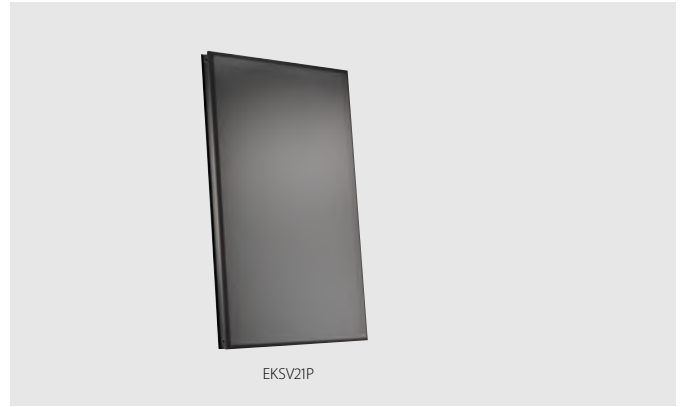

EKSV21P

Accessory				EKSV21P	EKSV26P	EKSH26P
Mounting				Vertical		Horizontal
Dimensions	Unit	HeightxWidthxDepth	mm	2,000x1,006x85	2,000x1,300x85	1,300x2,000x85
Weight	Unit		kg	33		42
Volume			L	1.30	1.70	2.10
Surface	Outer		m <sup>2</sup>	2.01		2.60
	Aperture		m <sup>2</sup>	1,800		2,360
	Absorber		m <sup>2</sup>	1.80		2.36
Coating				Micro-therm (absorption max. 96%, Emission ca. 5% +/-2%)		
Absorber				Harp-shaped copper pipe register with laser-welded highly selective coated aluminium plate		
Glazing				Single pane safety glass, transmission +/- 92%		
Allowed roof angle	Min. ~ Max.		°	15 ~ 80		
Operating pressure	Max.		bar	6		
Stand still temperature	Max.		°C	192		
Thermal performance	Collector efficiency (η <sub>col</sub> )		%	53		
	Zero loss collector efficiency η <sub>0</sub>		%	0.71		
	Heat loss coefficient a <sub>1</sub>		W/m <sup>2</sup> .K	4,300		
	Temperature dependence of the heat loss coefficient a <sub>2</sub>		W/m <sup>2</sup> .K <sup>2</sup>	0.006		
	Thermal capacity			kJ/K	4.90	

## EKSRPS4A/EKSRDS2A

# Pump station

- › Save energy and reduce CO<sub>2</sub> emissions with a solar system for domestic hot water production
- › Pump station connectable to drain-back solar system
- › Pump station and control provide the transfer of solar heat to the domestic hot water tank

More details and final information can be found by scanning or clicking the QR codes.



EKSRPS4A




EKSRDS2A



EKSRPS4A

Accessory				EKSRPS4A	EKSRDS2A
Mounting				On side of tank	On wall
Dimensions	Unit	HeightxWidthxDepth	mm	815x142x230	410x314x154
Weight	Unit		kg	6.40	6
Operation range	Ambient temperature	Min. ~ Max.	°C	5 ~ 40	- ~ 40
Operating pressure	Max.		bar	-	6
Stand still temperature	Max.		°C	85	120
Control				Digital temperature difference controller with plain text display	
	Power consumption		W	2	5
Sensor	Solar panel temperature sensor			Pt1000	
	Storage tank sensor			PTC	
	Return flow sensor			PTC	
	Feed temperature and flow sensor			Voltage signal (3.5V DC)	
Power supply	Phase/Frequency/Voltage		Hz/V	1 ~ /50/230	-/50/230
Power supply intake				Indoor unit	
Auxiliary	Solpump		W	37.3	23
	Annual auxiliary electricity consumption Q <sub>aux</sub>		kWh	92.1	89
	Solstandby		W	2.00	5.00

# Residential air-to-air heat pump solutions according to your customer's needs

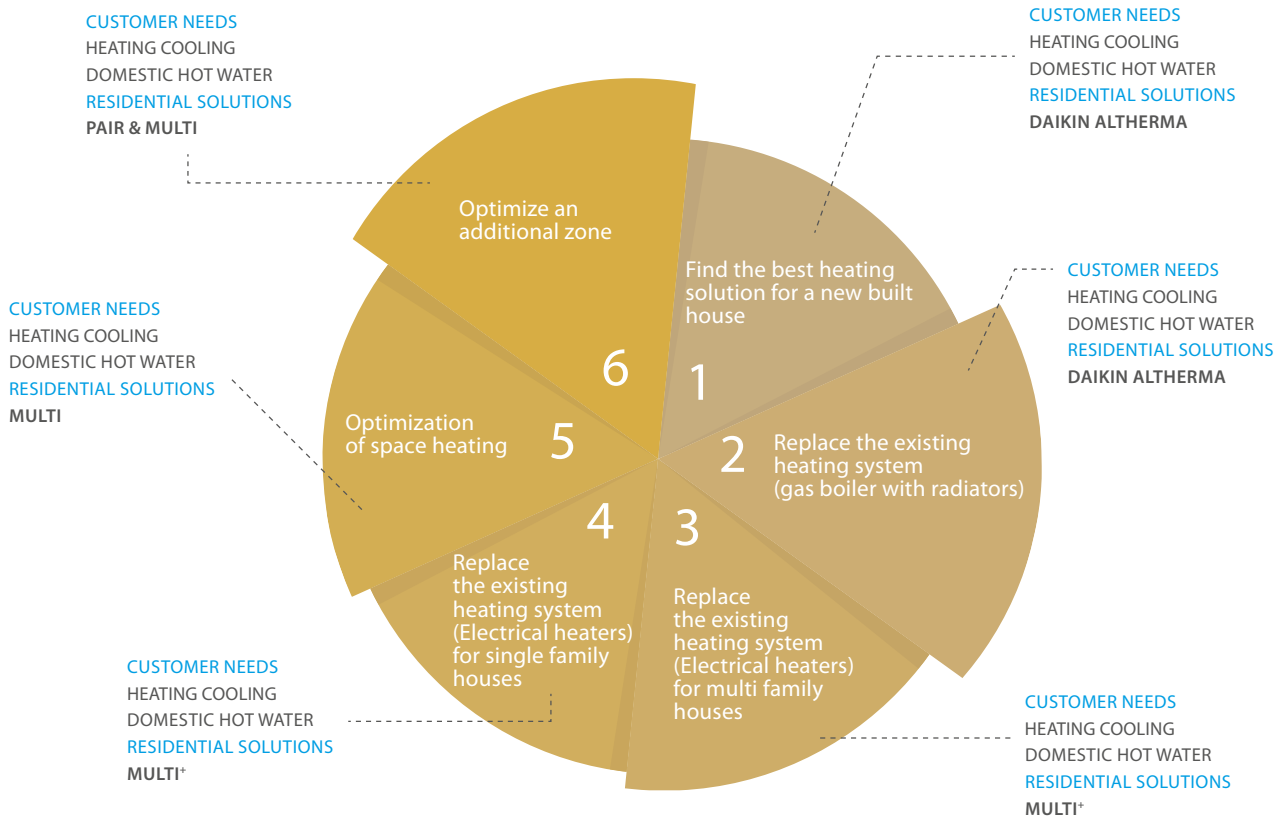

## 8 reasons to buy a Daikin (multi-)split system



**Best performance and highest energy** efficiencies in cooling and heating



Multi connection up to **5 ports**



Best comfort throughout the year, thanks to the **intelligent sensors** and **airflow techniques**



Top indoor air quality through **unique filtration**



Reliability thanks to **best technologies and service**



**Highest quality standards:** from parts to production





Connectivity: Remote monitoring and **WLAN available** on all units



Iconic and **award-winning** design

# Residential

## air to air solutions

Why choose a Daikin split system?	322		
Product range overview	340		
Benefits overview	342		
<b>R-32 standard range</b>	<b>344</b>		
Wall mounted units	344		
<b>UNIQUE</b>  FTXZ-N / RXZ-N	345		
FTXJ-AW/S/B / RXJ-A	348		
stylish C/FTXA-CW/S/B / RXA-A8/B(9)	350		
perfera C/FTXM-A/R / RXM-A/R	356		
<b>NEW</b> comfora FTXP-N(9) / RXP-N(9)	357		
<b>UPDATE</b> sensira FTXF-E/D / RXF-E/D	358		
<b>NEW</b> sensira FTXC-D / RXC-D	359		
Floor standing units	360		
C/FVXM-A9 / RXM-A	362		
Concealed ceiling unit	363		
FDXM-F9 / RXM-A/R	363		
Multi outdoor units	364		
<b>UPDATE</b> 2MXM40-50-68A9	365		
<b>UPDATE</b> 3MXM40-52-68A9	365		
<b>UPDATE</b> 4MXM68-80A9	365		
<b>UPDATE</b> 5MXM90A9	365		
Multi+ outdoor unit and tank	366		
<b>UPDATE</b> 4MWXM52A9	367		
EKHWET-BV3	367		
Sensira multi outdoor units	368		
2-3MXF-A(9)	368		
Hybrid multi	369		
CHYHBH-AV32 / EHYKOMB-AA2/3	369		
		<b>R-32 Siesta range</b>	<b>370</b>
		Siesta wall mounted units	370
		<b>NEW</b> ATXM-A / ARXM-A	371
		<b>UPDATE</b> ATXP-N9 / ARXP-N9	372
		<b>NEW</b> ATXF-E/A / ARXF-E/A	373
		ATXC-D / ARXC-D	374
		Siesta multi outdoor unit	375
		2/3AMXM-M9/N9	375
		2-3AMXF-A(9)	376
		<b>R-32 Nepura range</b>	<b>378</b>
		Wall mounted units	380
		<b>NEW</b>  FTXTJ-AW/B / RXTJ-A	380
		<b>UPDATE</b> stylish FTXTA-CW/B / RXTA-C	381
		<b>UPDATE</b> perfera FTXTM-S / RXTM-A	382
		<b>UPDATE</b> comfora FTXTP-N / RXTP-A	383
		Floor standing units	384
		<b>NEW</b> perfera FVXTM-A / RXTM-A	384
		Options & accessories	386

**BLUEvolution**

Bluevolution  
for complete  
range

The Bluevolution technology combines a specifically developed compressor and the R-32 refrigerant. Daikin is the first company in the world to launch heat pumps equipped with R-32. With a lower Global Warming Potential (GWP), the R-32 is equivalent in power to standard refrigerants, but achieves higher energy efficiency and lower CO<sub>2</sub> emissions. Easy to recover and reuse, R-32 is the perfect solution for attaining the new European CO<sub>2</sub> emission targets.

# What should you know from your customer to advise him with the best residential solution?


## What is the best solution for your customer?


- > The best solution for your customer is one which matches the requirements perfectly and is designed specifically for the house.
- > Whether your customer is building a new house or renovating an old farm, Daikin offers specific solutions which optimise efficiency, depending on the size and layout.
- > Combining heating, cooling, domestic hot water, with or without solar energy, anything is possible.

## What is the best solution for your customer?

- > Type of house: Multi family house / single family house / new built / insulation level / m<sup>2</sup>
- > Location of the house: City / country
- > How many persons live in the house?

## What does your customer want to do?

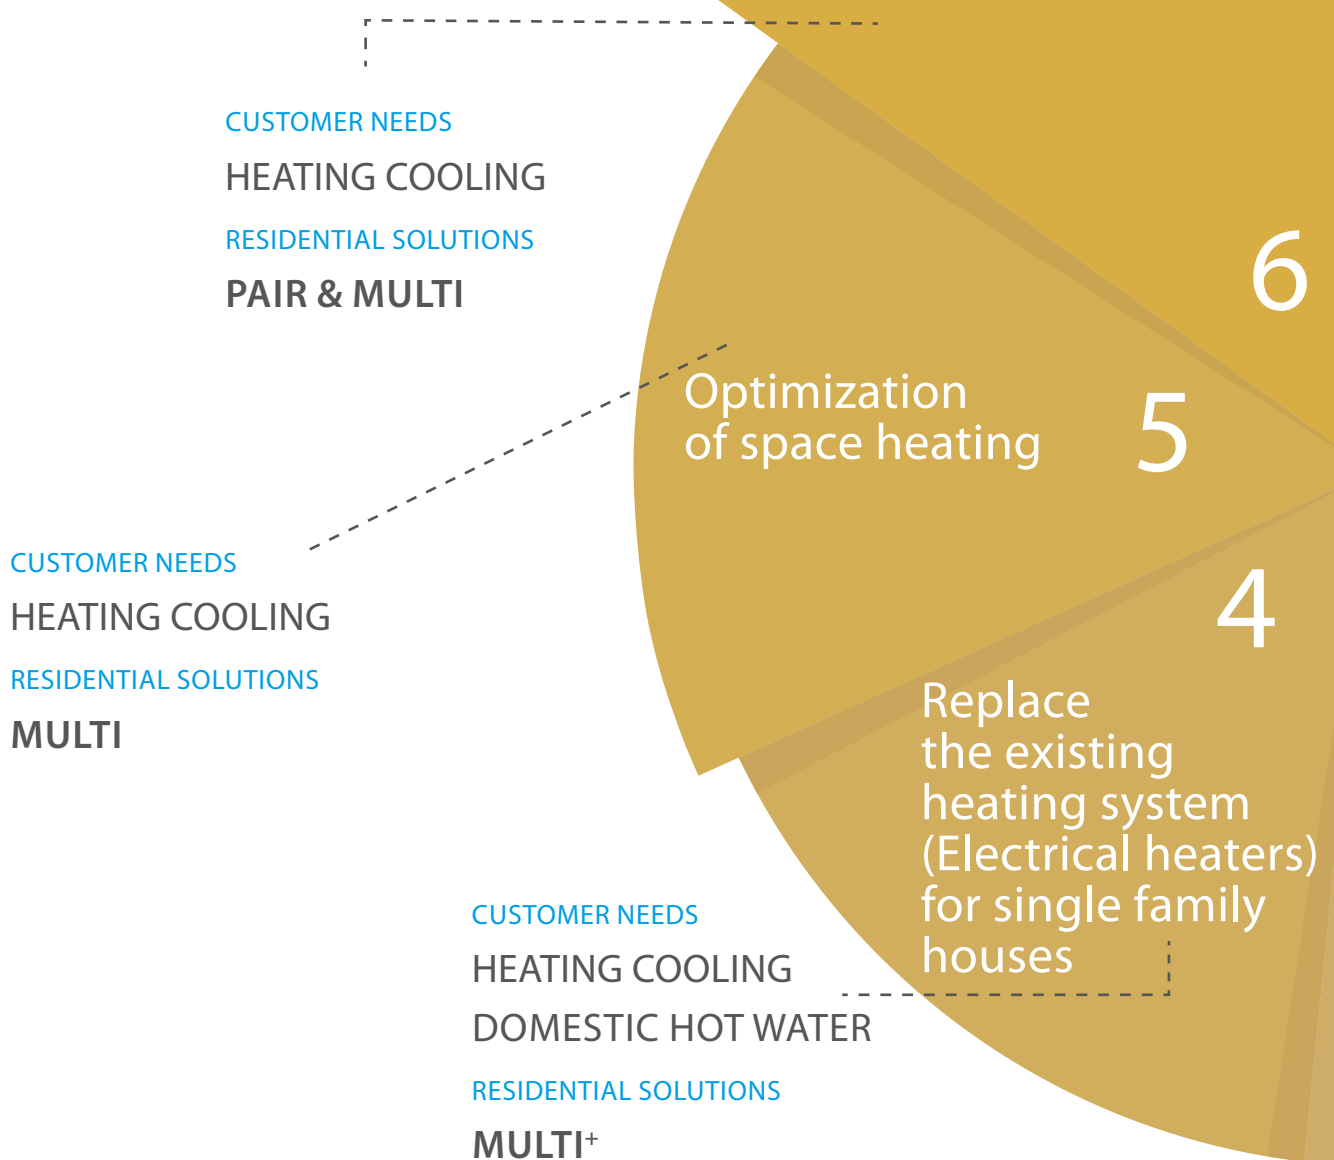

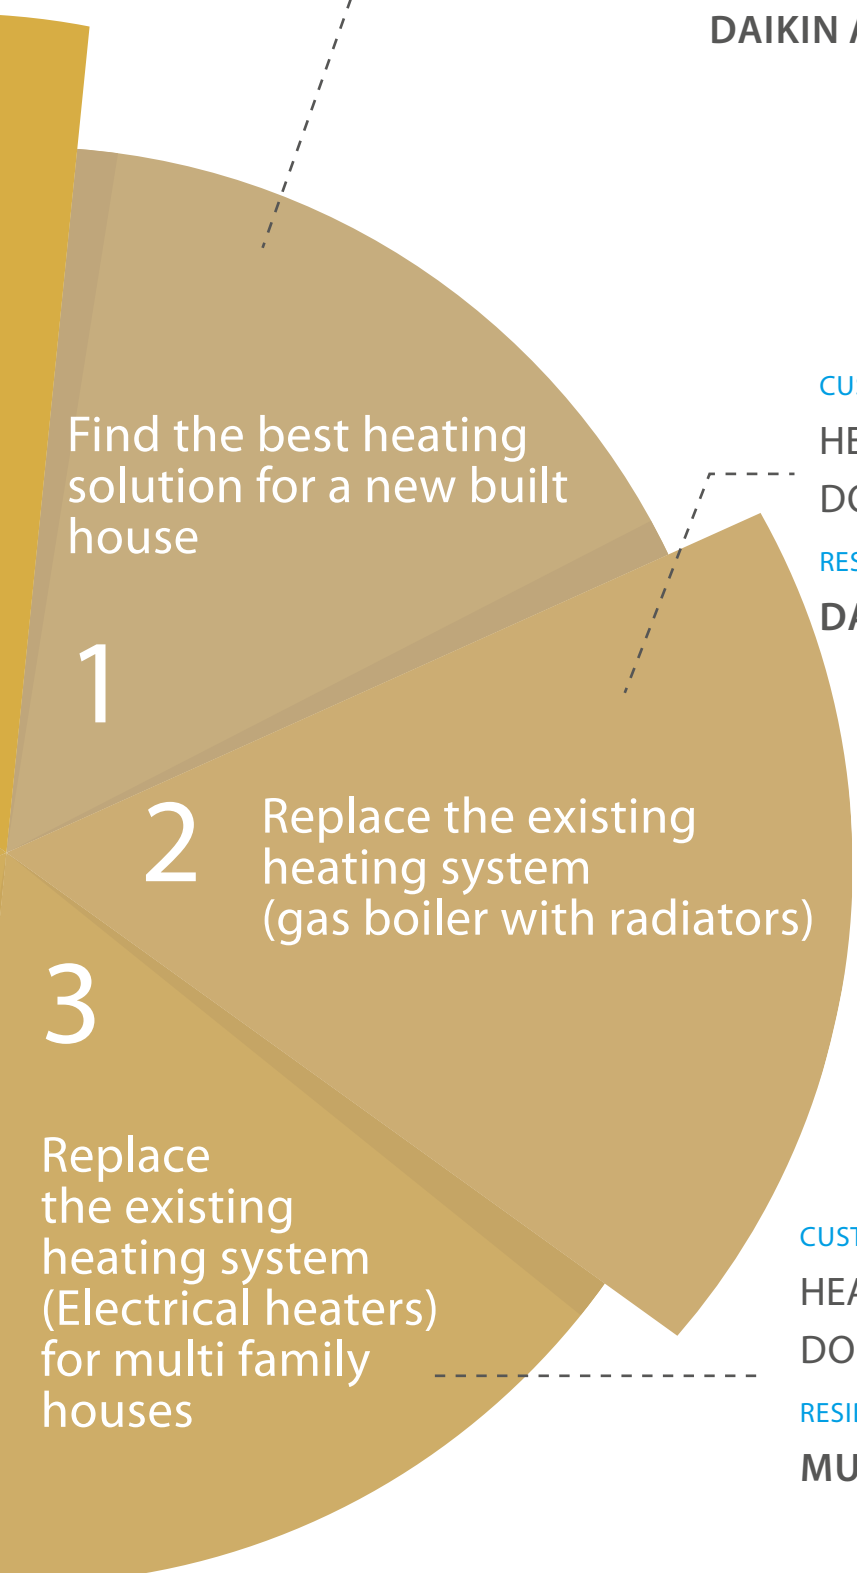

CUSTOMER NEEDS  
HEATING COOLING  
DOMESTIC HOT WATER  
RESIDENTIAL SOLUTIONS  
**DAIKIN ALTHERMA**

Find the best heating solution for a new built house

1

CUSTOMER NEEDS  
HEATING COOLING  
DOMESTIC HOT WATER  
RESIDENTIAL SOLUTIONS  
**DAIKIN ALTHERMA**

2 Replace the existing heating system (gas boiler with radiators)

3

Replace the existing heating system (Electrical heaters) for multi family houses


CUSTOMER NEEDS  
HEATING COOLING  
DOMESTIC HOT WATER  
RESIDENTIAL SOLUTIONS  
**MULTI+**

# Why choose Multi+?

Your customer is considering to **replace the existing heating system with electric heaters**


Your customer's house:

- > Around 80 m<sup>2</sup> or less
- > Located in southern Europe, in a single or multi family house
- > Max 3 inhabitants

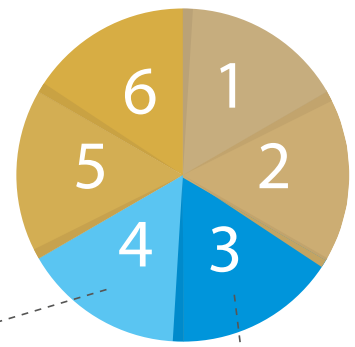

Replace the existing heating system (Electrical heaters) for single family houses  
**CUSTOMER NEEDS**  
 Heating | Cooling | Domestic hot water

Replace the existing heating system (Electrical heaters) for multi family houses  
**CUSTOMER NEEDS**  
 Heating | Cooling | Domestic hot water

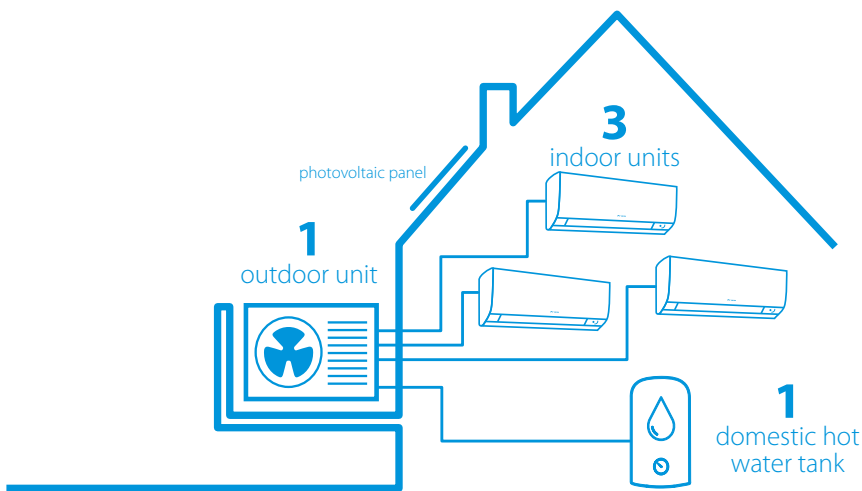

## Legend

> Connect Multi+ outdoor unit with up to 3 indoor units and a 90 l or 120 l tank to provide domestic hot water


## 1 - Flexibility

> Connect Multi+ outdoor unit with up to 3 indoor units and a 90 l or 120 l tank to provide domestic hot water



Extend the system according to your needs

Choose from a market-leading variety of indoor units. You can connect up to three different indoor units to cool or heat your rooms.

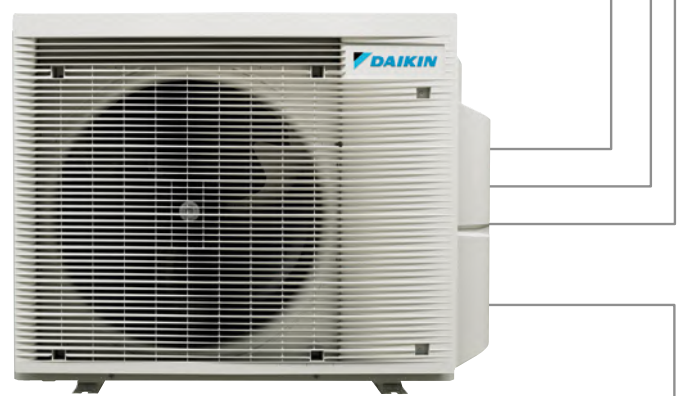

## 2 - Efficiency

> Replacing an old air conditioning system and electric hot water tank by Multi+ will give your customer a good return on investment

### Case Study: Second Home by the sea

- > Detached house / 70m<sup>2</sup>
- > Climate zone C (Naples) / Class D → A3

### Saving € in one year



Heating + Cooling: **OLD MULTISPLIT**  
Domestic hot water: **ELECTRIC WATER HEATER**



Equipped with Bluevolution technology providing low environmental impact



RETURN ON INVESTMENT DOMESTIC HOT WATER **3 YEARS**

## 3 - Easy installation

**INDOOR AND OUTDOOR UNITS:**  
Choose which location is most appropriate for the indoor units and the outdoor unit. The physical installation, wiring, drain piping as well as the initial setup is done quickly and easily.

**TANK:** No need to change the existing piping of the current electric hot water tank: the water connections are easily accessible from the tank bottom. Perfect for a simple and fast installation or maintenance.



**Water inlet and hot water outlet**  
The water connections are easily accessible from the tank bottom. Perfect for a simple and fast installation or maintenance.\*



## 4 - Full comfort offering heating, hot water AND cooling



Replacing ineffective or outdated electric water heating systems in small households with a modern heat pump solution saves energy and offers a high level of comfort: not only heating and hot water, but also cooling with high efficiencies

## 5 - Save more with photovoltaic solar panels

Thanks to HomeHub, tank optimisation is possible between the tank and photovoltaic solar panels. For example, with the accessory EKRHH, the electric heater of the tank will be switched on if injection is higher than 1.2 kW. Therefore, during sunny days, hot water will always be available, while the house is cooled.

## 6 - Control your units, wherever you are

All indoor units are individually controllable with their supplied remote control or via the Onecta app. The Daikin Onecta app enables scheduling, controlling and monitoring of each air-to-air heat pump unit along with controlling and monitoring of the domestic hot water tank – also via voice control. Onecta is compatible with Amazon Alexa and Google Assistant.

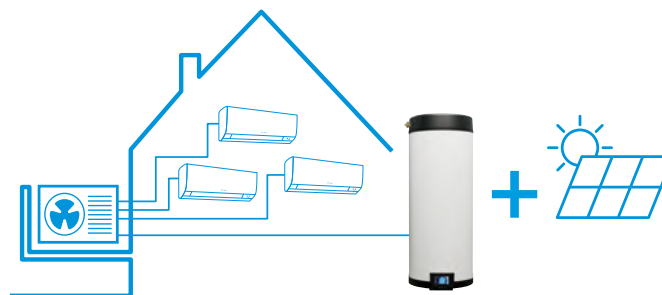



\* Pressure relief valve to be installed

# Why choose Multi?

Your customer wants to **keep the existing boiler** but **reduce the gas consumption**. Your customer wants a sustainable heating system while only using gas for water heating.

## Your customer's house:

- › Up to 5 rooms to be heated/cooled
- › Located in a warm or average climate region
- › Any number of inhabitants
- › A single or multi family house

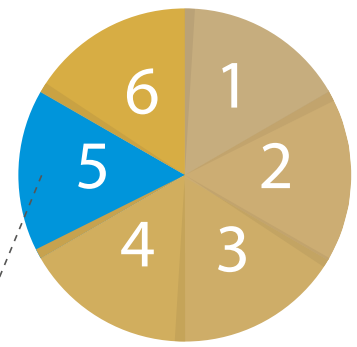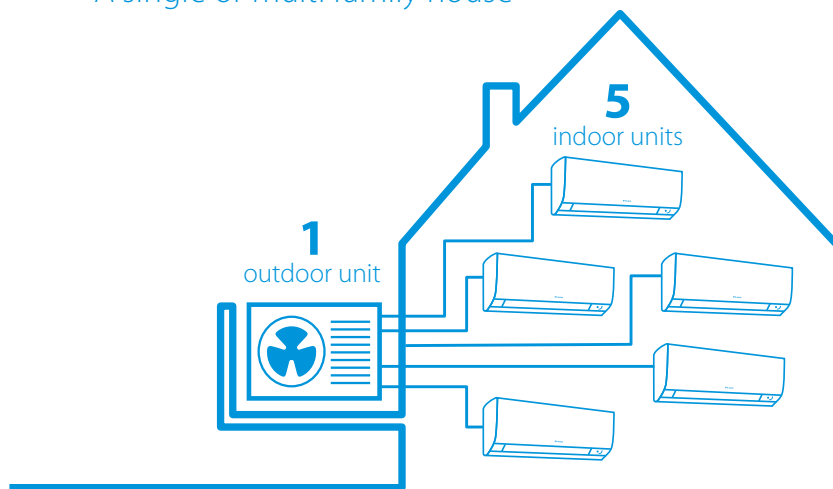

Optimization of space heating  
**CUSTOMER NEEDS**  
 Heating | Cooling

## Legend

› Connect Multi outdoor unit with up to 5 indoor units.

## 1 - Flexibility

There are many possibilities in comfort you can profit from a multi split solution:



Up to **5 indoor** units connectable to **only one outdoor** unit



Every single indoor unit can be **regulated separately**



Choose from a **greater variety** of connectable indoor unit types out of our split and Sky Air series



Use **low capacity** indoor units specially designed for small rooms which can only be connected to a multi split system



Are you planning an additional indoor unit later on? Just **decide now** for an outdoor unit with higher capacity and simply **connect it later**.



## 2 - Efficiency

Our big compressors can work very efficiently thanks to the inverter principle. Only the necessary capacity is produced according to the number of indoor units that are switched on. With efficiencies up to A+++\* in heating, your customer can drastically reduce the gas energy bill and only use the gas boiler for producing hot water.

\* Perfera C/FTXM-A in combination with 3MXM52A(9)  
For exact combinations, please refer to the multi specifications on p. 365

## BLUEVOLUTION

Equipped with Bluevolution technology  
providing low environmental impact

up to



in heating

up to




in cooling

### Quickly reduce on the energy consumption

Add a multisplit system and photovoltaic solar panels to an existing gas boiler and save on your energy bill.

In spring and autumn, simply turn down the radiators or room thermostat. The multisplit will be perfectly capable to cover the full demand.

In the heart of winter, open the radiators and have them work complementary with your air-to-air heat pump, as they will act as a secondary heat source when needed.

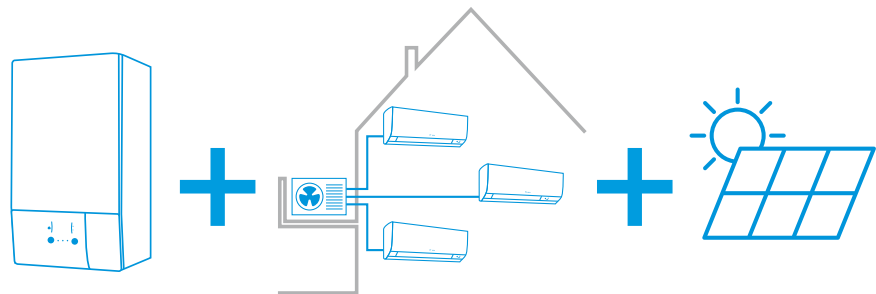

## 3 - Easy installation, piping and wiring

Wherever you want to place an outdoor unit, for every unit you will need correct mounting equipment for a secure fixing and problem-free operation.

The physical installation, wiring, drain piping as well as the initial setup of only one system is easy and fast.

## 4 - Full comfort offering heating AND cooling

Adding a multi system to the existing gas boiler, saves energy and offers a high level of comfort. And as a plus, not only heating but also cooling is offered with high efficiencies. But if needed, the heat lock mode exists to block the system to only operate in heating mode.

## 6 - Control your units, wherever you are

All indoor units are individually controllable with their supplied remote control or via the Onecta app. The Daikin Onecta app enables scheduling, controlling and monitoring of each air-to-air heat pump unit along with controlling and monitoring of the domestic hot water tank – also via voice control. Onecta is compatible with Amazon Alexa and Google Assistant.



## 5 - Limited mounting space, low sound


### Limited mounting space

The multi outdoor unit is very compact, which can be installed in different ways (on the wall, on a terrace, in the back of a garden, etc.).

### Low sound

Multi outdoor units are standardly very quiet, down to 46 dBA, similar to a dishwasher. Additionally, the Night Quiet Mode function reduces operating noise of the outdoor unit at nighttime, based upon your schedule. **DID YOU KNOW** A special software is developed on a range of outdoor units\* to lower the sound level at all times if required by legislation.

\*2MXM40-50A9, 3MXM40-52A9

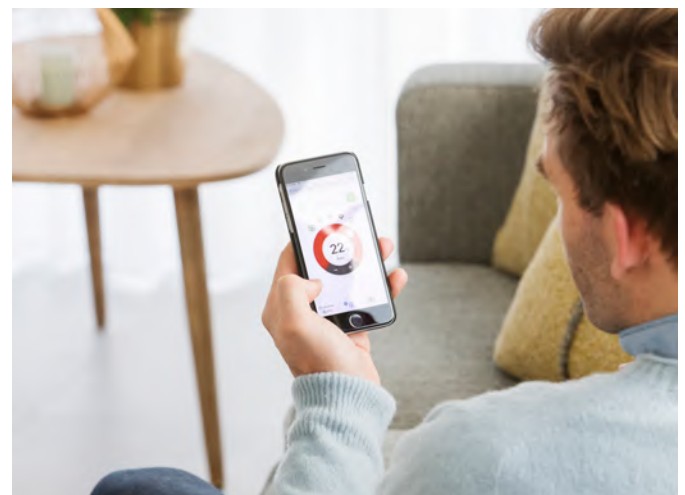


# Why choose Pair?

You already **have a hydronic heating system at home.**


You **arranged your attic, green house or garage as a home office or a hobby room.** You don't want to heat this additional zone all the time but you need comfortable and efficient solution all year long.

## Your customer's house:

- > 1 additional room to heat or cool
- > Located in any region \*
- > Any number of inhabitants
- > A single or multi family house

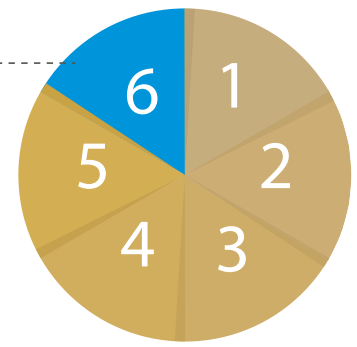

Optimize an additional zone  
**CUSTOMER NEEDS**  
 Heating | Cooling

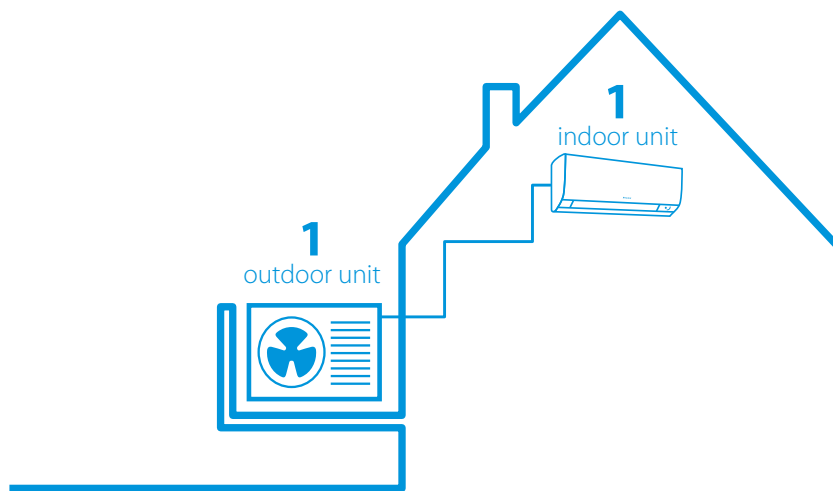

## Legend

> Connect one outdoor unit to one indoor unit.

## 1 - Flexibility

Your customer can choose the indoor unit that is most suitable for the installation

- > Wall mounted unit: installed high on the wall, available in many sizes and colours, from which some have earned **several awards for their innovative look and functional capabilities.**
- > Floor standing unit: Low enough to be installed beneath a window sill, the unit can be installed against the wall or recessed.



- > Concealed ceiling unit: Keep things clean and uncluttered with a concealed ceiling unit. They are compact enough to fit any interior and can be installed discreetly so that only the air vents are visible.



reddot design award  
winner 2013



FTXZ-N



reddot award 2018  
winner



White FTXA-CW



Silver FTXA-CS



DESIGN  
AWARD  
2018



GOOD  
DESIGN



Black FTXA-CB



reddot award 2022  
winner



White FTXJ-AW



Silver FTXJ-AS



DESIGN  
AWARD  
2022



GOOD  
DESIGN



Black FTXJ-AB

\* For cold climate regions, please refer to the Nepura range

## 2 - Efficiency

With the highest efficiencies in the market, a pair installation will save on your energy bill and provide comfort all year long.



up to  
**A+++**  
in heating



up to  
**A+++**  
in cooling


## 4 - Full comfort offering heating AND cooling

A **split system** saves energy and offers a high level of comfort to a room. And as a plus, not only heating but also cooling is offered with high efficiencies. Our indoor units are equipped with intelligent sensors and airflow techniques, to provide best comfort, both in heating as cooling.



### Intelligent thermal sensor

Stylish FTXA and Daikin Emura FTXJ use an intelligent thermal sensor to detect the surface temperature of a room to create a more comfortable climate by directing the airflow that requires cooling or heating.



### 3-D air flow

Combines vertical and horizontal auto-swing to circulate a stream of warm or cool air right to the corners of even large spaces.



### Coanda effect

By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room.




### Heat boost

Heat boost quickly heats up your home when starting up your heat pump system. Set temperature is reached 14% faster\* than a regular air-to-air heat pump (pair only).

\* Heat boost test condition: 50 class, outdoor temperature 2°C - Indoor temperature 10°C, R/C setting: 23°C

\* Applicable for Daikin Emura, Stylish and Perfera




### Fireplace logic

When installed close to a heating device (e.g. fireplace or oven) and the set temperature is reached, the fan keeps on running to have an even temperature throughout the whole house (Applicable for Nepura FTXTJ-AW/B, FTXTM-S and FTXTA-CW/B)

## 5 - Control your units, wherever you are


All indoor units are individually controllable with their supplied remote control or via the Onecta app.

The Daikin Onecta app enables scheduling, controlling and monitoring of each air-to-air heat pump unit along with controlling and monitoring of the domestic hot water tank – also via voice control. Onecta is compatible with Amazon Alexa and Google Assistant.

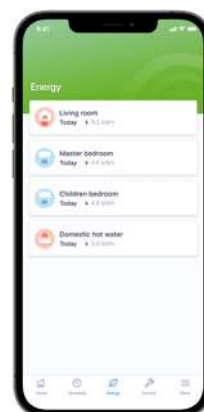

# Service and solutions

Daikin provides service throughout the different stages of the customer journey for end users and installers

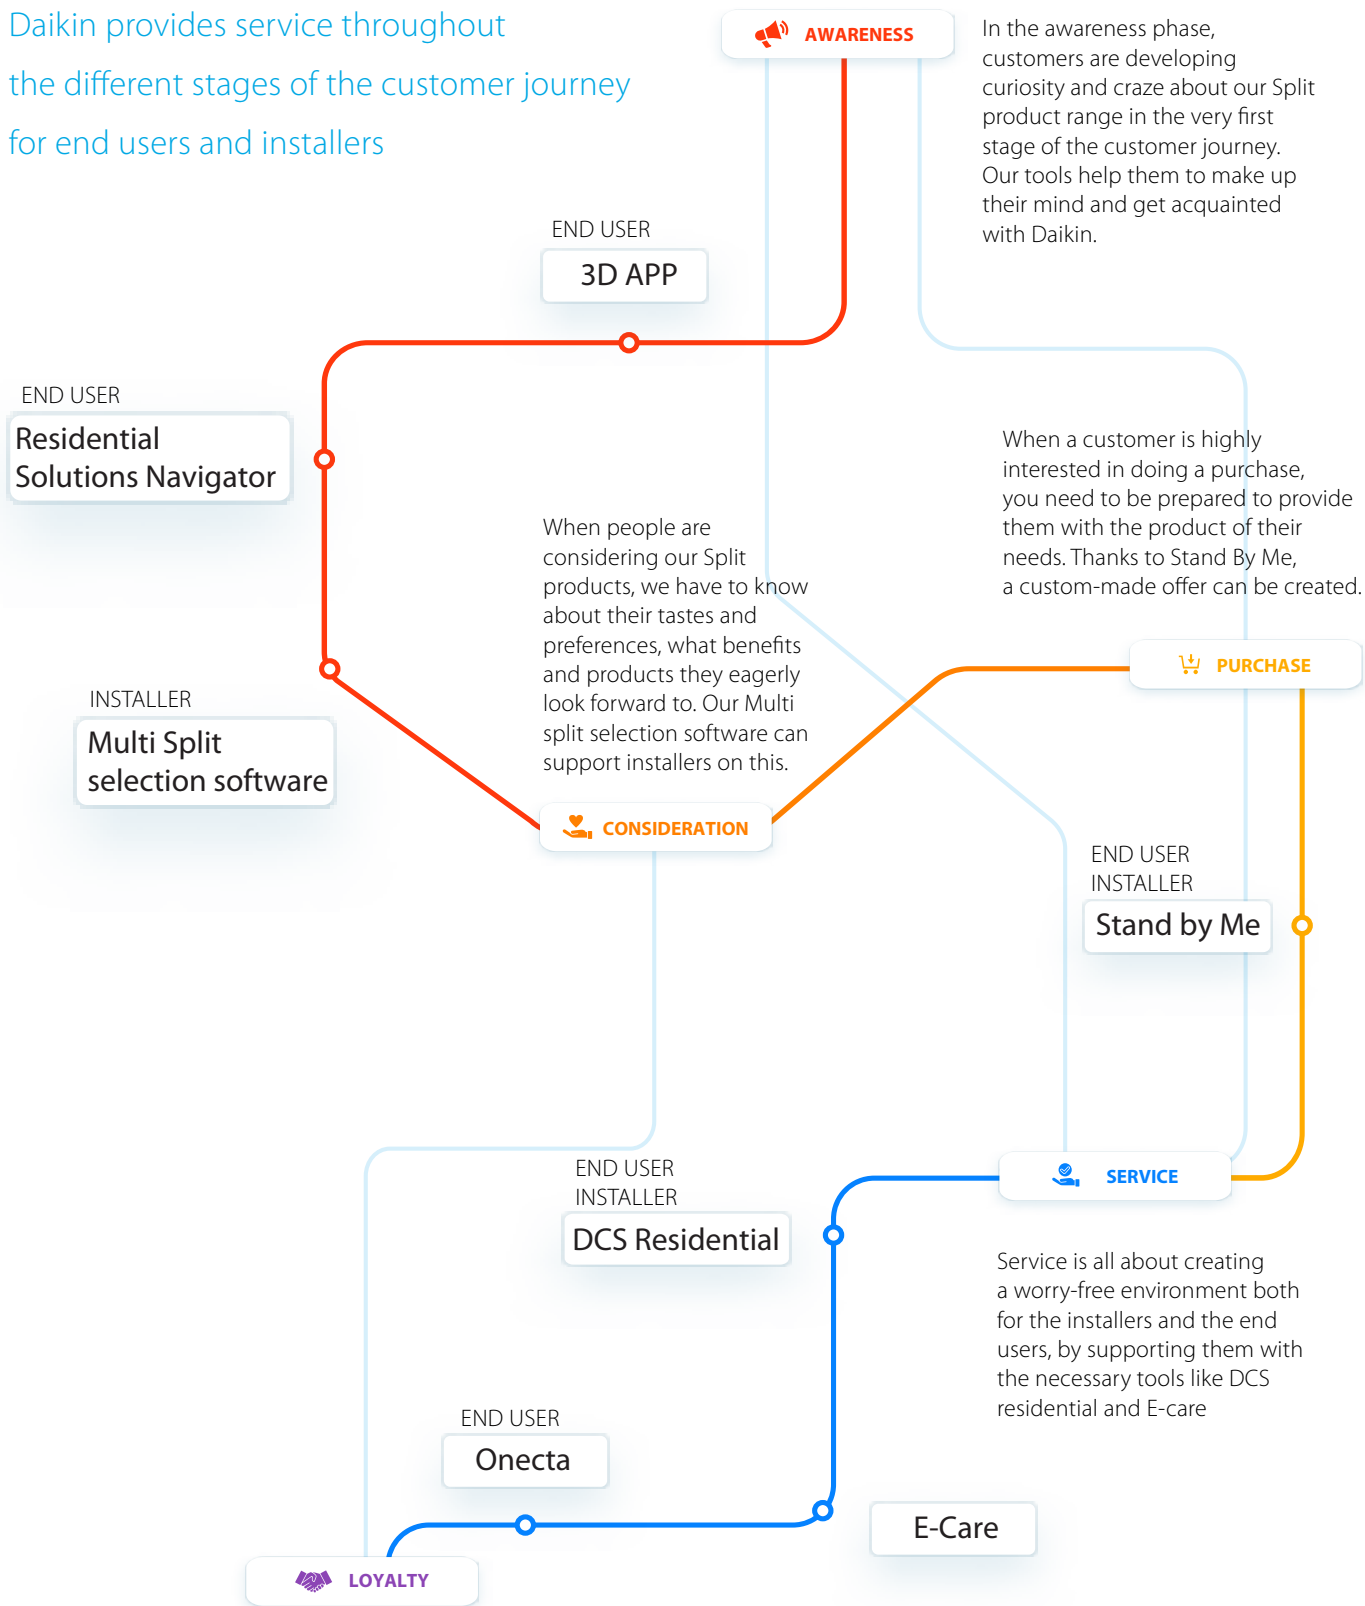

Focusing on regularity and repeatability, this is where loyalty makes customers use our tools on a daily basis and stay with us for years.

## **1. 3D APP**

Daikin 3D app is the application that allows you to choose the air-to-air heat pump and watch it at home BEFORE you buy it!

## **2. RESIDENTIAL SOLUTIONS NAVIGATOR**

Find your applicable solution in just a few clicks based on the number and size of the room.

**NEW** Calculate your savings with the Return on Investment calculator.

## **3. MULTI SPLIT SELECTION SOFTWARE**

Make an accurate selection of your Daikin Multi Split system in a few steps! Easy web-based selection tool for our multi split range. It allows to choose the most designated system for each customer's individual needs.

## **4. STAND BY ME**

With your customer's new Daikin installation and Stand By Me service programme, you can rest assured they are benefiting from the best comfort, energy efficiency, usability and service available on the market.

## **5. DCS RESIDENTIAL**

From the professional portal, Installers can activate the remote monitoring allowing them to supervise your installation on multiple parameters, from their location.

## **6. E-CARE**

The Daikin e-Care app wants to make the life of a Daikin installer easier by offering Stand By Me registrations via QR code scanning, easy configuration of your heating installation and trouble-shooting via the e-Doctor part.

## **7. ONECTA**

The Onecta app can control and monitor up to 50 split units. All Bluevolution units are connectable with the Onecta app.

# Daikin 3D app for end-users



Daikin 3D app is the application that allows you to choose the air-to-air heat pump and watch it at home **BEFORE** you buy it!

With the Daikin 3D app you can **virtually place** an air-to-air heat pump in your own interior.



Switch on the device, get close, look from every angle, add dimensions and take a photo so that you can easily compare all the different Daikin options.



**Product range**  
Choose the desired device




**Product detail**  
Consult the technical data sheets and find additional information



**3D visualisation**  
Customize the size, colour, rotate and move the indoor unit to your liking


# Residential Solutions Navigator

Find the applicable solution in just a few clicks

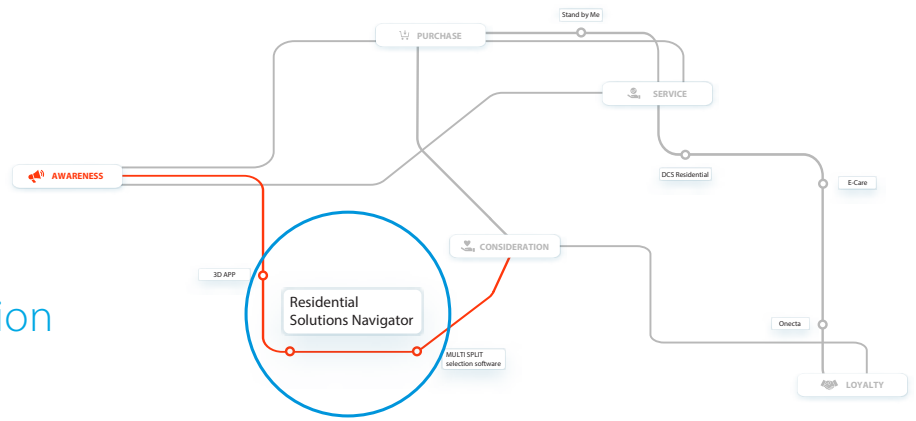


The Residential Solutions Navigator is a digital selection tool developed for end users with the aim to assist in providing the most suitable solution for their homes. Within a few clicks, the end user receives a proposal that fits to his personal requirements.

**1** Select the recommended solution based on application, type of indoor unit and room size

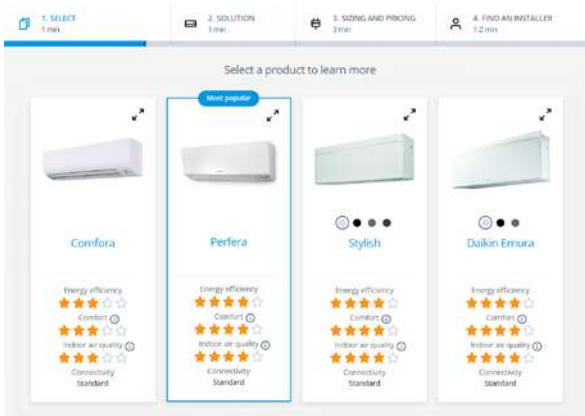



**2** The solution in detail: check pictures, features and efficiency

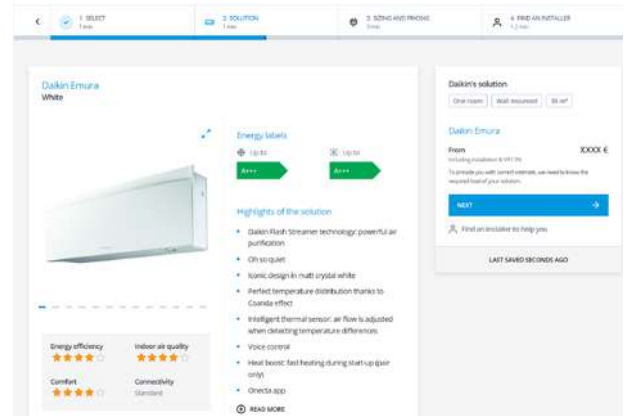

**3** NEW – Calculate energy savings based on current consumption



**4** Find an installer

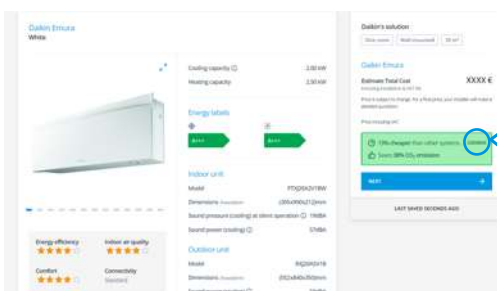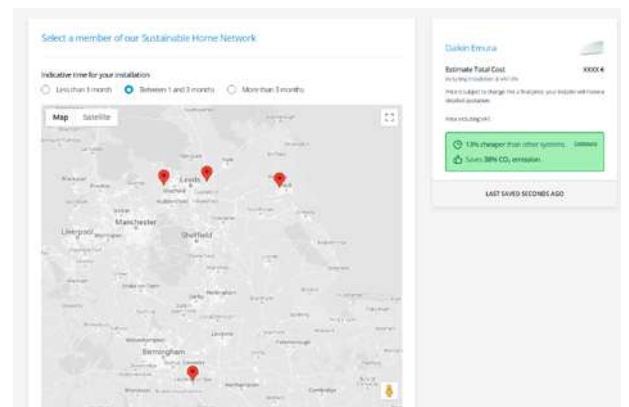


# Multi Split selection software

Make an accurate selection of your Daikin Multi Split system in a few steps!

Easy web-based selection tool for our multi split range. It allows to choose the most designated system for each customer's individual needs.

- 1 Sign in with your Daikin ID
- 2 Create a new project or choose one of your previously created projects
- 3 Enter your project details
- 4 Enter the building details
- 5 Add rooms
- 6 The best solution is proposed

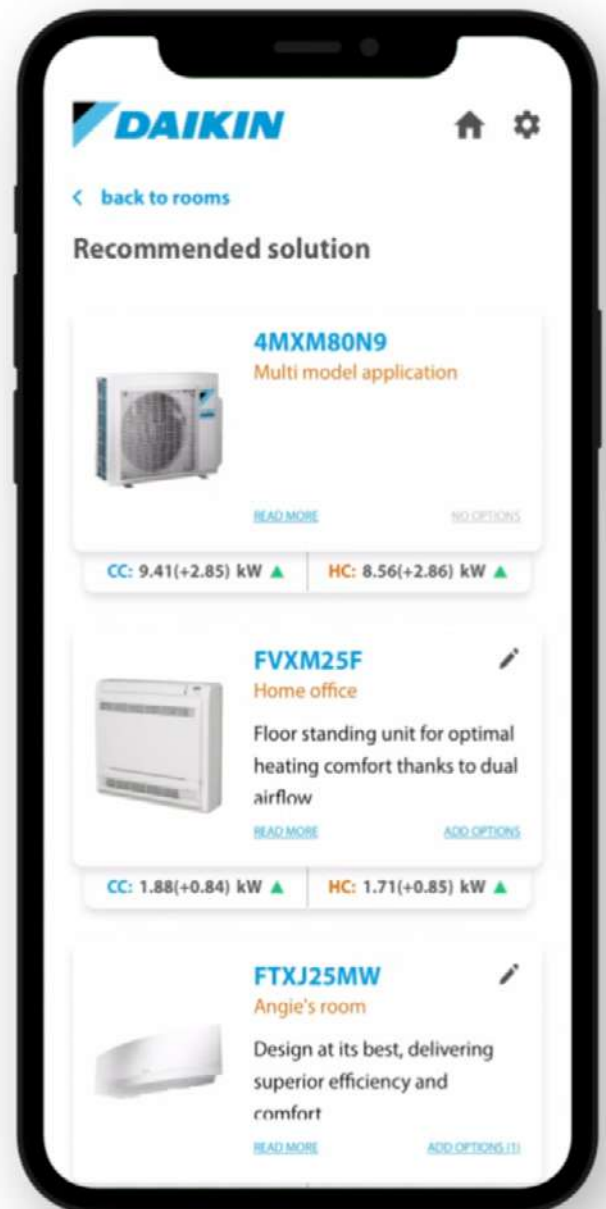


Go to [multi.daikin.eu](https://multi.daikin.eu)  
and watch the instruction video



# Stand By Me, my climate of security

With your customer's new Daikin installation and Stand By Me service programme, you can rest assured they are benefiting from the best comfort, energy efficiency, usability and service available on the market.

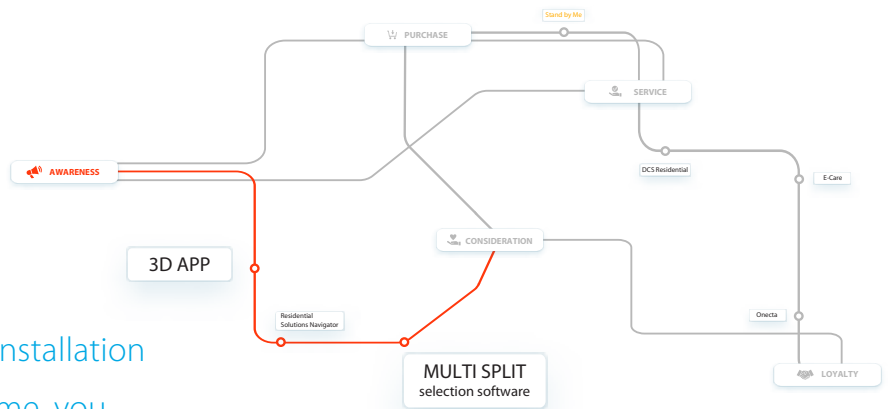

## Free warranty extension

The first advantage of **Stand By Me** is a free warranty extension:

- applies to both labour and parts
- begins immediately after registration

**FREE**



## Quick follow-up by Daikin service partners

Daikin service partners are automatically notified when a customer registers their installation on [www.standbyme.daikin.eu](http://www.standbyme.daikin.eu) and needs maintenance.

Your customer is guaranteed:

- quick and reliable service
- management of all information related to their installation such as, registration documents, attendance records, maintenance records, etc.
- immediate access to the correct information contributes to flawless service




## Extended warranty on parts


For a small fee, customers can extend the warranty on specific parts.

**Stand By Me** guarantees:

- that each component is replaced quickly
- helps avoid financial surprises
- long life and smooth operation and all other benefits of a Daikin installation
- reliable service from official Daikin service partners

Daikin service partners work exclusively with Daikin parts and have all of the necessary technical knowledge to solve any issue that may arise

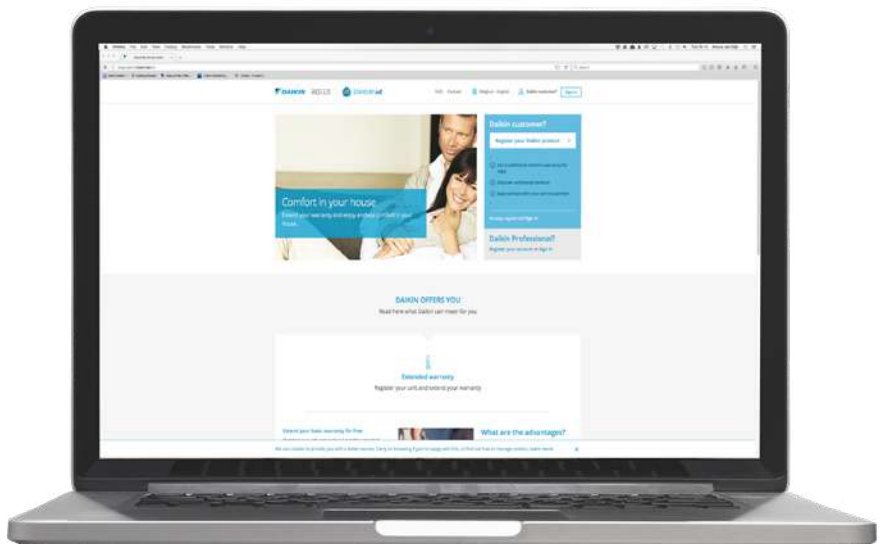

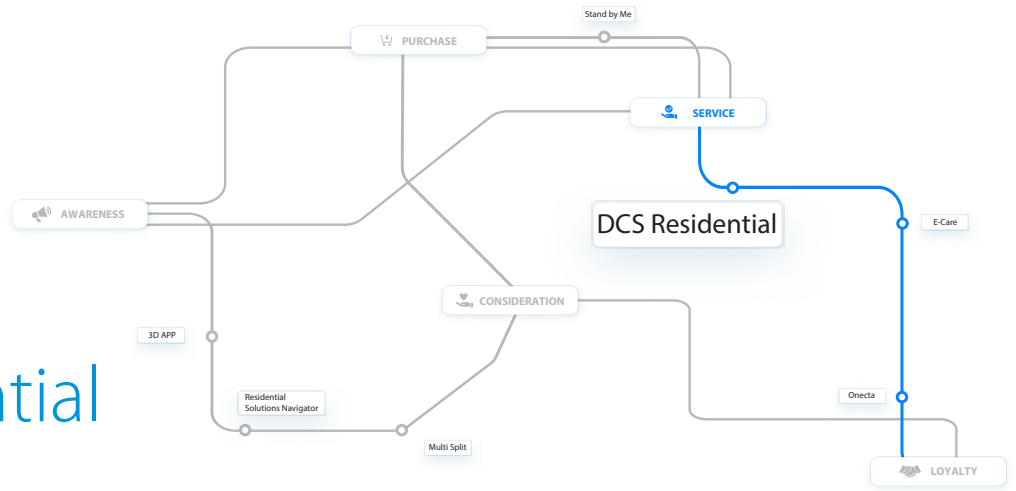

# DCS residential

From the professional portal, installers can activate the remote monitoring allowing them to supervise your installation on multiple parameters, from their location. They will get an automatic notification in case there is something wrong with the installation. By changing certain settings, they can improve your comfort immediately. Save time and get a better support, thanks to these new features.

### How to access?

Through the Stand By Me Pro portal.

### What to expect

Remote monitoring and servicing of split products, after consent from the end user.

- > Control your customer's unit and change settings.
- > Read out up to 34 D-checker data points.



## Solving a simple issue without broken parts

### Without DCS



### With DCS



## Solving a complex issue which needs ordering and replacing broken parts

### Without DCS



### With DCS



# Visualization

Overview per product, showing the selected parameters



# Adding Markers

Up to 5 markers can be placed and customized



# Parameter Panel

Easily select the required parameters and change colours



# Exporting (Image/CSV)

Export the data of a selected period in CSV or as an image



# E-Care app




The Daikin e-Care app wants to make the life of a Daikin installer easier by offering Stand By Me registrations via QR code scanning, easy configuration of your heating installation and trouble-shooting via the e-Doctor part.

## NEW

Order your **spareparts** directly via the e-Care app, update the settings of your installation with a **Wifi USB** stick and avoid any possible mistake during commissioning of your installation thanks to the easy guidance of the **Commissioning Assistant**.



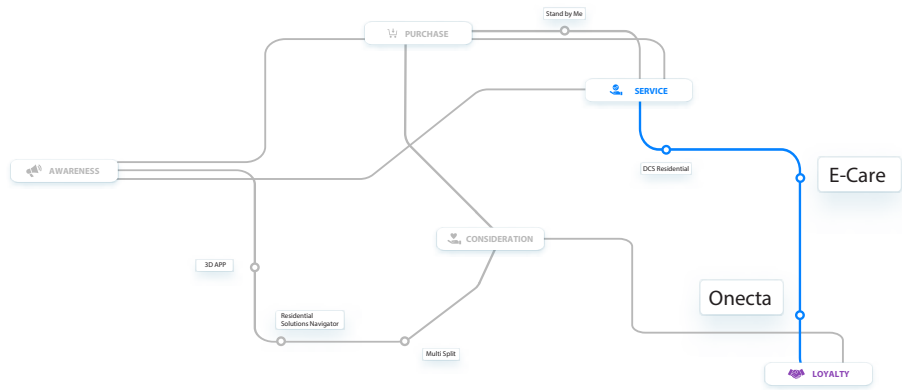


# Onecta


The Onecta app can control and monitor up to 50 split air conditioning units. All Bluevolution units are connectable with the Onecta app.



**Control**  
Control operation mode, temperature, air purification, fan speed & direction

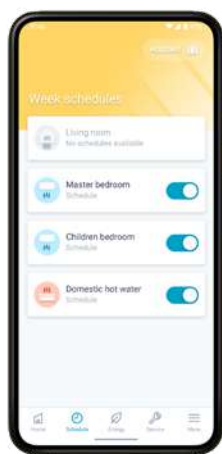

**Schedule**  
Schedule the set temperature, operation mode and fan speed

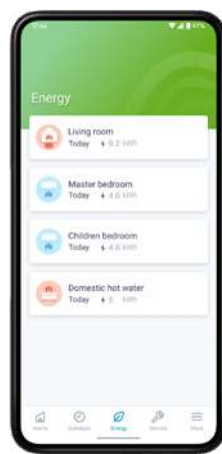

**Monitor**  
Monitor your energy consumption, set holiday schedule




**Identify**  
Identify the rooms of your house

## Intuitive online and voice control

Control your system and enjoy maximum comfort, just by using your voice. Via Amazon Alexa or Google Assistant you can control main functions such as temperature set point, operation mode, fan speed, and much more!





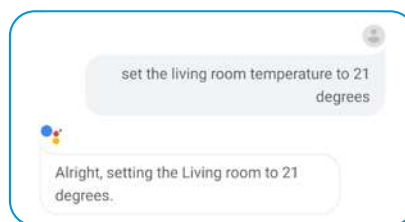

















### Your benefits

- > Access to various features for controlling your internal climate
- > Manage the temperature, operating mode, air purification and fans with the interactive thermostat
- > Create different operating schedules and modes
- > Monitor energy consumption



# Full Split R-32 product range

## Full **R-32** indoor unit range for average and cold outdoor temperatures

		Model	Product name	15	20	25	30	35	40	42	50	60	71		
Standard range	Wall mounted	<b>Ururu Sarara</b> Complete climate control with (de)humidification, air purification & ventilation with top efficiencies in heating & cooling	FTXZ-N 			A+++ A+++ (pair only)		A+++ A+++ (pair only)			A+++ A+++ (pair only)				
		<b>Daikin Emura</b> Design that speaks for itself	FTXJ-AW/S/B 		A+++ A+++	A+++ A+++		A+++ A+++		A++ A++	A++ A++				
		<b>UPDATE Stylish</b> Most compact design wall mounted unit	CTXA-CW/S/B  FTXA-CW/S/B 	(multi only)		A+++ A+++	A+++ A+++		A+++ A+++		A++ A++	A++ A++			
		<b>NEW Perfera</b> Wall mounted unit design for high performance and high indoor air quality	CTXM-A  FTXM-A 	(multi only)		A+++ A+++	A+++ A+++		A+++ A+++		A++ A++	A++ A++	A++ A++	A++ A++	
		<b>UPDATE Comfora</b> Discreet wall mounted unit providing high efficiency and comfort	FTXP-N(9) 			A++ A++	A++ A++		A++ A++			A++ A++ (pair only)	A++ A++ (pair only)	A++ A++ (pair only)	
		<b>Sensira</b> Wall mounted unit for low energy consumption and pleasant comfort	FTXF-E/D  CTXF-C 		(multi only)	A++ A+	A++ A+		A++ A+		A++ A+	A++ A+	A++ A+	A++ A+	
		<b>Sensira</b> Wall mounted unit, offering good value for money and ensuring a steady supply of clean air	FTXC-D 			A++ A+	A++ A+		A++ A+			A++ A+	A++ A+	A++ A+	
		Floor standing	<b>Perfera</b> Design floor standing unit for optimal heating comfort thanks to unique heating features	CVXM-A9  FVXM-A9 	(multi only)				A+++ A+++		A++ A++		A++ A+		
			<b>Concealed ceiling</b> Compact concealed ceiling unit, with a height of only 200mm	FDXM-F9 					A+ A+		A A		A+ A	A A	
		Siesta range	Wall mounted	<b>NEW Siesta wall mounted unit</b> Discreet, modern design for optimal efficiency and comfort thanks to 2 area motion detection sensor	ATXM-A 	(multi only)		A+++ A+++		A+++ A+++			A++ A++		
<b>UPDATE Siesta wall mounted unit</b> Discreet Siesta wall mounted unit providing high efficiency and comfort	ATXP-N9 					A++ A++	A++ A++		A++ A++						
<b>Siesta wall mounted unit</b> Wall mounted unit for low energy consumption and pleasant comfort	ATXF-E/A 					A++ A+	A++ A+		A++ A+		A++ A+ (pair only)	A++ A+ (pair only)	A++ A+ (pair only)	A++ A+ (pair only)	
<b>Siesta wall mounted unit</b> Wall mounted unit, offering good value for money and ensuring a steady supply of clean air	ATXC-D 					A++ A+	A++ A+		A++ A+			A++ A+ (pair only)	A++ A+ (pair only)	A++ A+ (pair only)	
nepura range	Wall mounted	<b>NEW Daikin Emura</b> Design that speaks for itself	FTXTJ-AW/B 					A+++ A+++ (pair only)							
		<b>NEW Stylish</b> Most compact design wall mounted unit, even at ambient temperatures down to -25°C	FTXTA-CW/B 					A+++ A+++ (pair only)							
		<b>NEW Perfera</b> Attractive, wall mounted design with perfect indoor air quality	FTXTM-S 					A+++ A+++ (pair only)		A+++ A+++ (pair only)					
		<b>NEW Comfora</b> Discreet wall mounted unit providing high efficiency and comfort	FTXTP-N 					A++ A++ (pair only)		A++ A++ (pair only)					
		<b>NEW Perfera</b> Design floor standing unit for optimal heating comfort thanks to unique heating features	FVXTM-A 							A+++ A+++ (pair only)					

Energy efficiency class in cooling and heating (average climate)




# Full **R-32** pair and multi outdoor unit range


Flexible configurations work in all homes

Whether you are looking for a single room solution or a system for your entire home, we can accommodate your needs.

Pair split or multi split combination – the direct system comparison



Conventional pair split installation for three rooms



Solution for the same situation with only one multi split outdoor unit

Model	Product name	20	25	30	35	40	42	50	52	60	68	71	80	90	
Standard range	RXZ-N		●		●			●							
	RXJ-A	●	●		●		●	●							
	<b>UPDATE</b> RXA-A8/B(9)	●	●		●		●	●							
	<b>NEW</b> RXM-A/R	●	●		●		●	●		●		●			
	<b>UPDATE</b> RXP-N(9)	●	●		●			●		●		●			
	RXF-E/D	●	●		●		●	●		●		●			
	RXC-D	●	●		●			●		●		●			
	2-port MXM-A9						●	●				●			
	3-port MXM-A9						●		●		●				
	4-port MXM-A9										●		●		
	5-port MXM-A9													●	
	2-port MXF-A						●		●						
	3-port MXF-A9									●		●			
	Multi + heat pump and hot water	4-port MWXM-A9								●					
Siesta range	<b>NEW</b> ARXM-A		●		●			●							
	<b>UPDATE</b> ARXP-N9	●	●		●										
	ARXF-E/A	●	●		●		●	●		●		●			
	ARXC-D	●	●		●			●		●		●			
	2-port AMXM-M9						●	●							
	3-port AMXM-N9								●						
	2-port AMXF-A						●	●							
	3-port AMXF-A9								●						
	nepura range	<b>NEW</b> RXTJ-A				● (pair only)									
		<b>NEW</b> RXTA-C				● (pair only)									
<b>NEW</b> RXTM-A					● (pair only)		● (pair only)								
<b>NEW</b> RXTP-A			● (pair only)		● (pair only)										

# Benefits overview

**R-32**

# Split

	Standard range								Concealed ceiling	
	Wall mounted									
	FTXZ-N	NEW C/FTXA-CW/S/B	FTXJ-AW/S/B	NEW C/FTXM-A	UPDATE FTXP-N(9)	FTXF-E/D	CTXF-C	FTXC-D		FDXM-F9
We care	Econo mode	•	•	•	•	•	•	•		
	2-area motion detection sensor				•					
	3-area motion detection sensor	•								
	Energy saving during operation standby	•	•	•	•	•	•	•	•	
	Home leave operation									•
	Night set mode		•	•	•	•				
	Fan only	•	•	•	•	•	•	•	•	•
	Auto cleaning filter	•								•*
Comfort	Comfort mode	•	•	•	•	•	•	•		
	Powerful mode	•	•	•	•	•	•	•	•	
	Auto cooling-heating changeover	•	•	•	•	•	•	•	•	
	Whisper quiet (down to 19dBA)	•	•	•	•	•				
	Practically inaudible		•	•	•	•				
	Indoor unit silent operation	•	•	•	•	•	•			
	Comfortable sleeping mode	•							•	
	Outdoor unit silent operation	•	•	•	•					
	Fire place logic									
	Heat boost		•	•	•					
Heat plus										
Floor warming										
Air flow	Weather compensation									
	3-D Air flow	•	•	•	•	•				
	Vertical auto swing	•	•	•	•	•	•	•	•	
	Horizontal auto swing	•	•	•	•	•				
	Auto fan speed	•	•	•	•	•	•	•	•	
	Fan speed steps	5	5	5	5	5	3	3	5	3
	Intelligent thermal sensor		•	•						
Coanda Effect	• (cooling only)	• (cooling and heating)	• (cooling and heating)							
Humidity control	Ururu - humidification	•								
	Sarara - dehumidification	•								
	Dry programme		•	•	•	•	•	•	•	•
Air treatment	Flash Streamer**	•	•	•	•					
	Titanium apatite deodorising filter	•	•	•	•	•		•		
	Silver allergen removal and air purifying filter		•	•	•	•				
	Air filter	•	• captures bacteria/viruses	•	• captures bacteria/viruses	•	•	•	•	•
Remote control & timer	Onecta app	•*	•	•	•	•	•*	•*	•*	•*
	Weekly timer		•	•	•					•
	24 Hour timer	•				•	•	•	•	•
	Infrared remote control	•	•	•	•	•	•	•	•	•
	Wired remote control		•*	•*	•*					•*
	Centralised remote control	•	•	•	•					•
Multi zoning									•	
Other functions	Auto-restart	•	•	•	•	•	•	•	•	•
	Self-diagnosis	•	•	•	•	•	•	•	•	•
	Multi model application		•	•	•	• 20,25,35 class	• 20,25,35 class			•
	Guaranteed operation down to -30°C									

\* Available as option  
\*\* The Flash Streamer technology is not meant to be used for medical purposes





## The best of the best



## Why choose Ururu Sarara?

The Daikin Ururu Sarara brings a new level of sophisticated control to air to air heat pumps. It has five air treatment techniques which together provide a total comfort solution. In addition, the Ururu Sarara range has SEER up to 9.54 and SCOP up to 5.90 with A+++ ratings thanks to its energy efficient compressor and heat exchanger. Because of its innovative technology, as well as its design, it won the prestigious Red Dot design award in 2013.

### 5 air treatment techniques

- › Heating and cooling in one unit, for year-round comfort with the highest energy label available
- › In winter, the Ururu function replenishes the moisture in the air to maintain a comfortable feel without unnecessary heating
- › In summer, the Sarara function removes excess moisture while maintaining an even temperature thus eliminating the need for extra cooling
- › Ventilation for fresh air even with closed windows
- › Air purification and automatic filter cleaning to remove allergens to supply clean air




reddot design award  
winner 2013



optional

**BLUEEVOLUTION**

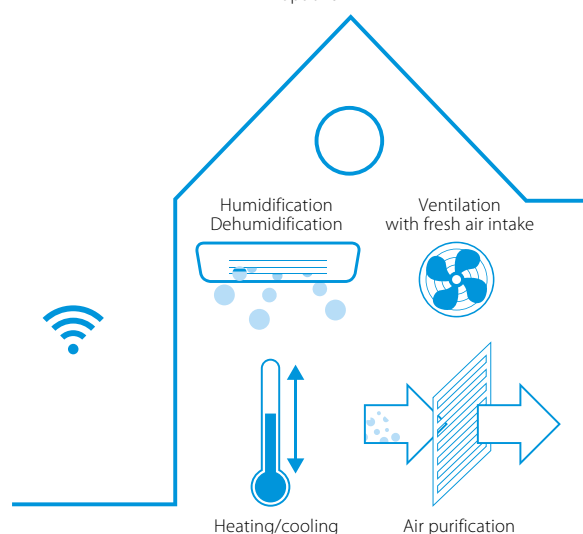

Flash Streamer\*:  
generates high-speed electrons  
Pre-filter: catches dust



Titanium apatite deodorising filter:  
decomposes bothersome odours  
of for example tobacco and pets



Did  
you  
know?



### Fresh air, even with closed windows

Unlike a conventional air conditioner, the Ururu Sarara brings fresh, conditioned air into the room. The Ururu Sarara is the very first residential heat pump system that – because of its powerful ventilation capacity of 30 m<sup>3</sup>/h – can fill a room of more than 26 m<sup>2</sup> with fresh air in less than two hours. Furthermore, the incoming air is brought in at the desired temperature without thermal loss.

## Wall mounted unit

Complete climate control with (de)humidification, air purification & ventilation with top efficiencies in heating & cooling

- › Unique combination of humidification, dehumidification, ventilation, air purification and heating & cooling in 1 system
- › 3 area motion detection sensor: air flow is sent to a zone other than where the person is located at that moment. Detection is done in 3 directions: left, front and right. If no people are detected, the unit will automatically switch over to the energy-efficient setting
- › No need to clean filters, thanks to the self cleaning filter
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Onecta app (optional): control your indoor from any location with an app, via your local network or internet
- › Seasonal efficiency values: full range A+++ in cooling and heating
- › Whisper quiet in operation: the operating of the unit can hardly be heard. The sound pressure level goes down to 19dBA!
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces
- › Reddot design award winner 2013



More details and final information can be found by scanning or clicking the QR codes.



FTXZ-N



RXZ-N

Efficiency data		FTXZ + RXZ		25N + 25N	35N + 35N	50N + 50N
Cooling capacity	Min./Nom./Max.	kW		0.6/2.5/3.9	0.6/3.5/5.3	0.6/5.0/5.8
Heating capacity	Min./Nom./Max.	kW		0.6/3.6/7.5	0.6/5.0/9.0	0.6/6.3/9.4
Power input	Cooling	Min./Nom./Max.	kW	0.11/0.41/0.88	0.11/0.66/1.33	0.11/1.10/1.60
	Heating	Min./Nom./Max.	kW	0.10/0.62/2.01	0.10/1.00/2.53	0.10/1.41/2.64
Space cooling	Energy efficiency class				A+++	
	Capacity	Pdesign	kW	2.50	3.50	5.00
	SEER			9.54	9.00	8.60
	Annual energy consumption		kWh/a	92	136	203
Space heating (Average climate)	Energy efficiency class				A+++	
	Capacity	Pdesign	kW	3.50	4.50	5.60
	SCOP/A			5.90	5.73	5.50
	Annual energy consumption		kWh/a	831	1,100	1,427
Nominal efficiency	EER			6.10	5.30	4.55
	COP			5.80	5.00	4.47
	Annual energy consumption		kWh	205	330	550
	Energy labeling Directive Cooling/Heating				A/A	

Indoor unit		FTXZ		25N	35N	50N	
Dimensions	Unit	HeightxWidthxDepth		295x798x372			
Weight	Unit	mm		15			
Air filter	Type			Auto cleaning filter			
Fan	Air flow rate	Cooling	Silent operation/Low/High	m <sup>3</sup> /min	4.0/5.3/10.7	4.0/5.6/12.1	4.6/6.6/15.0
		Heating	Silent operation/Low/High	m <sup>3</sup> /min	4.8/6.7/11.7	4.8/6.9/13.3	5.9/7.7/14.4
Sound power level	Cooling	dBA		54	57	60	
	Heating	dBA		56	57	59	
Sound pressure level	Cooling	Silent operation/Low/Nom./High	dBA	19/26/33/38	19/27/35/42	23/30/38/47	
	Heating	Silent operation/Low/Nom./High	dBA	19/28/35/39	19/29/36/42	24/31/38/44	
Control systems	Infrared remote control		ARC477A1				
Power supply	Phase/Frequency/Voltage		Hz/V			1~/50/220-240	

Outdoor unit		RXZ		25N	35N	50N	
Dimensions	Unit	HeightxWidthxDepth		693x795x300			
Weight	Unit	mm		50			
Sound power level	Cooling	dBA		59	61	63	
	Heating	dBA		59	61	64	
Sound pressure level	Cooling	High	dBA	46	48	49	
	Heating	High	dBA	46	48	50	
Operation range	Cooling	Ambient	Min.~Max.	°CDB			-10~43
	Heating	Ambient	Min.~Max.	°CWB			-20~18
Refrigerant	Type			R-32			
	GWP			675			
	Charge	kg/TCO2Eq		1.34/0.9			
Piping connections	Liquid	OD	mm	6.35			
	Gas	OD	mm	9.5			
	Piping length OU - IU	Max.	m	10			
	Level difference IU - OU	Max.	m	8			
Power supply	Phase/Frequency/Voltage		Hz/V			1~/50/220-240	
Current - 50Hz	Maximum fuse amps (MFA)		A			16	

# Daikin Emura

## Design that speaks for itself



### Why choose Daikin Emura?

- › Ultimate comfort, designed with the highest **quality** in mind... Its design speaks for itself: Daikin Emura pleases the eye and has a strong focus on comfort and user experience to improve your well-being at home.
- › When you choose Daikin technology, you can count on year-round **comfort, energy efficiency, reliability** and **control**.



reddot award 2022  
winner







### High energy efficiency

Seasonal efficiency gives a more realistic indication on how efficient air-to-air heat pump operate over an entire heating or cooling season. The label includes multiple classifications from A+++ to G. Daikin Emura achieves high energy efficiencies:

- › SEER up to
- › SCOP up to



### Benefits

-  Almost inaudible with sound levels down to 19 dBA
-  3D airflow
-  Intelligent thermal sensor
-  Heat boost
-  Weekly timer
-  Onecta app: always in control no matter where you are, including voice control
-  Connectable to pair, multi and VRV



## Unique design

Silver, matt white and matt black, these are the three monochrome colours in which Daikin Emura is available.



The front panel of the remote control matches the colours of the indoor unit – the casing is anthracite grey to create a floating effect.



The outdoor unit comes in ivory white.



## Comfort

### Intelligent thermal sensor

Daikin Emura uses an intelligent thermal sensor to detect a room's current temperature. After determining the room temperature, the intelligent thermal sensor distributes air evenly throughout the room before switching to an airflow pattern that directs warm and cool air to areas that need it.

### 3D airflow

Combines vertical and horizontal auto-swing to circulate a stream of warm or cool air right to the corners of even large spaces.

### Inaudible to hear

Daikin Emura is almost inaudible with sound levels down to 19 dBA.

### Coanda effect

By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room.

### Heat boost

Daikin Emura quickly heats the room when starting up, ensuring the set temperature is reached faster.

# Wall mounted unit

## Design that speaks for itself

- › Remarkable blend of iconic design and engineering excellence with an elegant finish in matt crystal white, silver and black
- › The Coanda effect optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room
- › The intelligent thermal sensor determines the current room temperature and distributes air evenly throughout the room before switching to an airflow pattern that directs warm or cool air to areas that need it
- › Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster than a regular air conditioner (pair only)
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc.
- › Onecta app: control your indoor from any location with an app, via your local network or internet



- › Whisper quiet in operation: the operating of the unit can hardly be heard. The sound pressure level goes down to 19dBA!
- › Seasonal efficiency values up to A+++ in cooling and heating

More details and final information can be found by scanning or clicking the QR codes.



FTXJ-AW



FTXJ-AS



FTXJ-AB



RXJ-A

Efficiency data		FTXJ/RXJ	20AW/S/B + 20A	25AW/S/B + 25A	35AW/S/B + 35A	42AW/S/B + 42A	50AW/S/B + 50A	
Cooling capacity	Min./Nom./Max.	kW	1.3/2.0/2.6	1.3/2.5/3.2	1.4/3.4/4.0	1.7/4.2/5.0	1.7/5.0/5.3	
Heating capacity	Min./Nom./Max.	kW	1.3/2.5/3.5	1.3/2.8/4.7	1.4/4.0/5.2	1.7/5.4/6.0	1.7/5.8/6.5	
Power input	Cooling	Nom. kW	0.43	0.56	0.78	1.05	1.36	
	Heating	Nom. kW	0.50	0.56	0.99	1.31	1.45	
Space cooling	Energy efficiency class			A+++		A++		
	Capacity	Pdesign	kW	2	2.5	3.4	4.2	5
	SEER			8.75	8.74	8.73	7.5	7.33
	Annual energy consumption		kWh/a	80	100	136	196	239
Space heating (Average climate)	Energy efficiency class			A+++		A++		
	Capacity	Pdesign	kW	2.40	2.45	2.50	3.80	4.00
	SCOP			5.15	5.15	5.15	4.6	4.6
	Annual energy consumption		kWh/a	652	666	680	1,156	1,218
Nominal efficiency	EER		4.7	4.46	4.37	3.99	3.68	
	COP		5	5	4.04	4.12	4	
	Annual energy consumption		213	280	389	526	679	
	Energy labeling Directive Cooling/Heating			A/A				

Indoor unit		FTXJ	20AW/S/B	25AW/S/B	35AW/S/B	42AW/S/B	50AW/S/B		
Dimensions	Unit	HeightxWidthxD	mm						
Weight	Unit	kg							
Air filter	Type	Removable / washable							
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m <sup>3</sup> /min	4.6/6.0/8.4/11.0	4.6/6.0/8.6/11.4	4.6/6.0/8.6/11.8	4.6/7.2/9.5/13	5.2/7.6/10.4/13.5
		Heating	Silent operation/ Low/Medium/High	m <sup>3</sup> /min	4.6/6.4/8.7/11.1	4.6/6.4/9.0/11.3	4.6/6.4/9.0/11.7	5.2/7.7/10.5/14.4	5.7/8.2/11.1/15.0
Sound power level	Cooling		dBA	57	57	60	60	60	
	Heating		dBA	-	-	-	-	-	
Sound pressure level	Cooling	Silent operation/Low/High	dBA	19/25/39	19/25/40	19/25/41	21/29/45	24/31/46	
	Heating	Silent operation/Low/High	dBA	19/25/39	19/25/40	19/25/41	21/29/45	24/33/46	
Control systems	Infrared remote control		ARC488A1W/S/B						
	Wired remote control		BRC073A1						
Piping connections	Drain	18							

\* +2 dBA in Multi combination

Outdoor unit		RXJ	20A	25A	35A	42A	50A	
Dimensions	Unit	HeightxWidthxD	mm				734x954x408	
Weight	Unit	kg					49	
Sound power level	Cooling	Nom.	dBA	59	59	61	62	62
	Heating	Nom.	dBA	59	59	61	62	62
Sound pressure level	Cooling	Nom.	dBA	46	46	49	48	48
	Heating	Nom.	dBA	47	47	49	48	49
Operation range	Cooling	Ambient	Min.~Max.	°CDB				-10~50
	Heating	Ambient	Min.~Max.	°CWB				-21~18
Refrigerant	Type/GWP	R-32/675.0						
Piping connections	Charge	kg/TCO2Eq	0.76/0.52				1.10/0.75	
	Liquid/Gas OD	mm	6.35/9.50				6.35/12.7	
Piping connections	Piping length	OU - IU Max.	m				20	
		System Chargeless	m					10
	Additional refrigerant charge	kg/m	0.02 (for piping length exceeding 10m)					
Power supply	Level difference	IU - OU Max.	m				20	
	Phase/Frequency/Voltage	Hz/V	1~/50/220-240					
Current - 50Hz	Maximum fuse amps (MFA)	A	10				13	

Contains fluorinated greenhouse gases



DAIKIN EMURA BLACK  
FTXJ-AB



SIMPLIFIED REMOTE  
CONTROL



DAIKIN EMURA WHITE  
FTXJ-AW



DAIKIN EMURA SILVER  
FTXJ-AS



DAIKIN EMURA OUTDOOR  
UNIT RXJ-A

Stylish  
where innovation  
meets creativity



White FTXA-CW



Silver FTXA-CS



Black FTXA-CB

up to



in heating & cooling

## Available in 3 colours

- › Users can choose from **three distinct colours** (white, silver and black)
- › **Curved corners** create an unobtrusive and space-saving design
- › **Thin dimensions** make it the most compact design unit on the market
- › Simple panel enables variation in texture and colour to easily blend into any room
- › Award winning design: Stylish earned the Reddot award, the Good Design Award and iF award for its innovative look and functional capabilities



reddot award 2018  
winner








GOOD DESIGN  
AWARD 2017


## The Coanda effect

Already present in the Ururu Sarara, the **Coanda effect** optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room.

The Coanda effect creates two different airflow patterns depending on whether Stylish is in cooling or heating mode. On the top is the Coanda effect in cooling mode (ceiling airflow), while the bottom images demonstrate the Coanda effect in heating mode (vertical airflow).





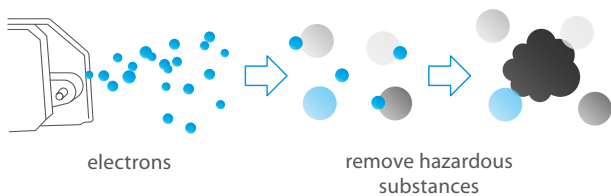


## Air quality

**Flash streamer:** using electrons to trigger chemical reactions with airborne particles, the Flash Streamer removes allergens such as pollen and fungal allergens, eliminating unpleasant odours and providing better, cleaner air.

**NEW Static air filter:** The new air filter has been treated with an active (Ionpure) substance in order to capture, reduce and remove bacteria and viruses.


## Intelligent thermal sensor

Stylish uses an **intelligent thermal sensor** to detect the surface temperature of a room to create a more comfortable climate. After determining the current room temperature, the sensor distributes air evenly throughout the room before switching to an airflow pattern that directs warm or cool air to areas that need it.

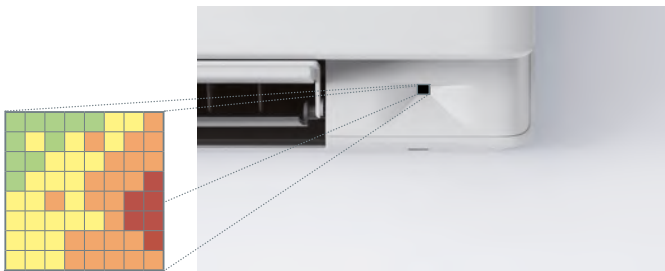

## Quiet operation

Stylish uses a **specially designed fan** to optimise airflow for higher energy efficiency at low sound levels. To achieve higher energy efficiency, Daikin designed a fan that runs efficiently within Stylish's compact dimensions. Together, the fan and heat exchanger attain top energy performance but operate at a sound level that is practically inaudible to occupants.

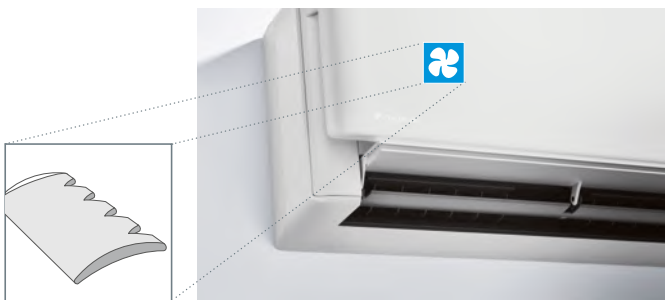


## Onecta app

Control your system and enjoy maximum comfort, just by using your voice. Via Amazon Alexa or Google Assistant you can control main functions such as temperature set point, operation mode, fan speed, and much more!

### Your benefits

- › Access to various features for controlling your internal climate
- › Manage the temperature, operating mode, air purification and fans with the interactive thermostat
- › Create different operating schedules and modes
- › Monitor energy consumption

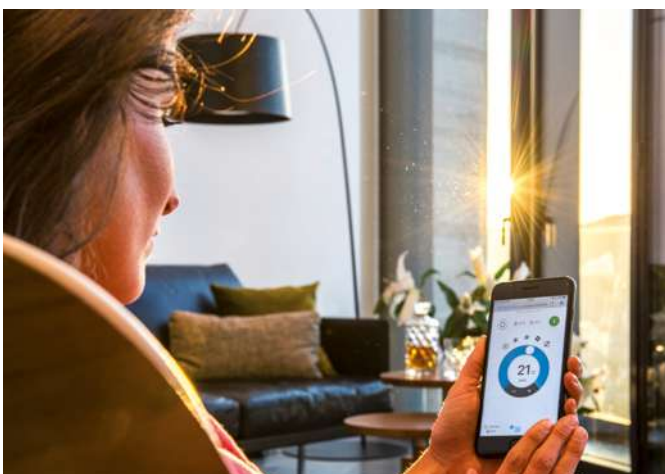

# Wall mounted unit

## Where innovation meets creativity

- > A compact and functional design suitable for all interiors in a white, black and silver coloured elegant finish
- > The Coanda effect optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room
- > The intelligent thermal sensor determines the current room temperature and distributes air evenly throughout the room before switching to an airflow pattern that directs warm or cool air to areas that need it
- > Practically inaudible: the unit runs so quietly, you will almost forget it is there.
- > Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- > Onecta app: control your indoor from any location with an app, via your local network or internet.
- > Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- > Seasonal efficiency values up to A+++ in cooling and heating



More details and final information can be found by scanning or clicking the QR codes.



Efficiency data		FTXA + RXA		CTXA15CW/S/B	20ACW/S/B + 20A8	25CW/S/B + 25A8	35CW/S/B + 35A8	42CW/S/B + 42B9	50CW/S/B + 50B
Cooling capacity	Min./Nom./Max.			Connectable to multi outdoor units only	1.30/2.00/2.60	1.30/2.50/3.20	1.40/3.40/4.00	1.70/4.20/5.00	1.70/5.00/5.30
Heating capacity	Min./Nom./Max.				1.30/2.50/3.50	1.30/2.80/4.70	1.40/4.00/5.20	1.70/5.40/6.00	1.70/5.80/6.50
Power input	Cooling	Min./Nom./Max.	kW		0.27/0.43/0.63	0.27/0.56/0.78	0.31/0.78/1.04	-1.05/-	-1.36/-
	Heating	Min./Nom./Max.	kW		0.25/0.50/0.91	0.25/0.56/1.22	0.26/0.99/1.67	-1.31/-	-1.45/-
Space cooling	Energy efficiency class					A+++			A++
	Capacity	Pdesign	kW		2.00	2.50	3.40	4.20	5.00
	SEER				8.75	8.74	8.73	7.50	7.33
Space heating (Average climate)	Annual energy consumption				80	100	136	196	239
	Energy efficiency class					A+++			A++
	Capacity	Pdesign	kW		2.40	2.45	2.50	3.80	4.00
Nominal efficiency	SCOP/A					5.15			4.60
	Annual energy consumption				653	666	680	1,150	1,217
	EER				4.70	4.46	4.37	3.99	3.68
Current - 50Hz	COP				5.00	4.04	4.12	4.00	
	Annual energy consumption			215	280	390	526	679	
	Energy labeling Directive Cooling/Heating					A/A			
Maximum fuse amps (MFA)			A	10			13		

Indoor unit		FTXA		CTXA15CW/S/B	20CW/S/B	25CW/S/B	35CW/S/B	42CW/S/B	50CW/S/B	
Dimensions	Unit	HeightxWidthxDp		295x798x189						
Weight	Unit			12						
Air filter	Type			Removable / washable						
Fan	Air flow rate	Cooling	Silent operation/Low/Medium/High	m³/min	4.6/6.1/8.1/11.0	4.6/6.1/8.2/11.0	4.6/6.1/8.6/11.5	4.6/6.1/8.6/11.9	4.6/7.2/9.8/13.1	5.2/7.6/10.4/13.5
		Heating	Silent operation/Low/Medium/High	m³/min	4.5/6.4/8.7/10.9		4.5/6.4/9.0/11.1	4.5/6.4/9.0/11.5	5.2/7.7/10.5/14.6	5.7/8.2/11.1/15.1
Sound power level	Cooling			57				60		
Sound pressure level	Cooling	Silent operation/Low/High	dBA	21/25/39	19/25/39	19/25/40	19/25/41	21/29/45	24/31/46	
	Heating	Silent operation/Low/High	dBA	21/25/39	19/25/39	19/25/40	19/25/41	21/29/45	24/33/46	
Control systems	Infrared remote control		ARC466A58							
	Wired remote control									

Outdoor unit		RXA		20A8	25A8	35A8	42B9	50B
Dimensions	Unit	HeightxWidthxDp		550x840x350		734x870x373		
Weight	Unit			32		50		
Sound power level	Cooling	Nom.	dBA	59.0		61.0	62.0	
	Heating	Nom.	dBA	59.0		61.0	62.0	
Sound pressure level	Cooling	Nom.	dBA	46.0		49.0	48.0	
	Heating	Nom.	dBA	47.0		49.0	48.0	
Operation range	Cooling	Ambient	Min.-Max.	-10~46				
	Heating	Ambient	Min. - Max.	-15~-18				
Refrigerant	Type/GWP			R-32/675.0				
Piping connections	Liquid/Gas OD		mm	0.76/0.52		1.10/0.75		
	Piping length OU - IU	Max.	m	6.35/9.50		6.35/12.7		
	Additional refrigerant charge		kg/m	20				
	Level difference IU - OU	Max.	m	0.02 (for piping length exceeding 10m)				
Power supply	Phase/Frequency/Voltage			15.0			20	

Contains fluorinated greenhouse gases | See separate drawing for operation range | See separate drawing for electrical data | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m.



STYLISH SILVER  
FTXA-CS



STYLISH WHITE  
FTXA-CW



STYLISH BLACK  
FTXA-CB



## All seasons, all-year-round comfort, efficiency, air purification, connectivity

### Comfort+

Two flaps create a precise angle to make the airflow path narrower. This increases air velocity to ensure the air travels further.

With its double flap system, the airflow is “squeezed” through the flaps acquiring greater velocity to travel upwards (avoiding cold airflow directly onto people).

**Improvement over the single flap in the current model**





### 2 area motion detection sensors

#### Area motion detection sensors

Air direction: the motion detection sensors detect where persons are located in the room to direct the air away from them. Upon leaving the room, the unit goes into energy-saving mode.

#### Result

Perfect comfort and low-energy consumption

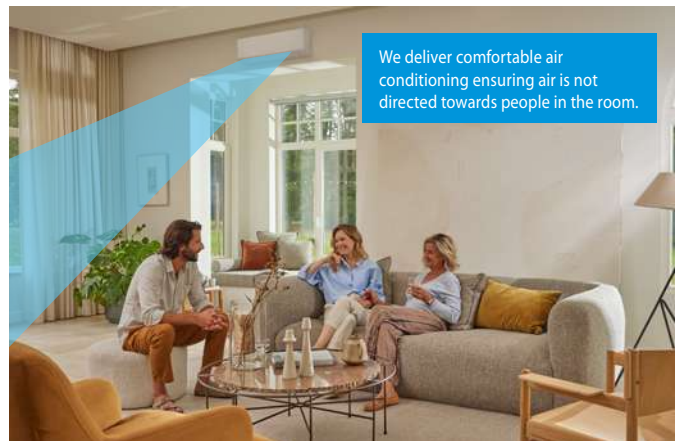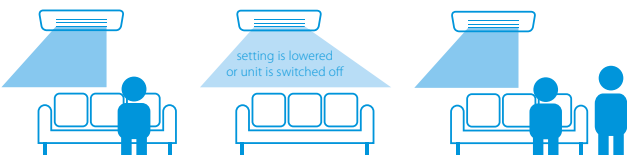

We deliver comfortable air conditioning ensuring air is not directed towards people in the room.



## Efficiency

Cost-efficiency and performance-efficiency can be achieved in 2 ways:

**1. PAIR:** By combining one indoor with one outdoor, Daikin delivers the highest efficiency levels on the market. With efficiencies up to A+++ , it will save on your energy bills and create wonderful living comfort all year round.

**2. MULTI:** With only one multi split outdoor unit, up to 5 indoor units can be connected. **NEW:** For certain combinations of Perfera with 3MXM52A(9) outdoor unit an energy efficiency of **up to A+++ in cooling and heating\*** can be reached


Outdoor Unit	Indoor Unit	Energy label	
		Cooling	Heating
3MXM52A(9)*	C/FTXM-A		
	1.5 + 1.5 + 3.5	A+++	A+++
	1.5 + 2.0 + 3.5	A+++	A+++
	1.5 + 2.5 + 3.5	A+++	A+++
	2.0 + 2.0 + 3.5	A+++	A+++
	2.0 + 2.5 + 3.5	A+++	A+++
	2.5 + 2.5 + 3.5	A+++	A+++

## Air purification

### Flash streamer/titanium apatite deodorising filter

Flash streamer: using electrons to trigger chemical reactions with airborne particles, the flash streamer removes allergens such as pollen and fungal allergens, eliminating unpleasant odours and providing fresher, cleaner air.

#### FLASH STREAMER




The titanium apatite deodorising filter works hard to combat smells such as tobacco smoke and pet odours.

### Silver allergen removal filter

The silver allergen removal and air-purifying filter is the ideal solution, because it captures allergens such as pollen to ensure a steady supply of clean air.

## NEW Static air filter:

The new air filter has been treated with an active (Ionpure) substance in order to capture, reduce and remove bacteria and viruses.

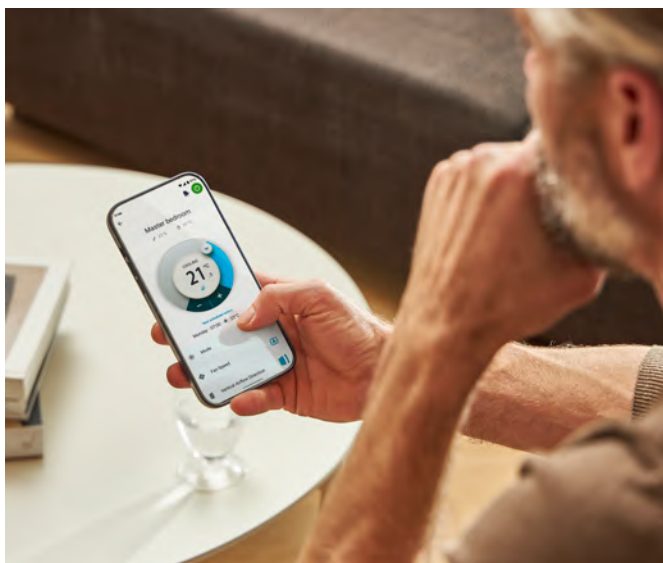

## Full connectivity

### Onecta App

Control your system and enjoy maximum comfort just by using your voice. Using Amazon Alexa or Google Assistant, you can control the main functions such as the temperature setting, operating mode, fan speed and much more! (see page 339)

### Residential Solutions Navigator (RSN)

Find your applicable solution in just a few clicks based on the number and size of the room. Calculate your savings with the Return on Investment calculator. (see page 333)

### DCS Residential

From the professional portal, Installers can activate the remote monitoring allowing them to supervise your installation on multiple parameters, from their location. (see page 336)

# Wall mounted unit

Attractive, wall mounted design with perfect indoor air quality

- › Seasonal efficiency values up to A+++ in cooling and heating in pair and multi
- › Comfort+: perfect comfort with homogeneous temperature throughout the room. The double flaps direct the air towards the ceiling in cooling and along the wall in heating.
- › 2-area motion detection sensor: air flow is sent to a zone other than where the person is located at that moment; if no people are detected, the unit will automatically switch over to the energy-efficient setting. (larger capacity area)
- › Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster than a regular air conditioner (pair only)
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- › Silver allergen removal and air purifying filter captures allergens such as pollen to ensure a steady supply of clean air
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Onecta app: control your indoor from any location with an app, via your local network or internet.



- › Quiet operation: down to 19dBa sound pressure level
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces

More details and final information can be found by scanning or clicking the QR codes.



FTXM-A



CTXM-A



FTXM-R

RXM-R

RXM-A

Efficiency data		FTXM + RXM	CTXM15A	20A + 20A9	25A + 25A9	35A + 35A9	42A + 42A	50A + 50A	60R + 60R	71R + 71R	
Cooling capacity	Min./Nom./Max.	kW		0.90/2.00/3.00	0.90/2.50/3.80	0.90/3.50/4.40	1.50/4.20/5.20	1.70/5.00/5.30	1.70/6.00/7.00	2.30/7.10/8.50	
Heating capacity	Min./Nom./Max.	kW		0.80/2.50/3.50	0.80/2.80/5.00	0.80/4.00/5.50	1.50/5.40/6.20	1.70/5.80/6.50	1.70/7.00/8.00	2.30/8.20/10.20	
Power input	Cooling	Nom.	kW	0.37	0.48	0.76	1.00	1.36	1.77	2.34	
	Heating	Nom.		0.50	0.50	0.88	1.29	1.40	1.94	2.57	
Space cooling	Energy efficiency class			A+++				A+++			
	Capacity	Pdesign	kW	2.00	2.50	3.50	4.20	5.00	6.00	7.10	
	SEER			9.47		9.25		8.11		6.90	
	Annual energy consumption			74		92		132		181	
Space heating (Average climate)	Energy efficiency class			A+++				A+++		A+++	
	Capacity	Pdesign	kW	2.30	2.40	2.50	4.00	4.50	4.80	6.20	
	SCOP/A			5.20		5.00		5.00		4.80	
Nominal efficiency	Annual energy consumption			619		647		673		1,120	
	EER			5.35		5.20		4.63		4.20	
	COP			5.00		4.55		4.19		3.68	
Annual energy consumption			kWh	187	240	378	500	679	885	1,172	
	Energy labeling Directive Cooling/Heating						A/A				B/D

Indoor unit		FTXM		CTXM15A	20A	25A	35A	42A	50A	60R	71R						
Dimensions	Unit	HeightxWidthxDepth	mm		298x804x252				299x998x292								
Weight	Unit	kg		11.5				14.5									
Air filter	Type	Removable/washable															
Fan	Air flow rate	Cooling	Silent operation/Low/Medium/High	m³/min		4.9/6.3/8.9/11.9		4.6/7.1/9.4/13.2		5.0/7.2/9.8/13.3		5.9/7.8/10.4/12.7		9.1/11.8/14.1/16.7		10.0/12.2/15.1/16.9	
		Heating	Silent operation/Low/Medium/High	m³/min		4.9/6.9/9.2/11.4		5.1/6.9/9.4/11.1		5.3/7.1/10.0/14.0		6.9/8.6/11.5/14.5		11.2/14.4/15.2/16.5		11.6/12.7/15.8/17.7	
Sound power level	Cooling	dBA		54		58		60		60.0							
	Heating	dBA		53		60		60		59.0							
Sound pressure level	Cooling	Silent operation/Low/High	dBA		19/25/41		19/29/45		21/30/45		27/33/46		30.0/37.0/46.0		32.0/38.0/47.0		
	Heating	Silent operation/Low/High	dBA		20/26/39		20/27/39		20/28/39		21/29/45		31/34/46		33.0/36.0/45.0		
Control systems	Infrared remote control		ARC466A86														

Outdoor unit		RXM		CTXM15A	20A	25A	35A	42A	50R	60R	71R		
Dimensions	Unit	HeightxWidthxDepth	mm		610x923x367				734x954x401				
Weight	Unit	kg		36				49.0			55		
Sound power level	Cooling	Nom.	dBA		58		61		62		63		
	Heating	Nom.	dBA		58		60		62		60		
Sound pressure level	Cooling	Nom.	dBA		46.0		47		48		48.0		
	Heating	Nom.	dBA		47.0		49.0		49		49.0		
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-10~50				-10~50		-10~46	
	Heating	Ambient	Min. - Max.	°CWB		-21~18				-21~18		-15~18	
Refrigerant	Type/GWP			R-32/675.0									
	Charge	kg/TCO2Eq		0.95/0.65		0.95/0.65		1.10/0.75		1.15/0.780			
Piping connections	Liquid	OD	mm		9.50				12.7		15.9		
	Gas	OD	mm		20				30				
	Piping length	OU - IU	Max.	m		10							
	Additional refrigerant charge	System	Chargeless	kg/m		0.02 (for piping length exceeding 10m)							
Power supply	Level difference	IU - OU	Max.	m		15				20.0			
	Phase/Frequency/Voltage			1~/50/220-240									
Current - 50Hz	Maximum fuse amps (MFA)	A		10		13		16		20			

See separate drawing for operation range | See separate drawing for electrical data | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m | Contains fluorinated greenhouse gases | See separate drawings for electrical data

# Wall mounted unit

Discreet wall mounted unit providing high efficiency and comfort

- › Practically inaudible: the unit runs so quietly, you will almost forget it is there.
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Silver allergen removal and air purifying filter captures allergens such as pollen to ensure a steady supply of clean air
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces
- › The unit's compact dimensions makes it ideal for renovation projects, especially for above door installation
- › Seasonal efficiency values up to A++ in cooling and heating
- › Space saving contemporary wall mounted design
- › Up to 5 indoor units can be connected to 1 multi outdoor unit; all indoor units are individually controllable and do not need to



be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.

**NEW**

More details and final information can be found by scanning or clicking the QR codes.



FTXP-N



FTXP-N9



RXP-N



RXP-N9

Efficiency data		FTXP + RXP		20N9 + 20N9	25N9 + 25N9	35N9 + 35N9	50N + 50N	60N + 60N	71N + 71N
Cooling capacity	Min./Nom./Max.	kW		1.3/2.00/2.6	1.3/2.50/3.0	1.3/3.50/4.0	1.7/5.0/6.0	1.7/6.0/7.0	2.3/7.1/7.3
Heating capacity	Min./Nom./Max.	kW		1.30/2.50/3.50	1.30/3.00/4.00	1.30/4.00/4.80	1.7/6.0/7.7	1.7/7.0/8.0	2.3/8.2/9.0
Power input	Cooling	Min./Nom./Max.	kW	0.31/0.54/0.72	0.31/0.67/0.72	0.29/1.08/1.30	0.320/1.385/1.826	0.332/1.824/2.980	0.449/2.689/3.274
	Heating			0.25/0.52/0.95	0.25/0.69/0.95	0.29/0.99/1.29	0.440/1.579/2.356	0.456/1.928/2.787	0.617/2.571/3.306
Space cooling	Energy efficiency class						A++		
	Capacity	Pdesign	kW	2.00	2.50	3.50	5.0	6.0	7.1
	SEER			7.20			7.30	6.82	6.20
	Annual energy consumption		kWh/a	97	121	170	240	308	401
Space heating (Average climate)	Energy efficiency class				A++			A+	
	Capacity	Pdesign	kW	2.20	2.40	2.80	4.60	4.80	6.20
	SCOP/A			4.65	4.61	4.64	4.40	4.10	4.01
	Annual energy consumption		kWh/a	663	728	845	1,463	1,638	2,166
Nominal efficiency	EER			3.75		3.26	3.61	3.29	2.64
	COP			4.77	4.36	4.02	3.80	3.63	3.19
	Annual energy consumption		kWh	270	335	540	693	912	1,345
	Energy labeling Directive Cooling/Heating			A/A				-/-	

Indoor unit		FTXP		20N9	25N9	35N9	50N	60N	71N	
Dimensions	Unit	HeightxWidthxDpeth		mm		286x770x225		295x990x263		
Weight	Unit	kg		8.50		9.00		13.5		
Air filter	Type	Removable / washable								
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m³/min	4.2/5.6/7.4/9.5	4.2/5.8/7.7/9.7	4.5/6.3/8.3/11.5	8.3/11.5/14.0/16.3	9.2/11.8/14.4/16.8	10.1/11.8/14.4/16.8
		Heating	Silent operation/ Low/Medium/High	m³/min	5.2/6.2/8.1/10.4	5.2/6.4/8.1/10.4	5.3/7.0/9.0/11.5	10.4/11.8/14.4/17.3	11.0/12.4/15.3/17.9	
Sound power level	Cooling	dBA		55		58		59		
	Heating	dBA		55		58		61		
Sound pressure level	Cooling	Silent operation/Low/High	dBA	19/25/39	19/26/40	20/27/43	27/34/43	30/36/45	32/37/46	
	Heating	Silent operation/Low/High	dBA	21/28/39	21/28/40	21/29/40	30/38/42	32/40/44	33/41/45	
Control systems	Infrared remote control		ARC480A53							

Outdoor unit		RXP		20N9	25N9	35N9	50N	60N	71N	
Dimensions	Unit	HeightxWidthxDpeth		mm		550x740x343		734x870x373		
Weight	Unit	kg		26		26		46.0		
Sound power level	Cooling	Nom.		60		62		61		
Sound pressure level	Cooling	dBA		46		48		47		
	Heating	dBA		47		48		49		
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-10~-48				
	Heating	Ambient	Min.~Max.	°CWB		-15~-18				
Refrigerant	Type	R-32								
	GWP	675.0								
	Charge	kg/TCO2Eq	0.55/0.37		0.70/0.48		0.90/0.61		1.15/0.78	
Piping connections	Liquid	OD	mm		6.4		6.35			
	Gas	OD	mm		9.5		12.7			
	Piping length OU - IU	Max.	m		20		30			
	Additional refrigerant charge	kg/m		0.02 (for piping length exceeding 10m)						
	Level difference IU - OU	Max.	m		12		20			
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50/220-240						
	Current - 50Hz	Maximum fuse amps (MFA)		A		16		20		

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for electrical data | See separate drawing for operation range | Contains fluorinated greenhouse gases

\*\* Integrated for 20-25-35 class. Standard for 50-60-71 class

# Wall mounted unit

Wall mounted unit for low energy consumption and pleasant comfort

- > Seasonal efficiency values up to A++ in cooling
- > Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- > **REMARK:** For 20-42 class, please order option package BRP069C47. A different remote controller is included in the package to control the unit once the option is installed.
- > Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- > Quiet in operation down to 21 dBA
- > Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency



More details and final information can be found by scanning or clicking the QR codes.



FTXF-D



FTXF-E



RXF-D



RXF-E

Efficiency data		FTXF + RXF		20E + 20E	25E + 25E	35E + 35E	42E + 42E	50D + 50D	60D + 60D	71D + 71D	
Cooling capacity	Min./Nom./Max.	kW		1.3/2.00/2.4	1.3/2.50/2.8	1.3/3.30/3.8	1.4/4.20/4.3	1.70/5.00/6.00	1.70/6.00/7.00	2.30/7.10/7.30	
Heating capacity	Min./Nom./Max.	kW		1.30/2.40/3.30	1.30/2.80/3.70	1.30/3.50/4.40	1.40/4.60/5.00	1.70/6.00/7.70	1.70/6.40/8.00	2.30/8.20/9.00	
Power input	Cooling	Min./Nom./Max.		kW		0.31/0.592/0.72	0.31/0.772/1.05	0.31/1.00/1.40	0.31/1.27/1.50	-/1.50/-	
	Heating	Min./Nom./Max.		kW		0.25/0.640/0.95	0.25/0.750/1.11	0.25/0.940/1.50	0.25/1.24/1.40	-/1.62/-	
Space cooling	Energy efficiency class		A++								
	Capacity	Pdesign	kW		2.00	2.50	3.50	4.20	5.00	6.00	7.10
	SEER				6.50				6.21	6.15	5.15
	Annual energy consumption		kWh/a		108	135	188	226	282	342	483
Space heating (Average climate)	Energy efficiency class		A+								
	Capacity	Pdesign	kW		2.20	2.40	2.60	3.30	4.60	4.80	6.20
	SCOP/A				4.20		4.30		4.06		3.81
	Annual energy consumption		kWh/a		733	801	867	1,075	1,585	1,654	2,275
Indoor unit		FTXF		20E	25E	35E	42E	50D	60D	71D	
Dimensions	Unit	HeightxWidthxDepth		mm		286x770x225			295x990x263		
Weight	Unit	kg		8.00		8.50		9.00		13.5	
Air filter	Type	Removable / washable									
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m³/min		4.3/6.0/8/9/8	4.3/6.2/8/10/0	4.4/6.4/8/11.5	4.9/6.9/9/12/6	10.5/11.9/14.4/16.8	
		Heating	Silent operation/ Low/Medium/High	m³/min		5.3/6.2/8.3/10.4	5.3/6.4/8.4/10.4	5.3/6.5/8.6/11.9	5.2/6.7/8.8/12.8	10.7/12.2/14.8/17.3	
Sound power level	Cooling	dBA		53.0		54.0		59.0		59	
	Heating	dBA		55.0		56.0		59.0		61	
Sound pressure level	Cooling	Silent operation/Low/High	dBA		20.0/25.0/39.0	20.0/26.0/40.0	20.0/27.0/43.0	22.0/30.0/45.0	31/34/43	33/36/45	34/37/46
	Heating	Silent operation/Low/High	dBA		21.0/28.0/39.0	21.0/28.0/40.0	21.0/29.0/40.0	22.0/28.0/44.0	30/33/42	32/35/44	33/36/45
Control systems	Infrared remote control		ARC470A1								
	Wired remote control		BRC073A1								
Piping connections	Drain		18								
Outdoor unit		RXF		20E	25E	35E	42E	50D	60D	71D	
Dimensions	Unit	HeightxWidthxDepth		mm		550x740x343			734x870x373		
Weight	Unit	kg		24.0		28.0		46.0		50.0	
Sound power level	Cooling	dBA		60		61		-		-	
	Heating	Low/Nom./High	dBA		-/-/46.0	-/-/48.0	-/-/48.0	-/47/-	-/49/-	-/52/-	
Sound pressure level	Cooling	Low/Nom./High	dBA		-/-/47.0	-/-/48.0	-/-/48.0	-/49/-	-/49/-	-/52/-	
	Heating	Low/Nom./High	dBA		-/-/47.0	-/-/48.0	-/-/48.0	-/49/-	-/49/-	-/52/-	
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-10 ~48					
	Heating	Ambient	Min.~Max.	°CWB		-15 ~18					
Refrigerant	Type		R-32								
	GWP		675.0								
	Charge	kg/TCO2Eq	0.450/0.280		0.550/0.370		0.750/0.510		0.90/0.61	1.15/0.78	
Piping connections	Liquid - Gas	Type	---								
	Piping length	OU - IU	Max.	m		20				30	
	Piping length	IU - OU	Max.	m		12.0				20	
	Level difference										
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50/220-240						
Current - 50Hz	Maximum fuse amps (MFA)		A		16				20		
Sound pressure level	Nom.		dBA								
Piping connections	Total piping length										

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. Data for high efficiency series, Eurovent certified | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. Data for standard efficiency series | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range | See separate drawing for electrical data | Contains fluorinated greenhouse gases



## Wall mounted unit

### Wall mounted unit, offering good value for money

- › Flat, stylish front panel blends easily within any interior décor and is easier to clean
- › Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- › Seasonal efficiency values up to A++ in cooling
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency



More details and final information can be found by scanning or clicking the QR codes.



FTXC-D



RXC-D

Efficiency data		FTXC + RXC		20D + 20D	25D + 25D	35D + 35D	50D + 50D	60D + 60D	71D + 71D		
Cooling capacity	Min./Max.	kW		1.3/3.0		1.3/4.0	1.4/6.2	1.8/7.0	2.3/7.3		
Heating capacity	Min./Max.	kW		1.30/4.00		1.30/4.80	1.36/6.60	1.48/8.00	2.30/9.00		
Power input	Cooling	Min./Nom./Max.	kW	0.30/0.595/1.15	0.30/0.765/1.15	0.32/1.05/1.74	0.30/1.55/2.11	0.38/1.89/2.05	0.44/2.38/2.54		
	Heating	Min./Nom./Max.	kW	0.28/0.670/1.35	0.28/0.750/1.35	0.28/1.07/1.57	0.27/1.52/1.85	0.33/1.68/2.35	0.50/2.46/2.74		
Space cooling	Energy efficiency class			A <sup>+</sup>							
	Capacity	Pdesign	kW	2.08	2.57	3.44	5.08	6.21	6.96		
	SEER			6.89	6.84	6.87	6.45	6.40	5.30		
	Annual energy consumption			106	131	175	276	339	460		
Space heating (Average climate)	Energy efficiency class			A <sup>+</sup>							
	Capacity	Pdesign	kW	1.87	2.23	2.24	3.90	4.10	6.35		
	SCOP/A			4.40	4.45	4.28	4.42	4.24	3.81		
	Annual energy consumption			595	701	733	1,234	1,353	2,332		
Nominal efficiency	EER			3.36	3.35		3.29	3.30	2.98		
	COP			3.73	3.79	3.74	3.71	3.81	3.25		
	Energy labeling Directive	Cooling/Heating		A/A							
Current - 50Hz	Maximum fuse amps (MFA)			A							
				16							
<b>Indoor unit</b>				<b>FTXC</b>	<b>20D</b>	<b>25D</b>	<b>35D</b>	<b>50D</b>	<b>60D</b>	<b>71D</b>	
Dimensions	Unit	HeightxWidthxDepth		288x770x234			297x990x273				
Weight	Unit			9.00			13.0				
Air filter	Type	Removable / washable									
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m <sup>3</sup> /min		5.4/6.1/8.1/10.8	5.4/6.4/8.7/11.1	7.4/8.1/9.9/12.5	10.2/12.5/14.5/20.4		
Sound power level	Cooling			dBA		57	58	60	63		
Sound pressure level	Cooling	Silent operation/Low/High		dBA		21/26/40	22/26/41	30/33/47	31/38/48		
Control systems	Infrared remote control			ARC486A2							
	Wired remote control			-							
<b>Outdoor unit</b>				<b>RXC</b>	<b>20D</b>	<b>25D</b>	<b>35D</b>	<b>50D</b>	<b>60D</b>	<b>71D</b>	
Dimensions	Unit	HeightxWidthxDepth		550x658x273			615x845x300			695x930x350	
Weight	Unit			24.0			26.0			45.0	
Sound power level	Cooling			dBA		58	60	65	66	69	
Sound pressure level	Cooling	High		dBA		45	46	51	54		
Operation range	Cooling	Ambient	Min.~Max.	°CDB		10~46		-10 ~46			
	Heating	Ambient	Min.~Max.	°CWB				-15 ~18			
Refrigerant	Type	R-32									
	GWP	675.0									
	Charge	kg/TCO <sub>2</sub> Eq	0.550/0.371		0.750/0.506		1.00/0.675	1.10/0.743	1.15/0.776		
Piping connections	Liquid	OD	mm		6.35						
	Gas	OD	mm		9.52			12.7			
	Piping length	OU - IU	Max.	m		20			30		
		System	Chargeless	m		8					
	Additional refrigerant charge	kg/m		0.01 (for piping length exceeding 7.5m)							
Level difference IU - OU	Max.		m		15.0			20.0			
Power supply	Phase/Frequency/Voltage			Hz/V		1~/50/220-240					
Current - 50Hz	Maximum fuse amps (MFA)			A		16					

Contains fluorinated greenhouse gases



# Perfera, Go with the heating flow

Perfera floor standing unit

## makes your world comfortable


Whatever you're planning to do with your day, you want to be comfortable while you're doing it. Whether it's the coolness of a summer breeze or the cosiness during winter, your living space needs that delicious feeling of wellbeing all year round. Perfera is unobtrusive and features a stylishly designed front panel, whisper-quiet operation and reduced airflow, turning each room into a true heaven of conspicuous comfort.

Multi connection on all capacities: from 2 to 5 port multi

### Comfortable: dual airflow

#### Easier individual control of airflow

The dual airflow of the Perfera floor-standing unit is perfect for creating the ideal level of heating. Air is directed both upwards and downwards to deliver even warm air distribution. And when the Perfera is in heat mode, your feet stay warm and the temperature throughout the room is evenly distributed, guaranteeing maximum comfort. Sheer bliss!

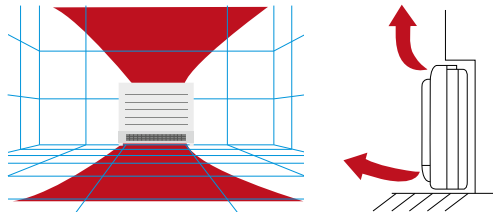

### Silent operation

Perfera uses a specially designed turbo fan that optimises airflow and creates high energy efficiency at low sound levels.



### Air quality

#### Flash streamer/titanium apatite deodorising filter

Flash streamer: using electrons to trigger chemical reactions with airborne particles, the Flash Streamer removes allergens such as pollen and fungal allergens, eliminating unpleasant odours and providing better, cleaner air. And the titanium apatite deodorising filter works hard to combat smells such as tobacco smoke and pets.

# Installation

Whether **built-in** or **wall-mounted**, the Perfera blends into the background and fits into your interior without any problem.



## 3 unique heating features



### Heat boost

Heat boost quickly heats up your home when starting up your air-to-air heat pump. Set temperature is reached 14% faster\* than a regular unit (pair only).

\*Heat Plus test condition: 50 class, outdoor temperature 2°C - Indoor temperature 10°C, R/C setting: 23°C





### Floor warming

The floor warming function optimises convection by distributing hot air from the bottom of the unit.



### Heat plus

The heat plus function provides cosy heating by simulating radiant heat for 30 minutes. Afterwards, the previous settings are again activated.

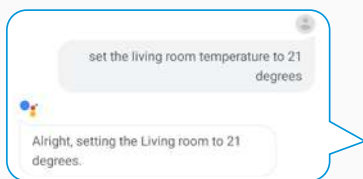


## Intuitive online and voice control

**NEW** Control your system and enjoy maximum comfort, just by using your voice. Via Amazon Alexa or Google Assistant you can control main functions such as temperature set point, operation mode, fan speed, and much more!

# Floor standing unit

Design floor standing unit for optimal heating comfort thanks to unique heating features

- › Seasonal efficiency values up to A++ in heating, resulting in low running costs compared to gas boilers and electric heating
- › Excellent contemporary design
- › Combinable with all multi outdoor units (2 to 5 ports)
- › Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster than a regular air conditioner (pair only)
- › The floor warming function optimises convection by distributing hot air from the bottom of the unit
- › The heat plus function provides 30 minutes cosy heating by simulating radiant heat
- › Dual air discharge flow for better air distribution
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air

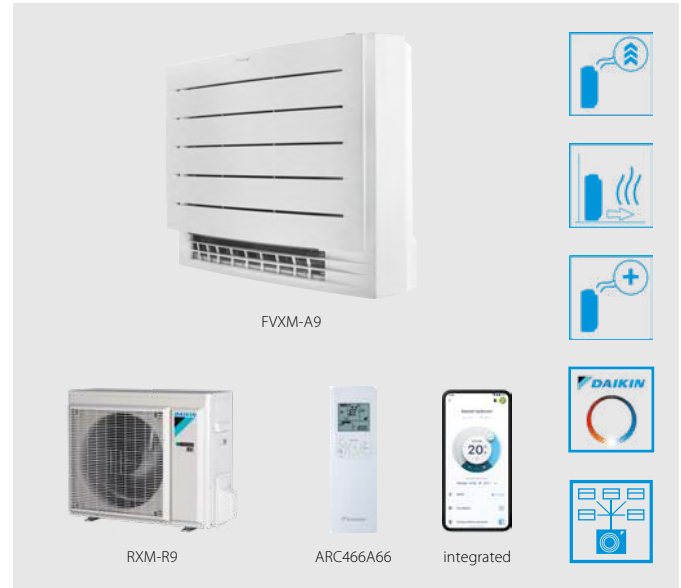

- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Quiet operation: down to 19dBA sound pressure level

More details and final information can be found by scanning or clicking the QR codes.



CVXM-A9



FVXM-A9

RXM-A

Efficiency data		FVXM + RXM		CVXM20A9	25A9 + 25R9	35A9 + 35R9	50A9 + 50A	
Cooling capacity	Min./Nom./Max.				1.30/2.40/3.50	1.40/3.40/4.00	1.40/5.00/5.80	
Heating capacity	Min./Nom./Max.				1.30/3.40/4.70	1.40/4.50/5.80	1.40/5.80/8.10	
Power input	Cooling	Nom.			0.54	0.85	1.31	
	Heating	Nom.			0.75	1.15	1.52	
Space cooling	Energy efficiency class			Multi connection only	A++	A++	A++	
	Capacity	Pdesign			kW	2.40	3.40	5.00
	SEER					8.55	8.11	7.30
Annual energy consumption			kWh/a		98	147	240	
Space heating (Average climate)	Energy efficiency class					A+		A+
	Capacity	Pdesign			kW	2.30	2.80	4.10
	SCOP/A					4.65	4.63	4.31
Nominal efficiency	Annual energy consumption				kWh/a	693	847	1,330
	EER					4.47	4.01	3.81
	COP					4.55	3.90	3.81
Current - 50Hz	Annual energy consumption			kWh	268	424	656	
	Energy labeling Directive	Cooling/Heating				A/A	A/A	
	Maximum fuse amps (MFA)			A	13		16	
Indoor unit		FVXM		CVXM20A9	25A9	35A9	50A9	
Dimensions	Unit	HeightxWidthxD		mm				
				600x750x238				
Weight	Unit			kg				
				17				
Air filter	Type			Removable / washable				
Fan	Air flow rate	Cooling	Silent operation/Low/Medium/High	m <sup>3</sup> /min	4.1/4.9/7/8.7		4.1/4.9/7/9.2	5.4/6.6/9/11.6
		Heating	Silent operation/Low/Medium/High	m <sup>3</sup> /min	4.1/5.6/7.2/9.2		4.1/5.6/7.2/9.8	5.9/8.4/10.0/12.8
Sound power level	Cooling			dBA	52.0		53.0	61.0
	Heating			dBA	52.0		53.0	62.0
Sound pressure level	Cooling	Silent operation/Low/High		dBA	22.0/25.0/38.0	20.0/25.0/38.0	20.0/25.0/39.0	27.0/31.0/44.0
	Heating	Silent operation/Low/High		dBA	21.0/25.0/38.0	19.0/25.0/38.0	19.0/25.0/39.0	29.0/35.0/46.0
Control systems	Infrared remote control				ARC466A66			
	Wired remote control				BRC073A1			
Outdoor unit		RXM		CVXM20A9	25A	35A	50A	
Dimensions	Unit	HeightxWidthxD		mm				
				552x840x350				
Weight	Unit			kg				
				32				
Sound power level	Cooling	Nom.		dBA	58.0	61.0	62.0	
	Heating	Nom.		dBA	59.0	61.0	62.0	
Sound pressure level	Cooling	Nom.		dBA	46.0	49.0	48.0	
	Heating	Nom.		dBA	47.0	49.0	49.0	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~-46		-10~-46	
	Heating	Ambient	Min. - Max.	°CDB	-15~-24		-15~-24	
Refrigerant	Type/GWP				R-32/675.0		R-32/675.0	
	Charge			kg/TCO2Eq	0.76/0.52		1.15/0.780	
Piping connections	Liquid/Gas OD			mm	6.35/9.50		6/12.7	
	Piping length	OU - IU	Max.	m	20		30	
	Additional refrigerant charge	System Chargeless		m	10		10	
	Level difference	IU - OU	Max.	m	0.02 (for piping length exceeding 10m)		0.02 (for piping length exceeding 10m)	
	Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240		1~/50/220-240
Current - 50Hz	Maximum fuse amps (MFA)			A	13		16	

Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range | See separate drawing for electrical data | Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB, 19°CWB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m | Contains fluorinated greenhouse gases | See separate drawings for electrical data

# Concealed ceiling unit

Compact concealed ceiling unit, with a height of only 200mm

- > Invisible unit as the unit is concealed in the ceiling: only the suction and discharge grilles are visible
- > Compact dimensions, can easily be mounted in a ceiling void of only 240mm
- > Medium external static pressure up to 40Pa facilitates unit use with flexible ducts of varying lengths
- > Unified indoor unit range for R-32 and R-410A
- > Auto cleaning filter option ensures maximum efficiency, comfort and reliability by regular filter cleaning
- > Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit
- > Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- > Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- > Low energy consumption thanks to DC fan motor



More details and final information can be found by scanning or clicking the QR codes.



FDXM-F9

RXM-R



RXM-R9

RXM-A

Efficiency data		FDXM + RXM		25F9 + 25R9	35F9 + 35R9	50F9 + 50A	60F9 + 60R	
Cooling capacity	Min./Nom./Max.	kW		1.30/2.40/3.00	1.40/3.40/3.80	1.70/5.00/5.30	1.70/6.00/6.50	
Heating capacity	Min./Nom./Max.	kW		1.30/3.20/4.50	1.40/4.00/5.00	1.70/5.80/6.00	1.70/7.00/7.10	
Space cooling	Energy efficiency class			A <sup>+</sup>	A	A <sup>+</sup>	A	
	Capacity	Pdesign	kW	2.40	3.40	5.00	6.00	
	SEER			5.68	5.26	5.77	5.56	
	Annual energy consumption		kWh/a	148	226	303	378	
Space heating (Average climate)	Energy efficiency class			A <sup>+</sup>	A	A	A	
	Capacity	Pdesign	kW	2.60	2.90	4.00	4.60	
	SCOP/A			4.24	3.88	3.93	3.80	
	Annual energy consumption		kWh/a	858	1,046	1,424	1,693	
Indoor unit		FDXM		25F9	35F9	50F9	60F9	
Dimensions	Unit	HeightxWidthxDepth		mm		200x750x620		
Weight	Unit	kg		21		28		
Air filter	Type		Removable/washable					
Fan	Air flow rate	Cooling	Low/Medium/High	m <sup>3</sup> /min		7.3/8.0/8.7	13.3/14.6/15.8	13.5/14.8/16.0
		Heating	Low/Medium/High	m <sup>3</sup> /min		7.3/8.0/8.7	13.3/14.6/15.8	13.5/14.8/16.0
	External static pressure	Nom.	Pa	30		40		
Sound power level	Cooling		dBA	53.0		55.0	56.0	
	Heating		dBA	53.0		55.0	56.0	
Sound pressure level	Cooling	Low/High	dBA	27.0/35.0		30.0/38.0		
	Heating	Low/High	dBA	27.0/35.0		30.0/38.0		
Control systems	Infrared remote control		-					
Outdoor unit		RXM		25R9	35R9	50A	60R	
Dimensions	Unit	HeightxWidthxDepth		mm		552x840x350		
Weight	Unit	kg		32		49.0		
Sound power level	Cooling	Nom.	dBA	58	61	62.0	63.0	
	Heating	Nom.	dBA	59	61	62.0	63.0	
Sound pressure level	Cooling	Nom.	dBA	46	49	48.0		
	Heating	Nom.	dBA	47	49	49.0		
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-10~50(1)/46(2)	-10~50(4)/46(5)	
	Heating	Ambient	Min. - Max.	°CWB		-15~24		
Refrigerant	Type		R-32					
	GWP		675.0					
Piping connections	Charge		kg/TCO <sub>2</sub> Eq	0.76/0.52		1.15/0.780		
	Liquid	OD	mm	6.35		6		
Piping length	Gas	OD	mm	9.50		12.7		
	OU - IU	Max.	m	20		30		
Additional refrigerant charge	System		Chargeless	m		10		
	Level difference		IU - OU	Max.	m	15		
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-240		16		
Current - 50Hz	Maximum fuse amps (MFA)		A	13		16		

See separate drawing for electrical data | See separate drawing for operation range | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | Contains fluorinated greenhouse gases

Less is  
more



## Multi Split Simply extend your comfort!

A Daikin multi split system offers you unexpected possibilities in creating a comfortable and cosy home. This is your solution to reduce limitations like environmental impact and financial aspects.


### Less mounting space, less visibility, less sound

- › **Save space:** Drastically reduce the space required for placing a number of units on your facade
- › **Less visibility:** Enjoy your nice ambience. Finding just one hiding place is much easier
- › **Less noise:** Only one unit in operation is much quieter than two or more units

### Lower power consumption, high efficiency

- › **Less power consumption:** Our big compressors can work more efficiently than various smaller ones with the same capacity in sum. Also save a significant proportion of energy thanks to standby mode

Pair split or multi split combination –  
the direct system comparison

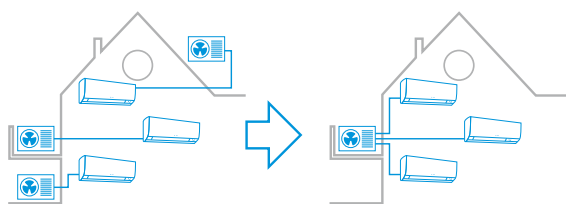

Conventional pair  
split installation for air-  
conditioning three rooms

Solution for the  
same situation with only  
one multi split outdoor unit

### Easier installation, wiring, piping and maintenance

- › **Save mounting equipment:** Wherever you want to place an outdoor unit, for every unit you will need a mounting for a secure fixing and problem-free operation
- › **Save time:** The physical installation, wiring, drain piping as well as the initial setup of only one system is much easier and faster
- › When using only one outdoor unit instead of two or more, the statistical probability of a **possible technical defect is reduced** with every unit that you do not need.

### More flexibility: Connect up to 5 indoor units of any style

There are many possibilities in comfort you can profit from a multi split solution:

- › **Up to 5 indoor units** connectable to only one outdoor unit
- › Every single indoor unit can be **regulated separately**
- › Choose from **a greater variety** of connectable indoor unit types out of our split and Sky Air series
- › Use low capacity indoor units specially **designed for small rooms** which can only be connected to a multi split system
- › Are you planning an **additional indoor unit later on?** Just decide now for an outdoor unit with higher capacity and simply connect it later
- › Have more than 5 rooms to connect? Our VRV systems provide the solution, find out more in the VRV chapter





# Multi+

Only one system for  
hot water +  
air-to-air heat pump

## Why choose Multi+?


Your customer is considering to replace the existing heating system with electric heaters

Your customer's house:

- Around 80 m<sup>2</sup> or less
- Located in southern Europe, in a single or multi family house
- Max 3 inhabitants

### 1 - Flexibility

- > Connect Multi+ outdoor unit with up to 3 indoor units and a 90 l or 120 l tank to provide domestic hot water.
- > Choose from a market-leading variety of indoor units. You can connect up to three different indoor units to cool or heat your rooms.

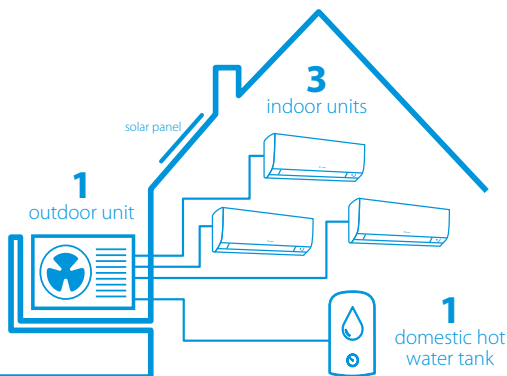

### 2 - Efficiency

> Replacing an old air conditioning system and electric hot water tank by Multi+ will give your customer a good return on investment




### 3 - Comfort

Benefit from high comfort and low expenses  
Enjoy your preferred room temperature in up to three rooms at any time all year round. Daikin offers a variety of heat pumps with industry-leading comfort and air quality features.

The domestic hot water tank is available in two sizes and perfectly matches the Multi+ outdoor unit. Two different operating modes adapt precisely to your comfort needs.

A user-friendly control lets you configure the entire system exactly the way you want it.

The Onecta app enables scheduling, controlling and monitoring of each indoor unit and the domestic hot water tank – also via voice control.



#### **NEW** HomeHub tank optimization by PV

Thanks to the HomeHub, tank optimisation is possible between the tank and photovoltaic solar panels. For example, with the accessory EKRHH, the electric heater of the tank will be switched on if injection is higher than 1.2 kW. Therefore, during sunny days, hot water will always be available, while the house is cooled.

Make an accurate selection of your multi+ system in a few steps  
[see also p. 324](#)





# Multi+

## Only one system for domestic hot water + air conditioning

- › New design outlook for outdoor unit
- › Seasonal efficiency values up to A+++ in cooling and A++ for air conditioning
- › Domestic hot water efficiencies up to A
- › Wall mounted domestic hot water tank, available in 90l and 120l
- › Up to 3 indoor units can be connected to 1 multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Different types of indoor units can be connected: e.g. wall mounted, ceiling mounted cassette corner, concealed ceiling unit
- › The outdoor unit is fitted with a swing compressor, renowned for its low noise and high energy efficiency



NOTE: please always install a pressure relief valve when installing a domestic hot water tank

CONNECTABLE INDOOR UNITS	Wall mounted															Concealed ceiling							Floor standing				Round flow		Fully flat			Ceiling mounted		Concealed floor standing			Domestic hot water tank			
	FTXJ-AW/S/B					C/FTXA-CW/S/B					C/FTXM-A					FDXM-F9			FBA-A9				CVXM-A9		FVXM-A9		FCAG-B		FFA-A9			FHA-A9		FNA-A9			EKHWT-BV3			
	20	25	35	42	50	15	20	25	35	42	50	15	20	25	35	42	50	25	35	50	35	50	60	71	20	25	35	50	35	50	25	35	50	35	50	25	35	50	90	120
4MWXM52A9	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

It is not allowed to install 1 indoor unit connection. Exception is 1 indoor unit connection of FBA60 or FBA71  
 \* No combination with additional indoor units possible

More details and final information can be found by scanning or clicking the QR codes.



4MWXM-A9



EKHWT-BV3

Efficiency data				EKHWT90BV3 + 4MWXM52A9				EKHWT120BV3 + 4MWXM52A9			
COPdhw	Average climate			2.19				2.30			
	Warm climate			2.68				2.70			
Heat-up time	Average climate			h:mm 1:18				2:15			
	Warm climate			h:mm 1:53				3:35			
Seasonal efficiency	Domestic hot water heating	General Average climate	Declared load profile (water heating efficiency)	M				L			
				90				94			
Water heating energy efficiency class*				A							
Set point				°C 44				47			

\*EN16147(2017)

Domestic hot water tank				EKHWT 90BV3				120BV3			
Casing	Colour			White				White			
Material				Enameled steel				Enameled steel			
Dimensions	HeightxWidthxDepth			mm 1,032x536x571				1,296x536x571			
Weight	kg			47				55			
Tank	Water volume			l 89				118			
	Energy efficiency class*			B				C			
Operation range	Heating	Ambient		°C Min.~Max. -15~43				°C Min.~Max. -10~46			
		Water side		°C Min.~Max. 10~53				°C Min.~Max. -15~24			

\* LOT 2

Outdoor unit				4MWXM 52A9			
Dimensions	Unit	HeightxWidthxDepth		mm 734x974x401			
Weight	Unit	kg		60			
Sound power level	Cooling			59			
	Sound pressure level	Cooling	Nom./High	dBA 46			
Heating		Nom./High	dBA 47				
Operation range	Cooling	Ambient	Min.~Max.		°CDB -10~46		
	Heating	Ambient	Min.~Max.		°CWB -15~24		
Refrigerant	Type			R-32			
	GWP			675			
Piping connections	Liquid	OD	mm		2.20/1.49		
			kg/TCO2Eq		6.35		
DX	Gas	OD	mm		9.50/12.7		
			mm		6.35		
Piping connections	Liquid	OD	mm		9.50		
			DHW	Gas	OD	mm	
Piping length	OU - IU					Max.	
	Additional refrigerant charge		kg/m		15		
Level difference	IU - OU	Max.		m 15			
Power supply	Phase/Frequency/Voltage			Hz/V 1~/50/220-240			
Current - 50Hz	Maximum fuse amps (MFA)			A 20			

# Multi model application

- › Seasonal efficiency values up to A+++ in cooling and A++ in heating thanks to its up-to-date technology and built-in intelligence
- › Up to 3 indoor units can be connected to 1 multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Different types of indoor units can be connected: e.g. wall mounted, ceiling mounted cassette corner, concealed ceiling unit
- › Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency



Indoor units		CTXF20C	CTXF25C	CTXF35C
Outdoor units	2MXF40A	•	•	•
	2MXF50A	•	•	•
	3MXF52A9	•	•	•
	3MXF68A9	•	•	•

More details and final information can be found by scanning or clicking the QR codes.



2MXF-A



3MXF-A9

Outdoor Unit				2MXF40A	2MXF50A	3MXF52A9	3MXF68A9	
Dimensions	Unit	HeightxWidthxDepth	mm	550x765x285		734x958x340		
Weight	Unit		kg	36	41	57.0	62.0	
Sound power level	Cooling			60		59	61	
Sound pressure level	Cooling	Nom./High	dBA	-/46	-/48	46.0/-	48.0/-	
	Heating	Nom./High	dBA	-/48	-/50	47.0/-	48.0/-	
Operation range	Cooling	Ambient	Min.~Max.	-10~46				
	Heating	Ambient	Min.~Max.	-15~18				
Refrigerant	Type	R-32						
	GWP	675						
	Charge		kg/TCO2Eq	0.88/0.60	1.15/0.78	1.80/1.22	2.00/1.35	
Piping connections	Liquid	OD	mm	6.35				
	Gas	OD	mm	9.5				
	Piping length	OU - IU	Max.	m	20 (1)		25 (1)	
		System	Chargeless	m	20		30	
	Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 20m)		0.02 (for piping length exceeding 30m)		
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-230-240				
Current - 50Hz	Maximum fuse amps (MFA)		A	16		20		

(1)For one room | See separate drawing for operation range | See separate drawing for electrical data | Contains fluorinated greenhouse gases

# Daikin Altherma hybrid heat pump

Hybrid technology combining gas, air to water and air to air heat pump for heating, cooling and hot water

- › Daikin Altherma hybrid heat pump combines air-to-water heat pump technology with gas condensing technology
- › Heating only wall mounted indoor unit of air-to-water heat pump
- › Wall mounted gas module
- › Depending on outdoor temperature, energy prices and internal heat load, Daikin Altherma hybrid heat pump always selects the most economical mode to operate
- › Low investment cost: no need to replace the existing radiators (up to 80°C) and pipe work
- › Provides sufficient heat in renovation applications as all heat loads are covered up to 32kW
- › Easy and fast installation thanks to the compact dimensions and quick interconnections



CHYHBH-AV32 / EHYKOMB-AA2/3

CONNECTABLE INDOOR UNITS	Wall mounted													Concealed ceiling						Floor standing		Round flow	Fully flat			Ceiling suspended			Concealed floor standing			Hybrid heat pump																									
	FTXJ-AW/S/B					CTXA-CW/B/S					FTXA-CW/B/S			CTXM-A			FTXM-A						FTXP-N9			FDXM-F9			FBA-A9			CVXM-A9		FVXM-A9		FCAG-B		FFA-A9			FHA-A9			FNA-A9			CHYHBH-AV32										
	20	25	35	42	50	15	20	25	35	42	50	15	20	25	35	42	50	60	71	20	25	35	25	35	50	60	35	50	60	20	25	35	50	35	50	60	25	35	50	60	25	35	50	60	35	50	60	25	35	50	60	25	35	50	60	05	08
3MXM52A9	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•																
3MXM68A9	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•																
4MXM68A9	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•																
4MXM80A9	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•																
5MXM90A9	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•																

It is not allowed to install 1 indoor unit connection.

NEW

Outdoor unit	Indoor unit	Energy label	
		Cooling	Heating
3MXM52A2V1B9	1.5+1.5+3.5	A+++	A+++
	1.5+2.0+3.5	A+++	A+++
	1.5+2.5+3.5	A+++	A+++
	2.0+2.0+3.5	A+++	A+++
	2.0+2.5+3.5	A+++	A+++

More details and final information can be found by scanning or clicking the QR codes.



CHYHBH-AV32



EHYKOMB-AA2



EHYKOMB-AA3

Efficiency data	CHYHBH05AV32 /3MXM52A9	CHYHBH05AV32 /3MXM68A9	CHYHBH05AV32 /4MXM68A9	CHYHBH05AV32 /4MXM80A9	CHYHBH08AV32 /4MXM80A9	CHYHBH05AV32 /5MXM90A9	CHYHBH08AV32 /5MXM590A9
Heating capacity Nom.	4.41 (1)		4.50 (1)			6.78 (1)	4.50 (1)
COP	4.49 (1)	3.91 (1)		4.04 (1)	4.17 (1)	4.04 (1)	4.17 (1)
Pump				51.80 (1)			
Seasonal efficiency Domestic hot water heating				XL			
General Average climate				96			
Declared load profile $\eta_{wh}$ (water heating efficiency) %							
Water heating energy efficiency class				A			

(1) DB/WB 7°C/6°C - LWC 35°C (DT=5°C), boiler bypassed

Indoor Unit (Hydrobox)			CHYHBH05AV32		CHYHBH08AV32	
Casing	Colour			White		
	Material			Precoated sheet metal		
Dimensions	Unit	HeightxWidthxDepth	mm	902x450x164		
Weight	Unit		kg	30.0		
Operation range	Heating	Ambient	Min.~Max.	-15 ~24		
		Water side	Min.~Max.	25 ~50		

Indoor unit (Boiler)				EHYKOMB33AA2/AA3	
Central heating	Heat input $Q_n$ (net calorific value)	Nom	Min/Max	6.2/7.6/7.6/22.1/27.0/27.0	
	Output $P_n$ at 80/60°C	Min/Nom		6.7/8.2/8.2/21.8/26.6/26.6	
	Efficiency	Net calorific value		98/107	
	Operation range	Min/Max		15/80	
	Domestic hot water	Output	Min/Nom		7.6/32.7
Water flow Rate		Nom	l/min	9.0/15.0	
Gas	Operation range	Min/Max		40/65	
	Connection	Diameter	mm	15	
	Consumption (G20)	Min/Max	$m^3/h$	0.78/3.39	
	Consumption (G25)	Min/Max	$m^3/h$	0.90/3.93	
	Consumption (G31)	Min/Max	$m^3/h$	0.30/1.29	
Supply air	Connection		mm	100	
	Concentric			1	
Flue gas	Connection		mm	60	
	Colour			White - RAL9010	
Casing	Material			Precoated sheet metal	
	Dimensions	Unit	HeightxWidthxDepth	Casing	mm
Weight	Unit	Empty		710x450x240	
Power supply	Phase/Frequency/Voltage			36	
Electrical power consumption	Max.		Hz/V	1~/50/230	
	Standby		W	55	
			W	2	

Siesta wall mounted units







The Siesta range offers a wide variety of wall mounted units with high efficiency values up to A+++. They provide excellent levels of comfort, and almost all indoor units are connectable to a multi outdoor unit.



BLUEEVOLUTION

Siesta Bluevolution range

R-32

Type	Model	Product name	20	25	35	50	60	71
Siesta Wall mounted	<p><b>Wall mounted unit</b> Siesta, discreet, modern unit for optimal efficiency and comfort thanks to 2-area motion detection sensor and Flash Streamer</p>	ATXM-A		(multi only)	A+++	A+++	A++	
	<p><b>Wall mounted unit</b> Siesta, providing high efficiency and comfort while reducing the environmental impact</p>	ATXP-N9		A++	A++	A++		
	<p><b>Siesta wall mounted unit</b> Wall mounted unit for low energy consumption and pleasant comfort</p>	ATXF-D/A		A++	A++	A++	A++	A
	<p><b>Siesta wall mounted unit</b> Wall mounted unit, offering good value for money and ensuring a steady supply of clean air</p>	ATXC-D		A++	A++	A++	A++	A

# Wall mounted unit

Attractive, wall mounted Siesta unit with perfect indoor air quality

- › Comfort+: perfect comfort with even temperatures throughout the room. The double flaps direct the air towards the ceiling in cooling and along the wall in heating.
- › Seasonal efficiency values up to A+++ in cooling and heating
- › 2-area motion detection sensor: air flow is sent to a zone other than where the person is located at that moment; if no people are detected, the unit will automatically switch over to the energy-efficient setting. (larger capacity area)
- › Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster than a regular air conditioner (pair only)
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- › Silver allergen removal and air purifying filter captures allergens such as pollen to ensure a steady supply of clean air
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Quiet operation: down to 19dBA sound pressure level
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces



More details and final information can be found by scanning or clicking the QR codes.



ATXM-A



ARXM-A

Efficiency data		ATXM + ARXM		ATXM20A		25A + 25A		35A + 35A		50A + 50A		
Cooling capacity	Min./Nom./Max.					0.90/2.50/3.80		0.90/3.50/4.40		1.70/5.00/5.30		
Heating capacity	Min./Nom./Max.					0.80/2.80/5.00		0.80/4.00/5.50		1.70/5.80/6.50		
Power input	Cooling	Nom.					0.49		0.78		1.40	
	Heating	Nom.					0.56		0.90		1.43	
Space cooling	Energy efficiency class						A+++				A+++	
	Capacity	Pdesign					2.50		3.50		5.00	
	SEER					9.30		9.10		7.65		
	Annual energy consumption					94		135		229		
Space heating (Average climate)	Energy efficiency class						A+++				A+++	
	Capacity	Pdesign					2.40		2.50		4.50	
	SCOP/A					5.15				4.75		
	Annual energy consumption					652		679		1,326		
Nominal efficiency	EER					5.10		4.50		3.58		
	COP					5.00		4.45		4.05		
	Annual energy consumption					245		389		698		
Energy labeling Directive		Cooling/Heating						A/A				

Indoor unit		ATXM		20A		25A		35A		50A	
Dimensions	Unit	HeightxWidthxDpeth		mm		298x804x252					
Weight	Unit			kg		11.5					
Air filter	Type					Removable / washable					
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m <sup>3</sup> /min	4.9/6.3/8.9/11.9	4.9/6.3/8.9/11.9	4.6/7.1/9.4/13.2	5.9/7.8/10.4/12.7			
		Heating	Silent operation/ Low/Medium/High	m <sup>3</sup> /min	4.9/6.9/9.2/11.4	4.9/6.9/9.2/11.4	5.1/6.9/9.4/11.1	6.9/8.6/11.5/14.5			
Sound power level	Cooling			dBA	55		58		60		
	Heating			dBA	54		58		60		
Sound pressure level	Cooling	Silent operation/Low/High	dBA		19/25/41		19/29/45		27/33/46		
	Heating	Silent operation/Low/High	dBA		20/26/39		20/27/39		20/28/39		
Control systems	Infrared remote control						ARC466A86				

Outdoor unit		ARXM		ATXM20A		25A9		35A9		50A	
Dimensions	Unit	HeightxWidthxDpeth		mm		610x823x367		734x954x401			
Weight	Unit			kg		36.0		49.0		49.0	
Sound power level	Cooling	Nom.	dBA		58.0		58.0		62.0		
	Heating	Nom.	dBA		58.0		60.0		62.0		
Sound pressure level	Cooling	Nom.	dBA		46.0		47.0		48.0		
	Heating	Nom.	dBA		47.0		49.0		49.0		
Operation range	Cooling	Ambient	Min.~Max.	°CDB				-10~50			
	Heating	Ambient	Min. - Max.	°CDB				-20~24			
Refrigerant	Type/GWP					R-32/675.0					
	Charge			kg/TCO2Eq		0.95/0.65		1.10/0.75			
Piping connections	Liquid/ Gas	OD		mm		6.35/9.50		6.35/12.7			
	Piping length	OU - IU	Max.	m		20		30			
	Additional refrigerant charge	System	Chargeless	m		10		10			
	Level difference	IU - OU	Max.	kg/m		0.02 (for piping length exceeding 10m)				20.0	
Power supply	Phase/Frequency/Voltage			Hz/V		15		1~/50/220-240			
Current - 50Hz	Maximum fuse amps (MFA)			A		13		16			

See separate drawing for operation range | See separate drawing for electrical data | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m | Contains fluorinated greenhouse gases

# Wall mounted unit

Discreet Siesta wall mounted unit providing high efficiency and comfort

- › Practically inaudible: the unit runs so quietly, you will almost forget it is there.
- › Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces
- › The unit's compact dimensions makes it ideal for renovation projects, especially for above door installation
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Seasonal efficiency values up to A++ in cooling and heating
- › Space saving contemporary wall mounted design



More details and final information can be found by scanning or clicking the QR codes.



ATXP-N9



ARXP-N9

Efficiency data		ATXP + ARXP	20N9 + 20N9	25N9 + 25N9	35N9 + 35N9	
Cooling capacity	Min./Nom./Max.	kW	1.3/2.00/2.6	1.3/2.50/3.0	1.3/3.50/4.0	
Heating capacity	Min./Nom./Max.	kW	1.30/2.50/3.50	1.30/3.00/4.00	1.30/4.00/4.80	
Power input	Cooling	Min./Nom./Max. kW	0.31/0.50/0.72	0.31/0.66/0.72	0.29/1.01/1.30	
	Heating	Min./Nom./Max. kW	0.25/0.52/0.95	0.25/0.69/0.95	0.29/1.00/1.29	
Space cooling	Energy efficiency class			A++		
	Capacity	Pdesign kW	2.00	2.50	3.50	
	SEER			6.90		
	Annual energy consumption		kWh/a	101	127	178
Space heating (Average climate)	Energy efficiency class			A++		
	Capacity	Pdesign kW	2.20	2.40	2.80	
	SCOP/A			4.64	4.60	4.62
	Annual energy consumption		kWh/a	663	730	847
Nominal efficiency	EER			3.71	3.24	
	COP			4.77	4.02	
	Energy labeling Directive Cooling/Heating				A/A	

Indoor unit		ATXP		20N9	25N9	35N9
Dimensions	Unit	HeightxWidthxD	Depth	mm		
						286x770x225
Weight	Unit					kg
						8.50
Air filter	Type					Removable / washable
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m³/min	4.2/5.6/7.4/9.5	
		Heating	Silent operation/ Low/Medium/High	m³/min	5.2/6.2/8.1/10.4	
Sound power level	Cooling					55
	Heating					55
Sound pressure level	Cooling	Silent operation/Low/High	dBA			19/25/39
	Heating	Silent operation/Low/High	dBA			21/28/39
Control systems	Infrared remote control		ARC480A53			

Outdoor unit		ARXP		20N9	25N9	35N9	
Dimensions	Unit	HeightxWidthxD	Depth	mm			
						556x740x343	
Weight	Unit					kg	
						26	
Sound power level	Cooling					60	
Sound pressure level	Cooling	High	dBA			46	
	Heating	High	dBA			47	
Operation range	Cooling	Ambient	Min.~Max.	°CDB			
	Heating	Ambient	Min.~Max.	°CWB			
Refrigerant	Type					R-32	
	GWP					675.0	
	Charge	kg/TCO2Eq		0.55/0.37	0.70/0.48		
Piping connections	Liquid	OD	mm			6.35	
	Gas	OD	mm			9.5	
	Piping length OU - IU		Max.	m			15
	Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 10m)			
	Level difference IU - OU		Max.	m			12
Power supply	Phase/Frequency/Voltage		Hz/V			1~/50/220-240	
Current - 50Hz	Maximum fuse amps (MFA)		A			16	

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for electrical data | See separate drawing for operation range | Contains fluorinated greenhouse gases

# Wall mounted unit

Siesta wall mounted unit for low energy consumption and pleasant comfort

- › Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- › REMARK: For 20-42 class, please order option package BRP069C47. A different remote controller is included in the package to control the unit once the option is installed.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Quiet in operation down to 20 dBA
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency



More details and final information can be found by scanning or clicking the QR codes.



ATXF-E



ATXF-A



ARXF-E



ARXF-A

Efficiency data		ATXF + ARXF		20E + 20E	25E + 25E	35E + 35E	42E + 42E	50A + 50A	60A + 60A	71A + 71A	
Cooling capacity	Min./Nom./Max.	kW		1.3/2.00/2.4	1.3/2.50/2.8	1.3/3.30/3.8	1.4/4.20/4.3	1.70/5.00/6.00	1.70/6.00/7.00	2.30/7.10/7.30	
Heating capacity	Min./Nom./Max.	kW		1.30/2.40/3.30	1.30/2.80/3.70	1.30/3.50/4.40	1.40/4.60/5.00	1.70/6.00/7.70	1.70/6.40/8.00	2.30/8.20/9.00	
Power input	Cooling	Min./Nom./Max.	kW	0.31/0.601/0.72	0.31/0.772/1.05	0.31/1.01/1.40	0.31/1.28/1.50	-/1.52/-	-/1.85/-	-/2.81/-	
	Heating			0.25/0.640/0.95	0.25/0.751/1.11	0.25/0.940/1.50	0.25/1.24/1.40	-/1.62/-	-/1.64/-	-/2.63/-	
Space cooling	Energy efficiency class					A <sup>++</sup>				A	
	Capacity	Pdesign	kW	2.00	2.50	3.50	4.20	5.00	6.00	7.10	
	SEER				6.40		6.45	6.18	6.12	5.12	
	Annual energy consumption		kWh/a	109	137	191	228	283	343	486	
Space heating (Average climate)	Energy efficiency class					A <sup>+</sup>				A	
	Capacity	Pdesign	kW	2.20	2.40	2.60	3.30	4.60	4.80	6.20	
	SCOP/A			4.16	4.10	4.25	4.03	3.81			
	Annual energy consumption		kWh/a	740	819	889	1,088	1,598	1,670	2,278	
<b>Indoor unit</b>		<b>ATXF</b>		<b>20E</b>	<b>25E</b>	<b>35E</b>	<b>42E</b>	<b>50A</b>	<b>60A</b>	<b>71A</b>	
Dimensions	Unit	HeightxWidthxDpeth	mm	286x770x225				295x990x263			
Weight	Unit		kg	8.00		8.50	9.00	13.5			
Air filter	Type			Removable/washable							
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m <sup>3</sup> /min	4.3/6.0/8/9.8	4.3/6.2/8/10.0	4.4/6.4/8/11.5	4.9/6.9/9/12.6	10.5/11.9/14.4/16.8	10.7/12.2/14.8/17.3	
		Heating	Silent operation/ Low/Medium/High	m <sup>3</sup> /min	5.3/6.2/8.3/10.4	5.3/6.4/8.4/10.4	5.3/6.5/8.6/11.9	5.2/6.7/8.8/12.8	10.7/12.2/14.8/17.3	11.3/12.8/15.8/17.9	
Sound power level	Cooling		dBA	53.0	54.0	59.0	59	60	62		
	Heating		dBA	55.0	56.0	59.0	61	62			
Sound pressure level	Cooling	Silent operation/Low/High	dBA	20.0/25.0/39.0	20.0/26.0/40.0	20.0/27.0/43.0	22.0/30.0/45.0	31/34/43	33/36/45	34/37/46	
	Heating	Silent operation/Low/High	dBA	21.0/28.0/39.0	21.0/28.0/40.0	21.0/29.0/40.0	22.0/28.0/44.0	30/33/42	32/35/44	33/36/45	
Control systems	Infrared remote control			ARC470A1							
	Wired remote control			BRC073A1							
Piping connections	Drain			18							
<b>Outdoor unit</b>		<b>ARXF</b>		<b>20E</b>	<b>25E</b>	<b>35E</b>	<b>42E</b>	<b>50A</b>	<b>60A</b>	<b>71A</b>	
Dimensions	Unit	HeightxWidthxDpeth	mm	556x740x343				734x870x373			
Weight	Unit		kg	24.0		28.0	46.0	50.0			
Sound power level	Cooling		dBA	60		61		-			
Sound pressure level	Cooling	Low/Nom./High	dBA	-/ /46.0		-/ /48		-/47/-	-/49/-	-/52/-	
	Heating	Low/Nom./High	dBA	-/ /47.0		-/ /48.0		-/49/-	-/52/-		
Operation range	Cooling	Ambient Min.~Max.	°CDB	-10~48				-10~46			
	Heating	Ambient Min.~Max.	°CWB					-15~18			
Refrigerant	Type			R-32							
	GWP			675.0				675			
	Charge		kg/TCO2Eq	0.450/0.280		0.550/0.370	0.750/0.510	0.90/0.61	1.15/0.78		
Piping connections	Liquid - Gas Type			---							
	Piping length	OU - IU Max.	m	20				30			
	Piping length			-							
	Level difference	IU - OU Max.	m	12.0				20			
Power supply	Phase/Frequency/Voltage		Hz/V					1~/50/220-240			
Current - 50Hz	Maximum fuse amps (MFA)		A	16				-			
Sound pressure level	Nom.		dBA	-							
Piping connections	Total piping length			-							

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. Data for high efficiency series, Eurovent certified | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. Data for standard efficiency series | See separate drawing for operation range | See separate drawing for electrical data | Contains fluorinated greenhouse gases

# Wall mounted unit

Wall mounted unit, offering good value for money

- > Flat, stylish front panel blends easily within any interior décor and is easier to clean
- > Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- > Seasonal efficiency values up to A++ in cooling
- > Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency



More details and final information can be found by scanning or clicking the QR codes.



ATXC-D



ARXC-D

Efficiency data		ATXC + ARXC		20D + 20D	25D + 25D	35D + 35D	50D + 50D	60D + 60D	71D + 71D	
Cooling capacity	Min./Max.	kW		1.3/3.0		1.3/4.0	1.4/6.2	1.8/7.0	2.3/7.3	
Heating capacity	Min./Max.	kW		1.30/4.00		1.30/4.80	1.36/6.60	1.48/8.00	2.30/9.00	
Power input	Cooling	Min./Nom./Max.	kW	0.30/0.600/1.15	0.30/0.775/1.15	0.32/1.06/1.74	0.30/1.57/2.11	0.38/1.92/2.05	0.44/2.41/2.54	
	Heating	Min./Nom./Max.	kW	0.28/0.670/1.35	0.28/0.755/1.35	0.28/1.08/1.57	0.27/1.52/1.85	0.33/1.73/2.35	0.50/2.49/2.74	
Space cooling	Energy efficiency class			A <sup>++</sup>						
	Capacity	Pdesign	kW	2.08	2.57	3.44	5.08	6.21	6.96	
	SEER			6.81	6.74	6.78	6.40	6.38	5.25	
	Annual energy consumption			107	134	177	278	341	464	
Space heating (Average climate)	Energy efficiency class			A <sup>+</sup>						
	Capacity	Pdesign	kW	1.87	2.23	2.24	3.90	4.10	6.35	
	SCOP/A			4.39	4.41	4.26	4.37	4.19	3.81	
	Annual energy consumption			597	708	737	1,249	1,371	2,332	
Nominal efficiency	EER			3.33		3.25		2.95		
	COP			3.73	3.76	3.72	3.71	3.71	3.21	
	Energy labeling Directive	Cooling/Heating				A/A		C/C		
Current - 50Hz	Maximum fuse amps (MFA)			A						
16										
Indoor unit				ATXC	20D	25D	35D	50D	60D	71D
Dimensions	Unit	HeightxWidthxDepth		288x770x234			297x990x273			
Weight	Unit	kg		9.00		13.0				
Air filter	Type	Removable / washable								
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	5.4/6.1/8.1/10.8		5.4/6.4/8.7/11.1		7.4/8.1/9.9/12.5		10.2/12.5/14.5/20.4
	Sound power level	Cooling		57		58		60		63
Sound pressure level	Cooling	Silent operation/Low/High		21/26/40		22/26/41		30/33/47		31/38/48
Control systems	Infrared remote control			ARC486A2						
	Wired remote control									
Outdoor unit				ARXC	20D	25D	35D	50D	60D	71D
Dimensions	Unit	HeightxWidthxDepth		550x658x273			615x845x300			695x930x350
Weight	Unit	kg		24.0		26.0			39.0	
Sound power level	Cooling	dBA		58		60		65		66
Sound pressure level	Cooling	High		45		46		51		54
Operation range	Cooling	Ambient	Min.~Max.	10 ~46		-15 ~18		-10 ~46		
	Heating	Ambient	Min.~Max.	°CWB		°CWB		°CWB		
Refrigerant	Type	R-32								
	GWP	675.0								
	Charge	kg/TCO2Eq	0.550/0.371		0.750/0.506		1.00/0.675		1.10/0.743	1.15/0.776
Piping connections	Liquid	OD	mm	6.35						
	Gas	OD	mm	9.52		12.7			12.7	
	Piping length	OU - IU	Max.	20		30			30	
	System	Chargeless	m	8						
	Additional refrigerant charge	kg/m	0.01 (for piping length exceeding 7.5m)							
Level difference IU - OU	Max.	m	15.0		20.0			20.0		
Power supply	Phase/Frequency/Voltage			Hz/V						
Current - 50Hz	Maximum fuse amps (MFA)			A						
16										



# Multi model application

- › Seasonal efficiency values up to A+++ in cooling and A++ in heating thanks to its up-to-date technology and built-in intelligence
- › Up to 3 indoor units can be connected to 1 siesta multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Different types of wall mounted indoor units can be connected
- › Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency



2AMXM40-50M9

Indoor units		ATXM20R	ATXM25R	ATXM35R	ATXM50R
	2AMXM40M9	•	•	•	•
Outdoor units	2AMXM50M9	•	•	•	•
	3AMXM52N9	•	•	•	•

More details and final information can be found by scanning or clicking the QR codes.



2AMXM-M9



3AMXM-N9

Indoor Unit		2AMXM/3AMXM		2AMXM40M9	2AMXM50M9	3AMXM52N9	
Dimensions	Unit	HeightxWidthxDepth	mm	552x852x350		734x974x401	
Weight	Unit		kg	36	41	57.0	
Sound power level	Cooling	Nom.	dBA	60		-	
	Heating	Nom.	dBA	62		-	
	Cooling		dBA	-		59.0	
	Heating		dBA	-		59.0	
Sound pressure level	Cooling	Nom./High	dBA	-/46	-/48	46.0/-	
	Heating	Nom./High	dBA	-/48	-/50	47.0/-	
Operation range	Cooling	Ambient	Min.~Max.	°CDB -10~46			
	Heating	Ambient	Min.~Max.	°CWB -15~18			
Refrigerant	Type	R-32					
	GWP	675					
	Charge	kg/TCO2Eq	0.88/0.60		1.15/0.78	1.80/1.22	
Piping connections	Liquid	OD	mm	6.4		6.35	
	Gas	OD	mm	9.5		9.50	
	Piping length	OU - IU	Max.	m	20 (1)		25 (1)
		System	Chargeless	m	20		30
	Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 20m)			0.02 (for piping length exceeding 30m)
Level difference IU - OU		Max.	m	15.0			
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-230-240		1~/50/220-240	
Current - 50Hz	Maximum fuse amps (MFA)		A	16		20	

(1)For one room | See separate drawing for operation range | See separate drawing for electrical data | Contains fluorinated greenhouse gases

# Multi model application

- › Seasonal efficiency values up to A+++ in cooling and A++ in heating thanks to its up-to-date technology and built-in intelligence
- › Up to 3 indoor units can be connected to 1 siesta multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Different types of wall mounted indoor units can be connected
- › Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency



2AMXF-A

Indoor units		ATXF25A	ATXF35A
	2AMXF40A	•	•
Outdoor units	2AMXF50A	•	•
	3AMXF52A9	•	•

More details and final information can be found by scanning or clicking the QR codes.



2AMXF-A



3AMXF-A9

Indoor Unit		2AMXF/3AMXF		2AMXF40A	2AMXF50A	3AMXF52A	
Dimensions	Unit	HeightxWidthxDepth	mm	550x765x285		734x958x340	
Weight	Unit		kg	36	41	57.0	
Sound power level	Cooling	Nom.	dBA	60		59	
Sound pressure level	Cooling	Nom./High	dBA	-/46	-/48	46.0 /-	
	Heating	Nom./High	dBA	-/48	-/50	47.0 /-	
Operation range	Cooling	Ambient	Min.~Max.	-10 ~46			
	Heating	Ambient	Min.~Max.	-15~18			
Refrigerant	Type			R-32			
	GWP			675.0			
	Charge		kg/TCO2Eq	0.88/0.60	1.15/0.78	1.80/1.22	
Piping connections	Liquid	OD	mm	6.35			
	Gas	OD	mm	9.50			
	Piping length	OU - IU	Max.	m	20.0		25 (1)
		System	Chargeless	m	20		30
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 20m)		0.02 (for piping length exceeding 30m)
	Level difference IU - OU	Max.	m	15.0			
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-230-240		1~/50/220-240	
Current - 50Hz	Maximum fuse amps (MFA)		A	16		20	

(1)For one room | See separate drawing for operation range | See separate drawing for electrical data | Contains fluorinated greenhouse gases





## Enjoy ultimate comfort inside, whatever the weather outside

In extreme cold conditions,  
you just want reliable heating

### When everything freezes, Nepura doesn't

Nepura is engineered to keep you warm, even in the coldest of winters.

With a guaranteed operation down to  $-30^{\circ}\text{C}$ , the air-to-air heat pump is the perfect fit for Scandinavian environments.

This is reached thanks to:

- > full bottom plate: easier to lift and better drainage of defrosted water
- > drain pan heater: quick defrost and only activated when needed
- > **NEW** OPTION: drain hose heater: connectable to the dedicated terminal strip on the PCB of the outdoor unit



### **NEW** Weather compensation

Nepura heat pump will automatically regulate itself when it gets colder outside, maintaining a continuous indoor temperature and keeping your place comfortably warm.

Activated at temperatures below  $7^{\circ}\text{C}$ , the function allows for 4 different levels of intensity compensation.

Available on Perfera wall mounted FTXTM.



### **NEW** Design that speaks for itself

Daikin Emura perfectly balances form and function. Its design speaks for itself. The unit pleases the eye and has a strong focus on comfort and user experience to improve your well-being at home






### The fireplace scenario

Rooms with a fireplace or other heat source tend to be warmer.

As soon as your room reaches the desired temperature due to the secondary heat source, the fireplace logic function starts automatically. The indoor unit stops heating, but the fan keeps rotating to distribute the hot air across the room. The airflow rate depends on the difference between the set temperature and the room temperature.

Available on Daikin Emura, Stylish and Perfera wall mounted.




Measured temperature in the room  $\geq$  set temperature = Thermo off Fan auto adjust according to  $\Delta T$



### The Coanda effect


The **Coanda effect** optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room.

Available in heating and cooling for Daikin Emura and Stylish.

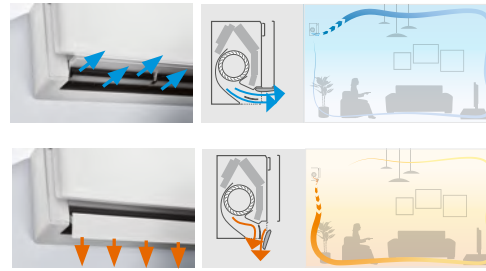

### Quiet operation


Daikin Emura and Stylish use a **specially designed fan** to optimise airflow for higher energy efficiency at low sound levels. Sound dispersion and noise reduction are the results of a special fan design.



### Intelligent thermal sensor


The intelligent thermal sensor detects a room's temperature. It distributes the air evenly throughout the room before switching to an air-flow pattern that directs warm and cool air to areas that need it.

Available on Daikin Emura and Stylish.

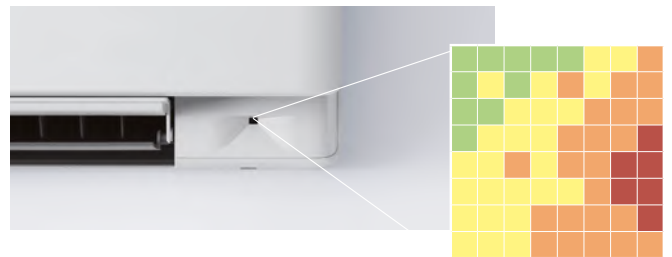

### Dual Airflow

Our floor standing FVXTM is ideal for heating comfort thanks to its dual airflow. Wide air flow coverage in both upward and downward directions allowing even air distribution.

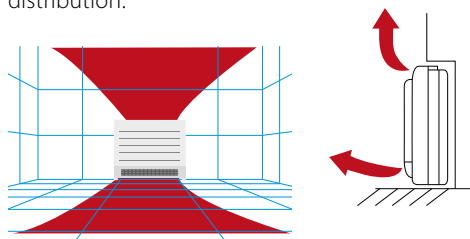

During heating operating, your feet stay warm and the temperature through the room is evenly distributed. Maximum comfort will be ensured.

### BLUEEVOLUTION

Type	Model	Product Name	25	30	35	40
NEW Wall mounted	Daikin Emura: Design that speaks for itself, even at ambient temperatures down to -30°C	FTXTJ-AW/B		A <sup>++</sup> * (pair only)		
Wall mounted	Stylish: Where innovation meets creativity, even at ambient temperatures down to -30°C	FTXTA-CW/B		A <sup>++</sup> * (pair only)		
Wall mounted	Perfera: Discreet, modern design for optimal efficiency and comfort thanks to 2- area motion detector sensor	FTXTM-S		A <sup>++</sup> * (pair only)		A <sup>++</sup> * (pair only)
Wall mounted	Comfora: Wall mounted unit, providing high efficiency and comfort while reducing the environmental impact	FTXTP-N	A <sup>+++</sup> * (pair only)			A <sup>+++</sup> * (pair only)
Floor Standing Unit	Design floor standing unit for optimal heating comfort thanks to unique heating features	FVXTM-A	*	A <sup>+++</sup> * (pair only)		*

\* Space heating - average climate

# Wall mounted unit

Design that speaks for itself, even at ambient temperatures down to -30°C

- › Guaranteed heating operation at low ambient temperature, down to -30°C
- › Remarkable blend of iconic design and engineering excellence with an elegant finish in matt crystal white
- › When installed close to a heating device (e.g. fire place or oven) and the set temperature is reached, the fan keeps on running to have an even temperature throughout the whole house
- › The Coanda effect optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room
- › The intelligent thermal sensor determines the current room temperature and distributes air evenly throughout the room before switching to an airflow pattern that directs warm or cool air to areas that need it
- › Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster than a regular air conditioner (pair only)
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Whisper quiet in operation: the operating of the unit can hardly be heard. The sound pressure level goes down to 19dB(A)



More details and final information can be found by scanning or clicking the QR codes.



Efficiency data		FTXTJ + RXTJ-A		30AW + 30A		30AB + 30A	
Cooling capacity	Min./Nom./Max.	kW		1.2/3.0/4.6			
Heating capacity	Min./Nom./Max.	kW		0.8/3.2/7.10			
Power input	Cooling	Nom.	kW	0.62			
	Heating	Nom.	kW	0.64			
Space cooling	Energy efficiency class			A+++			
	Capacity	Pdesign	kW	3.00			
	SEER			8.75			
	Annual energy consumption		kWh/a	120			
Space heating (Average climate)	Energy efficiency class			A+++			
	Capacity	Pdesign	kW	3.00			
	SCOP/A			5.17			
	Annual energy consumption		kWh/a	812			
Space heating (Cold climate)	Energy efficiency class			A+			
	Capacity	Pdesign	kW	4.38			
	Annual energy consumption		kWh/a	2,248			
	SCOP/C			4.09			
Nominal efficiency	EER			4.89			
	COP			5.01			
	Annual energy consumption		kWh	310			
	Energy labeling Directive Cooling/Heating			A/A			
Current - 50Hz	Maximum fuse amps (MFA)		A	16			

Indoor unit		FTXTJ		30AW		30AB	
Dimensions	Unit	HeightxWidthxDepth	mm	305x900x212			
Weight	Unit		kg	12			
Air filter	Type			Removable / washable			
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m³/min		4.9/5.9/8.8/12.1	
		Heating	Silent operation/ Low/Medium/High	m³/min		4.5/6.5/7.8/12.3	
Sound power level	Cooling		dB(A)	60.0			
	Heating		dB(A)	60.0			
Sound pressure level	Cooling	Silent operation/Low/High	dB(A)	20.0/25.0/43.0			
	Heating	Silent operation/Low/High	dB(A)	19.0/24.0/41.0			
Control systems	Infrared remote control			ARC488A4W		ARC488A4K	
	Wired remote control			BRC073A1			

Outdoor unit		RXTJ-A		30A	
Dimensions	Unit	HeightxWidthxDepth	mm	605x930x376	
Weight	Unit		kg	42	
Sound power level	Cooling		dB(A)	-	
Sound pressure level	Cooling	Nom.	dB(A)	48.0	
	Heating	Nom.	dB(A)	49.0	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	
	Heating	Ambient	Min.~Max.	°CWB	
Refrigerant	Type			R-32	
	GWP			675.0	
	Charge		kg/TCO2Eq	0.97/0.66	
Piping connections	Liquid	OD	mm	6.35	
	Gas	OD	mm	9.50	
	Piping length	OU - IU	Max.	m	
	Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 10m)	
	Level difference	IU - OU	Max.	m	
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-240	
Current - 50Hz	Maximum fuse amps (MFA)		A	16	

Contains fluorinated greenhouse gases | See separate drawing for operation range | See separate drawing for electrical data | Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m

# Wall mounted unit

Where innovation meets creativity, even at ambient temperatures down to -30°C

- › Guaranteed heating operation at low ambient temperature, down to -30°C
- › When installed close to a heating device (e.g. fire place or oven) and the set temperature is reached, the fan keeps on running to have an even temperature throughout the whole house
- › A compact and functional design suitable for all interiors in a matt crystal white finish
- › A compact and functional design suitable for all interiors in a matt black finish
- › The Coanda effect optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room
- › The intelligent thermal sensor determines the current room temperature and distributes air evenly throughout the room before switching to an airflow pattern that directs warm or cool air to areas that need it
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Seasonal efficiency values up to A+++ in cooling and heating
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- › Practically inaudible: the unit runs so quietly, you will almost forget it is there.



› Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster than a regular air conditioner (pair only)



FTXTA-CW



FTXTA-CB



RXTA-C

Efficiency data		FTXTA + RXTA		30CW + 30C		30CB + 30C	
Cooling capacity	Min./Nom./Max.	kW		1.2/3.0/4.6			
Heating capacity	Min./Nom./Max.	kW		0.8/3.2/7.10			
Power input	Cooling	Nom.	kW	0.62			
	Heating	Nom.	kW	0.64			
Space cooling	Energy efficiency class			A+++			
	Capacity	Pdesign	kW	3.00			
	SEER			8.75			
	Annual energy consumption	kWh/a		120			
Space heating (Average climate)	Energy efficiency class			A+++			
	Capacity	Pdesign	kW	3.00			
	SCOP/A			5.17			
	Annual energy consumption	kWh/a		812			
Space heating (Cold climate)	Energy efficiency class			A+			
	Capacity	Pdesign	kW	4.38			
	Annual energy consumption	kWh/a		2,248			
	SCOP/C			4.09			
Nominal efficiency	EER			4.89			
	COP			5.01			
	Annual energy consumption	kWh		310			
	Energy labeling Directive	Cooling/Heating		A/A			
Current - 50Hz	Maximum fuse amps (MFA)	A		16			

Indoor unit		FTXTA/FTXTA		30CW		30CB		
Dimensions	Unit	HeightxWidthxDepth		mm		295x798x189		
Weight	Unit			kg		12		
Air filter	Type					Removable / washable		
Fan	Air flow rate	Cooling	Silentoperation/ Low/Medium/High	m³/min		4.9/6.0/9.0/13.1		
		Heating	Silentoperation/ Low/Medium/High	m³/min		5.0/5.8/8.2/12.3		
Sound power level	Cooling			dBA		60.0		
	Heating			dBA		60.0		
Sound pressure level	Cooling	Silent operation/Low/High		dBA		20.0/25.0/43.0		
	Heating	Silent operation/Low/High		dBA		19.0/24.0/41.0		
Control systems	Infrared remote control						ARC466A84	
	Wired remote control						BRC073A4	

Outdoor unit		RXTA		30C			
Dimensions	Unit	HeightxWidthxDepth		mm		605x930x376	
Weight	Unit			kg		42	
Sound power level	Cooling			dBA		-	
Sound pressure level	Cooling	Nom.	dBA			48.0	
	Heating	Nom.	dBA			49.0	
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-10~-46	
	Heating	Ambient	Min.~Max.	°CWB		-31~-18	
Refrigerant	Type					R-32	
	GWP					675.0	
	Charge			kg/TCO2Eq		0.97/0.66	
Piping connections	Liquid	OD	mm			6.35	
	Gas	OD	mm			9.50	
	Piping length	OU - IU	Max.	m		20	
	Additional refrigerant charge			kg/m		0.02 (for piping length exceeding 10m)	
	Level difference	IU - OU	Max.	m		15.0	
Power supply	Phase/Frequency/Voltage			Hz/V		1~/50/220-240	
Current - 50Hz	Maximum fuse amps (MFA)			A		16	

Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m | See separate drawing for electrical data | Contains fluorinated greenhouse gases | See separate drawing for operation range

# Wall mounted unit

Attractive, wall mounted design with perfect indoor air quality down to -30°C

- › Guaranteed heating operation at low ambient temperature, down to -30°C
- › With weather compensation, heating reacts to colder outside temperatures maintaining a comfortable indoor climate with no drop-off while optimising energy use
- › Seasonal efficiency values up to A+++ in cooling and heating
- › When installed close to a heating device (e.g. fire place or oven) and the set temperature is reached, the fan keeps on running to have an even temperature throughout the whole house
- › Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster than a regular air conditioner (pair only)
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Silver allergen removal and air purifying filter captures allergens such as pollen to ensure a steady supply of clean air
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Quiet operation: down to 19dBA sound pressure level
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces
- › Sleek, unobtrusive air conditioning unit that matches European sensibilities regarding interior design



› 2 area motion detection sensor: air flow is sent to a zone other than where the person is located at that moment; if no people are detected, the unit will automatically switch over to the energy-efficient setting.

More details and final information can be found by scanning or clicking the QR codes.



FTXTM-S



RXTM-A

Efficiency data		FTXTM + RXTM		30S + 30A		40S + 40A	
Cooling capacity	Min./Nom./Max.	kW		1.2/3.0/4.6		1.2/4.0/5.2	
Heating capacity	Min./Nom./Max.	kW		0.8/3.2/7.40		0.9/4.0/8.80	
Power input	Cooling	Nom. kW		0.59		0.85	
	Heating	Nom. kW		0.62		0.73	
Space cooling	Energy efficiency class			A+++			
	Capacity	Pdesign	kW	3.00		4.00	
	SEER			8.65		8.93	
	Annual energy consumption		kWh/a	121		157	
Space heating (Average climate)	Energy efficiency class			A+++			
	Capacity	Pdesign	kW	3.00		3.80	
	SCOP/A			5.20		5.50	
	Annual energy consumption		kWh/a	807		967	
Space heating (Cold climate)	Energy efficiency class			A+			
	Capacity	Pdesign	kW	4.38		5.55	
	Annual energy consumption		kWh/a	2,222		2,640	
	SCOP/C			4.14		4.42	
Nominal efficiency	EER			5.13		4.71	
	COP			5.20		5.51	
	Annual energy consumption		kWh	295		425	
Current - 50Hz	Energy labeling Directive Cooling/Heating			A/A			
	Maximum fuse amps (MFA)		A	16			
Indoor unit		FTXTM		30S		40S	
Dimensions	Unit	HeightxWidthxDepth		mm		295x778x272	
Weight	Unit			kg		10	
Air filter	Type					Removable / washable	
Fan	Air flow rate	Cooling	Silentoperation/Low/Medium/High	m³/min		4.2/5.2/7.5/11.5	
	Heating	Silentoperation/Low/Medium/High		m³/min		4.0/4.7/7.3/11.6	
Sound power level	Cooling			dBA		60.0	
	Heating			dBA		60.0	
Sound pressure level	Cooling	Silent operation/Low/High		dBA		21.0/25.0/45.0	
	Heating	Silent operation/Low/High		dBA		19.0/22.0/45.0	
Control systems	Infrared remote control					ARC466A83	
	Wired remote control					BRC073A1	
Outdoor unit		RXTM		30A		40A	
Dimensions	Unit	HeightxWidthxDepth		mm		605x930x376	
Weight	Unit			kg		42	
Sound power level	Cooling			dBA		-	
Sound pressure level	Cooling	Nom.		dBA		48.0	
	Heating	Nom.		dBA		49.0	
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-10~-46	
	Heating	Ambient	Min.~Max.	°CWB		-31~-18	
Refrigerant	Type					R-32	
	GWP					675.0	
	Charge			kg/TCO2Eq		0.97/-	
Piping connections	Liquid	OD		mm		6.35	
	Gas	OD		mm		9.50	
	Piping length OU - IU		Max.	m		20	
	Additional refrigerant charge			kg/m		0.02 (for piping length exceeding 10m)	
	Level difference IU - OU		Max.	m		15.0	
Power supply	Phase/Frequency/Voltage			Hz/V		1~/50/220-240	
Current - 50Hz	Maximum fuse amps (MFA)			A		16	

Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m | See separate drawing for electrical data | Contains fluorinated greenhouse gases | See separate drawing for operation range



# Wall mounted unit

Wall mounted unit providing high efficiency and comfort down to -30°C

- › Guaranteed heating operation at low ambient temperature, down to -30°C
- › The unit's compact dimensions makes it ideal for renovation projects, especially for above door installation
- › Seasonal efficiency values: full range A++ in cooling and heating
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Space saving contemporary wall mounted design



More details and final information can be found by scanning or clicking the QR codes.



FTXTP-N



RXTP-A

Efficiency data		FTXTP + RXTP		25N + 25A		35N + 35A	
Cooling capacity	Min./Nom./Max.	kW		1.0/2.5/4.1		1.0/3.5/4.5	
Heating capacity	Min./Nom./Max.	kW		1.0/3.2/6.20		1.0/4.0/6.70	
Power input	Cooling	Nom.	kW	0.52		0.79	
	Heating	Nom.	kW	0.65		0.88	
Space cooling	Energy efficiency class			A+++			
	Capacity	Pdesign	kW	2.50		3.50	
	SEER			8.55		8.51	
	Annual energy consumption			kWh/a		102	
Space heating (Average climate)	Energy efficiency class			A++			
	Capacity	Pdesign	kW	2.50		3.00	
	SCOP/A			4.95		4.85	
	Annual energy consumption			kWh/a		707	
Space heating (Cold climate)	Energy efficiency class			A			
	Capacity	Pdesignh	kW	3.65		4.38	
	Annual energy consumption			kWh/a		1,937	
	SCOP/C			3.96		3.79	
Nominal efficiency	EER			4.88		4.45	
	COP			4.95		4.55	
	Annual energy consumption			kWh		260	
	Energy labeling Directive Cooling/Heating			A/A			
Current - 50Hz	Maximum fuse amps (MFA)			A		16	
Indoor unit		FTXTP		25N		35N	
Dimensions	Unit	HeightxWidthxD	Depth	mm			
				286x770x225			
Weight	Unit			kg			
				9			
Air filter	Type			Removable / washable			
Fan	Air flow rate	Cooling	Silentoperation/ Low/Medium/High	m³/min		3.7/5.0/7.9/11.0	
		Heating	Silentoperation/ Low/Medium/High	m³/min		4.4/5.5/9.0/10.5	
Sound power level	Cooling			dBA		58.0	
	Heating			dBA		58.0	
Sound pressure level	Cooling	Silent operation/Low/High		dBA		21.0/26.0/43.0	
	Heating	Silent operation/Low/High		dBA		21.0/26.0/43.0	
Control systems	Infrared remote control			ARC480A53			
	Wired remote control			BRC073A1			
Outdoor unit		RXTP		25A		35A	
Dimensions	Unit	HeightxWidthxD	Depth	mm			
				605x930x376			
Weight	Unit			kg			
				42			
Sound power level	Cooling			dBA			
				-			
Sound pressure level	Cooling	Nom.		dBA		48.0	
	Heating	Nom.		dBA		49.0	
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-10~-46	
	Heating	Ambient	Min.~Max.	°CWB		-31~-18	
Refrigerant	Type			R-32			
	GWP			675.0			
	Charge			kg/TCO2Eq			
				0.97/0.66			
Piping connections	Liquid	OD			mm		
					6.35		
	Gas	OD			mm		
					9.50		
	Piping length OU - IU			Max.		m	
				20			
Additional refrigerant charge			kg/m		0.02 (for piping length exceeding 10m)		
Level difference IU - OU			Max.		m		
				15.0			
Power supply	Phase/Frequency/Voltage			Hz/V			
				1~/50/220-240			
Current - 50Hz	Maximum fuse amps (MFA)			A			
				16			

Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m | See separate drawing for electrical data | Contains fluorinated greenhouse gases | See separate drawing for operation range

# Floor standing unit

Design floor standing unit for optimal heating comfort down to -30°C thanks to unique heating features

- › Guaranteed heating operation at low ambient temperature, down to -30°C
- › Seasonal efficiency values: full range A++ in cooling and heating
- › Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster than a regular air conditioner (pair only)
- › The floor warming function optimises convection by distributing hot air from the bottom of the unit
- › The heat plus function provides 30 minutes cosy heating by simulating radiant heat
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- › Excellent contemporary design
- › Dual air discharge flow for better air distribution
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Quiet operation: down to 19dBA sound pressure level



More details and final information can be found by scanning or clicking the QR codes.




FVXTM-A

RXTM-A

Efficiency data				FVXTM-A + RXTM	30A + 30A	
Cooling capacity	Min./Nom./Max.			kW	1.2/3.0/4.4	
Heating capacity	Min./Nom./Max.			kW	1.2/3.2/6.20	
Power input	Cooling	Nom.		kW	0.69	
	Heating	Nom.		kW	0.72	
Space cooling	Energy efficiency class				A++	
	Capacity	Pdesign		kW	3.00	
	SEER				7.50	
	Annual energy consumption				kWh/a	140
Space heating (Average climate)	Energy efficiency class				A++	
	Capacity	Pdesign		kW	3.00	
	SCOP/A				4.75	
	Annual energy consumption				kWh/a	884
Space heating (Cold climate)	Energy efficiency class				A+	
	Capacity	Pdesign		kW	4.38	
	Annual energy consumption				kWh/a	2,483
	SCOP/C				3.70	
Nominal efficiency	EER				4.35	
	COP				4.45	
	Annual energy consumption				kWh	345
	Energy labeling Directive Cooling/Heating				A/A	
Current - 50Hz	Maximum fuse amps (MFA)			A	16	
Indoor unit				FVXTM-A	30A	
Dimensions	Unit	HeightxWidthxDepth		mm	600x750x238	
Weight	Unit			kg	17	
Air filter	Type				Removable / washable	
Fan	Air flow rate	Cooling	Silentoperation/ Low/Medium/High	m <sup>3</sup> /min	4.0/4.8/6.7/9.0	
		Heating	Silentoperation/ Low/Medium/High	m <sup>3</sup> /min	4.0/5.3/6.8/9.4	
Sound power level	Cooling			dBA	53.0	
	Heating			dBA	53.0	
Sound pressure level	Cooling	Silent operation/Low/High		dBA	20.0/25.0/39.0	
	Heating	Silent operation/Low/High		dBA	19.0/25.0/39.0	
Control systems	Infrared remote control				ARC466A66	
	Wired remote control				BRC073A1	
Outdoor unit				RXTM	30A	
Dimensions	Unit	HeightxWidthxDepth		mm	605x930x376	
Weight	Unit			kg	42	
Sound power level	Cooling			dBA	-	
Sound pressure level	Cooling	Nom.		dBA	48.0	
	Heating	Nom.		dBA	49.0	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~-46	
	Heating	Ambient	Min.~Max.	°CWB	-31~-18	
Refrigerant	Type				R-32	
	GWP				675.0	
	Charge			kg/TCO2Eq	0.97/0.66	
Piping connections	Liquid	OD		mm	6.35	
	Gas	OD		mm	9.50	
	Piping length OU - IU Max.			m	20	
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 10m)	
	Level difference IU - OU Max.			m	15.0	
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240	
Current - 50Hz	Maximum fuse amps (MFA)			A	16	

Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m | See separate drawing for electrical data | Contains fluorinated greenhouse gases | See separate drawing for operation range

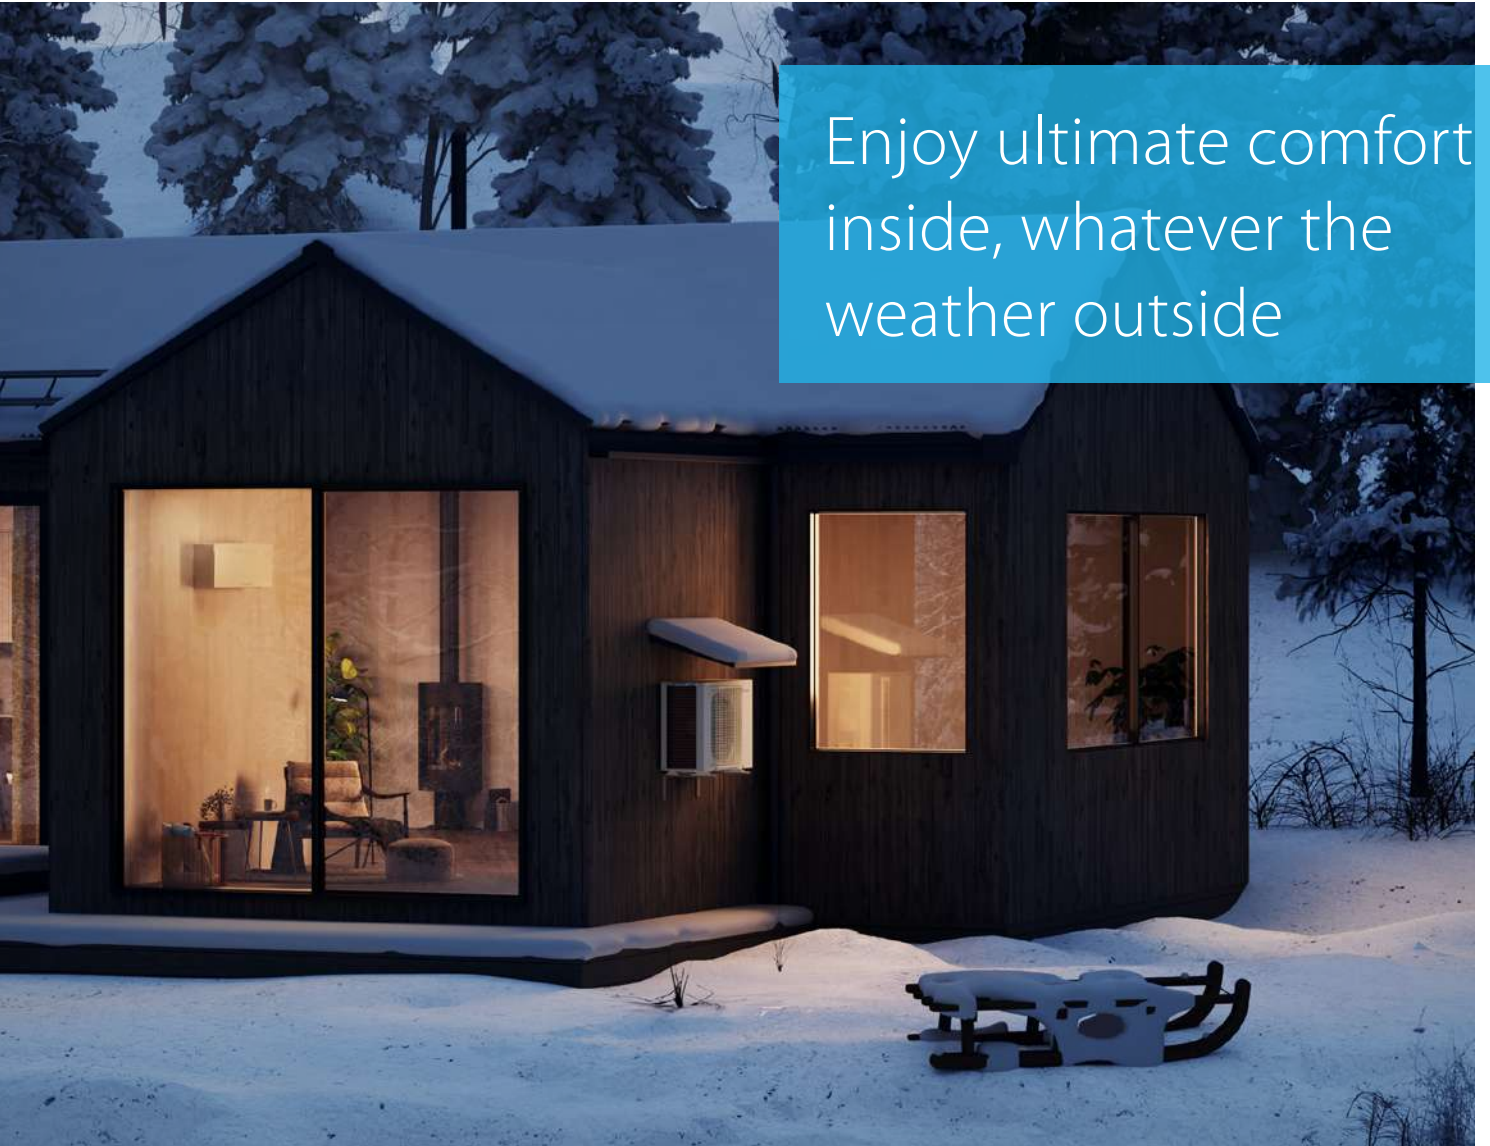

Enjoy ultimate comfort inside, whatever the weather outside

**In extreme cold conditions, you just want reliable heating** When temperatures drop well below zero, you need a heating solution you can rely on to keep your living comfort high. Daikin won't leave you out in the cold.

Nepura is engineered to keep you warm in the coldest of winters, down to -30°C. With Nepura, you can count on year-round comfort, more energy efficiency and ultimate reliability and control. So, bring on the winter season.

The Nepura range consists of different Daikin indoor units:

Daikin Emura



Stylish



Perfera - wall mounted



Comfora



Perfera - floor standing



Find out more on [daikin.eu](https://www.daikin.eu)

INDOOR UNITS		FTXZ-N	C/FTXA-CW/B/S	FTXJ-AW/S/B	C/FTXM-A	FTXP-N9	FTXF-D	FTXF-E	FTXC-D	
Online control system	Onecta app WiFi adapter for smart phone	BRP069B42	Standardly included	Standardly included	Standardly included	Standardly included	BRP069B45	BRP069C47	BRP069B45	
HomeHub	EKRHH PV self-consumption for Multi+ domestic hot water tank									
Individual control systems	BRC1E53A/B/C (3)(4)(5) / BRC1H51(9)W/S/K / BRC1H81W/S Premium wired remote control with full-text interface and back-light									
	BRC073A1 (9) Wired remote control (cord for wired remote control required)		•	•	•	•	•	•		
	BRC2E52C Simplified remote control (with operation mode selector button)									
	BRC3E52C Remote control for hotel use									
	BRC4C65 Infrared remote control									
	BRCW901A03 Extension cord for wired remote control (3m)		•	•	•	•	•	•	•	
Centralised control systems	BRCW901A08 Extension cord for wired remote control (8m)		•	•	•	•	•	•		
	DCC601A51 Centralised controller with cloud connection by using the adapter KRP928*	•	•	•	•	•	•	•		
	DCS302CA51** Central remote control	•	•	•	•	•	•	•		
	DCS301BA51** Unified ON/OFF control	•	•	•	•	•	•	•		
	DCS303A51 Residential central remote control									
	DST301BA51** Schedule timer	•	•	•		•	•	•		
	DCM601A51** Intelligent Touch Manager	•	•	•	•	•	•	•		
	Building Management System & Standard protocol interface	EKMBDXA7V1** Modbus interface	•	•	•	•	•	•	•	
		RTD-RA (9)** Modbus gateway	•	•	•	•	•	•	•	
		KLIC-DD (9)** KNX Interface	•	•	•	•	•	•	•	
Adapters	BRP7A54 (7)(8) Adapter PCB for interlock (key card, ...)									
	KRP1B56 Adapter for wiring									
	KRP413AB1S** Adapter for wiring normal open contact/normal open pulse contact (time clock and other devices to be purchased locally)	•	•	•	•	•		•		
	KRP4A54 Adapter for external ON/OFF and monitoring for electrical appendices									
	KRP2A53 Wiring adapter for electrical appendices									
	Installation box for adapter PCBs (when there is no space in the switchbox)									
	KRP067A41 Interface adapter for wired remote control							•*		
	KRP928BB2S** Interface adapter for DIII-net	•	•	•	•	•	•	•		
	DTA114A61 Multi tenant									
	KRCS01-4 External wired temperature sensor									
Filters	KJB212AA/KJB311A Electrical box with earth terminal (2 blocks / 3 blocks)									
	KAF046A41 Honeycomb deodorising and air purifying filter with frame	•								
	KAF968A42 Honeycomb deodorising and air purifying filter with frame	•								
	KEK26-1A Noise filter (for electromagnetic use only)									
Others	BAE20A62/102 Auto-cleaning filter (small/large)									
	Anti-theft protection for remote control	KKF936A4				KKF936A4	KKF936A4			
	Wire harness to connect to S21 connector		EKRS21	EKRS21	EKRS21	KRP067A41		KRP067A41		
	KDT25N32/50/63 Insulation kit for high humidity									
DHH25A Drain hose heater										

(1) Can be used only in combination with KRP980A1

(2) WLAN installation kit include interface adapter PCB

(3) BRC1E53A: included languages: English, German, French, Italian, Spanish, Dutch, Greek, Russian, Turkish, Portuguese, Polish

(4) BRC1E53B: included languages: English, German, Czech, Hungarian, Romanian, Slovenian, Bulgarian, Slovak, Serbian, Albanian

(5) BRC1E53C: included languages

(6) Installation box for adapter PCB is necessary. Hour meter is field supply and should not be installed inside the equipment.

(7) Installation box for adapter PCB is necessary. They require mounting plate KRP4A96, maximally 2 optional PCBs can be mounted.

(8) Only in combination with simplified remote control BRC2E52C or BRC3E52C.

(9) Wiring adapter supplied by Daikin. Time clock and other devices: to be purchased locally.

(10) Standard there is no remote control delivered with this indoor unit. Wired or infrared control to be ordered separately.


(11) Standard delivered with the unit.





# Breathe healthy air with the round flow UV Streamer kit

90% of our time is spent indoors. However indoor air is 2 to 5 times more polluted than outdoor air.

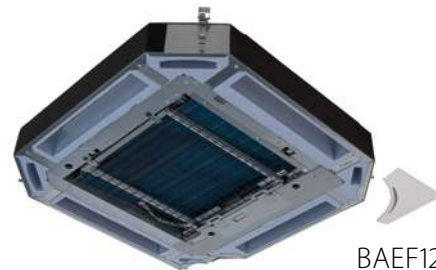

BAEF125AWB

These internal pollution effects on people are manifested in the long run. Tackle them now!

Our UV streamer kit offers you the solution:

- › It purifies the air of pollutants such as viruses, bacteria, fine dust (PM1), odours, allergens, etc ensuring a healthy and hygienic indoor environment
- › Unique catch & clean approach includes an ISO ePM1 60% (F7) filter, UV-C light and Streamer technology
- › Thanks to large air flow rate of the Round flow cassette, clean air can be quickly delivered to every corner of your space
- › Can be retrofitted into existing installations
- › Can be used with BYCQ140E and BYCQ140EW decoration panels



# 99.9%


of viruses removed in 30 minutes, thanks to Daikin's unique Catch & Clean approach

## Tested at Intertek

Results based on tests performed in the laboratories of Intertek, in a 28m<sup>3</sup> room. Daikin's Round flow cassette (FXFQ125B) removes more than 99.9% of enveloped viruses such as Corona viruses.

\* Additional details regarding this function can be found in the unit technical manual.

Tested according to real life sized room



# Sky Air the solution for the light commercial sector

Sky Air is Daikin's industry-leading light commercial range, which has been designed for optimum seasonal energy efficiency. Providing the ideal solution for all kinds of small commercial spaces, the Sky Air series offers a complete comfort solution that puts you in total control of your heating and cooling, ventilation and air curtains.

## Sky Air Light commercial applications

New Sky Air low height series	390
Low sound enclosure	391
Why choose a Daikin Sky Air	392
In the spotlight	394

### Indoor units 396

Products overview indoor units	396
Benefits overview indoor units	398
Ceiling mounted cassettes	402
<b>NEW</b> UV Streamer kit	402
<b>UNIQUE</b> FCAHG-H	405
<b>UNIQUE</b> FCAG-B	406
<b>UNIQUE</b> FFA-A9	410
Concealed ceiling units	414
<b>UNIQUE</b> Auto cleaning filter for concealed ceiling units	414
Multi zoning kit	415
FDXM-F9	416
FBA-A(9)	418
FDA125A	422
FDA200-250A	423
ADEA-A	424

Wall mounted units	425
FAA-B	425
FTXM-R	428
Ceiling suspended units	429
FHA-A(9)	429
FUA-A	433
Floor standing units	435
FVA-A	435
Concealed floor standing units	438
FNA-A9	438
Biddle air curtains	440
<b>NEW</b> Biddle air curtain for ERQ	441

### Outdoor units 443

Products overview outdoor units	444
Benefits overview outdoor units	445
Why choose <b>SkyAir</b> <i>A-series</i>	446
<b>R-32</b> <b>BLUEEVOLUTION</b> range	450
RZAG-A <b>SkyAir</b> <i>Alpha-series</i>	450
RZAG-NV1/NY1 <b>SkyAir</b> <i>Alpha-series</i>	450
RZASG-MV(1)/MY(1) <b>SkyAir</b> <i>Advance-series</i>	451
RZA-D <b>SkyAir</b> <i>Advance-series</i>	452
ARXM-R/	
AZAS-MV/MY <b>SkyAir</b> <i>Active-series</i>	453
Options & Accessories	454


Low height.  
High value.



- ✓ Unique, low-height single fan range



- ✓ Compact unit, easy to transport



- ✓ Market-leading serviceability and handling



Fast and easy access to all critical component


- › Single screw access
- › Wider access area



Newly positioned handle for easier carrying



The smart way for  
sound  
reduction

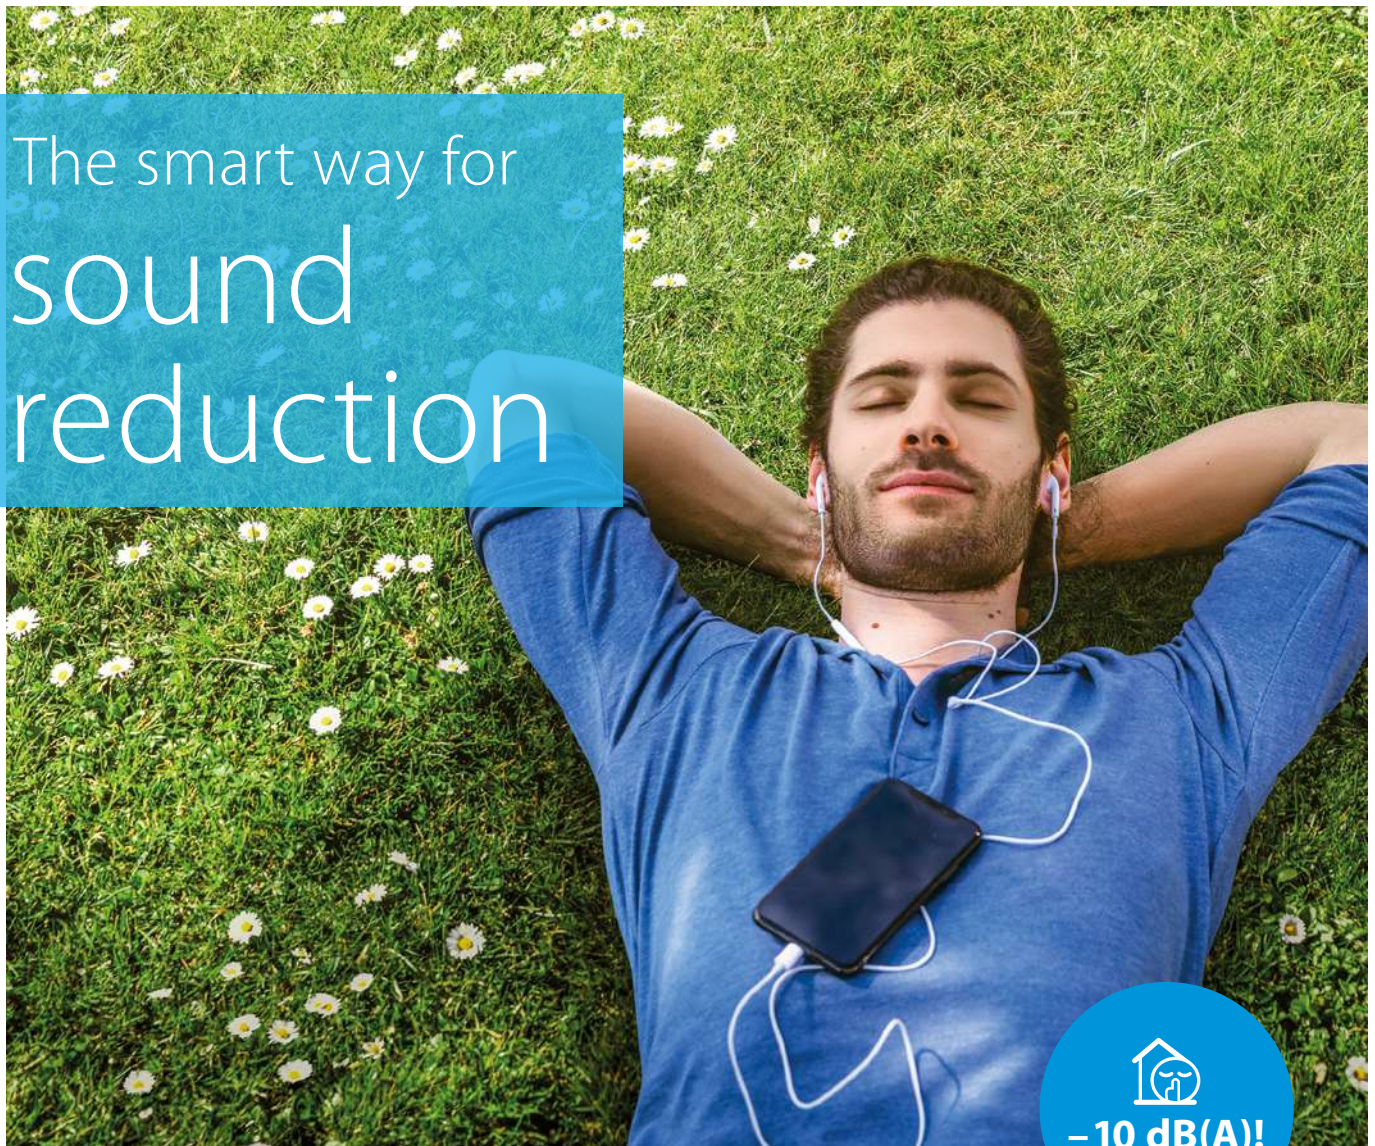

  
-10 dB(A)!

## Daikin dedicated solution for sound reduction

Meet strict sound requirements, while increasing flexibility to apply Sky Air and VRV heat pumps thanks to sound power reduction of up to 10 dB(A).

- › **Guaranteed high performance:** optimised design to keep the capacity and air flow as close as possible to the standard conditions
- › **Faster and reliable planning:** no calculations or estimations necessary thanks to tested data according to ISO 3744
- › **Perfect fit:** specially designed for Sky Air and VRV heat pumps
- › **Maximum flexibility:** can be installed and retrofitted on any plain surface
- › **Easy access:** simple and fast installation and maintenance through large side panels with fast locks
- › **Designed to be discreet:** tailor-made low height design; highly aesthetic finishing and smooth surface in anthracite colour-tone



**SkyAir** **VRV**

# 7 reasons why Sky Air is unique in the market

1 Full Sky Air R-32 range delivering future-proofed, best-in-class climate control

**SkyAir A-series**

**BLUEEVOLUTION**

More details on page 444



System	Type	Model	Product name	35	50	60	71	100	125	140	200	250	
Air cooled	Heat pump	<b>SkyAir Alpha-series</b> - Industry leading technology for commercial applications - Dedicated solution for infrastructure cooling - Variable Refrigerant Temperature (RZAG71-100-125-140 series) - Maximum piping length up to 85m (50m for RZAG35-50-60) - Replacement technology - Extended operation range down to -20°C in both heating and cooling - Pair, twin, triple and double twin application (RZAG71-100-125-140 series)	<b>R-32</b> <b>A++</b> (A+++ - D)	RZAG-A									
		<b>SkyAir Advance-series</b> - Technology and comfort combined for commercial applications - Very compact and easy to install outdoor units - Maximum piping length up to 50m (RZA-D up to 100m) - Replacement technology - Operation range down to -15°C both cooling and in heating (RZA-D down to -20°C) - Pair, twin, triple and double twin application	<b>R-32</b> <b>A+</b> (A+++ - D)	RZASG-MV(1)/MY(1)									
		<b>SkyAir Active-series</b> - Ideal solution for busy environments and small shops - Very compact and easy to install outdoor units - Maximum piping length up to 30m - Replacement technology - Easy-to-mount outdoor units: roof, terrace or wall - Exclusively offered for pair applications	<b>R-32</b> <b>A</b> (A+++ - D)	ARXM-R AZAS-MV/MY									


## Full indoor line up

(over 45 different models)




## 2 High energy efficiency

- › **Top seasonal efficiency**
  - › SEER up to 8.02 and A++ label in cooling and heating
  - › Variable Refrigerant Temperature that automatically adapts the refrigerant temperature to the load
- › Round flow and concealed ceiling units with **auto cleaning filter**



## 3 Best comfort

- › **Variable Refrigerant Temperature** preventing cold draughts
- › **Low sound** indoor and outdoor units
- › **Presence and floor sensors** direct the air flow away from persons, while ensuring an even temperature distribution
- › Operation down to **-20°C in heating and cooling** operation
- NEW** › **UV Streamer kit**, purifies the air of pollutants such as viruses, bacteria, fine dust (PM1), odours, allergens, etc
- › Fresh air intake integrated in indoor unit



## 4 Top reliability

- › For **infrastructure cooling**
  - › unique boosted capacity indoor unit systems
  - › duty rotation control
- › **Refrigerant cooled PCB**
- › New refrigerant passes keeping heat exchanger and drain holes completely open at all times
- › **Most extensive testing** before new units leave the factory
- › **Widest support network** and after sales service
- › All spare parts available in Europe



bottom plate refrigerant pass

## 5 Market leading controls

- › **Remote connectivity**
  - › **Intuitive app** control
  - › **Daikin Cloud Plus** offering online control, energy monitoring and comparison of multiple sites
- › **User-friendly wired remote controller with premium design**
  - › Intuitive touch button control
  - › 3 color versions
  - › Advanced settings can be easily done via your smartphone
- › **Dedicated control solutions**
  - › for retail applications
  - › for infrastructure cooling



## 6 Superior aesthetics


- › **Fully flat cassette** design unit that integrates fully flat into the ceiling
- › **Auto cleaning** units ensure dirt-free ceilings with high efficiency filters for regular and dust prone areas
- › Widest ever range cassette panels
  - › Available in **white and black**
  - › Sleek **designer panel** range



## 7 Unique installation benefits

- › **4-way blow ceiling suspended cassette (FUA)** for rooms without false ceiling.
- › Plug & play Daikin air handling unit with ERQ condensing units
- › Reliably replace Daikin and non-Daikin systems without the need for pipe cleaning thanks to the new hepta filtration
- › Dedicated low sound enclosure, reducing sound power up to -10 dB(A)
- › Use up to 4 indoor units linked to one outdoor unit for long or irregularly shaped rooms



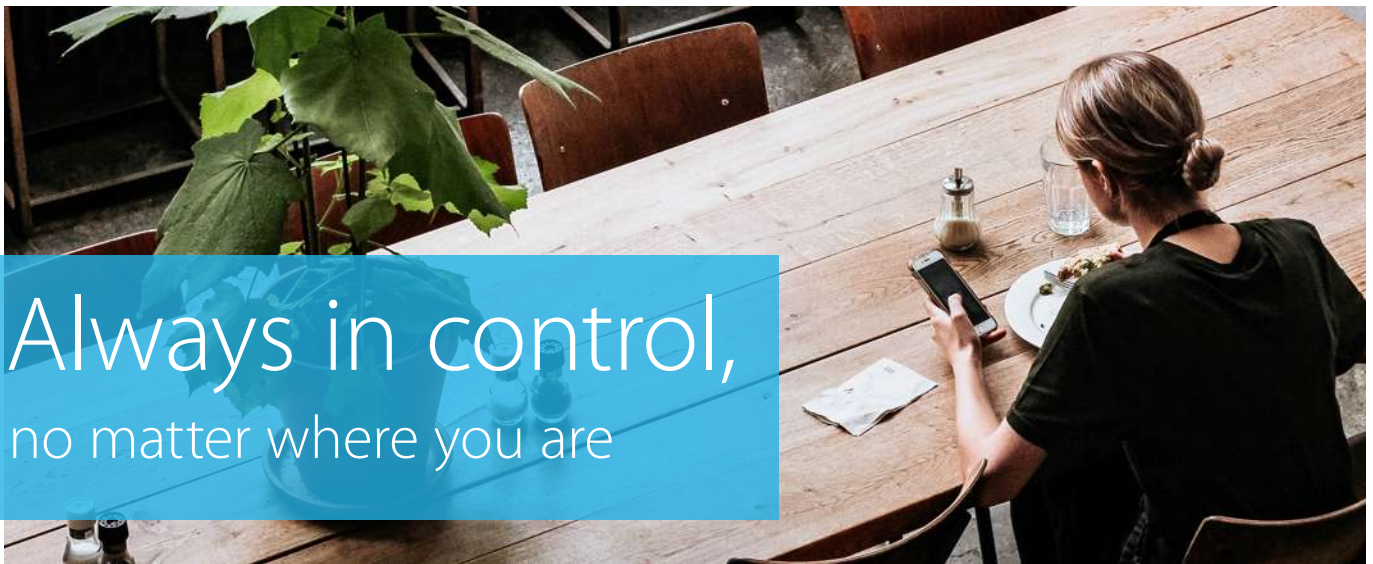

Always in control,  
no matter where you are

## Daikin Cloud Plus



Daikin Cloud Plus is a cloud-based remote control and monitoring solution for Daikin commercial HVAC installations. Using enhanced control, monitoring and predictive logic, Daikin Cloud Plus provides real-time data and support from Daikin experts to help you identify cost-saving opportunities, increase the lifetime of your equipment and reduce the risk of unexpected issues.


### The ultimate control over your indoor climate and air quality

- › Save energy & reduce costs
- › Enhance comfort & satisfaction
- › Smart control from anywhere
- › Ensure healthy indoor environment
- › Maximize uptime (remote prediction, monitor & diagnose)
- › Integrates easily with building systems


### Supporting your business and helping you succeed

- › Maximize comfort and satisfaction of your staff, customers, tenants, ...
- › Save energy & reduce costs
- › Facilitate your sustainability goals
- › Cost effective control and energy monitoring of HVAC and other facility systems such as lighting
- › Limits the necessity for on-site interventions
- › Minimizes downtime and engineer call outs

Dashboard to easily access multiple locations, energy consumption follow up, ...

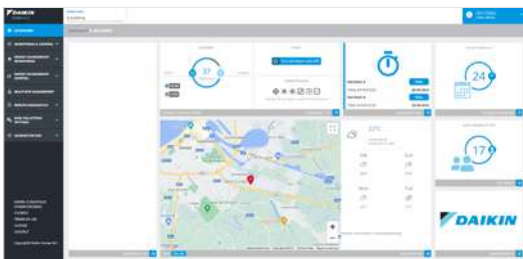

From one to ∞ sites

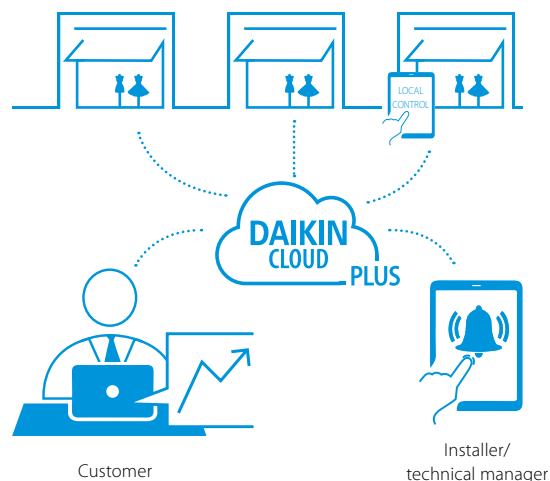

More details  
on page 944



# Infrastructure cooling



## Infrastructure cooling

- › For rooms and enclosures that require round-the-clock cooling
- › Where continuous uptime is the absolute requirement for server data protection

Between **20-40%** sensible capacity increase

### RELIABLE

- Guaranteed system operation:
- › Oversized indoor units boost cooling capacity and prevent freeze-ups on the indoor side
  - › Wide operating range envelope: operation range in cooling down to -20°C and up to +52°C

### EFFICIENT

- Optimum return on investment:
- › Lowers running costs by using highly efficient direct expansion cooling systems
  - › Lower running costs compared to other DX systems and water based chillers.
  - › Reduces mechanical cooling and energy consumption with the free cooling option for single phase systems


### FLEXIBLE

- › Scalable in capacity
- › Improved infrastructure control and management
- › Lower physical footprint since no floor space is occupied
- › Wide range of indoor units to suit application preferences (ceiling suspended cassettes, wall mounted indoors, concealed ceiling ducted type indoors)







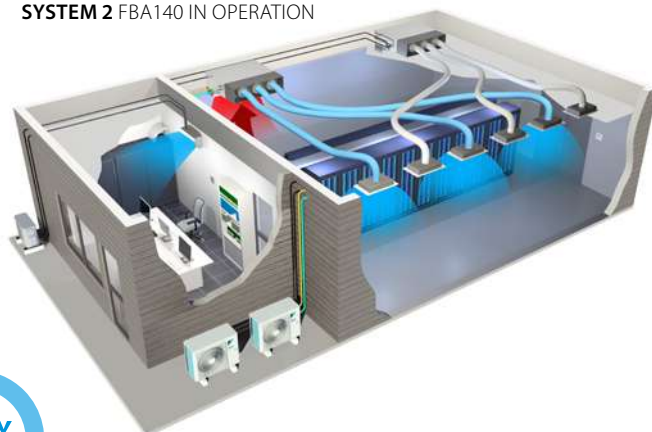





## Duty rotation application example

**SYSTEM 1** FBA140 IN OPERATION  
**SYSTEM 2** FBA140 STANDBY

**SYSTEM 1** FBA140 STANDBY  
**SYSTEM 2** FBA140 IN OPERATION



# Product overview *SkyAir*

Type	Model	Product name	PG				
Ceiling mounted cassette	<b>UNIQUE</b> High COP, Round flow cassette	UV Streamer kit	FCAHG-H	405	 <p>360° air discharge for the highest efficiency and comfort</p> <ul style="list-style-type: none"> <li>- High COP cassette ensures top performance for commercial applications</li> <li>- Auto cleaning function ensures high efficiency</li> <li>- Intelligent sensors save energy and maximize comfort</li> <li>- Flexibility to suit every room layout</li> <li>- Widest choice ever in decoration panel designs and colors</li> </ul> 		
	<b>UNIQUE</b> Round flow cassette	UV Streamer kit	FCAG-B	406	 <p>360° air discharge for the highest efficiency and comfort</p> <ul style="list-style-type: none"> <li>- Auto cleaning function ensures high efficiency</li> <li>- Intelligent sensors save energy and maximize comfort</li> <li>- Flexibility to suit every room layout</li> <li>- Lowest installation height in the market</li> <li>- Widest choice ever in decoration panel designs and colors</li> </ul> 		
	<b>UNIQUE</b> Fully flat cassette		FFA-A9	410	 <p>Unique design in the market that integrates fully flat into the ceiling</p> <ul style="list-style-type: none"> <li>- Perfect integration in standard architectural ceiling tiles</li> <li>- Blend of iconic design and engineering excellence with a white or silver and white finish</li> <li>- Intelligent sensors save energy and maximize comfort</li> <li>- Flexibility to suit every room layout without changing the location of the unit!</li> <li>- Quietest 600 x 600 cassette on the market</li> </ul>		
Concealed ceiling	Slim concealed ceiling unit	Auto cleaning option	Multi zoning option	FDXM-F9	416	 <p>Slim design for flexible installation</p> <ul style="list-style-type: none"> <li>- Compact dimensions enable installation in narrow ceiling voids</li> <li>- Medium external static pressure up to 40Pa</li> <li>- Small capacity unit developed for small of well insulated rooms</li> <li>- Auto cleaning function ensures high efficiency and reliability</li> </ul>	
	Concealed ceiling unit with medium ESP		Multi zoning option	FBA-A(9)	418	 <p>Slimmest yet most powerful medium static pressure unit on the market!</p> <ul style="list-style-type: none"> <li>- Slimmest unit in class, only 245mm</li> <li>- Low operating sound level</li> <li>- Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths</li> <li>- Automatic air flow adjustment function measures the air volume and static pressure and adjusts it towards the nominal air flow, guaranteeing comfort</li> </ul>	
	Concealed ceiling unit with high ESP			FDA-A	FDA125A	422	 <p>ESP up to 200Pa, ideal for large sized buildings</p> <ul style="list-style-type: none"> <li>- Discretely concealed in the ceiling: only the grilles are visible</li> <li>- Possibility to change ESP via wired remote control allows optimisation of the supply air volume</li> <li>- Flexible installation as the air suction direction can be altered from rear to bottom suction</li> </ul>
					FDA200-250A	423	 <p>ESP up to 250Pa, ideal for extra large sized spaces</p> <ul style="list-style-type: none"> <li>- Discretely concealed in the ceiling: only the grilles are visible</li> <li>- Possibility to change ESP via wired remote control allows optimisation of the supply air volume</li> </ul>
	Concealed ceiling unit		Multi zoning option	ADEA-A	424	 <p>Ideal for residential applications with false ceilings</p> <ul style="list-style-type: none"> <li>- Energy label up to A</li> <li>- Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths</li> <li>- Slimmest unit in class, only 245mm</li> <li>- Exclusively offered for pair applications</li> </ul>	
Wall mounted	Wall mounted unit		FAA-B	425	 <p>For rooms with no false ceilings nor free floor space</p> <ul style="list-style-type: none"> <li>- Flat, stylish front panel</li> <li>- The air is comfortably spread up- and downwards thanks to 5 different discharge angles</li> <li>- Easy maintenance as this can be done from the front of the unit</li> <li>- Flexible to install: pipe connection can be bottom, left or right</li> </ul>		
	Perfera wall mounted unit		FTXM-R	428	 <p>For rooms with no false ceilings nor free floor space</p> <ul style="list-style-type: none"> <li>- Practically inaudible</li> <li>- 2 area motion detection sensor</li> <li>- Flash streamer technology</li> <li>- 3D air flow</li> </ul>		
Ceiling suspended	Ceiling suspended unit		FHA-A(9)	429	 <p>For wide rooms with no false ceilings nor free floor space</p> <ul style="list-style-type: none"> <li>- Ideal for comfortable air flow in wide rooms thanks to Coanda effect</li> <li>- Even rooms with ceilings up to 3.8m can be heated up or cooled down very easily!</li> <li>- Can be mounted in corners or narrow spaces without any problem</li> </ul>		
	<b>UNIQUE</b> 4-way blow ceiling suspended unit		FUA-A	433	 <p>Unique Daikin unit for high rooms with no false ceilings nor free floor space</p> <ul style="list-style-type: none"> <li>- Even rooms with ceilings up to 3.5m can be heated up or cooled down very easily!</li> <li>- Flexibility to suit every room layout without changing the location of the unit!</li> <li>- Optimum comfort guaranteed with automatic air flow adjustment to the required load</li> <li>- The air is comfortably spread up- and downwards thanks to 5 different discharge angles</li> </ul>		
Floor standing	Floor standing unit		FVA-A	435	 <p>For spaces with high ceilings</p> <ul style="list-style-type: none"> <li>- Ideal solution for commercial spaces with no or narrow false ceilings</li> <li>- Even rooms with very high ceilings can be heated up or cooled down very easily!</li> <li>- Guarantees a stable temperature</li> <li>- Vertical and horizontal outblow</li> </ul>		
	Concealed floor standing unit		FNA-A9	438	 <p>Designed to be concealed in walls, only grilles remain visible</p> <ul style="list-style-type: none"> <li>- Slimmest unit on the market with a depth of only 200mm!</li> <li>- Both window sill or ducted installation are possible thanks to sufficient ESP</li> <li>- Whisper quiet operation allows installation in any location</li> </ul>		


# Full R-32 BLUEEVOLUTION line up

Indoor units




Capacity class										Outdoor unit combination					
										R-32					
										SkyAir Alpha-series		SkyAir Advance-series		SkyAir Active-series	SkyAir Active-series
										RZAG-A	RZAG- NV1/NY1	RZASG- MV(1)/MY(1)	RZA-D	AZAS- MV/MY	ARXM-R
25	35	50	60	71	100	125	140	200	250						
				•	•	•	•								
	•	•	•	•	•	•	•				✓	✓	✓	✓	✓
•	•	•	•								✓	✓	✓		
•	•	•	•								✓	✓	✓		
	•	•	•	•	•	•	•				✓	✓	✓	✓	✓
						•						✓	✓		
								•	•				✓		
				•	•	•								✓	✓
				•	•							✓	✓	✓	✓
	•	•	•								✓				
	•	•	•	•	•	•	•				✓	✓	✓	✓	NEW ✓
				•	•	•						✓	✓		
				•	•	•	•					✓	✓	✓	NEW ✓
•	•	•	•								✓	✓	✓		

# Benefit overview

We care	 Home leave operation	Maintains the indoor temperature at your specified comfort level during absence, thus saving energy.
	 Fan only	The unit can be used as fan, blowing air without heating or cooling.
	 Auto cleaning filter	The filter automatically cleans itself. Simplicity of upkeep means optimum energy efficiency and maximum comfort without the need for expensive or time-consuming maintenance.
	 Presence & floor sensor	The presence sensor directs the air away from any person detected in the room, when the air flow control is on. The floor sensor detects the average floor temperature and ensures an even temperature distribution between ceiling and floor.
Comfort	 Draught prevention	When starting to warm up or when the thermostat is off, the air discharge direction is set horizontally and the fan to low speed, to prevent draught. After warming up, air discharge and fan speed are set as desired.
	 Whisper quiet	Daikin indoor units are whisper quiet. Also the outdoor units are guaranteed not to disturb the quiet of the neighbourhood.
	 Auto cooling-heating changeover	Automatically selects cooling or heating mode to achieve the set temperature.
Air treatment	 <b>NEW</b> UV Streamer kit	Purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy and hygienic indoor environment
	 Air filter	Removes airborne dust particles to ensure a steady supply of clean air.
Humidity control	 Dry programme	Allows humidity levels to be reduced without variations in room temperature.
Air flow	 Ceiling soiling prevention	Prevents air from blowing out too long in horizontal position, to prevent ceiling stains.
	 Vertical auto swing	Possibility to select automatic vertical moving of the air discharge louvre, for uniform air flow and temperature distribution.
	 Fan speed steps	Allows to select up to the given number of fan speed.
	 Individual flap control	Individual flap control via the wired remote controller enables you to easily fix the position of each flap individually, to suit any new room configuration. Optional closure kits are available as well.
Remote control & timer	 Onecta app	Control your indoor climate from any location via smartphone or tablet.
	 Weekly timer	Can be set to start heating or cooling anytime on a daily or weekly basis.
	 Infrared remote control	Starts, stops and regulates the air conditioner from a distance.
	 Wired remote control	Starts, stops and regulates the air conditioner.
	 Centralised control	Starts, stops and regulates several air conditioners from one central point.
	 Multi zoning	Allows up to 6 individual climate zones with one indoor unit
Other functions	 Infrastructure cooling	Remove in a reliable, efficient and flexible way the heat constantly generated by the IT and server equipment to ensure maximum uptime while offering the best return on investment.
	 Auto-restart	The unit restarts automatically at the original settings after power failure.
	 Self-diagnosis	Simplifies maintenance by indicating system faults or operating anomalies.
	 Drain pump kit	Facilitates condensation draining from the indoor unit.
	 Twin/triple/double twin application	2, 3 or 4 indoor units can be connected to only a single outdoor unit even if they have different capacities. All indoor units operate within the same heating or cooling mode from one remote control.
	 Multi model application	Up to 5 indoor units can be connected to a single outdoor unit, even if they have different capacities. All indoor units can individually be operated within the same heating or cooling mode.
	 VRV for residential application	Up to 9 indoor units (even different capacities and up to 71 class) can be connected to a single outdoor unit. All indoor units can individually be operated within the same mode.



Ceiling mounted cassette units			Concealed ceiling units					Ceiling suspended units	4-Way blow ceiling suspended unit	Wall mounted unit	Perfera wall mounted unit	Floor standing units	
FCAHG-H	FCAG-B	FFA-A9	FDXM-F9	FBA-A(9)	FDA125A	FDA200-250A	ADEA-A	FHA-A(9)	FUA-A	FAA-B	FTXM-R	FVA-A	FNA-A9
•	•	•	•	•	•	•	•	•	•	•		•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•
○	○		○										
•	•	•											
•	•	•							•				
•	•	•		•			•				•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•
○	○												
• (Optional high efficiency filter ePM10 60%)	•	•	•	•	•	•	•	•	•	•	•	• (Flash streamer; titanium apatite deodorising filter)	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•											
•	•	•											
•	•	•									• (incl. 3D air flow)	•	
5 + auto	5 + auto	3 + auto	3	3 + auto	9 + auto	3 + auto	3 + auto	5 + auto	3 + auto	3 + auto	5 + auto	3 + auto	3 + auto
•	•	•							•				
○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	•		○
○	○	○	○	○	○	○	○	○	○	○	○	○	○
			○	○			○						
•	•	•	•	•	•	•		•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	○	○	•	○			
•	•	•	•	•	•	•	•	•	•	•			•
	•	•	•	•	•			•					•
	•	•	•	•				•					•

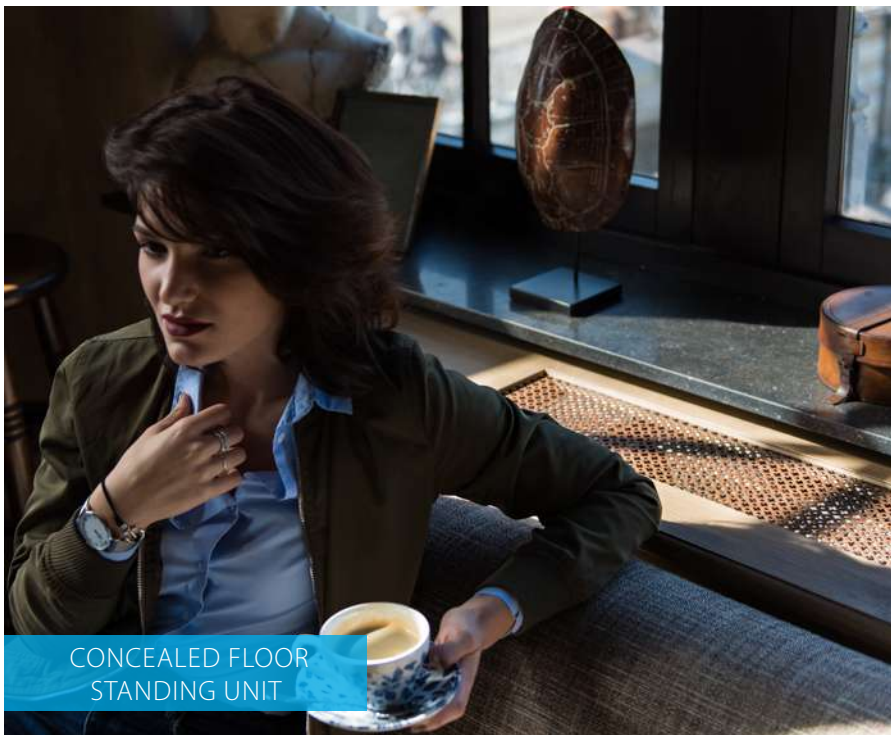






Pure air  
because we care

## Breathe healthy air with the round flow UV Streamer kit

90% of our time is spent indoors. However indoor air is 2 to 5 times more polluted than outdoor air.

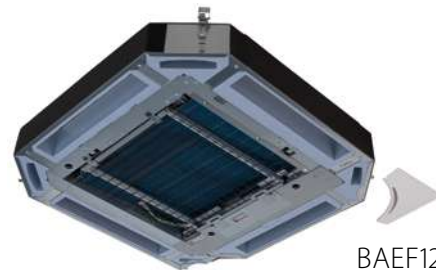

BAEF125AWB

These internal pollution effects on people are manifested in the long run. Tackle them now!

Our UV streamer kit offers you the solution:

- › It purifies the air of pollutants such as viruses, bacteria, fine dust (PM1), odours, allergens, etc ensuring a healthy and hygienic indoor environment
- › Unique catch & clean approach includes an ISO ePM1 60% (F7) filter, UV-C light and Streamer technology
- › Thanks to large air flow rate of the Round flow cassette, clean air can be quickly delivered to every corner of your space
- › Can be retrofitted into existing installations
- › Can be used with BYCQ140E and BYCQ140EW decoration panels



# 99.9%


of viruses removed in 30 minutes, thanks to Daikin's unique Catch & Clean approach

### Tested at Intertek

Results based on tests performed in the laboratories of Intertek, in a 28m<sup>3</sup> room. Daikin's Round flow cassette (FXFQ125B) removes more than 99.9% of enveloped viruses such as Corona viruses.

\* Additional details regarding this function can be found in the unit technical manual.

Tested according to real life sized room




# Daikin's unique **Catch & Clean** approach includes an ePM1 50% filter, UV-C light and Streamer technology

**1 Effective capturing of air borne pollutants**

- > Highly efficient capturing particulate matter and pollutants thanks to the ISO ePM1 60% (F7) filter
- > Anti bacterial and viral coating


**Indicator light**  
Indicates operation, malfunction or replacement status

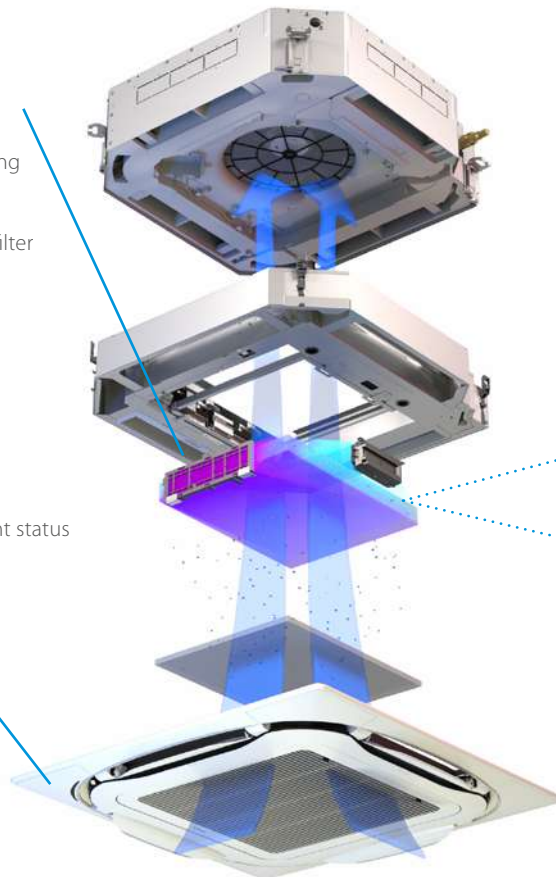

**2 Effective cleaning and decomposition of pollutants**

Our unique combined UV-C light and Streamer technology ensures both surface and in-depth sanitising of the filter to ensure hygienic air.

**UVC LED** light with high output wavelength of 265nm which is the most effective for surface cleaning and inactivation of bacteria and viruses.

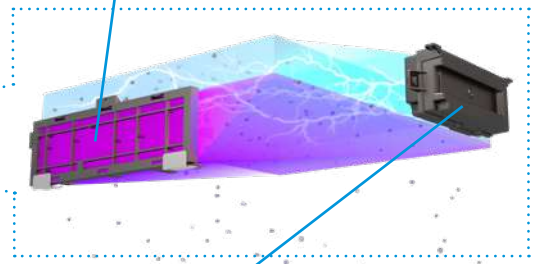

**Streamer technology** for deep sanitising of the filter and powerful decomposition of viruses and bacteria trapped inside the filter.

## Specifications

		<b>BAEF125AWB</b>
Power Supply		1P, 220-240V, 50/60 Hz
Dimensions HxWxD	mm	100 x 840 x 840
Weight	kg	12
Compatible decoration panels		BYCQ140E/BYCQ140EW * <small>(UV-streamer kit cannot be used with other filters, chambers, fresh air intake kits or air discharge outlet sealing member kit)</small>
Filter efficiency		ePM1 60% @ISO16890 (F7)
Replacement interval		Pleated filter (BAF55A125): every year Flash streamer device: every 7 years UV-C LED: every 7 years

\* For compatibility with older panels, consult your local sales representative

download the leaflet here

Complete indoor  
comfort, including  
pure air


## The round flow cassette

› Maximum comfort thanks to **360° air discharge and intelligent sensors**

› **Widest ever choice in panels** to match any interior



Black auto cleaning panel




Black designer panel



Full white standard panel



White designer panel



presence  
sensor

floor sensor

› **Auto cleaning panel** keeps the filter free of dust for maximum efficiency



› **UV streamer kit**

**NEW** › Purifies the air of pollutants such as viruses, bacteria, fine dust PM1, odours, allergens, etc ensuring a healthy and hygienic indoor environment

› Unique catch & clean approach includes an ISO ePM1 60% (F7) filter, UV-C light and Streamer technology

› Can be **retrofitted** into existing installations



# 99.9%

of viruses removed in 30 minutes,  
thanks to Daikin's unique  
Catch & Clean approach


### Tested at Intertek

Results based on tests performed in the laboratories of Intertek, in a 28m<sup>3</sup> room. Daikin's Round flow cassette (FXFQ125B) removes more than 99.9% of enveloped viruses such as Corona viruses.

\* Additional details regarding this function can be found in the unit technical manual.

Tested according to  
real life sized room

28m<sup>3</sup>



# High COP, round flow cassette

360° air discharge for optimum efficiency and comfort

- › Combination with Sky Air Alpha-series ensures best in class quality, highest efficiency and performance
- › High COP cassette ensures top performance and great energy savings
- › Optional automatic filter cleaning panel results in higher efficiency & comfort and lower maintenance costs.
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- › Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- › Bigger flaps and unique swing pattern improve equal air distribution
- › 5 different fan speeds available for maximum comfort
- › UV streamer kit, purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy and hygienic indoor environment
- › Optional fresh air intake
- › Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms
- › Standard drain pump with 675mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.



FCAHG-H

RZAG-NV1

RZAG-NY1

Efficiency data			FCAHG + RZAG		71H + 71NV1	100H + 100NV1	125H + 125NV1	140H + 140NV1	71H + 71NY1	100H + 100NY1	125H + 125NY1	140H + 140NY1						
Cooling capacity	Nom.	kW	6.80	9.50	12.1	13.4	6.80	9.50	12.1	13.4								
Heating capacity	Nom.	kW	7.50	10.8	13.5	15.5	7.50	10.8	13.5	15.5								
Space cooling	Energy efficiency class		A++				-				A++							
	Capacity	Pdesign	kW	6.80	9.50	12.1	13.4	6.80	9.50	12.1	13.4							
	SEER			7.90	7.70	8.02	7.93	7.90	7.70	8.02	7.93							
	ηs,c		%	-	-	318	314	-	-	318	314							
Space heating (Average climate)	Annual energy consumption		kWh/a	301	432	905	1,014	301	432	905	1,014							
	Energy efficiency class			A++				-				A++						
	Capacity	Pdesign	kW	4.70	-	9.52	-	4.70	-	9.52	-							
	SCOP/A			4.61	4.75	4.53	4.44	4.56	4.75	4.53	4.44							
	ηs,h	%	-	-	178	175	-	-	178	175								
	Annual energy consumption		kWh/a	1,427	2,805	2,943	3,002	1,443	2,805	2,943	3,002							
<b>Indoor unit</b>			<b>FCAHG</b>	<b>71H</b>	<b>100H</b>	<b>125H</b>	<b>140H</b>	<b>71H</b>	<b>100H</b>	<b>125H</b>	<b>140H</b>							
Dimensions	Unit	HeightxWidthxDepth	mm															
Weight	Unit		kg															
Air filter	Type		Resin net															
Decoration panel	Model		Standard panels: BYCQ140E - white with grey louvers / BYCQ140EW - full white / BYCQ140EB - black Auto cleaning panels: BYCQ140EGF - white / BYCQ140EGFB - black Designer panels: BYCQ140EP - white / BYCQ140EPB - black															
			Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950															
Fan	Air flow rate	Cooling	Low/Medium/High		m³/min		13.7/18.8/23.6		19.1/25.7/32.2		21.2/27.3/34.4		13.7/18.8/23.6		19.1/25.7/32.2		21.2/27.3/34.4	
		Heating	Low/Medium/High		m³/min		13.7/18.8/23.6		18.3/24.6/30.8		19.7/25.5/32.1		13.7/18.8/23.6		18.3/24.6/30.8		19.7/25.5/32.1	
Sound power level	Cooling		Low/Medium/High		m³/min		13.7/18.8/23.6		18.3/24.6/30.8		19.7/25.5/32.1		13.7/18.8/23.6		18.3/24.6/30.8		19.7/25.5/32.1	
		Heating	Low/Medium/High		m³/min		13.7/18.8/23.6		18.3/24.6/30.8		19.7/25.5/32.1		13.7/18.8/23.6		18.3/24.6/30.8		19.7/25.5/32.1	
Sound pressure level	Cooling	Nom.	Low/High		dBA		29.0/36.0		33.0/44.0		35.0/45.0		29.0/36.0		33.0/44.0		35.0/45.0	
		Heating	Low/High		dBA		29.0/36.0		33.0/44.0		35.0/45.0		29.0/36.0		33.0/44.0		35.0/45.0	
Control systems	Infrared remote control		BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB															
	Wired remote control		BRCIH52W/S/K / BRCIE53A / BRCIE53B / BRCIE53C / BRCID52															
Power supply	Phase/Frequency/Voltage		Hz/V															
Piping connections	Drain		VP25 (I.D. 25/O.D. 32)															
<b>Outdoor unit</b>			<b>RZAG</b>	<b>71NV1</b>	<b>100NV1</b>	<b>125NV1</b>	<b>140NV1</b>	<b>71NY1</b>	<b>100NY1</b>	<b>125NY1</b>	<b>140NY1</b>							
Dimensions	Unit	HeightxWidthxDepth	mm															
Weight	Unit		kg															
Sound power level	Cooling		Low/Medium/High		m³/min		13.7/18.8/23.6		19.1/25.7/32.2		21.2/27.3/34.4		13.7/18.8/23.6		19.1/25.7/32.2		21.2/27.3/34.4	
		Heating	Low/Medium/High		m³/min		13.7/18.8/23.6		18.3/24.6/30.8		19.7/25.5/32.1		13.7/18.8/23.6		18.3/24.6/30.8		19.7/25.5/32.1	
Sound pressure level	Cooling	Nom.	Low/High		dBA		46		47		49		46		47		49	
		Heating	Low/High		dBA		48		50		52		48		50		52	
Operation range	Cooling	Ambient	Min.~Max.		°CDB						-20~-52							
		Heating	Ambient		Min.~Max.		°CWB						-20~-18					
Refrigerant	Type/GWP		R-32/675															
	Charge	kg/TCO2Eq	3.20/2.16		3.70/2.50		3.20/2.16		3.70/2.50									
Piping connections	Liquid/Gas OD		mm															
	Piping length	OU - IU	Max.		m		55		85		55		85					
		System	Equivalent		m		75		100		75		100					
		Chargeless	m		40		30											
	Level difference IU - OU	Max.		m														
	Additional refrigerant charge	kg/m		See installation manual														
Power supply	Phase/Frequency/Voltage		Hz/V															
Current - 50Hz	Maximum fuse amps (MFA)		A		20		32				16							

Contains fluorinated greenhouse gases

# Round flow cassette

## 360° air discharge for optimum efficiency and comfort

- › Combination with Sky Air Alpha-series ensures best in class quality, highest efficiency and performance
- › Optional automatic filter cleaning panel results in higher efficiency & comfort and lower maintenance costs
- › Two optional intelligent sensors improve energy efficiency and comfort
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- › Lowest installation height in the market: 214mm for class 20-63
- › Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- › Bigger flaps and unique swing pattern improve equal air distribution
- › UV streamer kit, purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy and hygienic indoor environment
- › Optional fresh air intake
- › Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms
- › Standard drain pump with 675mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.

		FCAG-B				RZAG-A				RZAG-NV1				RZAG-NY1														
<b>Efficiency data</b>		<b>FCAG + RZAG</b>		<b>35B</b>	<b>35A</b>	<b>50B</b>	<b>50A</b>	<b>60B</b>	<b>60A</b>	<b>71B</b>	<b>71NV1</b>	<b>100B</b>	<b>100NV1</b>	<b>125B</b>	<b>125NV1</b>	<b>140B</b>	<b>140NV1</b>	<b>71B</b>	<b>71NY1</b>	<b>100B</b>	<b>100NY1</b>	<b>125B</b>	<b>125NY1</b>	<b>140B</b>	<b>140NY1</b>			
Cooling capacity	Nom.	kW		1.6/3.5/4.5	1.7/5.0/6.0	1.7/6.0/6.5	-/6.80/-	-/9.50/-	-/12.1/-	-/13.4/-	-/6.80/-	-/9.50/-	-/12.1/-	-/13.4/-	-/6.80/-	-/9.50/-	-/12.1/-	-/13.4/-	-/6.80/-	-/9.50/-	-/12.1/-	-/13.4/-	-/6.80/-	-/9.50/-	-/12.1/-	-/13.4/-		
Heating capacity	Nom./Max.	kW		1.40/4.00/5.00	1.50/5.80/6.00	1.60/7.00/7.50	-/7.50/-	-/10.8/-	-/13.5/-	-/15.5/-	-/7.50/-	-/10.8/-	-/13.5/-	-/15.5/-	-/7.50/-	-/10.8/-	-/13.5/-	-/15.5/-	-/7.50/-	-/10.8/-	-/13.5/-	-/15.5/-	-/7.50/-	-/10.8/-	-/13.5/-	-/15.5/-		
Space cooling	Energy efficiency class			A++				-				A++				-												
	Capacity	Pdesign		kW		3.50	5.00	6.00	6.80	9.50	12.1	13.4	6.80	9.50	12.1	13.4	6.80	9.50	12.1	13.4	6.80	9.50	12.1	13.4	6.80	9.50		
	SEER			7.30	6.80	6.60	6.83	7.14		7.15	6.80	6.83	7.14		7.15	6.80	6.83	7.14		7.15	6.80	6.83	7.14		7.15	6.80		
	ηs,c			-				-				-				-												
	Annual energy consumption	kWh/a		168	257	318	348	466		1,016	1,182	348	466		1,016	1,182	348	466		1,016	1,182	348	466		1,016	1,182		
Space heating	Energy efficiency class			A+				-				A+				-												
(Average climate)	Capacity	Pdesign		kW		3.30	4.30	4.60	4.70	7.80	9.52	4.70	7.80	9.52	4.70	7.80	9.52	4.70	7.80	9.52	4.70	7.80	9.52	4.70	7.80	9.52		
	SCOP/A			4.30		4.25	4.22	4.53		4.34	4.22	4.53	4.34	4.22	4.53	4.34	4.22	4.53	4.34	4.22	4.53	4.34	4.22	4.53	4.34	4.22	4.53	
	ηs,h			-				-				-				-												
	Annual energy consumption	kWh/a		1,074	1,398	1,515	1,560	2,413		3,071	3,071	1,560	2,413	3,071	1,560	2,413	3,071	1,560	2,413	3,071	1,560	2,413	3,071	1,560	2,413	3,071		
<b>Indoor unit</b>	<b>FCAG</b>		<b>35B</b>	<b>50B</b>	<b>60B</b>	<b>71B</b>	<b>100B</b>	<b>125B</b>	<b>140B</b>	<b>71B</b>	<b>100B</b>	<b>125B</b>	<b>140B</b>															
Dimensions	Unit	HeightxWidthxDpeth		mm				246x840x840				204x840x840				246x840x840												
Weight	Unit	kg		18				19				21				23												
Air filter	Type	Resin net																										
Decoration panel	Model	Standard panels: BYCQ140E - white with grey louvers / BYCQ140EW - full white / BYCQ140EB - black Auto cleaning panels: BYCQ140EGF - white / BYCQ140EGFB - black Designer panels: BYCQ140EP - white / BYCQ140EPB - black																										
	Dimensions	HeightxWidthxDpeth		mm				Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950				Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950				Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950												
	Weight	kg		Standard panels: 5.5 / Auto cleaning panels: 10.3 / Designer panels: 6.5				Standard panels: 5.5 / Auto cleaning panels: 10.3 / Designer panels: 6.5				Standard panels: 5.5 / Auto cleaning panels: 10.3 / Designer panels: 6.5																
Fan	Air flow rate	Cooling	Low/Medium/High	m <sup>3</sup> /min		8.8/10.6/12.9	9.4/11.8/14.6	9.6/12.2/14.9	10.8/13.0/15.1	13.0/17.8/22.7	13.1/20.4/27.2	10.8/13.0/15.1	13.0/17.8/22.7	13.1/20.4/27.2	9.4/11.6/14.1	9.4/11.8/14.6	9.6/12.2/14.9	10.8/12.9/15.1	13.2/18.1/23.0	13.0/20.2/27.0	10.8/12.9/15.1	13.2/18.1/23.0	13.0/20.2/27.0	9.4/11.6/14.1	9.4/11.8/14.6	9.6/12.2/14.9	10.8/12.9/15.1	13.2/18.1/23.0
	Sound power level	Cooling	Heating	dBA		49.0	51.0	54.0	58.0	51.0	54.0	58.0	51.0	54.0	49.0	51.0	54.0	58.0	51.0	54.0	58.0	51.0	54.0	58.0	51.0	54.0	58.0	
	Sound pressure level	Cooling	Low/High	dBA		27.0/31.0	28.0/33.0	28.0/35.0	29.0/37.0	29.0/41.0	28.0/35.0	29.0/37.0	29.0/41.0	28.0/35.0	27.0/31.0	28.0/33.0	28.0/35.0	29.0/37.0	29.0/41.0	28.0/35.0	29.0/37.0	29.0/41.0	28.0/35.0	29.0/37.0	29.0/41.0	28.0/35.0	29.0/37.0	29.0/41.0
	Control systems	Infrared remote control / Wired remote control / BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB																										
	Power supply	Phase/Frequency/Voltage		Hz/V				1~/50/60/220-240/220				1~/50/60/220-240/220				1~/50/60/220-240/220												
	Piping connections	Drain / VP25 (O.D. 32 / I.D. 25)																										
<b>Outdoor unit</b>	<b>RZAG</b>		<b>35A</b>	<b>50A</b>	<b>60A</b>	<b>71NV1</b>	<b>100NV1</b>	<b>125NV1</b>	<b>140NV1</b>	<b>71NY1</b>	<b>100NY1</b>	<b>125NY1</b>	<b>140NY1</b>															
Dimensions	Unit	HeightxWidthxDpeth		mm				734x870x373				870x1,100x460																
Weight	Unit	kg		52				81				85				95												
Sound power level	Cooling	dBA		62.0	63.0	64.0	64	66	69	70	64	66	69	62.0	63.0	64.0	64	66	69	70	64	66	69	70	62.0	63.0	64.0	
	Heating	dBA		48.0	49.0	50.0	46	47	49	50	46	47	49	48.0	49.0	50.0	46	47	49	50	46	47	49	50	48.0	49.0	50.0	
Operation range	Cooling	Ambient	Min.~Max.	°CDB				-20~-52				-20~-52																
	Heating	Ambient	Min.~Max.	°CWB				-20~-24				-20~-18																
Refrigerant	Type/GWP	R-32/675.0																										
	Charge	kg/TCO2Eq		1.55/1.05				3.20/2.16				3.70/2.50				3.20/2.16				3.70/2.50								
Piping connections	Liquid/Gas OD	mm		6.35/9.52				6.35/12.7				9.52/15.9																
	Piping length	OU - IU	Max.	m		55				85				55				85										
	System Equivalent Chargeless	m		-				75				100				75				100								
	Level difference IU - OU	Max.		m		30				40				30														
	Additional refrigerant charge	kg/m		0.02 (for piping length exceeding 30m)				See installation manual				See installation manual																
Power supply	Phase/Frequency/Voltage	Hz/V																										
Current - 50Hz	Maximum fuse amps (MFA)	A		-				20				32				16												



# Round flow cassette

## 360° air discharge for optimum efficiency and comfort

- › Combination with Sky Air Advance-series ensures good value for money for all types of commercial applications
- › Optional automatic filter cleaning panel results in higher efficiency & comfort and lower maintenance costs.
- › Two optional intelligent sensors improve energy efficiency and comfort
- › Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- › Bigger flaps and unique swing pattern improve equal air distribution
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- › UV streamer kit, purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy and hygienic indoor environment
- › Optional fresh air intake
- › Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms
- › Standard drain pump with 675mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.

		FCAG-B	RZASG-MV1		RZASG-MY1		RZASG-MV		RZASG-MY	
<b>Efficiency data</b>		<b>FCAG + RZASG</b>	<b>71B + 71MV1</b>	<b>100B + 100MV(1)</b>	<b>125B + 125MV(1)</b>	<b>140B + 140MV(1)</b>	<b>100B + 100MY(1)</b>	<b>125B + 125MY(1)</b>	<b>140B + 140MY(1)</b>	
Cooling capacity	Nom.	kW	6.80	9.50	12.1	13.4	9.50	12.1	13.4	
Heating capacity	Nom.	kW	7.50	10.8	13.5	15.5	10.8	13.5	15.5	
Space cooling	Energy efficiency class		A++		-		A++		-	
	Capacity	Pdesign	kW	6.80	9.50	12.1	13.4	9.50	12.1	13.4
	SEER		6.47	6.55	5.76	6.53	6.55	5.76	6.53	
	ηs,c		%	-	-	227	258	-	227	258
	Annual energy consumption	kWh/a	368	507	1,261	1,231	507	1,261	1,231	
Space heating (Average climate)	Energy efficiency class		A+		-		A+		-	
	Capacity	Pdesign	kW	4.50	6.00	7.80	6.00	7.80		
	SCOP/A		4.10	4.17	4.05	4.31	4.17	4.05	4.31	
	ηs,h		%	-	-	159	169	-	159	169
	Annual energy consumption	kWh/a	1,537	2,016	2,074	2,534	2,016	2,074	2,534	
<b>Indoor unit</b>		<b>FCAG</b>	<b>71B</b>	<b>100B</b>	<b>125B</b>	<b>140B</b>	<b>100B</b>	<b>125B</b>	<b>140B</b>	
Dimensions	Unit	HeightxWidthxDpeth	mm		204x840x840		246x840x840			
Weight	Unit		kg		21		23			
Air filter	Type		Resin net							
Decoration panel	Model		Standard panels: BYCQ140E - white with grey louvers / BYCQ140EW - full white / BYCQ140EB - black Auto cleaning panels: BYCQ140EGF - white / BYCQ140EGFB - black Designer panels: BYCQ140EP - white / BYCQ140EPB - black							
	Dimensions	HeightxWidthxDpeth	mm		Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950					
	Weight		kg		Standard panels: 5.5 / Auto cleaning panels: 10.3 / Designer panels: 6.5					
Fan	Air flow rate	Cooling	Low/Medium/High	m³/min	10.8/13.0/15.1	13.0/17.8/22.7	13.1/20.4/27.2	13.0/17.8/22.7	13.1/20.4/27.2	
		Heating	Low/Medium/High	m³/min	10.8/12.9/15.1	13.2/18.1/23.0	13.0/20.2/27.0	13.2/18.1/23.0	13.0/20.2/27.0	
Sound power level	Cooling			dBA	51.0	54.0	58.0	54.0	58.0	
	Heating			dBA	51.0	54.0	58.0	54.0	58.0	
Sound pressure level	Cooling	Low/Medium/High		dBA	28.0/31.0/35.0	29.0/33.0/37.0	29.0/35.0/41.0	29.0/33.0/37.0	29.0/35.0/41.0	
	Heating	Low/Medium/High		dBA	28.0/31.0/33.0	29.0/33.0/37.0	29.0/35.0/41.0	29.0/33.0/37.0	29.0/35.0/41.0	
Control systems	Infrared remote control				BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB					
	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52					
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220					
<b>Outdoor unit</b>		<b>RZASG</b>	<b>71MV1</b>	<b>100MV(1)</b>	<b>125MV(1)</b>	<b>140MV(1)</b>	<b>100MY(1)</b>	<b>125MY(1)</b>	<b>140MY(1)</b>	
Dimensions	Unit	HeightxWidthxDpeth	mm		770x900x320		990x940x320			
Weight	Unit		kg		60		70 (MV1) / 72 (MV)		78 (MV1) / 79 (MV)	
Sound power level	Cooling			dBA	65	70	71	73	70	
	Heating			dBA	-	-	71	73	71	
Sound pressure level	Cooling	Nom.		dBA	46	53	54	53	54	
	Heating	Nom.		dBA	47	-	-	57	-	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-15~46					
	Heating	Ambient	Min.~Max.	°CWB	-15~-15.5					
Refrigerant	Type/GWP				R-32/675					
	Charge			kg/TCO2Eq	2.45/1.65	2.60/1.76	2.90/1.96	2.60/1.76	2.90/1.96	
Piping connections	Liquid/Gas	OD		mm	9.52/15.9					
	Piping length	OU - IU	Max.	m	50					
		System	Equivalent	m	70					
			Chargeless	m	30					
	Additional refrigerant charge			kg/m	See installation manual					
	Level difference IU - OU	Max.		m	30.0					
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 / 220-240		3~/50 / 380-415			
Current - 50Hz	Maximum fuse amps (MFA)		A	20	25	32	16			

Contains fluorinated greenhouse gases

# Round flow cassette

360° air discharge for optimum efficiency and comfort

- › Ideal solution for small businesses and shops
- › Optional automatic filter cleaning panel results in higher efficiency & comfort and lower maintenance costs.
- › Two optional intelligent sensors improve energy efficiency and comfort
- › Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- › Bigger flaps and unique swing pattern improve equal air distribution
- › UV streamer kit, purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy and hygienic indoor environment
- › Optional fresh air intake
- › Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms
- › Standard drain pump with 675mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.

		FCAG-B		ARXM-R		AZAS-MV		AZAS-MY			
<b>Efficiency data</b>		FCAG + ARXM / AZAS		71B + ARXM 71R	100B + AZAS100MV	125B + AZAS125MV	140B + AZAS140MV	100B + AZAS100MY	125B + AZAS125MY	140B + AZAS140MY	
Cooling capacity	Nom.	kW		6.80/7.05	9.50/-	12.1/-	13.4/-	9.50/-	12.1/-	13.4/-	
Heating capacity	Nom./Max.	kW		7.50/7.58	10.8/-	13.5/-	15.5/-	10.8/-	13.5/-	15.5/-	
Space cooling	Energy efficiency class			A+		-		A+		-	
	Capacity	Pdesign	kW	6.80	9.50	12.1	13.0	9.50	12.1	13.0	
	SEER			5.87	6.1	5.6	6.2	6.1	5.6	6.2	
	ηs,c		%	-	-	221	245	-	221	245	
	Annual energy consumption	kWh/a		405	586	1,345	1,300	586	1,345	1,300	
Space heating (Average climate)	Energy efficiency class			A+		A		A		-	
	Capacity	Pdesign	kW	4.50	6.00	7.80	6.00	4.50	6.00	7.80	
	SCOP/A			4.00	3.85	3.80	4.31	3.85	3.80	4.31	
	ηs,h		%	-	-	149	169	-	149	169	
	Annual energy consumption	kWh/a		1,573	2,182	2,211	2,534	2,182	2,211	2,534	
<b>Indoor unit</b>		FCAG		71B	100B	125B	140B	100B	125B	140B	
Dimensions	Unit	HeightxWidthxDepth		mm		204x840x840		246x840x840		23	
Weight	Unit	kg		21		23		23		23	
Air filter	Type	Resin net		Resin net		Resin net		Resin net		Resin net	
Decoration panel	Model	Standard panels: BYCQ140E - white with grey louvers / BYCQ140EW - full white / BYCQ140EB - black		Standard panels: BYCQ140E - white with grey louvers / BYCQ140EW - full white / BYCQ140EB - black		Standard panels: BYCQ140E - white with grey louvers / BYCQ140EW - full white / BYCQ140EB - black		Standard panels: BYCQ140E - white with grey louvers / BYCQ140EW - full white / BYCQ140EB - black		Standard panels: BYCQ140E - white with grey louvers / BYCQ140EW - full white / BYCQ140EB - black	
	Model	Auto cleaning panels: BYCQ140EGF - white / BYCQ140EGFB - black		Auto cleaning panels: BYCQ140EGF - white / BYCQ140EGFB - black		Auto cleaning panels: BYCQ140EGF - white / BYCQ140EGFB - black		Auto cleaning panels: BYCQ140EGF - white / BYCQ140EGFB - black		Auto cleaning panels: BYCQ140EGF - white / BYCQ140EGFB - black	
	Model	Designer panels: BYCQ140EP - white / BYCQ140EPB - black		Designer panels: BYCQ140EP - white / BYCQ140EPB - black		Designer panels: BYCQ140EP - white / BYCQ140EPB - black		Designer panels: BYCQ140EP - white / BYCQ140EPB - black		Designer panels: BYCQ140EP - white / BYCQ140EPB - black	
	Dimensions	HeightxWidthxDepth		mm		Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950		Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950		Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950	
	Weight	kg		Standard panels: 5.5 / Auto cleaning panels: 10.3 / Designer panels: 6.5		Standard panels: 5.5 / Auto cleaning panels: 10.3 / Designer panels: 6.5		Standard panels: 5.5 / Auto cleaning panels: 10.3 / Designer panels: 6.5		Standard panels: 5.5 / Auto cleaning panels: 10.3 / Designer panels: 6.5	
Fan	Air flow rate	Cooling	Low/Medium/High	m³/min	10.8/13.0/15.1	13.0/17.8/22.7	13.1/20.4/27.2	13.0/17.8/22.7	13.1/20.4/27.2	13.0/17.8/22.7	
	Heating	Low/Medium/High	m³/min	10.8/12.9/15.1	13.2/18.1/23.0	13.0/20.2/27.0	13.2/18.1/23.0	13.0/20.2/27.0	13.2/18.1/23.0	13.0/20.2/27.0	
Sound power level	Cooling	dBA		51.0	54.0	58.0	54.0	58.0	54.0	58.0	
	Heating	dBA		51.0	54.0	58.0	54.0	58.0	54.0	58.0	
Sound pressure level	Cooling	Low/Medium/High	dBA	28.0/31.0/35.0	29.0/33.0/37.0	29.0/35.0/41.0	29.0/33.0/37.0	29.0/35.0/41.0	29.0/33.0/37.0	29.0/35.0/41.0	
	Heating	Low/Medium/High	dBA	28.0/31.0/33.0	29.0/33.0/37.0	29.0/35.0/41.0	29.0/33.0/37.0	29.0/35.0/41.0	29.0/33.0/37.0	29.0/35.0/41.0	
Control systems	Infrared remote control		BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB		BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB		BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB		BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB		
	Wired remote control		BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52		BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52		BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52		BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52		
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50/60/220-240/220		1~/50/60/220-240/220		1~/50/60/220-240/220		
<b>Outdoor unit</b>		ARXM / AZAS		ARXM71R	AZAS100MV	AZAS125MV	AZAS140MV	AZAS100MY	AZAS125MY	AZAS140MY	
Dimensions	Unit	HeightxWidthxDepth		mm		734x954x401		990x940x320		990x940x320	
Weight	Unit	kg		49.0		72		79		79	
Sound power level	Cooling	dBA		-		70		71		73	
	Heating	dBA		-		71		73		73	
Sound pressure level	Cooling	Nom.	dBA	52.0	53	54	53	53	54	54	
	Heating	Nom.	dBA	52.0	53	54	53	53	54	54	
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-10~-46		-10~-46		-10~-46	
	Heating	Ambient	Min.~Max.	°CWB		-15~-24		-15~-15.5		-15~-15.5	
Refrigerant	Type/GWP	R-32/675		R-32/675		R-32/675		R-32/675		R-32/675	
	Charge	kg/TCO2Eq		1.15/0.780		2.60/1.76		2.90/1.96		2.60/1.76	
Piping connections	Liquid/Gas	OD		mm		11.5/0.780		2.60/1.76		2.90/1.96	
	Piping length	OU - IU	Max.	m		9.52/15.9		9.52/15.9		9.52/15.9	
	System	Equivalent	m		30		30		30		
	Chargeless	m		50		50		50		50	
	Additional refrigerant charge	kg/m		0.035		0.035		0.035		0.035	
	Level difference	IU - OU	Max.	m		20.0		30.0		30.0	
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50 / 220-240		1~/50 / 220-240		3~/50 / 380-415		
Current - 50Hz	Maximum fuse amps (MFA)		A		-		25		32		

Contains fluorinated greenhouse gases

# Round flow cassette

## 360° air discharge for optimum efficiency and comfort

- › Combination with split outdoor units is ideal for small retail, offices or residential applications
- › Optional automatic filter cleaning panel results in higher efficiency & comfort and lower maintenance costs.
- › Two optional intelligent sensors improve energy efficiency and comfort
- › Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- › Bigger flaps and unique swing pattern improve equal air distribution
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- › UV streamer kit, purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy and hygienic indoor environment
- › Optional fresh air intake
- › Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms
- › Standard drain pump with 675mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.

		FCAG-B	RXM-R	RXM-R9	RXM-A		
<b>Efficiency data</b>		<b>FCAG + RXM</b>	<b>35B + 35R9</b>	<b>50B + 50A</b>	<b>60B + 60R</b>		
Cooling capacity	Nom.	kW	3.50	5.00	5.70		
Heating capacity	Nom.	kW	4.20	6.00	7.00		
Space cooling	Energy efficiency class		A++		A++		
	Capacity	Pdesign	kW	3.50	5.00	5.70	
	SEER		6.35	6.54	6.40		
	Annual energy consumption		kWh/a	193	268	312	
Space heating (Average climate)	Energy efficiency class		A++		A+		
	Capacity	Pdesign	kW	3.32	4.36	4.71	
	SCOP/A		4.90	4.30	4.20		
	Annual energy consumption		kWh/a	948	1,418	1,569	
<b>Indoor unit</b>		<b>FCAG</b>	<b>35B</b>	<b>50B</b>	<b>60B</b>		
Dimensions	Unit	HeightxWidthxDepth	mm	204x840x840			
Weight	Unit		kg	18	19		
Air filter	Type			Resin net			
Decoration panel	Model			Standard panels: BYCQ140E - white with grey louvers / BYCQ140EW - full white / BYCQ140EB - black Auto cleaning panels: BYCQ140EGF - white / BYCQ140EGFB - black Designer panels: BYCQ140EP - white / BYCQ140EPB - black			
	Dimensions	HeightxWidthxDepth	mm	Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950			
	Weight		kg	Standard panels: 5.5 / Auto cleaning panels: 10.3 / Designer panels: 6.5			
Fan	Air flow rate	Cooling	Low/Medium/High	m <sup>3</sup> /min	8.8/10.6/12.9	9.4/11.8/14.6	9.6/12.2/14.9
		Heating	Low/Medium/High	m <sup>3</sup> /min	9.4/11.6/14.1	9.4/11.8/14.6	9.6/12.2/14.9
Sound power level	Cooling			dBA	49.0	49.0	51.0
	Heating			dBA	49.0	49.0	51.0
Sound pressure level	Cooling	Low/Medium/High		dBA	27.0/29.0/31.0		28.0/31.0/33.0
	Heating	Low/Medium/High		dBA	27.0/29.0/31.0		28.0/31.0/33.0
Control systems	Infrared remote control				BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB		
	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220		
<b>Outdoor unit</b>		<b>RXM</b>	<b>35R9</b>	<b>NEW 50A</b>	<b>60R</b>		
Dimensions	Unit	HeightxWidthxDepth	mm	552x840x350		734x954x401	
Weight	Unit		kg	32		49.0	
Sound pressure level	Cooling	Nom.		dBA	49.0		48.0
	Heating	Nom.		dBA	49.0		48.0
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~-46		
	Heating	Ambient	Min.~Max.	°CWB	-15~-18		
Refrigerant	Type				R-32		
	GWP				675.0		
	Charge		kg/TCO2Eq		0.76/0.52		1.15/0.780
Piping connections	Liquid	OD		mm	6.35		
	Gas	OD		mm	9.50		12.7
	Piping length	OU - IU	Max.	m	20		30
		System	Chargeless		m	10	
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 10m)		
	Level difference	IU - OU	Max.	m	15		20.0
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 / 220-240		
Current - 50Hz	Maximum fuse amps (MFA)			A	13		16

Contains fluorinated greenhouse gases

# Fully Flat Cassette

Design & Genius in one



## Why choose fully flat cassette

- › Unique design in the market that integrates fully flat into the ceiling
- › Advanced technology and top efficiency combined
- › Most quiet cassette available on the market

## FFA-A9 / FXZQ-A



Choice between grey or white panel

## Benefits for the installer


- › Unique product in the market!
- › Most quiet unit (25dBA)
- › The user-friendly remote control, available in several languages, enables the easy set-up of sensor option and control of the individual flap position
- › Meeting European design taste.

## Benefits for the consultant

- › Unique product in the market!
- › Blends seamlessly in any modern office interior design
- › Ideal product to improve BREEAM score/EPBD in combination with Sky Air (FFA\*) or VRV IV heat pump units (FXZQ\*).

## Benefits for the end user

- › Engineering excellence and unique design in one
- › Most quiet unit (25dBA)
- › Perfect working conditions: no more cold draughts
- › Save up to 27% on your energy bill thanks to the optional sensors
- › Flexible usage of space and suits any room configuration thanks to individual flap control
- › User-friendly remote control, available in several languages.

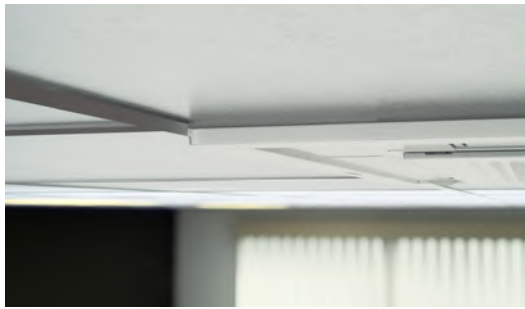

### Unique design

- › Designed by a European design office to fully meet the European taste.
- › Fully flat into the ceiling, leaving only 8mm.



- › Fully integrated in the one ceiling tile, enabling lights, speakers and sprinklers to be installed in adjoining ceiling tiles.
- › Decoration panel available in 2 colours (white and white-silver).



### Differentiating in technology

#### Optional presence sensor

- › When the room is empty, it can adjust the set temperature or switch off the unit – saving energy.
- › When people are detected, the direction of the airflow is adapted to avoid cold draughts being directed towards occupants.



#### Optional floor sensor


- › Detects the temperature difference and re-directs the airflow to ensure even temperature distribution.



### Top efficiency

- › Seasonal efficiency labels up to **A++**\*
- › When the room is empty, the sensor option can adjust the set temperature or switch off the unit – saving up to 27% energy.

\* for FFA25,35A9 in combination with RXM25,35

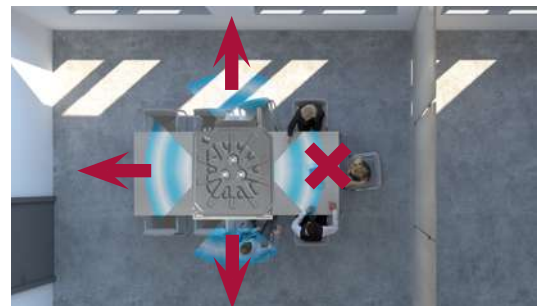

### Other benefits

- › Individual flap control: easily control one or more flaps via the wired remote controller (BRC1E/ BRC1H) when rearranging the room. When fully closing or blocking the flaps, the option "Sealing member of air discharge outlet" is needed.
- › Most silent cassette in the market (25dBA), important for office applications.

## Marketing tools

- › [https://www.daikin.eu/en\\_us/product-group/fully-flat-cassette.html](https://www.daikin.eu/en_us/product-group/fully-flat-cassette.html)
- › [www.youtube.com/DaikinEurope](https://www.youtube.com/DaikinEurope)

# Fully flat cassette

Unique design in the market that integrates fully flat into the ceiling

- › Combination with Sky Air Alpha-series ensures best in class quality, highest efficiency and performance
- › Fully flat integration in standard architectural ceiling tiles, leaving only 8mm
- › Remarkable blend of iconic design and engineering excellence with an elegant finish in white or a combination of silver and white
- › Two optional intelligent sensors improve energy efficiency and comfort
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- › Optional fresh air intake
- › Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms
- › Standard drain pump with 630mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.

FFA-A9

RZAG-A

Efficiency data		FFA + RZAG		35A9 + 35A		50A9 + 50A		60A9 + 60A		
Cooling capacity	Min./Nom./Max.	kW		1.6/3.5/4.5		1.7/5.0/6.0		1.7/6.0/6.5		
Heating capacity	Min./Nom./Max.	kW		1.40/4.00/5.00		1.50/5.80/6.00		1.60/7.00/7.50		
Space cooling	Energy efficiency class				A++		A+			
	Capacity	Pdesign	kW		3.50		5.00		6.00	
	SEER				6.40		6.30		5.80	
	Annual energy consumption		kWh/a		191		278		362	
Space heating (Average climate)	Energy efficiency class				A		A+			
	Capacity	Pdesign	kW		4.20		4.30		4.50	
	SCOP/A				3.80		4.01		4.04	
	Annual energy consumption		kWh/a		1,546		1,501		1,558	
Indoor unit		FFA		35A9		50A9		60A9		
Dimensions	Unit	HeightxWidthxDepth		mm		260x575x575				
Weight	Unit			kg		16.0		17.5		
Air filter	Type					Resin net				
Decoration panel	Model					BYFQ60C2W1W / BYFQ60C2W1S / BYFQ60B2W1 / BYFQ60B3W1				
	Colour					White (N9.5)/SILVER/White (RAL9010)/WHITE (RAL9010)				
	Dimensions	HeightxWidthxDepth	mm		46x620x620 / 46x620x620 / 55x700x700 / 55x700x700					
	Weight			kg		2.8/2.8/2.7/2.7				
Fan	Air flow rate	Cooling	Low/Medium/High	m³/min	6.5/8.5/10.0		8.6/10.9/12.7		9.5/12.5/14.5	
		Heating	Low/Medium/High	m³/min	6.5/8.5/10.0		8.6/10.9/12.7		9.5/12.5/14.5	
Sound power level	Cooling			dBA	51.0		56.0		60.0	
Sound pressure level	Cooling	Low/Medium/High		dBA	25.0/30.5/34.0		27.0/34.0/39.0		32.0/40.0/43.0	
	Heating	Low/Medium/High		dBA	25.0/30.5/34.0		27.0/34.0/39.0		32.0/40.0/43.0	
Control systems	Infrared remote control						BRC7EB530W (standard panel) / BRC7F530W (white panel) / BRC7F530S (grey panel)			
	Wired remote control						BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52			
Power supply	Phase/Frequency/Voltage				Hz/V		1~/50/220-240			
Outdoor unit		RZAG		35A		50A		60A		
Dimensions	Unit	HeightxWidthxDepth		mm		734x870x373				
Weight	Unit			kg		52				
Sound power level	Cooling			dBA	62.0		63.0		64.0	
	Heating			dBA	62.0		63.0		64.0	
Sound pressure level	Cooling	Nom.		dBA	48.0		49.0		50.0	
	Heating	Nom.		dBA	48.0		49.0		50.0	
Operation range	Cooling	Ambient	Min.~Max.	°CDB			-20~-52			
	Heating	Ambient	Min.~Max.	°CWB			-20~-24			
Refrigerant	Type/GWP						R-32/675.0			
	Charge		kg/TCO2Eq				1.55/1.05			
Piping connections	Liquid/Gas OD		mm		6.35/9.52		6.35/12.7			
	Piping length	OU - IU	Max.	m			50			
	Additional refrigerant charge		kg/m				30			
	Level difference	IU - OU	Max.	m			30.0			
Power supply	Phase/Frequency/Voltage				Hz/V		1~/50/220-240			

Contains fluorinated greenhouse gases

# Fully flat cassette

Unique design in the market that integrates fully flat into the ceiling

- › Combination with split outdoor units is ideal for small retail, offices and residential applications
- › Fully flat integration in standard architectural ceiling tiles, leaving only 8mm
- › Remarkable blend of iconic design and engineering excellence with an elegant finish in white or a combination of silver and white
- › Unified indoor unit range for R-32 and R-410A
- › Two optional intelligent sensors improve energy efficiency and comfort
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- › Optional fresh air intake
- › Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms
- › Standard drain pump with 630mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.

		FFA-A9		RXM-R		RXM-R9		RXM-A	
<b>Efficiency data</b>		<b>FFA + RXM</b>	<b>25A9 + 25R9</b>	<b>35A9 + 35R9</b>	<b>50A9 + 50A</b>			<b>60A9 + 60R</b>	
Cooling capacity	Nom.	kW	2.50	3.40	5.00			5.70	
Heating capacity	Nom.	kW	3.20	4.20	5.80			7.00	
Power input	Cooling	Nom.	kW	0.55	0.89			1.54	1.86
	Heating	Nom.	kW	0.82	1.20			1.66	2.05
Space cooling	Energy efficiency class			A++				A+	
	Capacity	Pdesign	kW	2.50	3.40			5.00	5.70
	SEER			6.17	6.38			5.98	5.76
	Annual energy consumption		kWh/a	142	186			293	346
Space heating (Average climate)	Energy efficiency class			A+				A	
	Capacity	Pdesign	kW	2.31	3.10			3.84	3.96
	SCOP/A			4.24	4.10			3.90	4.04
	Annual energy consumption		kWh/a	762	1,058			1,378	1,373
Nominal efficiency	EER			4.57	3.81			3.24	3.05
	COP			3.90	3.50			3.49	3.41
	Annual energy consumption			273	446			772	931
	Energy labeling Directive Cooling/Heating			A/A		A/B			B/B
<b>Indoor unit</b>		<b>FFA</b>	<b>25A9</b>	<b>35A9</b>	<b>50A9</b>			<b>60A9</b>	
Dimensions	Unit	HeightxWidthxDpeth	mm	260x575x575					
Weight	Unit		kg	16.0			17.5		
Air filter	Type			Resin net					
Decoration panel	Model			BYFQ60C2W1W / BYFQ60C2W1S / BYFQ60B2W1 / BYFQ60B3W1					
	Colour			White (N9.5)/SILVER/White (RAL9010)/WHITE (RAL9010)					
	Dimensions	HeightxWidthxDpeth	mm	46x620x620 / 46x620x620 / 55x700x700 / 55x700x700					
Fan	Air flow rate	Cooling	Low/Medium/High m³/min	6.5/8.0/9.0	6.5/8.5/10.0	8.6/10.9/12.7		9.5/12.5/14.5	
		Heating	Low/Medium/High m³/min	6.5/8.0/9.0	6.5/8.5/10.0	8.6/10.9/12.7		9.5/12.5/14.5	
Sound power level	Cooling		dBA	48.0	51.0	56.0		60.0	
Sound pressure level	Cooling	Low/Medium/High	dBA	25.0/28.5/31.0	25.0/30.5/34.0	27.0/34.0/39.0		32.0/40.0/43.0	
	Heating	Low/Medium/High	dBA	25.0/28.5/31.0	25.0/30.5/34.0	27.0/34.0/39.0		32.0/40.0/43.0	
Control systems	Infrared remote control			BRC7E8530W (standard panel) / BRC7F530W (white panel) / BRC7F530S (grey panel)					
	Wired remote control			BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52					
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 / 220-240					
<b>Outdoor unit</b>		<b>RXM</b>	<b>25R9</b>	<b>35R9</b>	<b>NEW 50A</b>		<b>60R</b>		
Dimensions	Unit	HeightxWidthxDpeth	mm	552x840x350		734x954x401			
Weight	Unit		kg	32			49.0		
Sound pressure level	Cooling	Nom.	dBA	46.0	49.0	49.0		48.0	
	Heating	Nom.	dBA	47.0					
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-10~-46			
	Heating	Ambient	Min.~Max.	°CWB		-15~-18			
Refrigerant	Type			R-32					
	GWP			675			675.0		
Piping connections	Charge		kg/TCO2Eq	0.76/0.52		1.15/0.780			
	Liquid	OD	mm	6.35					
Power supply	Gas	OD	mm	9.52			12.7		
	Piping length	OU - IU Max. System Chargeless	m	20			30		
	Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 10m)					
	Level difference	IU - OU Max.	m	15			20.0		
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 / 220-240					
Current - 50Hz	Maximum fuse amps (MFA)		A	13			16		



Contains fluorinated greenhouse gases

# Auto cleaning filter for concealed ceiling units

The unique automatic cleaning filter achieves higher efficiency and comfort with lower maintenance costs

## Reduce running costs

- › Automatic filter cleaning ensures low maintenance costs because the filter is always clean

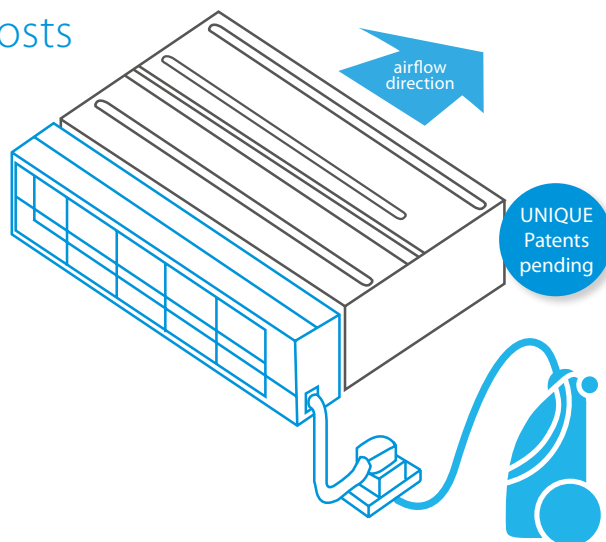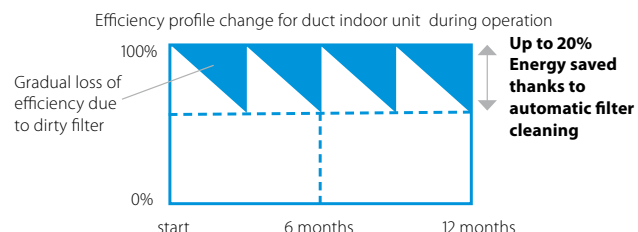

## Minimal time required for filter cleaning

- › The dust box can be emptied with a vacuum cleaner for fast and easy cleaning
- › No more dirty ceilings

## Improved indoor air quality

- › Optimum airflow eliminates draft and insulates sound

## Superb reliability

- › Prevents clogged filters for seamless operation

## Unique technology

- › Unique and innovative filter technology inspired by the Daikin auto cleaning cassette



## How does it work?

- 1 Scheduled automatic filter cleaning
- 2 Dust collects in a dust box that's integrated into the unit
- 3 The dust can easily be removed with a vacuum cleaner

## Combination table

	Split / Sky Air				VRV						
	FDXM-F9				FXDA-A/FXDQ-A3						
	25	35	50	60	15	20	25	32	40	50	63
BAE20A62	•	•			•	•	•	•			
BAE20A82									•	•	
BAE20A102			•	•							•



youtube.com/DaikinEurope



## Specifications

	BAE20A62	BAE20A82	BAE20A102
Height (mm)	210		
Width (mm)	830	1,030	1,230
Depth (mm)	188		





# Slim concealed ceiling unit

Compact concealed ceiling unit, with a height of only 200mm

- › Combination with Sky Air Alpha-series ensures best in class quality, highest efficiency and performance
- › Invisible unit as the unit is concealed in the ceiling: only the suction and discharge grilles are visible
- › Compact dimensions, can easily be mounted in a ceiling void of only 240mm
- › Medium external static pressure up to 40Pa facilitates unit use with flexible ducts of varying lengths
- › Auto cleaning filter option ensures maximum efficiency, comfort and reliability by regular filter cleaning
- › Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit
- › Onecta app (optional): control your indoor from any location with an app, via your local network or internet and keep an overview on your energy consumption

**with auto cleaning and multi zoning option**



More details and final information can be found by scanning or clicking the QR codes.

		FDXM-F9		RZAG-A						
<b>Efficiency data</b>		<b>FDXM + RZAG</b>		<b>35F9 + 35A</b>		<b>50F9 + 50A</b>		<b>60F9 + 60A</b>		
Cooling capacity	Min./Nom./Max.	kW		1.6/3.5/4.5		1.7/5.0/6.0		1.7/6.0/6.5		
Heating capacity	Min./Nom./Max.	kW		1.40/4.00/5.00		1.70/5.00/6.00		1.70/7.00/7.50		
Space cooling	Energy efficiency class					A+				
	Capacity	Pdesign	kW	3.50		5.00		6.00		
	SEER					5.90		5.70		
	Annual energy consumption			kWh/a		208		296		368
Space heating (Average climate)	Energy efficiency class					A				
	Capacity	Pdesign	kW	3.50		4.30		4.50		
	SCOP/A					3.90				
	Annual energy consumption			kWh/a		1,255		1,544		1,616
<b>Indoor unit</b>		<b>FDXM</b>		<b>35F9</b>		<b>50F9</b>		<b>60F9</b>		
Dimensions	Unit	HeightxWidthxDepth	mm		200x750x620		200x1,150x620			
Weight	Unit	kg		21		28				
Air filter	Type					Removable / washable				
Fan	Air flow rate	Cooling	Low/Medium/High	m <sup>3</sup> /min	7.3/8.0/8.7		13.3/14.6/15.8		13.5/14.8/16.0	
		Heating	Low/Medium/High	m <sup>3</sup> /min	7.3/8.0/8.7		13.3/14.6/15.8		13.5/14.8/16.0	
	External static pressure	Nom.	Pa		30		40			
Sound power level	Cooling	dBA		53.0		55.0		56.0		
	Heating	dBA		53.0		55.0		56.0		
Sound pressure level	Cooling	Low/High	dBA		27.0/35.0		30.0/38.0			
	Heating	Low/High	dBA		27.0/35.0		30.0/38.0			
Control systems	Infrared remote control					BRC4C65				
	Wired remote control					BRC1H52W/S/K, BRC1E53A/B/C, BRC1D52				
<b>Outdoor unit</b>		<b>RZAG</b>		<b>35A</b>		<b>50A</b>		<b>60A</b>		
Dimensions	Unit	HeightxWidthxDepth	mm				734x870x373			
Weight	Unit	kg				52				
Sound power level	Cooling	dBA		62.0		63.0		64.0		
	Heating	dBA		62.0		63.0		64.0		
Sound pressure level	Cooling	Nom.	dBA		48.0		49.0		50.0	
	Heating	Nom.	dBA		48.0		49.0		50.0	
Operation range	Cooling	Ambient	Min.~Max.	°CDB			-20~-52			
	Heating	Ambient	Min.~Max.	°CWB			-20~-24			
Refrigerant	Type/GWP					R-32/675.0				
	Charge			kg/TCO <sub>2</sub> Eq		1.55/1.05				
Piping connections	Liquid/Gas OD			mm		6.35/9.52		6.35/12.7		
	Piping length	OU - IU	Max.	m				50		
	System Chargeless			m				30		
	Additional refrigerant charge			kg/m		0.02 (for piping length exceeding 30m)				
	Level difference IU - OU			Max.		m		30.0		
Power supply	Phase/Frequency/Voltage			Hz/V				1~/50/220-240		

Contains fluorinated greenhouse gases

# Slim concealed ceiling unit

Compact concealed ceiling unit, with a height of only 200mm

- › Combination with split outdoor units is ideal for small retail, offices and residential applications
- › Invisible unit as the unit is concealed in the ceiling: only the suction and discharge grilles are visible
- › Compact dimensions, can easily be mounted in a ceiling void of only 240mm
- › Medium external static pressure up to 40Pa facilitates unit use with flexible ducts of varying lengths
- › Auto cleaning filter option ensures maximum efficiency, comfort and reliability by regular filter cleaning
- › Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit
- › Onecta app (optional): control your indoor from any location with an app, via your local network or internet.

with auto cleaning and multi zoning option



More details and final information can be found by scanning or clicking the QR codes.


		FDXM-F9		RXM-R		RXM-R9		RXM-A			
<b>Efficiency data</b>		FDXM + RXM		25F9 + 25R9	35F9 + 35R9	50F9 + 50A	60F9 + 60R				
Cooling capacity	Nom.	kW		1.30/2.40/3.00	1.40/3.40/3.80	1.70/5.00/5.30	1.70/6.00/6.50				
Heating capacity	Nom./Max.	kW		1.30/3.20/4.50	1.40/4.00/5.00	1.70/5.80/6.00	1.70/7.00/7.10				
Space cooling	Energy efficiency class			A+		A		A+			
	Capacity	Pdesign		kW		2.40	3.40	5.00	6.00		
	SEER			5.68		5.26		5.77			
	Annual energy consumption			kWh/a		148	226	303	378		
Space heating (Average climate)	Energy efficiency class			A+		A		A			
	Capacity	Pdesign		kW		2.60	2.90	4.00	4.60		
	SCOP/A			4.24		3.88		3.93			
	Annual energy consumption			kWh/a		858	1,046	1,424	1,693		
<b>Indoor unit</b>		FDXM		25F9	35F9	50F9	60F9				
Dimensions	Unit	HeightxWidthxDepth		mm		200x750x620		200x1,150x620			
Weight	Unit	kg		21		28					
Air filter	Type		Removable/washable								
Fan	Air flow rate	Cooling	Low/Medium/High		m <sup>3</sup> /min		7.3/8.0/8.7		13.3/14.6/15.8		
	Heating	Low/Medium/High		m <sup>3</sup> /min		7.3/8.0/8.7		13.3/14.6/15.8		13.5/14.8/16.0	
	External static pressure	Nom.		Pa		30		40			
Sound power level	Cooling	dBA		53.0		55.0		56.0			
	Heating	dBA		53.0		55.0		56.0			
Sound pressure level	Cooling	Low/High		dBA		27.0/35.0		30.0/38.0			
	Heating	Low/High		dBA		27.0/35.0		30.0/38.0			
<b>Outdoor unit</b>		RXM		25R9	35R9	50A	60R				
Dimensions	Unit	HeightxWidthxDepth		mm		552x840x350		734x954x401			
Weight	Unit	kg		32		49.0					
Sound pressure level	Cooling	Nom.		dBA		46.0		49.0			
	Heating	Nom.		dBA		47.0		49.0			
Operation range	Cooling	Ambient	Min.~Max.		°CDB		-10~46				
	Heating	Ambient	Min.~Max.		°CWB		-15~18				
Refrigerant	Type			R-32		R-32					
	GWP			675		675.0					
	Charge			kg/TCO2Eq		0.76/0.52		1.15/0.780			
Piping connections	Liquid	OD		mm		6.35					
	Gas	OD		mm		9.50		12.7			
	Piping length	OU - IU	Max.		m		20		30		
		System	Chargeless		m		10		10		
	Additional refrigerant charge			kg/m		0.02 (for piping length exceeding 10m)		0.02 (for piping length exceeding 10m)			
Level difference IU - OU			Max.		m		15		20.0		
Power supply	Phase/Frequency/Voltage			Hz/V		1~/50 /220-240		1~/50 /220-240			
Current - 50Hz	Maximum fuse amps (MFA)			A		13		16			

Contains fluorinated greenhouse gases

# Concealed ceiling unit with medium ESP

Slimmest yet most powerful medium static pressure unit on the market

- › Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge
- › Low operation sound level down to 25dBA
- › Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths
- › Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- › Discretely concealed in the ceiling: only the suction and discharge grilles are visible
- › Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit
- › Optional fresh air intake
- › Flexible installation: air suction direction can be altered from rear to bottom suction and choice between free use or connection to optional suction grilles
- › Standard built-in drain pump with 625mm lift increases flexibility and installation speed

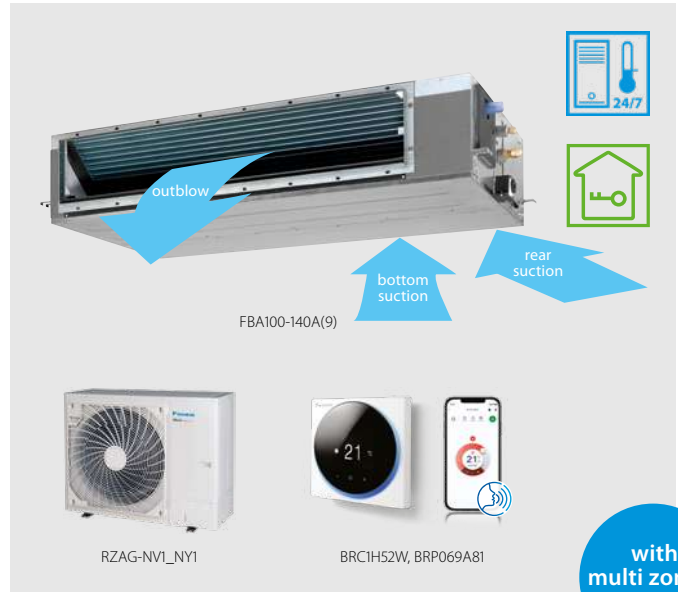

More details and final information can be found by scanning or clicking the QR codes.

FBA-A(9)

RZAG-A

RZAG-NV1

RZAG-NY1

Efficiency data			FBA + RZAG																	
			35A9+35A	50A9+50A	60A9+60A	71A9+71NV1	100A+100NV1	125A+125NV1	140A+140NV1	71A9+71NY1	100A+100NY1	125A+125NY1	140A+140NY1							
Cooling capacity	Min./Nom./Max.	kW	1.6/3.5/5.0	1.7/5.0/6.0	1.7/6.0/7.0	-/6.80/-	-/9.50/-	-/12.1/-	-/13.4/-	-/6.80/-	-/9.50/-	-/12.1/-	-/13.4/-							
Heating capacity	Min./Nom./Max.	kW	1.40/4.00/5.00	1.70/6.00/6.00	1.70/7.00/7.50	-/7.50/-	-/10.8/-	-/13.5/-	-/15.5/-	-/7.50/-	-/10.8/-	-/13.5/-	-/15.5/-							
Space cooling	Energy efficiency class		A++				-		A++				-							
	Capacity	Pdesign kW	3.50	5.00	6.00	6.80	9.50	12.1	13.4	6.80	9.50	12.1	13.4							
	SEER		6.12	6.30	6.15	6.50	6.47	6.56	6.42	6.50	6.47	6.56	6.42							
	ηs,c	%	-				259	254	-		259	254	-							
	Annual energy consumption	kWh/a	200	278	341	366	514	1,107	1,252	366	514	1,107	1,252							
Space heating (Average climate)	Energy efficiency class		A+				-		A+				-							
	Capacity	Pdesign kW	4.20	4.30	4.50	4.70	7.80	9.52		4.70	7.80	9.52								
	SCOP/A		4.10		4.20	4.36	4.37	4.34	4.20	4.36	4.37	4.34								
	ηs,h	%	-				172	171	-		172	171	-							
	Annual energy consumption	kWh/a	1,434	1,469	1,537	1,566	2,505	3,050	3,070	1,566	2,505	3,050	3,070							
Indoor unit			FBA	35A9	50A9	60A9	71A9	100A	125A	140A	71A9	100A	125A	140A						
Dimensions	Unit	HeightxWidthxDp	mm	245x700x800			245x1,000x800		245x1,400x800		245x1,000x800		245x1,400x800							
Weight	Unit		kg	28.0		35.0		46.0		35.0		46.0								
Air filter	Type		Resinnet																	
Fan	Air flow	Cooling	Low/Medium/High	m³/min			10.5/12.5/15.0		12.5/15.0/18.0		23.0/26.0/29.0		23.5/29.0/34.0		12.5/15.0/18.0		23.0/26.0/29.0		23.5/29.0/34.0	
	rate	Heating	Low/Medium/High	m³/min			10.5/12.5/15.0		12.5/15.0/18.0		23.0/26.0/29.0		23.5/29.0/34.0		12.5/15.0/18.0		23.0/26.0/29.0		23.5/29.0/34.0	
	External static pressure	Nom./High	Pa	30/150			40/150		50/150		30/150		40/150		50/150					
Sound power level	Cooling		dBA	60.0			56.0		58.0		62.0		56.0		58.0		62.0			
Sound pressure level	Cooling	Low/High	dBA	29.0/35.0			25.0/30.0		30.0/34.0		32.0/37.0		25.0/30.0		30.0/34.0		32.0/37.0			
	Heating	Low/High	dBA	29.0/37.0			25.0/31.0		30.0/36.0		32.0/38.0		25.0/31.0		30.0/36.0		32.0/38.0			
Control systems	Infrared remote control		BRC4C65 / BRC4C66																	
	Wired remote control		BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52																	
Power supply	Phase/Frequency/Voltage		Hz/V																	
Piping connections	Drain		VP20 (I.D. 20/O.D. 26)																	
Drain-up height		mm	625																	
Outdoor unit			RZAG	35A	50A	60A	71NV1	100NV1	125NV1	140NV1	71NY1	100NY1	125NY1	140NY1						
Dimensions	Unit	HeightxWidthxDp	mm	734x870x373						870x1,100x460										
Weight	Unit		kg	52			81	85	95		81	85	94							
Sound power level	Cooling		dBA	62.0	63.0	64.0	64	66	69	70	64	66	69	70						
	Heating		dBA	62.0	63.0	64.0	-	-	68	71	-	-	68	71						
Sound pressure level	Cooling	Nom.	dBA	48.0	49.0	50.0	46	47	49	50	46	47	49	50						
	Heating	Nom.	dBA	48.0	49.0	50.0	48	50	52		48	50	52							
Operation range	Cooling	Ambient	Min.~Max.	°CDB						-20 ~ 52										
	Heating	Ambient	Min.~Max.	°CWB						-20 ~ 24										
Refrigerant	Type/GWP		R-32/675.0																	
	Charge	kg/TCO2Eq	1.55/1.05			3.20/2.16		3.70/2.50		3.20/2.16		3.70/2.50								
Piping connections	Liquid/Gas OD	mm	6.35/9.52		6.35/12.7		9.52/15.9													
	Piping length	OU - IU	Max.	m		55		85		55		85								
		System	Equivalent	m		75		100		75		100								
			Chargeless	m		30		40		30		40								
		Level difference	IU - OU	Max.	m		30.0		30		30		30							
	Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 30m)																
Power supply	Phase/Frequency/Voltage		Hz/V																	
	Current - 50Hz	Maximum fuse amps (MFA)	A	-			20		32		-		16							

Contains fluorinated greenhouse gases

# Concealed ceiling unit with medium ESP

Slimmest yet most powerful medium static pressure unit on the market

- > Combination with Sky Air Advance-series ensures good value for money for all types of commercial applications
- > Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge
- > Low operation sound level down to 25dBA
- > Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths
- > Possibility to change ESP via wired remote control allows optimisation of the supply air volume




## Optimised supply air volume

Automatically selects the most appropriate fan curve to achieve the units' nominal air flow within ±10%

### Why?

After installation the real ducting will frequently differ from the initially calculated air flow resistance → the real air flow may be much lower or higher than nominal, leading to a lack of capacity or uncomfortable air temperature. Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically (10 or more fan curves are available on every model), making installation much faster



More details and final information can be found by scanning or clicking the QR codes.

- FBA-A(9)
- RZASG-MV1
- RZASG-MY1
- RZASG-MV
- RZASG-MY

Efficiency data		FBA + RZASG		71A9 + 71MV1	100A + 100MV(1)	125A + 125MV(1)	140A + 140MV(1)	100A + 100MY(1)	125A + 125MY(1)	140A + 140MY(1)
Cooling capacity	Nom.	kW		6.80	9.50	12.1	13.4	9.50	12.1	13.4
Heating capacity	Nom.	kW		7.50	10.8	13.5	15.5	10.8	13.5	15.5
Space cooling	Energy efficiency class			A++	A+	-	-	A+	-	-
	Capacity	Pdesign	kW	6.80	9.50	12.1	13.4	9.50	12.1	13.4
	SEER			6.19	5.83	5.49	5.81	5.83	5.49	5.81
	ηs,c		%	-	-	217	229	-	217	229
Annual energy consumption		kWh/a	385	570	1,322	1,384	570	1,322	1,384	
Space heating (Average climate)	Energy efficiency class			A+	A	-	-	A	-	-
	Capacity	Pdesign	kW	4.50	6.00	7.80	7.80	6.00	6.00	7.80
	SCOP/A			4.01	3.85	3.63	3.85	3.63	3.63	3.85
	ηs,h		%	-	-	142	151	-	142	151
Annual energy consumption		kWh/a	1,571	2,182	2,314	2,836	2,182	2,314	2,836	
<b>Indoor unit</b>		<b>FBA</b>		<b>71A9</b>	<b>100A</b>	<b>125A</b>	<b>140A</b>	<b>100A</b>	<b>125A</b>	<b>140A</b>
Dimensions	Unit	HeightxWidthxDepth	mm	245x1,000x800			245x1,400x800			
Weight	Unit		kg	35.0			46.0			
Air filter	Type			Resin net						
Fan	Air flow rate	Cooling	Low/Medium/High	m³/min	12.5/15.0/18.0	20.0/24.5/29.0	23.5/29.0/34.0	20.0/24.5/29.0	23.5/29.0/34.0	23.5/29.0/34.0
		Heating	Low/Medium/High	m³/min	12.5/15.0/18.0	20.0/24.5/29.0	23.5/29.0/34.0	20.0/24.5/29.0	23.5/29.0/34.0	23.5/29.0/34.0
	External static pressure	Nom.	Pa	30	40	50	40	50		
Sound power level	Cooling		dBA	56.0	58.0	62.0	58.0	62.0		
Sound pressure level	Cooling	Low/Medium/High	dBA	25.0/28.0/30.0	30.0/32.0/34.0	32.0/35.0/37.0	30.0/32.0/34.0	32.0/35.0/37.0		
	Heating	Low/Medium/High	dBA	25.0/28.0/31.0	30.0/33.0/36.0	32.0/35.0/38.0	30.0/33.0/36.0	32.0/35.0/38.0		
Control systems	Infrared remote control			BRC4C65 / BRC4C66						
	Wired remote control			BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52						
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220						
<b>Outdoor unit</b>		<b>RZASG</b>		<b>71MV1</b>	<b>100MV(1)</b>	<b>125MV(1)</b>	<b>140MV(1)</b>	<b>100MY(1)</b>	<b>125MY(1)</b>	<b>140MY(1)</b>
Dimensions	Unit	HeightxWidthxDepth	mm	770x900x320			990x940x320			
Weight	Unit		kg	60	70 (MY1) / 72 (MY)	71	73 (MV1) / 79 (MV)	70 (MY1) / 72 (MY)	71	73 (MV1) / 79 (MV)
Sound power level	Cooling		dBA	65	70	71	73	70	71	73
	Heating		dBA	-	-	71	73	-	71	73
Sound pressure level	Cooling	Nom.	dBA	46	53	54	53	53	54	
	Heating	Nom.	dBA	47	-	-	57	-	-	
Operation range	Cooling	Ambient	Min.~Max.	°CDB			-15~-46			
	Heating	Ambient	Min.~Max.	°CWB			-15~-15.5			
Refrigerant	Type/GWP			R-32/675						
	Charge		kg/TCO2Eq	2.45/1.65	2.60/1.76	2.90/1.96	2.60/1.76	2.90/1.96		
Piping connections	Liquid/Gas	OD	mm	9.52/15.9						
	Piping length	OU - IU	Max.	m			50			
		System	Equivalent	m			70			
		Chargeless	m			30				
	Additional refrigerant charge		kg/m	See installation manual						
Level difference	IU - OU	Max.	m			30.0				
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 / 220-240				3~/50 / 380-415		
Current - 50Hz	Maximum fuse amps (MFA)		A	20	25	32	16			

Contains fluorinated greenhouse gases

# Concealed ceiling unit with medium ESP

Slimmest yet most powerful medium static pressure unit on the market

- › Ideal solution for small businesses and shops
- › Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge
- › Low operation sound level down to 25dBA
- › Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths
- › Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- › Discretely concealed in the ceiling: only the suction and discharge grilles are visible
- › Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit
- › Reduced energy consumption thanks to specially developed DC fan motor
- › Optional fresh air intake
- › Flexible installation: air suction direction can be altered from rear to bottom suction and choice between free use or connection to optional suction grilles



- › Standard built-in drain pump with 625mm lift increases flexibility and installation speed

More details and final information can be found by scanning or clicking the QR codes.

		FBA-A(9)		ARXM-R		AZAS-MV		AZAS-MY		
<b>Efficiency data</b>		FBA + ARXM/AZAS		71A9 + ARXM71R	100A + AZAS100MV	125A + AZAS125MV	140A + AZAS140MV	100A + AZAS100MY	125A + AZAS125MY	140A + AZAS140MY
Cooling capacity	Nom./Max.	kW		6.80/6.98	9.50/-	12.1/-	13.4/-	9.50/-	12.1/-	13.4/-
Heating capacity	Nom./Max.	kW		7.50/7.66	10.8/-	13.5/-	15.5/-	10.8/-	13.5/-	15.5/-
Space cooling	Energy efficiency class		A							
	Capacity	Pdesign	kW	6.80	9.50	12.1	13.0	9.50	12.1	13.0
	SEER			5.57	5.7	5.2	5.7	5.7	5.2	5.7
	ηs,c		%	-	-	205	225	-	205	225
	Annual energy consumption		kWh/a	427	633	1,497	1,418	633	1,497	1,418
Space heating (Average climate)	Energy efficiency class		A							
	Capacity	Pdesign	kW	4.50	6.00	-	7.80	6.00	-	7.80
	SCOP/A			3.81	-	3.55	3.85	3.81	3.55	3.85
	ηs,h		%	-	-	139	151	-	139	151
	Annual energy consumption		kWh/a	1,652	2,205	2,366	2,836	2,205	2,366	2,836
<b>Indoor unit</b>		FBA		71A9	100A	125A	140A	100A	125A	140A
Dimensions	Unit	HeightxWidthxD	mm	245x1,000x800	245x1,400x800					
Weight	Unit		kg	35.0	46.0					
Air filter	Type	Resin net								
Fan	Air flow rate	Cooling	Low/Medium/High	m <sup>3</sup> /min	12.5/15.0/18.0	20.0/24.5/29.0	23.5/29.0/34.0	20.0/24.5/29.0	23.5/29.0/34.0	20.0/24.5/29.0
		Heating	Low/Medium/High	m <sup>3</sup> /min	12.5/15.0/18.0	20.0/24.5/29.0	23.5/29.0/34.0	20.0/24.5/29.0	23.5/29.0/34.0	20.0/24.5/29.0
	External static pressure	Nom.		Pa	30	40	50	40	50	
Sound power level	Cooling			dBA	56.0	58.0	62.0	58.0	62.0	
Sound pressure level	Cooling	Low/Medium/High		dBA	25.0/28.0/30.0	30.0/32.0/34.0	32.0/35.0/37.0	30.0/32.0/34.0	32.0/35.0/37.0	
	Heating	Low/Medium/High		dBA	25.0/28.0/31.0	30.0/33.0/36.0	32.0/35.0/38.0	30.0/33.0/36.0	32.0/35.0/38.0	
Control systems	Infrared remote control		BRC4C65 / BRC4C66							
	Wired remote control		BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52							
Power supply	Phase/Frequency/Voltage		1~/50/60/220-240/220							
<b>Outdoor unit</b>		ARXM/AZAS		ARXM71R	AZAS100MV	AZAS125MV	AZAS140MV	AZAS100MY	AZAS125MY	AZAS140MY
Dimensions	Unit	HeightxWidthxD	mm	734x954x401	990x940x320					
Weight	Unit		kg	49.0	72	79	79	72	79	
Sound power level	Cooling		dBA	-	70	71	73	70	71	73
	Heating		dBA	-	-	71	73	-	71	73
Sound pressure level	Cooling	Nom.		dBA	52.0	53	54	53	54	
	Heating	Nom.		dBA	52.0	-	57	-	57	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-	-	-10~46	-	-	
	Heating	Ambient	Min.~Max.	°CWB	-15~24	-	-15~15.5	-	-	
Refrigerant	Type/GWP		R-32/675							
	Charge		kg/TCO2Eq	1.15/0.780	2.60/1.76	2.90/1.96	2.60/1.76	2.90/1.96		
Piping connections	Liquid/Gas OD		mm	9.52/15.9						
	Piping length	OU - IU	Max.	m	-	-	-	30	-	
		System	Equivalent	m	-	-	-	50	-	
		Chargeless		m	-	-	-	30	-	
	Additional refrigerant charge		kg/m	0.035	See installation manual					
	Level difference IU - OU		Max.	m	20.0	-	30.0	-	-	
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /220-240				3~/50 /380-415		
Current - 50Hz	Maximum fuse amps (MFA)		A	-	25	32	-	16	-	

Contains fluorinated greenhouse gases

# Concealed ceiling unit with medium ESP

Slimmest yet most powerful medium static pressure unit on the market

- > Combination with split outdoor units is ideal for small retail, offices and residential applications
- > Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge
- > Low operation sound level down to 25dBA
- > Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths
- > Possibility to change ESP via wired remote control allows optimisation of the supply air volume




More details and final information can be found by scanning or clicking the QR codes.

## Optimised supply air volume

Automatically selects the most appropriate fan curve to achieve the units' nominal air flow within ±10%

### Why?

After installation the real ducting will frequently differ from the initially calculated air flow resistance → the real air flow may be much lower or higher than nominal, leading to a lack of capacity or uncomfortable air temperature. Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically (10 or more fan curves are available on every model), making installation much faster



FBA-A(9)

RXM-R

RXM-R9

RXM-A

Efficiency data		FBA + RXM	35A9 + 35R9	50A9 + 50A	60A9 + 60R
Cooling capacity	Nom.	kW	3.40	5.00	5.70
Heating capacity	Nom.	kW	4.00	5.50	7.00
Space cooling	Energy efficiency class		A++		
	Capacity	Pdesign	kW	5.00	5.70
	SEER			6.27	5.91
	Annual energy consumption		kWh/a	279	336
Space heating (Average climate)	Energy efficiency class		A+		
	Capacity	Pdesign	kW	4.40	4.60
	SCOP/A			4.06	4.01
	Annual energy consumption		kWh/a	1,517	1,607

Indoor unit			FBA	35A9	50A9	60A9
Dimensions	Unit	HeightxWidthxDepth	mm	245x700x800		245x1,000x800
Weight	Unit		kg	28.0		35.0
Air filter	Type			Resin net		
Fan	Air flow rate	Cooling	Low/Medium/High	10.5/12.5/15.0		12.5/15.0/18.0
		Heating	Low/Medium/High	10.5/12.5/15.0		12.5/15.0/18.0
	External static pressure	Nom.	Pa	30		
Sound power level	Cooling		dBA	60.0		56.0
Sound pressure level	Cooling	Low/Medium/High	dBA	29.0/32.0/35.0		25.0/28.0/30.0
	Heating	Low/Medium/High	dBA	29.0/34.0/37.0		25.0/28.0/31.0
Control systems	Infrared remote control			BRC4C65 / BRC4C66		
	Wired remote control			BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52		
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220		


Outdoor unit			RXM	35R9	NEW 50A	60R	
Dimensions	Unit	HeightxWidthxDepth	mm	552x840x350	734x954x401		
Weight	Unit		kg	32	49.0		
Sound pressure level	Cooling	Nom.	dBA	49.0	48.0		
	Heating	Nom.	dBA		49.0		
Operation range	Cooling	Ambient	Min.~Max.	-10~-46			
	Heating	Ambient	Min.~Max.	-15~-18			
Refrigerant	Type			R-32			
	GWP			675.0			
	Charge		kg/TCO2Eq	0.76/0.52	1.15/0.780		
Piping connections	Liquid	OD	mm	6.35			
	Gas	OD	mm	9.52	12.7		
	Piping length	OU - IU	Max.	20	30		
		System	Chargeless	m	10		
		Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 10m)		
	Level difference	IU - OU	Max.	15	20.0		
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /220-240			
Current - 50Hz	Maximum fuse amps (MFA)		A	13	16		

Contains fluorinated greenhouse gases

# Concealed ceiling unit with high ESP

ESP up to 200 Pa, ideal for large sized spaces

- › High external static pressure up to 200Pa facilitates extensive duct and grille network
- › Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- › Discretely concealed in the ceiling: only the suction and discharge grilles are visible
- › Built-in drain pump (625mm) increases the flexibility and installation speed (standard for FDA125, optional for FDA200-250)
- › Standard supplied suction filter simplifies installation

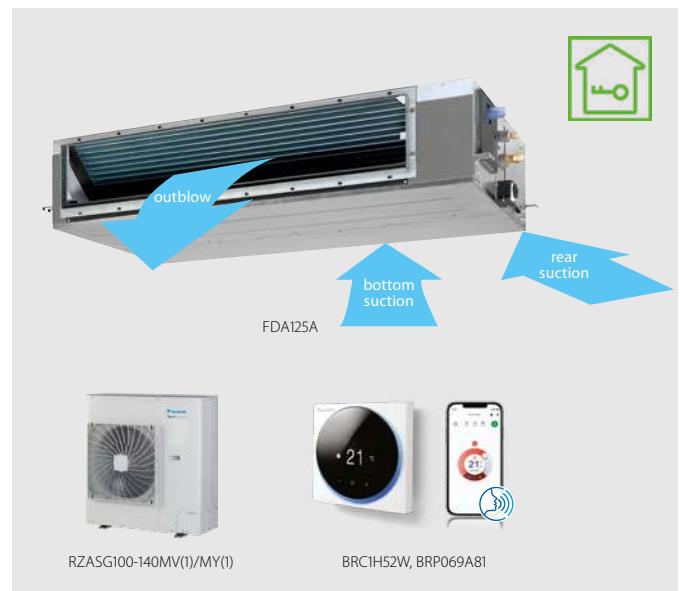

FDA-A                      RZAG-NV1                      RZAG-NY1

RZASG-MV1                      RZASG-MY1                      RZASG-MV                      RZASG-MY

More details and final information can be found by scanning or clicking the QR codes.

		Sky Air Alpha-series				Sky Air Advance-series	
Efficiency data		FDA125A+RZAG125NV1		FDA125A+RZAG125NY1		FDA125A+RZASG125MV(1) FDA125A+RZASG125MY(1)	
Cooling capacity	Nom.					12.1	
Heating capacity	Nom.					13.5	
Space cooling	Capacity	Pdesign				12.1	
	SEER			6.59		5.03	
	ηs,c			261		198	
	Annual energy consumption			1,102		1,444	
Space heating (Average climate)	Capacity	Pdesign		9.52		6.00	
	SCOP/A			4.35		3.58	
	ηs,h			171		140	
	Annual energy consumption			3,064		2,346	
<b>Indoor unit</b>		<b>FDA</b>		<b>125A</b>		<b>125A</b>	
Dimensions	Unit	HeightxWidthxDepth		mm		300x1,400x700	
Weight	Unit			kg		45	
Required ceiling void >				mm		350	
Air filter	Type					Resin net	
Decoration panel	Model					BYBS125DJW1	
	Colour					White (10Y9/0.5)	
	Dimensions	HeightxWidthxDepth		mm		55x1,500x500	
	Weight			kg		6.5	
Fan	Air flow rate	Cooling	Low/High	m³/min		28.0/39.0	
		Heating	Low/High	m³/min		28.0/39.0	
	External static pressure	Nom./High		Pa		50/200	
Sound power level	Cooling			dBA		66	
Sound pressure level	Cooling	Low/High		dBA		33/40	
	Heating	Low/High		dBA		33/40	
Control systems	Infrared remote control					BRC4C65/BRC4C66	
	Wired remote control					BRC1H52W/S/K/BRC1E53A/BRC1E53B/BRC1E53C/BRC1D52	
Power supply	Phase/Frequency/Voltage			Hz/V		1~/50/60/220-240/220	
Piping connections	Drain					VP25 (I.D. 25/O.D. 32)	
<b>Outdoor unit</b>		<b>RZAG125NV1</b>		<b>RZAG125NY1</b>		<b>RZASG125MV(1) RZASG125MY(1)</b>	
Dimensions	Unit	HeightxWidthxDepth		mm		870x1,100x460	
Weight	Unit			kg		95                      94	
Sound power level	Cooling			dBA		69                      68	
	Heating			dBA		68                      -	
Sound pressure level	Cooling	Nom.		dBA		49                      54	
	Heating	Nom.		dBA		52                      58	
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-20~-52                      -15~-46	
	Heating	Ambient	Min.~Max.	°CWB		-20~-18                      -15~-15.5	
Refrigerant	Type/GWP					R-32/675                      R-32/675	
	Charge			kg/TCO2Eq		3.70/2.50                      2.60/1.76	
Piping connections	Liquid/Gas OD			mm		9.52/15.9                      9.52/15.9	
	Piping length	OU - IU	Max.	m		85                      50	
		System	Equivalent	m		100                      70	
			Chargeless	m		40                      30	
		Level difference IU - OU	Max.		m		30                      30.0
	Additional refrigerant charge			kg/m		See installation manual                      See installation manual	
Power supply	Phase/Frequency/Voltage			Hz/V		1~/50/220-240                      3~/50/380-415	
Current - 50Hz	Maximum fuse amps (MFA)			A		32                      16                      32                      16	

Contains fluorinated greenhouse gases



# Concealed ceiling unit with high ESP

ESP up to 250 Pa, ideal for large sized spaces

- › High external static pressure up to 250Pa facilitates extensive duct and grille network
- › Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- › Discretely concealed in the ceiling: only the suction and discharge grilles are visible
- › Optional drain pump
- › Standard supplied suction filter simplifies installation
- › Up to 26.4kW in heating mode



More details and final information can be found by scanning or clicking the QR codes.

FDA-A

RZA-D

Efficiency data				FDA + RZA	200A + 200D	250A + 250D
Cooling capacity	Min./Nom./Max.		kW		-/19.0/-	-/22.0/-
Heating capacity	Min./Nom./Max.		kW		-/22.4/-	-/24.0/-
Space cooling	Capacity	Pdesign	kW		19.0	22.0
	SEER				6.26	5.38
	ηs,c		%		247	212
	Annual energy consumption		kWh/a		1,821	2,455
Space heating (Average climate)	Capacity	Pdesign	kW		11.2	12.1
	SCOP/A				3.59	3.55
	ηs,h		%		141	139
	Annual energy consumption		kWh/a		4,368	4,765
Indoor unit				FDA	200A	250A
Dimensions	Unit	HeightxWidthxDepth		mm	470x1,490x1,100	
Weight	Unit			kg	104	115
Air filter	Type		Resinnet			
Fan	Air flow rate	Cooling	Low/Medium/High	m³/min	36.0/50/64.0	
		Heating	Low/Medium/High	m³/min	36.0/50.0/64.0	
	External static pressure	Nom./High	Pa	62/250		
Sound power level	Cooling			dBA	69.0	71.0
Sound pressure level	Cooling	Low / Medium / High		dBA	36.0/39.0/43.0	
	Heating	Low / Medium / High		dBA	36.0/39.0/43.0	
Control systems	Wired remote control		BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52			
Piping connections	Drain		BSP1			
Outdoor unit				RZA	200D	250D
Dimensions	Unit	HeightxWidthxDepth		mm	870x1,100x460	
Weight	Unit			kg	117	
Sound power level	Cooling			dBA	73	76
	Heating			dBA	76	79
Sound pressure level	Cooling	Nom.		dBA	53	57
	Heating	Nom.		dBA	60	63
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20~46	
	Heating	Ambient	Min.~Max.	°CWB	-20~15	
Refrigerant	Type/GWP		R-32/675			
	Charge			kg/TCO2Eq	5/3.38	
Piping connections	Liquid/Gas OD		mm			
	Piping length	OU - IU	Max.	m	100	
	System Chargeless		m			
	Additional refrigerant charge		kg/m			
Power supply	Phase/Frequency/Voltage		Hz/V			
Current - 50Hz	Maximum fuse amps (MFA)		A			

Contains fluorinated greenhouse gases

# Concealed ceiling unit

Ideal for residential applications with false ceilings

- › Combination with split outdoor units is ideal for small retail, offices or residential applications
- › Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge
- › Low operation sound level down to 25dBA
- › Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths
- › Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- › Discretely concealed in the ceiling: only the suction and discharge grilles are visible
- › Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit




## Optimised supply air volume

Automatically selects the most appropriate fan curve to achieve the units' nominal air flow within ±10%

### Why?

After installation the real ducting will frequently differ from the initially calculated air flow resistance → the real air flow may be much lower or higher than nominal, leading to a lack of capacity or uncomfortable air temperature. Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically (10 or more fan curves are available on every model), making installation much faster



More details and final information can be found by scanning or clicking the QR codes.



ADEA-A

ARXM-R

AZAS-MV

Efficiency data		ADEA + ARXM / AZAS		71A + ARXM71R		100A + AZAS100MV		125A + AZAS125MV			
Cooling capacity	Nom.	kW		6.80/6.98		9.50		12.10			
Heating capacity	Nom.	kW		7.50/7.66		10.80		13.50			
Space cooling	Energy efficiency class		A		A		-				
	Capacity	Pdesign	kW		6.80		9.50		12.10		
	SEER		5.35		5.13		4.73				
	ηs,c		445		-		186				
Space heating (Average climate)	Energy efficiency class		A		A		-				
	Capacity	Pdesign	kW		3.80		6.00		-		
	SCOP/A		2,209		3.81		3.50				
	ηs,h		%		-		137				
Annual energy consumption		kWh/a		2,206		2,399					
Indoor unit		ADEA		71A		100A		125A			
Dimensions	Unit	HeightxWidthxDPTH		mm		245x1,000x800		245x1,400x800			
Weight	Unit	kg		35.0		46.0					
Air filter	Type					Resin net					
Fan	Air flow rate	Cooling	Low/Medium/High	m³/min		12.5/15.0/18.0		23.0/26.0/29.0		23.5/29.0/34.0	
		Heating	Low/Medium/High	m³/min		12.5/15.0/18.0		23.0/26.0/29.0		23.5/29.0/34.0	
	External static pressure	Nom./High	Pa		30/150		40/150		50/150		
Sound power level	Cooling	dBA		56		58		62			
Sound pressure level	Cooling	Low/Medium/High	dBA		25/28/30		30/32/34		32/35/37		
	Heating	Low/Medium/High	dBA		25/28/31		30/33/36		32/35/38		
Control systems	Infrared remote control						BRC4C65 / BRC4C66				
	Wired remote control						BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52				
Power supply	Phase/Frequency/Voltage	Hz/V				1~/50 /220-240/220					
Outdoor unit		ARXM / AZAS		ARXM71R		AZAS100MV		AZAS125MV			
Dimensions	Unit	HeightxWidthxDPTH		mm		734x954x401		990x940x320			
Weight	Unit	kg		49.0		72		71			
Sound power level	Cooling	dBA		-		70		71			
	Heating	dBA		-		-		71			
Sound pressure level	Cooling	Nom.	dBA		52.0		53				
	Heating	Nom.	dBA		52.0		57				
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-10 ~46		-15 ~15.5			
	Heating	Ambient	Min.~Max.	°CWB		-15~-24					
Refrigerant	Type/GWP					R-32/675					
Piping connections	Charge	kg/TCO2Eq		1.15/0.780		2.60/1.76					
	Liquid/Gas OD	mm				9.52/15.9					
Piping length	Piping	OU - IU	Max.	m		30		50			
	System	Equivalent	m		-		30				
	Chargeless	m		-		30					
	Additional refrigerant charge	kg/m		0.035 (for piping length exceeding 10m)		See installation manual		30.0			
Power supply	Phase/Frequency/Voltage	Hz/V				1~/50 /220-240					
Current - 50Hz	Maximum fuse amps (MFA)	A		-		25		32			

Contains fluorinated greenhouse gases

# Wall mounted unit

For rooms with no false ceilings nor free floor space

- › Combination with Sky Air Alpha-series ensures best in class quality, highest efficiency and performance
- › Flat, stylish front panel blends easily within any interior décor and is easier to clean
- › Can easily be installed in both new and refurbishment projects
- › The air is comfortably spread up- and downwards thanks to 5 different discharge angles that can be programmed via the remote control
- › Maintenance operations can be performed easily from the front of the unit
- › Flexible to install as the largest casing only weighs 17kg and piping connection can be done at the bottom, left or right of the unit



More details and final information can be found by scanning or clicking the QR codes.

FAA-B

RZAG-NV1

RZAG-NY1

Efficiency data		FAA + RZAG	71B + 71NV1	100B + 100NV1	71B + 71NY1	100B + 100NY1		
Cooling capacity	Nom.	kW	6.80	9.50	6.80	9.50		
Heating capacity	Nom.	kW	7.50	10.80	7.50	10.80		
Space cooling	Energy efficiency class		A++					
	Capacity	Pdesign	kW	6.80	9.50	6.80	9.50	
	SEER			6.58	6.42	6.58	6.42	
	Annual energy consumption		kWh/a	362	518	362	518	
Space heating (Average climate)	Energy efficiency class		A+					
	Capacity	Pdesign	kW	4.70	7.80	4.70	7.80	
	SCOP/A			4.20	4.01	4.20	4.01	
	Annual energy consumption		kWh/a	1,567	2,725	1,567	2,725	
Indoor unit		FAA	71B	100B	71B	100B		
Dimensions	Unit	HeightxWidthxDepth	mm	290x1,050x269	340x1,200x262	290x1,050x269	340x1,200x262	
Weight	Unit		kg	14.0	18	14.0	18	
Fan	Air flow rate	Cooling	Low/Medium/High	m <sup>3</sup> /min	12.1/13.4/16.2	18.7/21.1/23.0	12.1/13.4/16.2	18.7/21.1/23.0
		Heating	Low/Medium/High	m <sup>3</sup> /min	12.7/14.2/16.9	18.7/20.9/23.0	12.7/14.2/16.9	18.7/20.9/23.0
Sound power level	Cooling		dBA	61.0	65.0	61.0	65.0	
	Heating		dBA	61.0	65.0	61.0	65.0	
Sound pressure level	Cooling	Low/Medium/High	dBA	40.0/42.0/45.0	41.0/45.0/49.0	40.0/42.0/45.0	41.0/45.0/49.0	
	Heating	Low/Medium/High	dBA	40.0/42.0/45.0	41.0/45.0/49.0	40.0/42.0/45.0	41.0/45.0/49.0	
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-240				
Outdoor unit		RZAG	71NV1	100NV1	71NY1	100NY1		
Dimensions	Unit	HeightxWidthxDepth	mm	870x1,100x460				
Weight	Unit		kg	81	85	81	85	
Sound power level	Cooling		dBA	64	66	64	66	
Sound pressure level	Cooling	Nom.	dBA	46	47	46	47	
	Heating	Nom.	dBA	48	50	48	50	
Operation range	Cooling	Ambient	Min.~Max.	°CDB				
	Heating	Ambient	Min.~Max.	°CWB				
Refrigerant	Type/GWP		R-32/675					
	Charge		kg/TCO2Eq	3.20/2.16				
Piping connections	Liquid/Gas OD		mm	9.52/15.9				
	Piping length	OU - IU	Max.	m	55	85	55	85
		System	Equivalent	m	75	100	75	100
	Chargeless			m	40			
	Additional refrigerant charge		kg/m	See installation manual				
Level difference IU - OU		Max.	m	30				
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-240		3~/50/380-415		
Current - 50Hz	Maximum fuse amps (MFA)		A	20		32	16	

Contains fluorinated greenhouse gases

# Wall mounted unit

For rooms with no false ceilings nor free floor space

- › Combination with Sky Air Advance-series ensures good value for money for all types of commercial applications
- › Flat, stylish front panel blends easily within any interior décor and is easier to clean
- › Can easily be installed in both new and refurbishment projects
- › The air is comfortably spread up- and downwards thanks to 5 different discharge angles that can be programmed via the remote control
- › Maintenance operations can be performed easily from the front of the unit
- › Flexible to install as the largest casing only weighs 17kg and piping connection can be done at the bottom, left or right of the unit



More details and final information can be found by scanning or clicking the QR codes.

FAA-B

RZASG-MV1

RZASG-MY1

RZASG-MV

RZASG-MY

Efficiency data		FAA + RZASG		71B + 71MV1		100B + 100MV(1)		100B + 100MY(1)		
Cooling capacity	Nom.	kW		6.80		9.50				
Heating capacity	Nom.	kW		7.50		10.8				
Space cooling	Energy efficiency class			A++		A+				
	Capacity	Pdesign	kW		6.80		9.50			
	SEER			6.41		5.83				
	ηs,c			%		-				
Annual energy consumption		kWh/a		371		570				
Space heating (Average climate)	Energy efficiency class			A		-				
	Capacity	Pdesign	kW		4.50		6.00			
	SCOP/A			3.90		3.85				
	ηs,h			%		-				
Annual energy consumption		kWh/a		1,615		2,182				
Indoor unit		FAA		71B		100B		100B		
Dimensions	Unit	HeightxWidthxDepth		mm		290x1,050x269		340x1,200x262		
Weight	Unit	kg		14.0		18				
Fan	Air flow rate	Cooling	Low/Medium/High	m <sup>3</sup> /min		12.1/13.4/16.2		18.7/21.1/23.0		
		Heating	Low/Medium/High	m <sup>3</sup> /min		12.7/14.2/16.9		18.7/20.9/23.0		
Sound power level	Cooling	dBA		61.0		65.0				
	Heating	dBA		61.0		65.0				
Sound pressure level	Cooling	Low/Medium/High		dBA		40.0/42.0/45.0		41.0/45.0/49.0		
	Heating	Low/Medium/High		dBA		40.0/42.0/45.0		41.0/45.0/49.0		
Power supply	Phase/Frequency/Voltage			Hz/V		1~/50 /220-240				
Outdoor unit		RZASG		71MV1		100MV(1)		100MY(1)		
Dimensions	Unit	HeightxWidthxDepth		mm		770x900x320		990x940x320		
Weight	Unit	kg		60		70 (MV1/MY1) / 72 (MV/MY)				
Sound power level	Cooling	dBA		65		70				
Sound pressure level	Cooling	Nom.		dBA		46		53		
	Heating	Nom.		dBA		47		57		
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-15~46				
	Heating	Ambient	Min.~Max.	°CWB		-15~-15.5				
Refrigerant	Type/GWP			R-32/675						
	Charge	kg/TCO2Eq		2.45/1.65		2.60/1.76				
Piping connections	Liquid/ Gas	OD		mm		9.52/15.9				
	Piping length	OU - IU	Max.		m		50			
		System	Equivalent		m		70			
		Chargeless		m		30				
	Additional refrigerant charge		kg/m		See installation manual					
Level difference	IU - OU	Max.		m		30.0				
Power supply	Phase/Frequency/Voltage			Hz/V		1~/50 /220-240		3~/50 /380-415		
Current - 50Hz	Maximum fuse amps (MFA)			A		20		25		
								16		

Contains fluorinated greenhouse gases

# Wall mounted unit

For rooms with no false ceilings nor free floor space

- › Ideal solution for small businesses and shops
- › Flat, stylish front panel blends easily within any interior décor and is easier to clean
- › Can easily be installed in both new and refurbishment projects
- › The air is comfortably spread up- and downwards thanks to 5 different discharge angles that can be programmed via the remote control
- › Maintenance operations can be performed easily from the front of the unit
- › Flexible to install as the largest casing only weighs 17kg and piping connection can be done at the bottom, left or right of the unit



More details and final information can be found by scanning or clicking the QR codes.

FAA-B

ARXM-R

AZAS-MV

AZAS-MY

Efficiency data		FAA + ARXM/AZAS		71B + ARXM71R		100B + AZAS100MV		100B + AZAS100MY			
Cooling capacity	Nom./Max.	kW		6.80/6.95				9.50 /-			
Heating capacity	Nom./Max.	kW		7.50/7.59				10.8 /-			
Space cooling	Energy efficiency class			A+				A			
	Capacity	Pdesign	kW		6.80				9.50		
	SEER			5.77				5.25			
	Annual energy consumption			kWh/a		412				633	
Space heating (Average climate)	Energy efficiency class					A					
	Capacity	Pdesign	kW		4.50				6.00		
	SCOP/A			3.81						3.81	
	Annual energy consumption			kWh/a		1,652				2,205	
Indoor unit		FAA		71B		100B		100B			
Dimensions	Unit	HeightxWidthxDPTH		mm		290x1,050x269		340x1,200x262			
Weight	Unit	kg		14.0				18			
Fan	Air flow rate	Cooling	Low/Medium/High	m <sup>3</sup> /min		12.1/13.4/16.2		18.7/21.1/23.0			
		Heating	Low/Medium/High	m <sup>3</sup> /min		12.7/14.2/16.9		18.7/20.9/23.0			
Sound power level	Cooling	dBA		61.0				65.0			
	Heating	dBA		61.0				65.0			
Sound pressure level	Cooling	Low/Medium/High		dBA		40.0/42.0/45.0		41.0/45.0/49.0			
	Heating	Low/Medium/High		dBA		40.0/42.0/45.0		41.0/45.0/49.0			
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50 /220-240				1~/50 /220-240		
Outdoor unit		ARXM/AZAS		ARXM71R		AZAS100MV		AZAS100MY			
Dimensions	Unit	HeightxWidthxDPTH		mm		734x954x401		990x940x320			
Weight	Unit	kg		49.0				72			
Sound power level	Cooling	dBA		-				70			
Sound pressure level	Cooling	Nom.		dBA		52.0		53			
	Heating	Nom.		dBA		52.0		57			
Operation range	Cooling	Ambient	Min.~Max.	°CDB				-10~46			
	Heating	Ambient	Min.~Max.	°CWB		-15~24		-15~15.5			
Refrigerant	Type/GWP					R-32/675					
	Charge	kg/TCO2Eq		1.15/0.780				2.60/1.76			
Piping connections	Liquid/ Gas	OD		mm		9.52/15.9					
	Piping length	OU - IU	Max.	m		30					
		System	Equivalent	m		-		50			
	Chargeless			m		-		30			
	Additional refrigerant charge			kg/m		0.035 (for piping length exceeding 10m)		See installation manual			
Level difference	IU - OU	Max.		m		20.0		30.0			
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50 /220-240				3~/50 /380-415		
Current - 50Hz	Maximum fuse amps (MFA)		A		-		25		16		

Contains fluorinated greenhouse gases

## Wall mounted unit

Attractive, wall mounted design with perfect indoor air quality

- › Combination with Sky Air Alpha-series ensures best in class quality, highest efficiency and performance
- › Seasonal efficiency values up to A+++ in cooling and heating
- › Practically inaudible: the unit runs so quietly, you will almost forget it is there
- › Cleaner air thanks to Daikin's Flash Streamer technology: you can breathe deep with no worries about impure air
- › 2-area motion detection sensor: air flow is sent to a zone other than where the person is located at that moment; if no people are detected, the unit will automatically switch over to the energy-efficient setting. (larger capacity area)
- › Onecta app: control your indoor from any location with an app, via your local network or internet
- › Sleek, unobtrusive air conditioning unit that matches European sensibilities regarding interior design
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces



More details and final information can be found by scanning or clicking the QR codes.



FTXM-R

RZAG-A


Efficiency data		FTXM + RZAG		35R + 35A		50R + 50A		60R + 60A			
Cooling capacity	Min./Nom./Max.	kW		1.6/3.5/5.0		1.7/5.0/6.0		1.7/6.0/6.8			
Heating capacity	Min./Nom./Max.	kW		1.40/4.00/5.30		1.50/6.00/6.50		1.60/7.00/7.50			
Space cooling	Energy efficiency class					A++					
	Capacity	Pdesign	kW	3.50		5.00		6.00			
	SEER			7.70		7.41		6.90			
	Annual energy consumption			kWh/a		159		236			
Space heating (Average climate)	Energy efficiency class					A++		A+			
	Capacity	Pdesign	kW	2.60		4.50		4.60			
	SCOP/A			7.90		4.60		4.35			
	Annual energy consumption			kWh/a		790		1,369			
<b>Indoor unit</b>		<b>FTXM</b>		<b>35R</b>		<b>50R</b>		<b>60R</b>			
Dimensions	Unit	HeightxWidthxDepth		mm		295x778x272		299x998x292			
Weight	Unit	kg		10.0		14.5					
Air filter	Type		Removable/washable								
Fan	Air flow rate	Cooling	Silent operation/Low/Medium/High	m <sup>3</sup> /min	4.2/6.0/7.8/11.3		8.3/11.4/14/15.8		9.1/11.8/14/16.7		
		Heating	Silent operation/Low/Medium/High	m <sup>3</sup> /min	4.9/6.5/8.5/9.8		10.5/12.0/14.2/15.8		11.1/12.4/15.2/16.5		
Sound power level	Cooling	dBA		58		58.0		60.0			
	Heating	dBA		54		58.0		59.0			
Sound pressure level	Cooling	Silent operation/Low/High		dBA		19/29/45		27.0/36.0/44.0		30.0/37.0/46.0	
	Heating	Silent operation/Low/High		dBA		20/28/39		31.0/34.0/43.0		33.0/36.0/45.0	
Control systems	Infrared remote control					ARC466A67					
	Wired remote control					BRC073A1					
<b>Outdoor unit</b>		<b>RZAG</b>		<b>35A</b>		<b>50A</b>		<b>60A</b>			
Dimensions	Unit	HeightxWidthxDepth		mm		734x870x373					
Weight	Unit	kg		52							
Sound power level	Cooling	dBA		62.0		63.0		64.0			
	Heating	dBA		62.0		63.0		64.0			
Sound pressure level	Cooling	Nom.	dBA		48.0		49.0		50.0		
	Heating	Nom.	dBA		48.0		49.0		50.0		
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-20~-52					
	Heating	Ambient	Min.~Max.	°CWB		-20~-24					
Refrigerant	Type/GWP					R-32/675.0					
	Charge			kg/TCO2Eq		1.55/1.05					
Piping connections	OD		mm		6.35/9.52		6.35/12.7				
	Piping length	OU - IU	Max.		m		50				
		System	Chargeless		m		30				
	Additional refrigerant charge			kg/m		0.02 (for piping length exceeding 30m)					
	Level difference IU - OU		Max.		m		30.0				
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50/220-240						

Contains fluorinated greenhouse gases


# Ceiling suspended unit

For wide rooms with no false ceilings nor free floor space

- › Combining with Sky Air Advance-series ensures good value for money for all types of commercial applications
- › Ideal for comfortable air flow in wide rooms thanks to Coanda effect: up to 100° discharge angle



- › Even rooms with ceilings up to 3.8m can be heated up or cooled down very easily without capacity loss
- › Can easily be installed in both new and refurbishment projects
- › Can easily be mounted in corners and narrow spaces, as it only needs 30mm lateral service space



- › Reduced energy consumption thanks to specially developed DC fan motor
- › 5 different fan speeds available for maximum comfort



More details and final information can be found by scanning or clicking the QR codes.

FHA-A(9)

RZAG-A

RZAG-NV1

RZAG-NY1

Efficiency data		FHA + RZAG															
		35A9+35A	50A9+50A	60A9+60A	71A9+71NV1	100A+100NV1	125A+125NV1	140A+140NV1	71A9+71NY1	100A+100NY1	125A+125NY1	140A+140NY1					
Cooling capacity	Min./Nom./Max.	kW		170/350/450	170/500/600	190/600/680	-/6.80/-	-/9.50/-	-/12.1/-	-/13.4/-	-/6.80/-	-/9.50/-	-/12.1/-	-/13.4/-			
Heating capacity	Min./Nom./Max.	kW		140/400/550	170/580/650	170/700/750	-/7.50/-	-/10.8/-	-/13.5/-	-/15.5/-	-/7.50/-	-/10.8/-	-/13.5/-	-/15.5/-			
Space cooling	Energy efficiency class	A++															
	Capacity	Pdesign	kW		3.50	5.00	6.00	6.80	9.50	12.1	13.4	6.80	9.50	12.1	13.4		
	SEER			6.40	6.80	6.60	7.11	6.42	7.14	6.42	7.11	6.42	7.14	6.42			
	ηs,c	%				-	-	-	283	254	-	283	254				
	Annual energy consumption	kWh/a		191	257	318	335	518	1,017	1,253	335	518	1,017	1,253			
Space heating (Average climate)	Energy efficiency class	A+															
	Capacity	Pdesign	kW		3.10	4.00	4.60	4.70	7.80	9.52		4.70	7.80	9.52			
	SCOP/A			4.10	4.30	4.20	4.32	4.61	4.20	4.30	4.32	4.61	4.20	4.30			
	ηs,h	%				-	-	-	165	169	-	165	169				
	Annual energy consumption	kWh/a		1,058	1,302	1,633	1,523	2,369	3,174	3,100	1,523	2,369	3,174	3,100			
Indoor unit		FHA															
Dimensions	Unit	HeightxWidthxDepth	mm														
Weight	Unit	kg															
Air filter	Type	Resinnet															
Fan	Air flow rate	Cooling	Low/Medium/High	m³/min			10.0/11.5/14.0	10.0/12.0/15.0	11.5/15.0/19.5	14.0/17.0/20.5	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0	14.0/17.0/20.5	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0
	Heating	Low/Medium/High	m³/min			10.0/11.5/14.0	10.0/12.0/15.0	11.5/15.0/19.5	14.0/17.0/20.5	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0	14.0/17.0/20.5	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0	
Sound power level	Cooling			dB(A)	53.0	54.0	55.0	60.0	62.0	64.0	55.0	60.0	62.0	64.0			
	Heating			dB(A)	53.0	54.0	55.0	60.0	62.0	64.0	55.0	60.0	62.0	64.0			
Sound pressure level	Cooling	Low/High	dB(A)		31.0/36.0	32.0/37.0	33.0/37.0	34.0/38.0	34.0/42.0	37.0/44.0	38.0/46.0	34.0/38.0	34.0/42.0	37.0/44.0	38.0/46.0		
	Heating	Nom./High	dB(A)		34.0/36.0	35.0/37.0	36.0/38.0	38.0/42.0	41.0/44.0	42.0/46.0	36.0/38.0	38.0/42.0	41.0/44.0	42.0/46.0			
Control systems	Infrared remote control	BRC7GA53-9 / BRC7GA56															
	Wired remote control	BRC1D528 / BRC1H51(9)W/S/K7 / BRC1H52W/S/K / BRC1H81W7 / BRC1H81S7 / BRC1E53A/B/C7 / BRC1H82W/S/K															
Power supply	Phase/Frequency/Voltage	Hz/V															
Piping connections	Drain	VP20															
Outdoor unit		RZAG															
Dimensions	Unit	HeightxWidthxDepth	mm														
Weight	Unit	kg															
Sound power level	Cooling			dB(A)	62.0	63.0	64.0	64	66	69	70	64	66	69	70		
	Heating			dB(A)	62.0	63.0	64.0	-	-	68	71	-	-	68	71		
Sound pressure level	Cooling	Nom.	dB(A)		48.0	49.0	50.0	46	47	49	50	46	47	49	50		
	Heating	Nom.	dB(A)		48.0	49.0	50.0	48	50	52	48	50	52				
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-20 ~ 52				-20 ~ 52							
	Heating	Ambient	Min.~Max.	°CWB		-20 ~ 24				-20 ~ 18							
Refrigerant	Type/GWP	R-32/675.0															
	Charge	kg/TCO2Eq		1.55/1.05			3.20/2.16		3.70/2.50		3.20/2.16		3.70/2.50				
Piping connections	Liquid/Gas OD	mm		6.35/9.50			6.35/12.7			10/15.9							
	Piping length	OU - IU	Max.	m		50		55		85		85					
	System	Equivalent	m		-		75		100		100						
	Chargeless	m		30			40										
	Level difference	IU - OU	Max.	m		30.0			30								
Additional refrigerant charge	kg/m		0.02 (for piping length exceeding 30m)			See installation manual											
Power supply	Phase/Frequency/Voltage	Hz/V															
Current - 50Hz	Maximum fuse amps (MFA)	A		-			20		32		16						

Contains fluorinated greenhouse gases

# Ceiling suspended unit

For wide rooms with no false ceilings nor free floor space

- › Combination with Sky Air Advance-series ensures good value for money for all types of commercial applications
- › Ideal for comfortable air flow in wide rooms thanks to Coanda effect: up to 100° discharge angle
- › Even rooms with ceilings up to 3.8m can be heated up or cooled down very easily without capacity loss
- › Can easily be installed in both new and refurbishment projects
- › Can easily be mounted in corners and narrow spaces, as it only needs 30mm lateral service space
- › 5 different fan speeds available for maximum comfort
- › Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating and there are no air intake grilles visible



More details and final information can be found by scanning or clicking the QR codes.

		FHA-A(9)	RZASG-MV1		RZASG-MY1		RZASG-MV		RZASG-MY			
<b>Efficiency data</b>		<b>FHA + RZASG 71A9 + 71MV1</b>		<b>100A + 100MV(1)</b>	<b>125A + 125MV(1)</b>	<b>140A + 140MV(1)</b>	<b>100A + 100MY(1)</b>	<b>125A + 125MY(1)</b>	<b>140A + 140MY(1)</b>			
Cooling capacity	Nom.	kW		6.80	9.50	12.1	13.4	9.50	12.1	13.4		
Heating capacity	Nom.	kW		7.50	10.8	13.5	15.5	10.8	13.5	15.5		
Space cooling	Energy efficiency class			A+		-		A+		-		
	Capacity	Pdesign		kW		6.80	9.50	12.1	13.4	9.50	12.1	13.4
	SEER			5.95		5.83		5.83		5.88		
	ηs,c			%		-		230		232		
	Annual energy consumption			kWh/a		400	570	1,246	1,368	570	1,246	1,368
Space heating (Average climate)	Energy efficiency class			A		-		A		-		
	Capacity	Pdesign		kW		4.50	6.00	7.80	6.00	7.80		
	SCOP/A			3.90		3.91		3.83		3.81		
	ηs,h			%		-		150		149		
	Annual energy consumption			kWh/a		1,616	2,148	2,193	2,866	2,148	2,193	2,866
<b>Indoor unit</b>		<b>FHA 71A9</b>		<b>100A</b>	<b>125A</b>	<b>140A</b>	<b>100A</b>	<b>125A</b>	<b>140A</b>			
Dimensions	Unit	HeightxWidthxDepth		mm		235x1,270x690		235x1,590x690				
Weight	Unit	kg		34		41						
Air filter	Type			Resin net								
Fan	Air flow rate	Cooling	Low/Medium/High	m³/min	14.0/17.0/20.5	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0	
		Heating	Low/Medium/High	m³/min	14.0/17.0/20.5	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0	
Sound power level	Cooling		dBA		55.0	60.0	62.0	64.0	60.0	62.0	64.0	
	Heating		dBA		55.0	60.0	62.0	64.0	60.0	62.0	64.0	
Sound pressure level	Cooling	Low/High	dBA		34.0/38.0	34.0/42.0	37.0/44.0	38.0/46.0	34.0/42.0	37.0/44.0	38.0/46.0	
	Heating	Nom./High	dBA		36.0/38.0	38.0/42.0	41.0/44.0	42.0/46.0	38.0/42.0	41.0/44.0	42.0/46.0	
Control systems	Infrared remote control			BRC7GA53-9 / BRC7GA56								
	Wired remote control			BRC1H52W/S/K; BRC1E53A; BRC1E53B; BRC1E53C; BRC1D52								
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50/60/220-240/220							
Piping connections	Drain			VP20								
<b>Outdoor unit</b>		<b>RZASG 71MV1</b>		<b>100MV(1)</b>	<b>125MV(1)</b>	<b>140MV(1)</b>	<b>100MY(1)</b>	<b>125MY(1)</b>	<b>140MY(1)</b>			
Dimensions	Unit	HeightxWidthxDepth		mm		770x900x320		990x940x320				
Weight	Unit	kg		60		70 (MY1) / 72 (MY)		78 (MV1) / 79 (MV)		70 (MY1) / 72 (MY) / 78 (MV1) / 79 (MV)		
Sound power level	Cooling		dBA		65	70	71	73	70	71	73	
	Heating		dBA		-	71	73	-	71	73		
Sound pressure level	Cooling	Nom.	dBA		46	53	54	53	54			
	Heating	Nom.	dBA		47	57	57	57	54			
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-15~-46						
	Heating	Ambient	Min.~Max.	°CWB		-15~-15.5						
Refrigerant	Type/GWP			R-32/675								
	Charge	kg/TCO2Eq		2.45/1.65	2.60/1.76	2.90/1.96	2.60/1.76	2.90/1.96				
Piping connections	Liquid/ Gas	OD		mm		9.52/15.9						
	Piping length	OU - IU	Max.	m		50						
		System	Equivalent	m		70						
			Chargeless	m		30						
	Level difference	IU - OU	Max.	m		30.0						
Additional refrigerant charge			kg/m		See installation manual							
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50 /220-240				3~/50 /380-415			
Current - 50Hz	Maximum fuse amps (MFA)			A		20	25	32	16			

Contains fluorinated greenhouse gases



# Ceiling suspended unit

For wide rooms with no false ceilings nor free floor space

- › Ideal solution for small businesses and shops
- › Ideal for comfortable air flow in wide rooms thanks to Coanda effect: up to 100° discharge angle
- › Even rooms with ceilings up to 3.8m can be heated up or cooled down very easily without capacity loss
- › Can easily be installed in both new and refurbishment projects
- › Can easily be mounted in corners and narrow spaces, as it only needs 30mm lateral service space
- › 5 different fan speeds available for maximum comfort
- › Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating and there are no air intake grilles visible



More details and final information can be found by scanning or clicking the QR codes.

FHA-A(9)                      AZAS-MV                      AZAS-MY

Efficiency data		FHA + AZAS	100A + 100MV	125A + 125MV	140A + 140MV	100A + 100MY	125A + 125MY	140A + 140MY	
Cooling capacity	Nom.	kW	9.50	12.1	13.4	9.50	12.1	13.4	
Heating capacity	Nom.	kW	10.8	13.5	15.5	10.8	13.5	15.5	
Space cooling	Energy efficiency class		A			A			
	Capacity	Pdesign	kW	9.50	12.1	13.4	9.50	12.1	13.4
	SEER		5.6						
	ηs,c	%		221			221		
Annual energy consumption		kWh/a	594	1,297	1,436	594	1,297	1,436	
Space heating (Average climate)	Energy efficiency class		A			A			
	Capacity	Pdesign	kW	6.00	7.80	6.00	7.80	7.80	
	SCOP/A		3.87		3.75	3.81	3.87	3.75	3.81
	ηs,h	%		147			149		
Annual energy consumption		kWh/a	2,171	2,240	2,866	2,171	2,240	2,866	

Indoor unit			FHA	100A	125A	140A	100A	125A	140A
Dimensions	Unit	HeightxWidthxDepth	mm	235x1,590x690					
Weight	Unit		kg	41					
Air filter	Type			Resin net					
Fan	Air flow rate	Cooling	Low/Medium/High m³/min	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0
		Heating	Low/Medium/High m³/min	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0
Sound power level	Cooling		dBA	60.0	62.0	64.0	60.0	62.0	64.0
	Heating		dBA	60.0	62.0	64.0	60.0	62.0	64.0
Sound pressure level	Cooling	Low/High	dBA	34.0/42.0	37.0/44.0	38.0/46.0	34.0/42.0	37.0/44.0	38.0/46.0
	Heating	Nom./High	dBA	38.0/42.0	41.0/44.0	42.0/46.0	38.0/42.0	41.0/44.0	42.0/46.0
Control systems	Infrared remote control			BRC7GA53-9 / BRC7GA56					
	Wired remote control			RC1H52W/S/K; BRC1E53A; BRC1E53B; BRC1E53C; BRC1D52					
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220					
Piping connections	Drain			VP20					

Outdoor Unit			AZAS100MV	AZAS125MV	AZAS140MV	AZAS100MY	AZAS125MY	AZAS140MY		
Dimensions	Unit	HeightxWidthxDepth	mm	990x940x320						
Weight	Unit		kg	72	79	72	79	79		
Sound power level	Cooling		dBA	70	71	72	70	71	72	
	Heating		dBA	70	71	72	70	71	72	
Sound pressure level	Cooling	Nom.	dBA	53	54	55	53	54	55	
	Heating	Nom.	dBA	57	58	59	57	58	59	
Operation range	Cooling	Ambient Min.~Max.	°CDB	-10~46						
	Heating	Ambient Min.~Max.	°CWB	-15~-15.5						
Refrigerant	Type/GWP			R-32/675						
	Charge		kg/TCO2Eq	2.60/1.76	2.90/1.96	2.60/1.76	2.90/1.96	2.90/1.96		
Piping connections	Liquid/Gas OD		mm	9.52/15.9						
	Piping length	OU - IU	Max.	m						
		System Equivalent Chargeless		m	30					
				m	50					
Additional refrigerant charge		kg/m	See installation manual							
Level difference IU - OU		Max.	m	30.0						
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-240			3~/50/380-415			
Current - 50Hz	Maximum fuse amps (MFA)		A	25	32	25	32	16		

Contains fluorinated greenhouse gases

# Ceiling suspended unit

For wide rooms with no false ceilings nor free floor space

- › Combination with split outdoor units is ideal for small retail, offices and residential applications
- › Ideal for comfortable air flow in wide rooms thanks to Coanda effect: up to 100° discharge angle
- › Even rooms with ceilings up to 3.8m can be heated up or cooled down very easily without capacity loss
- › Can easily be installed in both new and refurbishment projects
- › Can easily be mounted in corners and narrow spaces, as it only needs 30mm lateral service space
- › 5 different fan speeds available for maximum comfort
- › Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating and there are no air intake grilles visible



More details and final information can be found by scanning or clicking the QR codes.

		FHA-A(9)	RXM-R	RXM-R9	RXM-A
<b>Efficiency data</b>		<b>FHA + RXM</b>	<b>35A9 + 35R9</b>	<b>50A9 + 50A</b>	<b>60A9 + 60R</b>
Cooling capacity	Nom.	kW	3.40	5.00	5.70
Heating capacity	Nom.	kW	4.00	6.00	7.20
Space cooling	Energy efficiency class		A++		A+
	Capacity	Pdesign kW	3.40	5.00	5.70
	SEER		6.24	5.92	6.08
	Annual energy consumption	kWh/a	191	295	328
Space heating (Average climate)	Energy efficiency class		A+		A
	Capacity	Pdesign kW	3.10	4.35	4.71
	SCOP/A		4.43	3.86	3.87
	Annual energy consumption	kWh/a	979	1,577	1,704
<b>Indoor unit</b>		<b>FHA</b>	<b>35A9</b>	<b>50A9</b>	<b>60A9</b>
Dimensions	Unit	HeightxWidthxDepth mm	235x960x690	235x960x690	235x1,270x690
Weight	Unit	kg	26	27	32
Air filter	Type		Resin net	Resin net	
Fan	Air flow rate	Cooling Low/Medium/High m <sup>3</sup> /min	10.0/11.5/14.0	10.0/12.0/15.0	11.5/15.0/19.5
		Heating Low/Medium/High m <sup>3</sup> /min	10.0/11.5/14.0	10.0/12.0/15.0	11.5/15.0/19.5
Sound power level	Cooling	dB(A)	53.0	54.0	
	Heating	dB(A)	53.0	54.0	
Sound pressure level	Cooling	Low/Medium/High dB(A)	31.0/34.0/36.0	32.0/35.0/37.0	33.0/35.0/37.0
	Heating	Medium/Nom./High dB(A)	31.0/34.0/36.0	32.0/35.0/37.0	33.0/35.0/37.0
Control systems	Infrared remote control		BRC7GA53-9 / BRC7GA56		
	Wired remote control		BRC1H52W/S/K / BRC1E53A/B/C / BRC1D52		
Power supply	Phase/Frequency/Voltage		1~/50/60/220-240/220		

		RXM	35R9	<b>NEW</b> 50A	60R
<b>Outdoor unit</b>		<b>RXM</b>	<b>35R9</b>	<b>50A</b>	<b>60R</b>
Dimensions	Unit	HeightxWidthxDepth mm	552x840x350	734x954x401	
Weight	Unit	kg	32	49.0	
Sound pressure level	Cooling	Nom. dB(A)	49.0	48.0	
	Heating	Nom. dB(A)		49.0	
Operation range	Cooling	Ambient Min.~Max. °CDB		-10 ~ 46	
	Heating	Ambient Min.~Max. °CWB		-15 ~ 18	
Refrigerant	Type			R-32	
	GWP			675.0	
	Charge	kg/TCO2Eq	0.76/0.52	1.15/0.780	
Piping connections	Liquid	OD mm		6.35	
	Gas	OD mm	9.52	12.7	
	Piping length	OU - IU Max. System Chargeless m	20	30	
	Additional refrigerant charge	kg/m		10	
	Level difference	IU - OU Max. m	15	0.02 (for piping length exceeding 10m)	
Power supply	Phase/Frequency/Voltage		1~/50 /220-240		
Current - 50Hz	Maximum fuse amps (MFA)		13	16	

Contains fluorinated greenhouse gases


# 4-way blow ceiling suspended unit

Unique Daikin unit for high rooms with no false ceilings nor free floor space

- > Combining with Sky Air Advance-series ensures good value for money for all types of commercial applications
- > Even rooms with ceilings up to 3.5m can be heated up or cooled down very easily without capacity loss
- > Can easily be installed in both new and refurbishment projects
- > Unified indoor unit range for R-32 and R-410A
- > Individual flap control: flexibility to suit every room layout without changing the location of the unit!




- > 5 different discharge angles between 0 and 60° can be programmed via the remote control



More details and final information can be found by scanning or clicking the QR codes.



- > Stylish modern casing finished in pure white (RAL9010) and iron grey (RAL7011) blends easily with any interior
- > Optimum comfort guaranteed with automatic air flow adjustment to the required load
- > Standard drain pump with 720mm lift increases flexibility and installation speed



FUA-A

RZAG-NV1

RZAG-NY1

Efficiency data				FUA + RZAG	71A + 71NV1	100A + 100NV1	125A + 125NV1	71A + 71NY1	100A + 100NY1	125A + 125NY1
Cooling capacity	Nom.		kW	6.80	9.50	12.1	12.1	6.80	9.50	12.1
Heating capacity	Nom.		kW	7.50	10.8	13.5	13.5	7.50	10.8	13.5
Space cooling	Energy efficiency class			A++			-	A++		
	Capacity	Pdesign	kW	6.80	9.50	12.1	12.1	6.80	9.50	12.1
	SEER			7.02	6.42	6.39	6.39	7.02	6.42	6.39
	ηs,c		%	-	-	253	253	-	-	253
	Annual energy consumption		kWh/a	339	518	1,136	1,136	339	518	1,136
Space heating (Average climate)	Energy efficiency class			A+			-	A+		
	Capacity	Pdesign	kW	4.70	7.80	9.52	9.52	4.70	7.80	9.52
	SCOP/A			4.20	4.50	4.26	4.26	4.20	4.50	4.26
	ηs,h		%	-	-	167	167	-	-	167
	Annual energy consumption		kWh/a	1,567	2,427	3,129	3,129	1,567	2,427	3,129
<b>Indoor unit</b>				<b>FUA</b>	<b>71A</b>	<b>100A</b>	<b>125A</b>	<b>71A</b>	<b>100A</b>	<b>125A</b>
Dimensions	Unit	HeightxWidthxDpeth	mm	198x950x950						
Weight	Unit		kg	25.0	26.0			25.0	26.0	
Air filter	Type			Resinnet						
Fan	Air flow rate	Cooling	Low/Medium/High m³/min	16.0/19.5/23.0	20.0/25.5/31.0	20.5/26.5/32.5	20.5/26.5/32.5	16.0/19.5/23.0	20.0/25.5/31.0	20.5/26.5/32.5
		Heating	Low/Medium/High m³/min	16.0/19.5/23.0	20.0/25.5/31.0	20.5/26.5/32.5	20.5/26.5/32.5	16.0/19.5/23.0	20.0/25.5/31.0	20.5/26.5/32.5
Sound power level	Cooling		dBA	59	64	65	65	59	64	65
Sound pressure level	Cooling	Low/High	dBA	35/41	39/46	40/47	40/47	35/41	39/46	40/47
	Heating	Low/High	dBA	35/41	39/46	40/47	40/47	35/41	39/46	40/47
Control systems	Wired remote control			BRC1H52W/S/K / BRC1E53A/B/C / BRC1D52						
Piping connections	Drain			VP25 (OD Ø32.0)						
<b>Outdoor unit</b>				<b>RZAG</b>	<b>71NV1</b>	<b>100NV1</b>	<b>125NV1</b>	<b>71NY1</b>	<b>100NY1</b>	<b>125NY1</b>
Dimensions	Unit	HeightxWidthxDpeth	mm	870x1,100x460						
Weight	Unit		kg	81	85	95	95	81	85	94
Sound power level	Cooling		dBA	64	66	69	69	64	66	69
	Heating		dBA	-	-	68	68	-	-	68
Sound pressure level	Cooling	Nom.	dBA	46	47	49	49	46	47	49
	Heating	Nom.	dBA	48	50	52	52	48	50	52
Operation range	Cooling	Ambient	Min.~Max.	-20 ~52						
	Heating	Ambient	Min.~Max.	-20 ~18						
Refrigerant	Type/GWP			R-32/675						
	Charge		kg/TCO2Eq	3.20/2.16		3.70/2.50		3.20/2.16		3.70/2.50
Piping connections	Liquid/Gas OD			mm						
	Piping length	OU - IU	Max.	m						
		System	Equivalent	m						
			Chargeless	m						
		Level difference IU - OU	Max.	m						
	Additional refrigerant charge			kg/m						
Power supply	Phase/Frequency/Voltage			1~/50 /220-240				3~/50 /380-415		
Current - 50Hz	Maximum fuse amps (MFA)			20		32		16		

Contains fluorinated greenhouse gases

# 4-way blow ceiling suspended unit

Unique Daikin unit for high rooms with no false ceilings nor free floor space

- › Combination with Sky Air Advance-series ensures good value for money for all types of commercial applications
- › Even rooms with ceilings up to 3.5m can be heated up or cooled down very easily without capacity loss
- › Can easily be installed in both new and refurbishment projects
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- › 5 different discharge angles between 0 and 60° can be programmed via the remote control
- › Stylish modern casing finished in pure white (RAL9010) and iron grey (RAL7011) blends easily with any interior
- › Optimum comfort guaranteed with automatic air flow adjustment to the required load
- › Standard drain pump with 720mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.


		FUA-A	RZASG-MV1	RZASG-MY1	RZASG-MV	RZASG-MY		
<b>Efficiency data</b>		<b>FUA + RZASG</b>	<b>71A + 71MV1</b>	<b>100A + 100MV(1)</b>	<b>125A + 125MV(1)</b>	<b>100A + 100MY(1)</b>	<b>125A + 125MY(1)</b>	
Cooling capacity	Nom.	kW	6.80	9.50	12.1	9.50	12.1	
Heating capacity	Nom.	kW	7.50	10.8	13.5	10.8	13.5	
Space cooling	Energy efficiency class		A++	A+	-	A+	-	
	Capacity	Pdesign	kW	6.80	9.50	12.1	9.50	12.1
	SEER			6.16	5.83	5.49	5.83	5.49
	ηs,c		%	-	-	217	-	217
	Annual energy consumption		kWh/a	386	570	1,322	570	1,322
Space heating (Average climate)	Energy efficiency class		A	A+	-	A+	-	
	Capacity	Pdesign	kW	4.50		6.00		
	SCOP/A			3.90	4.01	3.84	3.84	
	ηs,h		%	-	-	151	-	151
	Annual energy consumption		kWh/a	1,615	2,095	2,188	2,095	2,188
<b>Indoor unit</b>		<b>FUA</b>	<b>71A</b>	<b>100A</b>	<b>125A</b>	<b>100A</b>	<b>125A</b>	
Dimensions	Unit	HeightxWidthxDpeth	mm	198x950x950				
Weight	Unit		kg	25.0	26.0			
Air filter	Type			Resinnet				
Fan	Air flow rate	Cooling	Low/Medium/High m³/min	16.0/19.5/23.0	20.0/25.5/31.0	20.5/26.5/32.5	20.0/25.5/31.0	20.5/26.5/32.5
		Heating	Low/Medium/High m³/min	16.0/19.5/23.0	20.0/25.5/31.0	20.5/26.5/32.5	20.0/25.5/31.0	20.5/26.5/32.5
Sound power level	Cooling		dBA	59	64	65	64	65
Sound pressure level	Cooling	Low/High	dBA	35/41	39/46	40/47	39/46	40/47
	Heating	Low/High	dBA	35/41	39/46	40/47	39/46	40/47
Control systems	Wired remote control			BRC1H52W/S/K; BRC1E53A; BRC1E53B; BRC1E53C; BRC1D52				
Piping connections	Drain			VP25 (OD Ø32.0)				
<b>Outdoor unit</b>		<b>RZASG</b>	<b>71MV1</b>	<b>100MV(1)</b>	<b>125MV(1)</b>	<b>100MY(1)</b>	<b>125MY(1)</b>	
Dimensions	Unit	HeightxWidthxDpeth	mm	770x900x320				
Weight	Unit		kg	60	70 (MV1/MY1) / 72 (MV/MY)			
Sound power level	Cooling		dBA	65	69	71	69	71
	Heating		dBA	-				
Sound pressure level	Cooling	Nom.	dBA	46	53	54	53	54
	Heating	Nom.	dBA	47	57	58	57	58
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-15 ~-46	-15~-46	-15~-46	-15~-46
	Heating	Ambient	Min.~Max.	°CWB	-15 ~-15.5	-15~-15.5	-15~-15.5	-15~-15.5
Refrigerant	Type/GWP			R-32/675	R-32/675	R-32/675	R-32/675	R-32/675
	Charge		kg/TCO2Eq	2.45/1.65		2.60/1.76		
Piping connections	Liquid/ Gas	OD	mm	9.52/15.9				
	Piping length	OU - IU	Max.	m	50	50		
		System	Equivalent	m	70	70		
		Chargeless		m	30	30		
	Level difference	IU - OU	Max.	m	30.0	30.0		
Additional refrigerant charge			kg/m	See installation manual				
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /220-240			3~/50 /380-415	
Current - 50Hz	Maximum fuse amps (MFA)		A	20	25	32	16	

Contains fluorinated greenhouse gases

# Floor standing unit

For commercial spaces with high ceilings

- › Combining with Sky Air Alpha-series ensures best in class quality, highest efficiency and performance
- › Decrease of temperature variation by automatic fan speed selection or freely selectable 3-step fan speed.
- › Improved comfort as a result of better airflow distribution from the vertical out blow which allows manual adjustment of air outlet blades at the top of the unit.
- › Selectable horizontal out blow to better suit the layout of the room (via wired remote controller BRC1E\*/BRC1H\*)

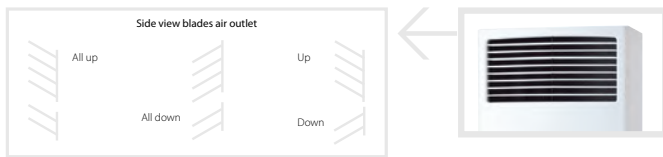

More details and final information can be found by scanning or clicking the QR codes.

FVA-A

RZAG-NV1

RZAG-NY1


Efficiency data		FVA + RZAG		71A + 71NV1	100A + 100NV1	125A + 125NV1	140A + 140NV1	71A + 71NY1	100A + 100NY1	125A + 125NY1	140A + 140NY1	
Cooling capacity	Nom.	kW		6.80	9.50	12.1	13.4	6.80	9.50	12.1	13.4	
Heating capacity	Nom.	kW		7.50	10.8	13.5	15.5	7.50	10.8	13.5	15.5	
Space cooling	Energy efficiency class		A++									
	Capacity	Pdesign	kW	6.80	9.50	12.1	13.4	6.80	9.50	12.1	13.4	
	SEER			6.34	6.40	6.41	6.12	6.34	6.40	6.41	6.12	
	ηs,c		%	-	-	253	242	-	-	253	242	
	Annual energy consumption		kWh/a	376	520	1,133	1,314	376	520	1,133	1,314	
Space heating (Average climate)	Energy efficiency class		A+									
	Capacity	Pdesign	kW	4.70	7.80	9.52		4.70	7.80	9.52		
	SCOP/A			4.05	4.20	4.15	3.94	4.05	4.20	4.15	3.94	
	ηs,h		%	-	-	163	155	-	-	163	155	
	Annual energy consumption		kWh/a	1,625	2,600	3,209	3,383	1,625	2,600	3,209	3,383	
Indoor unit		FVA		71A	100A	125A	140A	71A	100A	125A	140A	
Dimensions	Unit	HeightxWidthxD	Depth	mm		1,850x600x270		1,850x600x350		1,850x600x350		
Weight	Unit	kg		42	50			42	50			
Air filter	Type	Resin net										
Fan	Air flow rate	Cooling	Low/Medium/High	m³/min	14/16/18	22/25/28	24/26/28	26/28/30	14/16/18	22/25/28	24/26/28	26/28/30
		Heating	Low/Medium/High	m³/min	14/16/18	22/25/28	24/26/28	26/28/30	14/16/18	22/25/28	24/26/28	26/28/30
Sound power level	Cooling	dBA		55	62	63	65	55	62	63	65	
Sound pressure level	Cooling	Low/High	dBA	38/43	44/50	46/51	48/53	38/43	44/50	46/51	48/53	
	Heating	Nom./High	dBA	41/43	47/50	48/51	51/53	41/43	47/50	48/51	51/53	
Control systems	Wired remote control		BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52									
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220								
Piping connections	Drain		I.D. 20/O.D. 26									
Outdoor unit		RZAG		71NV1	100NV1	125NV1	140NV1	71NY1	100NY1	125NY1	140NY1	
Dimensions	Unit	HeightxWidthxD	Depth	mm								
Weight	Unit	kg		81	85	95		81	85	94		
Sound power level	Cooling	dBA		64	66	69	70	64	66	69	70	
	Heating	dBA		-	-	68	71	-	-	68	71	
Sound pressure level	Cooling	Nom.	dBA	46	47	49	50	46	47	49	50	
	Heating	Nom.	dBA	48	50	52		48	50	52		
Operation range	Cooling	Ambient	Min.~Max.	°CDB								
	Heating	Ambient	Min.~Max.	°CWB								
Refrigerant	Type/GWP	R-32/675										
	Charge	kg/TCO2Eq		3.20/2.16		3.70/2.50		3.20/2.16		3.70/2.50		
Piping connections	Liquid/ Gas	OD	mm	9.52/15.9								
	Piping length	OU - IU	Max.	m	55	85		55	85			
		System Equivalent Chargeless	m	75	100		75	100				
	Level difference	IU - OU	Max.	m	40							
	Additional refrigerant charge	kg/m		30								
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /220-240				3~/50 /380-415				
Current - 50Hz	Maximum fuse amps (MFA)		A	20	32		16					

Contains fluorinated greenhouse gases

# Floor standing unit

For commercial spaces with high ceilings

- › Combination with Sky Air Advance-series ensures good value for money for all types of commercial applications
- › Decrease of temperature variation by automatic fan speed selection or freely selectable 3-step fan speed.
- › Improved comfort as a result of better airflow distribution from the vertical out blow which allows manual adjustment of air outlet blades at the top of the unit.
- › Selectable horizontal out blow to better suit the layout of the room (via wired remote controller BRC1E\*/BRC1H\*)

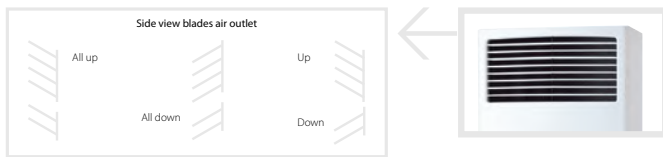

More details and final information can be found by scanning or clicking the QR codes.


		FVA-A	RZASG-MV1		RZASG-MY1		RZASG-MV		RZASG-MY		
<b>Efficiency data</b>		<b>FVA + RZASG</b>	<b>71A + 71MV1</b>	<b>100A + 100MV(1)</b>	<b>125A + 125MV(1)</b>	<b>140A + 140MV(1)</b>	<b>100A + 100MY(1)</b>	<b>125A + 125MY(1)</b>	<b>140A + 140MY(1)</b>		
Cooling capacity	Min./Nom./Max.	kW	6.80	9.50	12.1	13.4	9.50	12.1	13.4		
Heating capacity	Min./Nom./Max.	kW	7.50	10.8	13.5	15.5	10.8	13.5	15.5		
Space cooling	Energy efficiency class		A+	A+		-	A+		-		
	Capacity Pdesign	kW	6.80	9.50	12.1	13.4	9.50	12.1	13.4		
	SEER		5.83	5.72	5.52	5.63	5.72	5.52	5.63		
	ηs,c	%	-	-	218	222	-	218	222		
Space heating (Average climate)	Annual energy consumption	kWh/a	408	581	1,314	1,428	581	1,314	1,428		
	Energy efficiency class		A+	A		-	A		-		
	Capacity Pdesign	kW	4.50	6.00		7.80	6.00		7.80		
	SCOP/A		4.04	3.83	3.64	3.81	3.83	3.64	3.81		
	ηs,h	%	-	-	143	149	-	143	149		
Annual energy consumption	kWh/a	1,559	2,193	2,308	2,866	2,193	2,308	2,866			
<b>Indoor unit</b>		<b>FVA</b>	<b>71A</b>	<b>100A</b>	<b>125A</b>	<b>140A</b>	<b>100A</b>	<b>125A</b>	<b>140A</b>		
Dimensions	Unit	HeightxWidthxDpeth	mm	1,850x600x270		1,850x600x350					
Weight	Unit		kg	42	50						
Air filter	Type			Resinnet							
Fan	Air flow rate	Cooling	Low/Medium/High	m³/min	14/16/18	22/25/28	24/26/28	26/28/30	22/25/28	24/26/28	26/28/30
		Heating	Low/Medium/High	m³/min	14/16/18	22/25/28	24/26/28	26/28/30	22/25/28	24/26/28	26/28/30
Sound power level	Cooling			dBA	55	62	63	65	62	63	65
Sound pressure level	Cooling	Low/Medium/High		dBA	38/41/43	44/47/50	46/48/51	48/51/53	44/47/50	46/48/51	48/51/53
	Heating	Medium/Nom./High		dBA	38/41/43	44/47/50	46/48/51	48/51/53	44/47/50	46/48/51	48/51/53
Control systems	Wired remote control			BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52							
Power supply	Phase - Frequency - Voltage		Hz - V	1~ - 50/60 - 220-240/220							
<b>Outdoor unit</b>		<b>RZASG</b>	<b>71MV1</b>	<b>100MV(1)</b>	<b>125MV(1)</b>	<b>140MV(1)</b>	<b>100MY(1)</b>	<b>125MY(1)</b>	<b>140MY(1)</b>		
Dimensions	Unit	HeightxWidthxDpeth	mm	770x900x320		990x940x320					
Weight	Unit		kg	60	70 (MY1) / 72 (MY)		78 (MV1) / 79 (MV)		70 (MY1) / 72 (MY)		78 (MV1) / 79 (MV)
Sound power level	Cooling		dBA	65	70	71	73	70	71	73	
	Heating		dBA	-	-	71	73	-	71	73	
Sound pressure level	Cooling	Nom.		dBA	46	53	54	53	54		
	Heating	Nom.		dBA	47	-	57	-	57		
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-15~-46						
	Heating	Ambient	Min.~Max.	°CWB	-15~-15.5						
Refrigerant	Type/GWP			R-32/675							
	Charge		kg/TCO2Eq	2.45/1.65	2.60/1.76		2.90/1.96	2.60/1.76		2.90/1.96	
Piping connections	Liquid/Gas	OD	mm	9.52/15.9							
	Piping length	OU - IU	Max.	m	50						
		System	Equivalent	m	70						
			Chargeless	m	30						
		Additional refrigerant charge		kg/m	See installation manual						
	Level difference IU - OU	Max.	m	30.0							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /220-240				3~/50 /380-415			
Current - 50Hz	Maximum fuse amps (MFA)		A	20	25	32		16			

Contains fluorinated greenhouse gases

# Floor standing unit

For commercial spaces with high ceilings

- › Ideal solution for small businesses and shops
- › Decrease of temperature variation by automatic fan speed selection or freely selectable 3-step fan speed.
- › Improved comfort as a result of better airflow distribution from the vertical out blow which allows manual adjustment of air outlet blades at the top of the unit.
- › Selectable horizontal out blow to better suit the layout of the room (via wired remote controller BRC1E\*/BRC1H\*)

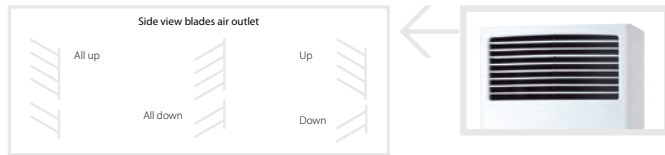

More details and final information can be found by scanning or clicking the QR codes.

		FVA-A			AZAS-MV		AZAS-MY			
<b>Efficiency data</b>		<b>FVA + AZAS</b>	<b>100A + 100MV</b>	<b>125A + 125MV</b>	<b>140A + 140MV</b>	<b>100A + 100NY</b>	<b>125A + 125NY</b>	<b>140A + 140NY</b>		
Cooling capacity	Nom.	kW	9.50	12.1	13.4	9.50	12.1	13.4		
Heating capacity	Nom.	kW	10.8	13.5	15.5	10.8	13.5	15.5		
Space cooling	Energy efficiency class		A			A				
	Capacity	Pdesign	kW	9.50	12.1	13.4	9.50	12.1	13.4	
	SEER			5.5	5.3	5.4	5.5	5.3	5.4	
	ηs,c		%	-	209	213	-	209	213	
	Annual energy consumption	kWh/a	605	1,370	1,489	605	1,370	1,489		
Space heating (Average climate)	Energy efficiency class		A			A				
	Capacity	Pdesign	kW	6.00		7.80		6.00		
	SCOP/A			3.79	3.56	3.81	3.79	3.56	3.81	
	ηs,h		%	-	139	149	-	139	149	
	Annual energy consumption	kWh/a	2,217	2,360	2,866	2,217	2,360	2,866		
<b>Indoor unit</b>		<b>FVA</b>	<b>100A</b>	<b>125A</b>	<b>140A</b>	<b>100A</b>	<b>125A</b>	<b>140A</b>		
Dimensions	Unit	HeightxWidthxDpeth	mm			1,850x600x350				
Weight	Unit		kg			50				
Air filter	Type		Resin net							
Fan	Air flow rate	Cooling	Low/Medium/High	m³/min	22/25/28	24/26/28	26/28/30	22/25/28	24/26/28	26/28/30
		Heating	Low/Medium/High	m³/min	22/25/28	24/26/28	26/28/30	22/25/28	24/26/28	26/28/30
Sound power level	Cooling		dBA	62	63	65	62	63	65	
Sound pressure level	Cooling	Low/High	dBA	44/50	46/51	48/53	44/50	46/51	48/53	
	Heating	Nom./High	dBA	47/50	48/51	51/53	47/50	48/51	51/53	
Control systems	Wired remote control		BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220						
Piping connections	Drain			I.D. 20/O.D. 26						
<b>Outdoor Unit</b>		<b>AZAS</b>	<b>100MV</b>	<b>125MV</b>	<b>140MV</b>	<b>100MY</b>	<b>125MY</b>	<b>140MY</b>		
Dimensions	Unit	HeightxWidthxDpeth	mm							
Weight	Unit		kg							
Sound power level	Cooling		dBA	70	71	72	70	71	72	
	Heating		dBA	70	71	72	70	71	72	
Sound pressure level	Cooling	Nom.	dBA	53	54	55	53	54	55	
	Heating	Nom.	dBA	57	58	59	57	58	59	
Operation range	Cooling	Ambient	Min.~Max.	°CDB						
	Heating	Ambient	Min.~Max.	°CWB						
Refrigerant	Type/GWP		R-32/675							
	Charge		kg/TCO2Eq	2.60/1.76		2.90/1.96		2.60/1.76		
Piping connections	Liquid/Gas OD		mm	9.52/15.9						
	Piping length	OU - IU	Max.	m						
		System	Equivalent	m	30					
			Chargeless	m	50					
	Additional refrigerant charge		kg/m	30						
	Level difference IU - OU	Max.	m							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-240			3~/50/380-415			
Current - 50Hz	Maximum fuse amps (MFA)		A	25	32		16			

Contains fluorinated greenhouse gases

# Concealed floor standing unit

Designed to be concealed in walls

- › Combination with Sky Air Alpha-series ensures best in class quality, highest efficiency and performance
- › Discretely concealed in the wall: only the suction and discharge grilles are visible
- › Requires very little installation space as the depth is only 200mm
- › Its low height (620 mm) enables the unit to fit perfectly beneath a window
- › High ESP allows flexible installation



More details and final information can be found by scanning or clicking the QR codes.

				FNA-A9		RZAG-A				
<b>Efficiency data</b>		<b>FNA + RZAG</b>		<b>35A9 + 35A</b>		<b>50A9 + 50A</b>		<b>60A9 + 60A</b>		
Cooling capacity	Min./Nom./Max.	kW		1.6/3.5/4.5		1.7/5.0/6.0		1.7/6.0/6.5		
Heating capacity	Min./Nom./Max.	kW		1.40/4.00/5.00		1.70/5.00/6.00		1.70/7.00/7.50		
Space cooling	Energy efficiency class					A+				
	Capacity	Pdesign	kW	3.50		5.00		6.00		
	SEER					5.90		5.70		
	Annual energy consumption			kWh/a		208		297		368
Space heating (Average climate)	Energy efficiency class					A				
	Capacity	Pdesign	kW	3.50		4.30		4.50		
	SCOP/A					3.90				
	Annual energy consumption			kWh/a		1,255		1,542		1,616
<b>Indoor unit</b>		<b>FNA</b>		<b>35A9</b>		<b>50A9</b>		<b>60A9</b>		
Dimensions	Unit	HeightxWidthxDepth	mm	620/720x790x200		620/720x1,190x200				
Weight	Unit	kg		23.0		30.0				
Air filter	Type					Resin net				
Fan	Air flow rate	Cooling	Low/High	m <sup>3</sup> /min	7.3/8.7		13.5/16.0			
		Heating	Low/High	m <sup>3</sup> /min	7.3/8.7		13.5/16.0			
	External static pressure		Nom./High	Pa	30/48		40/49			
Sound power level	Cooling		dBA	53.0		56.0				
Sound pressure level	Cooling	Low/Medium/High	dBA	28.0/31.0/33.0		30.0/33.0/36.0				
	Heating	Low/Nom./High	dBA	28.0/31.0/33.0		30.0/33.0/36.0				
Control systems	Infrared remote control					BRC4C65				
	Wired remote control					BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52				
Power supply	Phase/Frequency/Voltage		Hz/V			1~/50/60/220-240/220				
<b>Outdoor unit</b>		<b>RZAG</b>		<b>35A</b>		<b>50A</b>		<b>60A</b>		
Dimensions	Unit	HeightxWidthxDepth	mm			734x870x373				
Weight	Unit	kg				52				
Sound power level	Cooling		dBA	62.0		63.0		64.0		
	Heating		dBA	62.0		63.0		64.0		
Sound pressure level	Cooling	Nom.	dBA	48.0		49.0		50.0		
	Heating	Nom.	dBA	48.0		49.0		50.0		
Operation range	Cooling	Ambient	Min.~Max.	°CDB			-20~-52			
	Heating	Ambient	Min.~Max.	°CWB			-20~-24			
Refrigerant	Type/GWP					R-32/675.0				
	Charge			kg/TCO2Eq			1.55/1.05			
Piping connections	Liquid/Gas OD		mm	6.35/9.52		6.35/12.7				
	Piping length	OU - IU	Max.	m			50			
		System	Chargeless	m			30			
	Additional refrigerant charge			kg/m			0.02 (for piping length exceeding 30m)			
Power supply	Level difference IU - OU		Max.	m			30.0			
	Phase/Frequency/Voltage		Hz/V			1~/50/220-240				

Contains fluorinated greenhouse gases



# Concealed floor standing unit

Designed to be concealed in walls

- › Combination with split outdoor units is ideal for small retail, offices and residential applications
- › Discretely concealed in the wall: only the suction and discharge grilles are visible
- › Requires very little installation space as the depth is only 200mm
- › Its low height (620 mm) enables the unit to fit perfectly beneath a window
- › High ESP allows flexible installation



More details and final information can be found by scanning or clicking the QR codes.

		FNA-A9		RXM-R		RXM-R9		RXM-A				
<b>Efficiency data</b>		<b>FNA + RXM</b>		<b>25A9 + 25R9</b>		<b>35A9 + 35R9</b>		<b>50A9 + 50A</b>		<b>60A9 + 60R</b>		
Cooling capacity	Nom.	kW		2.60		3.40		5.00		6.00		
Heating capacity	Nom.	kW		3.20		4.00		5.80		7.00		
Power input	Cooling	Nom. kW		0.68		1.10		1.48		2.22		
	Heating	Nom. kW		0.80		1.15		1.74		2.25		
Space cooling	Energy efficiency class					A+				A		
	Capacity	Pdesign kW		2.60		3.40		5.00		6.00		
	SEER			5.68		5.70		5.77		5.56		
	Annual energy consumption	kWh/a		160		209		303		378		
Space heating (Average climate)	Energy efficiency class					A+						
	Capacity	Pdesign kW		2.80		2.90		4.00		4.60		
	SCOP/A			4.24		4.05		4.09		4.16		
	Annual energy consumption	kWh/a		924		1,002		1,368		1,547		
Nominal efficiency	EER			3.80		3.09		3.38		2.70		
	COP			4.00		3.48		3.34		3.11		
	Annual energy consumption			kWh		342		550		740		
	Energy labeling Directive Cooling/Heating			A/A		B/B		A/C		D/D		
<b>Indoor unit</b>		<b>FNA</b>		<b>25A9</b>		<b>35A9</b>		<b>50A9</b>		<b>60A9</b>		
Dimensions	Unit	HeightxWidthxDPTH		mm		620/720x790x200		620/720x1,190x200				
Weight	Unit	kg		23.0				30.0				
Air filter	Type						Resinnet					
Fan	Air flow rate	Cooling	Low/High	m <sup>3</sup> /min		7.3/8.7				13.5/16.0		
		Heating	Low/High	m <sup>3</sup> /min		7.3/8.7				13.5/16.0		
	External static pressure	Nom./High		Pa		30/48				40/49		
Sound power level	Cooling		dBA		53.0				56.0			
Sound pressure level	Cooling	Low/Medium/High		dBA		28.0/31.0/33.0				30.0/33.0/36.0		
	Heating	Low/Nom./High		dBA		28.0/31.0/33.0				30.0/33.0/36.0		
Control systems	Infrared remote control							BRC4C65				
	Wired remote control							BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52				
Power supply	Phase/Frequency/Voltage		Hz/V				1~/50/60/220-240/220					
<b>Outdoor unit</b>		<b>RXM</b>		<b>25R9</b>		<b>35R9</b>		<b>NEW 50A</b>		<b>60R</b>		
Dimensions	Unit	HeightxWidthxDPTH		mm		552x840x350		734x954x401				
Weight	Unit	kg		32				49.0				
Sound pressure level	Cooling	Nom. dBA		46.0		49.0				48.0		
	Heating	Nom. dBA		47.0				49.0				
Operation range	Cooling	Ambient	Min.~Max.	°CDB				-10~46				
	Heating	Ambient	Min.~Max.	°CWB				-15~18				
Refrigerant	Type							R-32				
	GWP					675				675.0		
	Charge			kg/TCO2Eq		0.76/0.52				1.15/0.780		
Piping connections	Liquid	OD		mm				6.35				
	Gas	OD		mm		9.52				12.7		
	Piping length	OU - IU	Max.		m		20				30	
		System	Chargeless		m				10			
	Additional refrigerant charge			kg/m				0.02 (for piping length exceeding 10m)				
Level difference IU - OU	Max.		m		15				20.0			
Power supply	Phase/Frequency/Voltage		Hz/V				1~/50 / 220-240					
Current - 50Hz	Maximum fuse amps (MFA)			A		13				16		

Contains fluorinated greenhouse gases




# Biddle air curtains

Biddle air curtains provide highly efficient solutions for retailers and consultants to combat the issue of climate separation across their outlet or office doorway.

## Benefits of Biddle air curtains

- > Connectable to ERQ and VRV units
- > Unified range for R-32 and R-410A refrigerant
- > payback period of less than 1.5 years compared to installing an electric air curtain

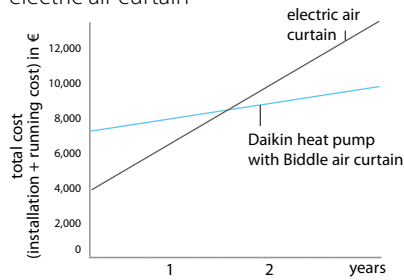

### 3 different models to choose from:



Free-hanging model (F):  
easy wall mounted installation




Cassette model (C):  
mounted into a false ceiling leaving only the decoration panel visible



Recessed model (R):  
neatly concealed in the ceiling

### Select your Biddle air curtain range

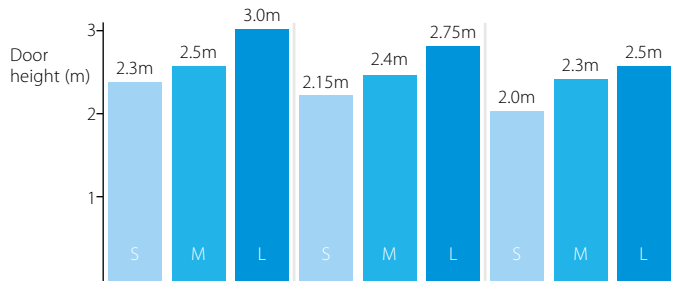

Installation condition

#### Favourable

ex: covered shopping mall or revolving door entrance


#### Normal

ex: little direct wind, no opposite open doors, building with ground floor only

#### Unfavourable



ex: location at a corner or square, multiple floors and/or open stairwell

### Biddle air curtain nomenclature

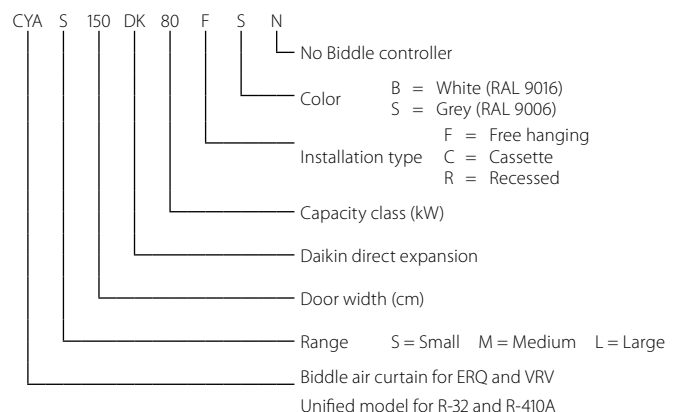

# Biddle air curtain

- › Connectable to ERQ and VRV DX outdoor units
- › Unified model for R-32 and R-410A refrigerant
- › Free-hanging model (F): easy wall mounted installation
- › Cassette model (C): mounted into a false ceiling leaving only the decoration panel visible
- › Recessed model (R): neatly concealed in the ceiling
- › A payback period of less than 1.5 years compared to installing an electric air curtain
- › Provides virtually free air curtain heating via recovered heat from indoor units in cooling mode (in case of VRV heat recovery)
- › Easy and quick to install at reduced costs since no additional water systems, boilers and gas connections are required

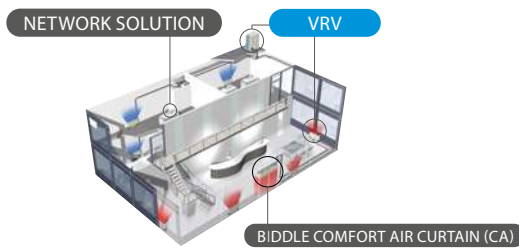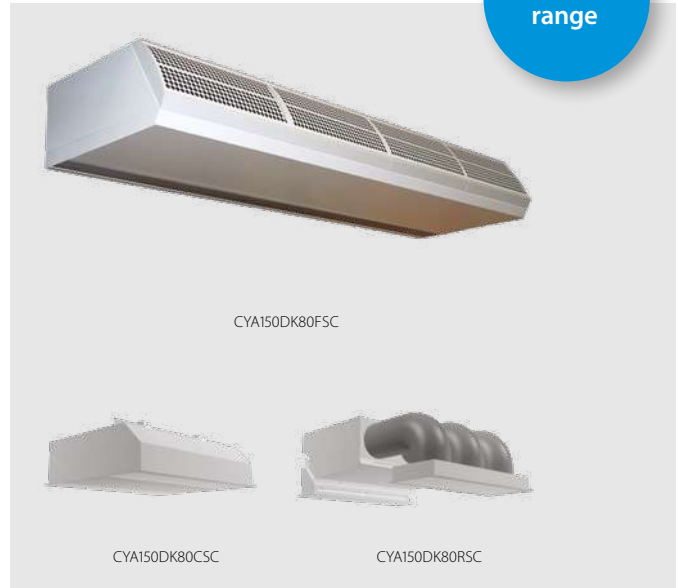


More details and final information can be found by scanning or clicking the QR codes.



				Small				Medium				
				CYAS100DK80*	CYAS150DK80*	CYAS200DK100*	CYAS250DK140*	CYAM100DK80*	CYAM150DK80*	CYAM200DK100*	CYAM250DK140*	
Heating capacity	Speed 3		kW	6,94	8,6	10,9	15,2	8,65	10,5	12,5	18,6	
Power input	Fan only	Nom.	kW	0,14	0,21	0,28	0,36	0,27	0,40	0,53	0,67	
	Heating	Nom.	kW	0,14	0,21	0,28	0,36	0,27	0,40	0,53	0,67	
Delta T	Speed 3		K	17,7	14,6	13,9	15,5	16	12,9	12,7	13,8	
Casing	Colour	B: RAL9016 / S: RAL9006				B: RAL9016 / S: RAL9006						
Dimensions	Unit	Height F/C/R	mm	270/270/270				270/270/270				
		Width F/C/R	mm	1000/1000/1048	1500/1500/1548	2000/2000/2048	2500/2500/2548	1000/1000/1048	1500/1500/1548	2000/2000/2048	2500/2500/2548	
		Depth F/C/R	mm	590/821/561				590/821/561				
Required ceiling void >		mm	420				420					
Door height	Max.		m	2,3				2,5				
Door width	Max.		m	1	1,5	2	2,5	1	1,5	2	2,5	
Weight	Unit		kg	56/59/61	66/83/88	83/102/108	107/129/137	57/68/66	73/88/93	94/111/117	108/136/144	
Fan		Speed 3	m <sup>3</sup> /h	1164	1746	2328	2910	1605	2408	2910	4013	
Sound pressure level	Heating	Speed 3	dB(A)	47	49	50	51	50	51	53	54	
Refrigerant	GWP	675/2087,5				675/2087,5						
	Type	R32/R410A				R32/R410A						
Piping connections	Liquid	OD	mm	6,35			9,52			6,35		9,52
	Gas	OD	mm	12,7			15,9			12,7		15,9
Air filter	Type	Vacuum cleanable filter G1										
Power supply	Frequency		Hz	50Hz				50Hz				
	Voltage		V	230V				230V				
	Maximum fuse amps (MFA)		A	16				16				

				Large			
				CYAL100DK125*	CYAL150DK200*	CYAL200DK250*	CYAL250DK250*
Heating capacity	Speed 3		kW	14,4	21,5	27,6	29,7
Power input	Fan only	Nom.	kW	0,48	0,72	0,96	1,20
	Heating	Nom.	kW	0,48	0,72	0,96	1,20
Delta T	Speed 3		K	13,8	13,7	13,2	11,4
Casing	Colour	B: RAL9016 / S: RAL9006					
Dimensions	Unit	Height F/C/R	mm	370/370/370			
		Width F/C/R	mm	1000/1000/1048	1500/1500/1548	2000/2000/2048	2500/2500/2548
		Depth F/C/R	mm	774/1105/745			
Required ceiling void >		mm	520				
Door height	Max.		m	3			
Door width	Max.		m	1	1,5	2	2,5
Weight	Unit		kg	76/81/83	100/118/141	126/151/155	157/190/196
Fan		Speed 3	m <sup>3</sup> /h	3100	4650	6200	7750
Sound pressure level	Heating	Speed 3	dB(A)	53	54	56	57
Refrigerant	GWP	675/2087,5					
	Type	R32/R410A					
Piping connections	Liquid	OD	mm	15,9			19,1
	Gas	OD	mm	15,9			19,1
Air filter	Type	Vacuum cleanable filter G1					
Power supply	Frequency		Hz	50Hz			
	Voltage		V	230V			
Current	Maximum fuse amps (MFA)		A	16			

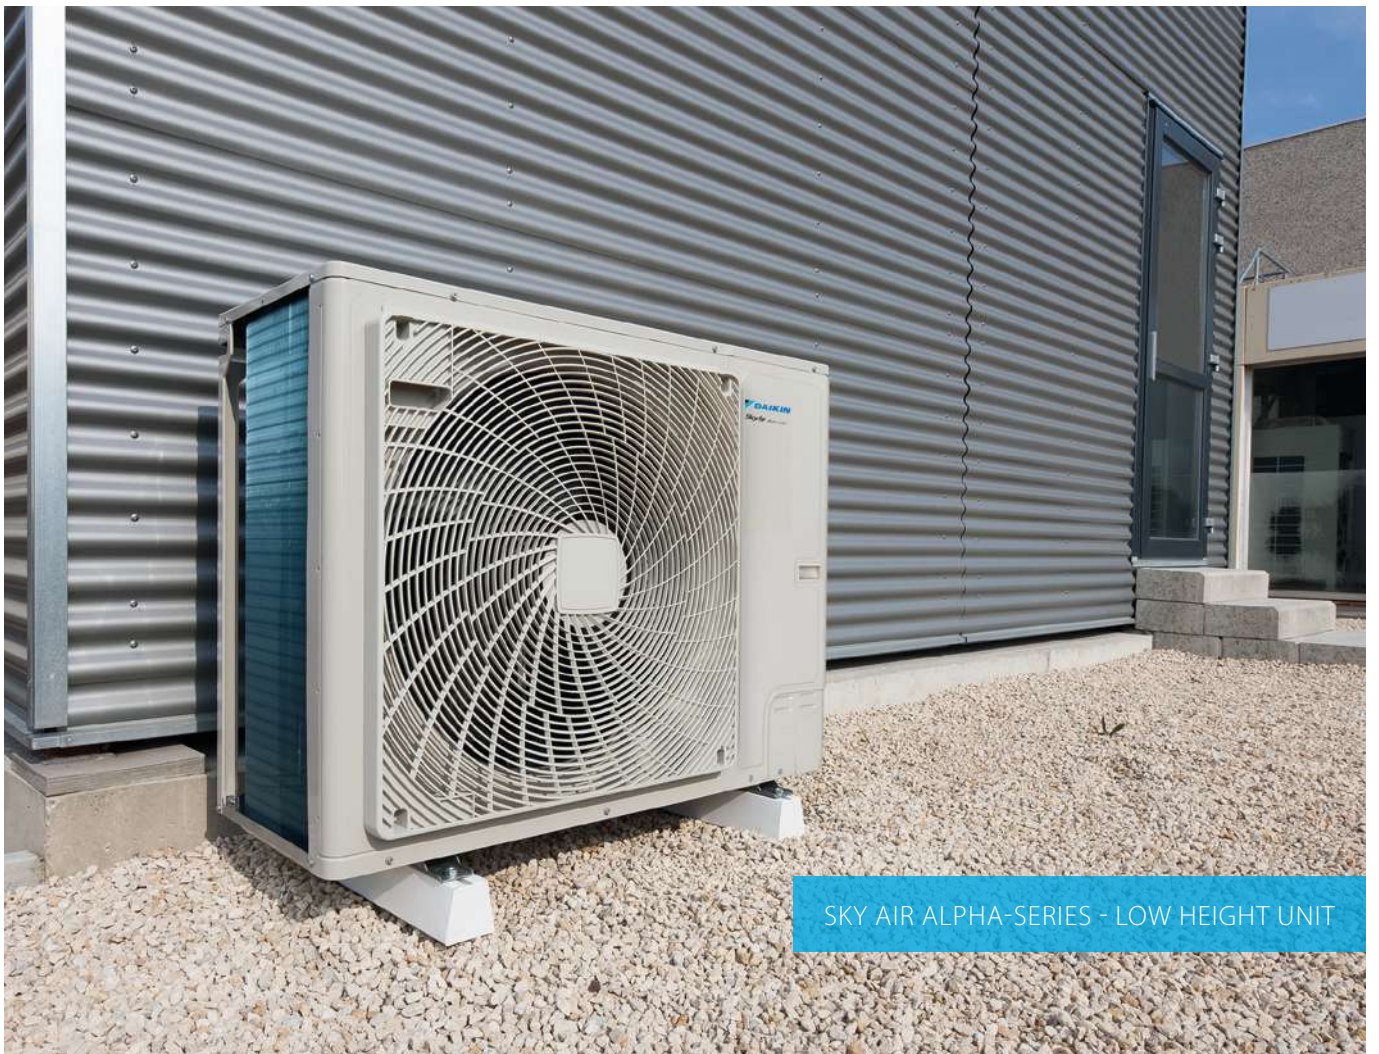

SKY AIR ALPHA-SERIES - LOW HEIGHT UNIT




LOW SOUND ENCLOSURE FOR SKY AIR ALPHA-SERIES (RZAG-N) AND ADVANCE-SERIES (RZA-D)

# Outdoor units


## A range of industry leading technology outdoor units

Products overview outdoor units	444
Benefits overview outdoor units	445
<b>SkyAir A-series</b>	446
Low sound enclosure	447
Variable Refrigerant Temperature	448
Replacement technology	449
<b>R-32 BLUEEVOLUTION range</b>	<b>450</b>
RZAG-A <b>SkyAir Alpha-series</b>	450
RZAG-NV1/NY1 <b>SkyAir Alpha-series</b>	450
RZASG-MV(1)/MY(1) <b>SkyAir Advance-series</b>	451
RZA-D <b>SkyAir Advance-series</b>	452
ARXM-R/	
AZAS-MV/MY <b>SkyAir Active-series</b>	453
Multi model and VRV range	
See Split or VRV chapter	
Options & Accessories	454

Pair solution

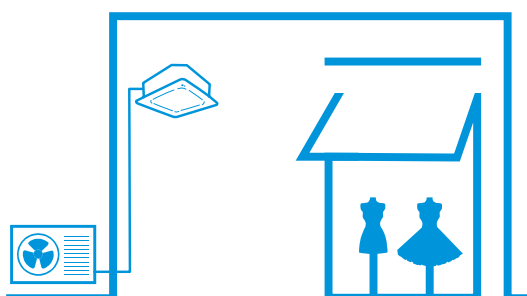

Twin, triple, double twin solution

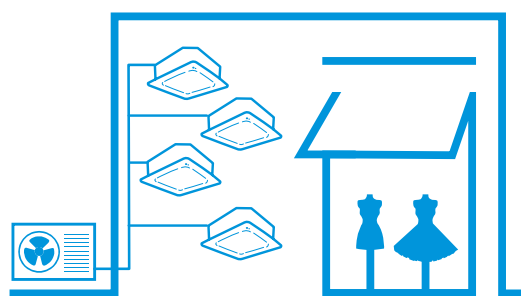

# Products overview outdoor units



Pair, twin, triple & double twin application

BLUEEVOLUTION

**R-32**

**SkyAir A-series**

System	Type	Model	Product name	35	50	60	71	100	125	140	200	250		
Air cooled	Heat pump	<p><b>SkyAir Alpha-series</b></p> <ul style="list-style-type: none"> <li>- Industry leading technology for commercial applications</li> <li>- Dedicated solution for infrastructure cooling</li> <li>- Variable Refrigerant Temperature (RZAG71-100-125-140 series)</li> <li>- Maximum piping length up to 85m (50m for RZAG35-50-60)</li> <li>- Replacement technology</li> <li>- Extended operation range down to -20°C in both heating and cooling</li> <li>- Pair, twin, triple and double twin application (RZAG71-100-125-140 series)</li> </ul>	<p><b>R-32</b></p> <p><b>A++</b></p> <p>(A+++ - D)</p>											
			<p>RZAG-A</p> <p>RZAG-NV1/NY1</p>											
Air cooled	Heat pump	<p><b>SkyAir Advance-series</b></p> <ul style="list-style-type: none"> <li>- Technology and comfort combined for commercial applications</li> <li>- Very compact and easy to install outdoor units</li> <li>- Maximum piping length up to 50m (RZA-D up to 100m)</li> <li>- Replacement technology</li> <li>- Operation range down to -15°C both cooling and in heating (RZA-D down to -20°C)</li> <li>- Pair, twin, triple and double twin application</li> </ul>	<p><b>R-32</b></p> <p><b>A+</b></p> <p>(A+++ - D)</p>											
			<p>RZASG-MV(1)/MY(1)</p> <p>RZA-D</p>											
Air cooled	Heat pump	<p><b>SkyAir Active-series</b></p> <ul style="list-style-type: none"> <li>- Ideal solution for busy environments and small shops</li> <li>- Very compact and easy to install outdoor units</li> <li>- Maximum piping length up to 30m</li> <li>- Replacement technology</li> <li>- Easy-to-mount outdoor units: roof, terrace or wall</li> <li>- Exclusively offered for pair applications</li> </ul>	<p><b>R-32</b></p> <p><b>A</b></p> <p>(A+++ - D)</p>											
			<p>ARXM-R</p> <p>AZAS-MV/MY</p>											

# Benefits overview outdoor units

		<i>SkyAir</i> Alpha-series		<i>SkyAir</i> Advance-series		<i>SkyAir</i> Active-series	<i>SkyAir</i> Active-series
		RZAG-A	RZAG-NV1/NY1	RZASG-MV(1)/MY(1)	RZA-D	AZAS-MV/MY	ARXM-R(9)
We care icons	Seasonal efficiency - Smart use of energy	 (A+++ - D)	 (A+++ - D)	 (A+++ - D)	-	 (A+++ - D)	 (A+++ - D)
	Inverter technology	●	●	●	●	●	●
	Replacement technology	●	●	●	●	●	●
Comfort	Night quiet	●	●	●	●	●	●
	Auto cooling-heating changeover	●	●	●	●	●	●
Other functions	Variable refrigeration temperature		●				
	Twin/triple/double twin application		●	●	●		
	Swing compressor	●	●	●	●	●	●
	Guaranteed operation down to -20°C	●	●		●		
	Infrastructure cooling	●	●				
Low sound enclosure		○		○			

## Technical benefit overview

### *SkyAir* A-series

	<i>SkyAir</i> Alpha-series		<i>SkyAir</i> Advance-series		<i>SkyAir</i> Active-series	<i>SkyAir</i> Active-series
	RZAG-A	RZAG-NV1/NY1	RZASG-MV(1)/MY(1)	RZA-D	AZAS-MV/MY	ARXM-R(9)
Compact single fan casing on the entire range	●	●	●	●	●	●
Maximum piping length	50 m	85 m	50 m	100 m	30 m	30 m
Pivoting front plate		●		●		
7 segment display		●	●	●	●	●
Increased factory charge	●	●				
Integrated leak check		●				
Refrigerant bottom plate pass		●				
Specially developed R-32 swing compressor	●	●	●	●	●	●
Refrigerant cooled PCB		●	●	●	●	●
Intelligent Tablet controller - Onecta app	○	○	○	○	○	○

● standard, ○ optional


Low height.  
High value.



- ✓ Unique, low-height single fan range



- ✓ Compact unit, easy to transport



- ✓ Market-leading serviceability and handling



Fast and easy access to all critical component

- › Single screw access
- › Wider access area



Newly positioned handle for easier carrying



# Low sound enclosure

EKLN140A



## Benefits

- ✔ **Dedicated Daikin option for:**
  - › Sky Air Alpha-series
  - › Sky Air Advance-series
  - › VRV 5 S-series
- ✔ **Fully optimised and tested in Daikin factory**
  - › Guaranteed performance levels (sound, capacity, efficiency)
- ✔ **Outdoor unit sound reduction of up to -10 dB(A) on sound power levels**
  - › Enabling to meet local sound requirements
  - › Increased flexibility to apply outdoor units
  - › Reduces sound on the entire sound spectrum
- ✔ **Minimal capacity reduction**
  - › Separated air intake and discharge to prevent air flow short circuit
  - › No additional calculations needed thanks to factory tested data
- ✔ **Easy to integrate**
  - › Anthracite (RAL 7016), highly aesthetic finishing
  - › Mechanically designed to perfectly suit the Sky Air Alpha/ Advance and VRV 5 S-series casings
  - › Self-supporting; can be installed on any flat surface
- ✔ **Fast & easy installation & servicing**
  - › 100 % weather resistant
  - › Easy opening to access most system components
- ✔ **Durable**
  - › 3 years warranty on all components
  - › Made of stainless steel with robust double layer powder coating, ensuring maximum corrosion resistance

## Tried and tested: values that you can rely on

Our low sound enclosure eliminates possible problems and reduces your workload significantly:

- › **No incompatibilities** – tested combinations with the outdoor unit that you want to encase
- › **No surprises** – measured and guaranteed sound reduction according to ISO 3744
- › **No calculations** – tested performance values for capacity and efficiency



Sound power level measurement in acoustic chamber



Sound enclosure				EKLN140A
Casing	Colour			Anthracite (RAL 7016)
	Material			Sheet metal
Dimensions	Unit	Height	mm	1,100
		Width	mm	1,400
		Depth	mm	1,500
	Packed unit	Height	mm	1,017
		Width	mm	1,517
		Depth	mm	917
Weight	Unit			152
	Packed unit			186
Combines with	Sky Air Alpha-series			RZAG-NV1/NY1
	Sky Air Advance-series			RZA-D
	VRV 5 S-series			RXYS-A-V1/AY1




# Variable Refrigerant Temperature



## The ultimate customer experience

- ✓ Increases air discharge temperature and eliminates cold drafts!
- ✓ Increased customer comfort and reduced energy consumption!


› The system automatically increases its evaporating temperature ( $T_e$ ) when the gap between the actual indoor temperature ( $T_{in}$ ) and the setpoint ( $T_{set}$ ) is becoming smaller, increasing comfort and providing more stable operation

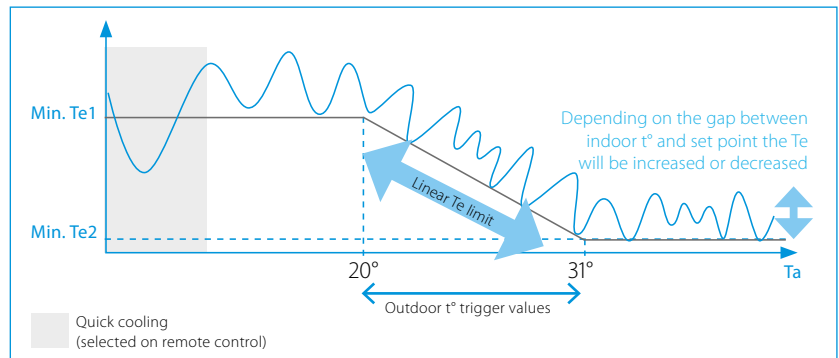

## Case study: JBC, Vilvoorde


- ✓ Two pair systems are installed in the same zone allowing comparison
- ✓ More energy efficient: up to 20% lower energy consumption

Average energy consumption over 5 months of operation

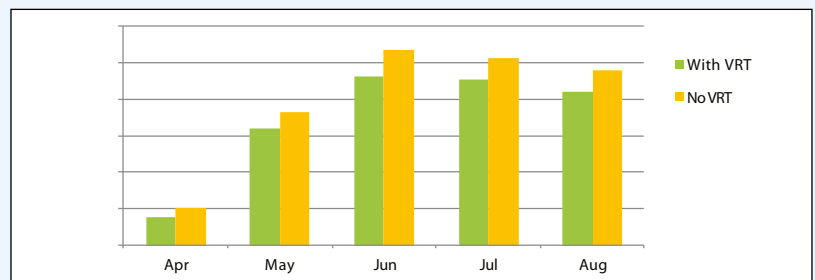

- ✓ Improved comfort: higher discharge temperatures

› More stable and continuous operation  
› Average discharge temperature increased with 3~4°C

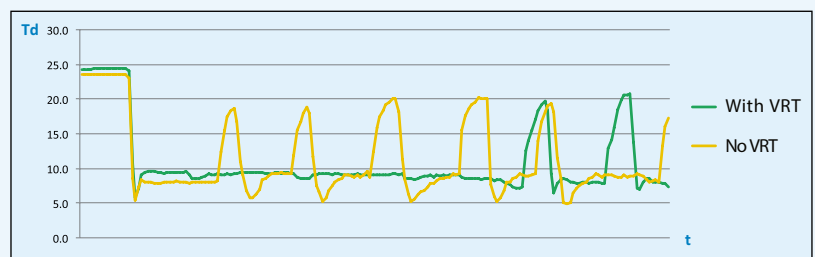



# Replacement technology

The quick and quality way of upgrading R-22 and R-410A systems

## Benefits to increase your profit Optimise your business

### Less installation time

Tackle more projects in less time thanks to faster installation. It is more profitable than replacing the full system with new piping.

### Lower installation costs

Reducing installation costs enables you to offer customers the most cost-effective solution and improve your competitive edge.

### Replace non-Daikin systems

**NON DAIKIN** **DAIKIN**

It is a trouble-free replacement solution for Daikin systems and for systems made by other manufacturers.

### Easy as one-two-three


A simple solution for replacement technology enables you to handle more projects for more customers in less time and offer them the best price! Everybody gains.

## How does it work?

### The Daikin low-cost upgrade solution

#### ! Replace indoor units

Contact your local dealer to check compatibility in case you need to keep the indoor units.

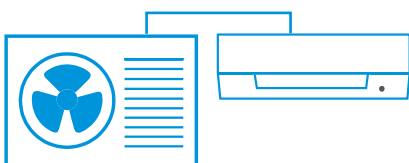

#### ✓ Replace outdoor units

Learn more about Daikin replacement solutions at [www.daikin.eu/en\\_us/knowledge-center/replacement-technology.html](http://www.daikin.eu/en_us/knowledge-center/replacement-technology.html)

## The benefits will convince your customer


- ✓ To prevent unexpected breakdown
- ✓ To lower running costs
- ✓ To protect the environment
- ✓ To improve comfort

### Your copper pipes will last for multiple generations

- copper pipes used in air conditioning systems tested by Daikin will last over 60 years after installation.

## Unique technologies

> Cleaning free piping re-usage thanks to unique hepta filtering for maximum particle reduction

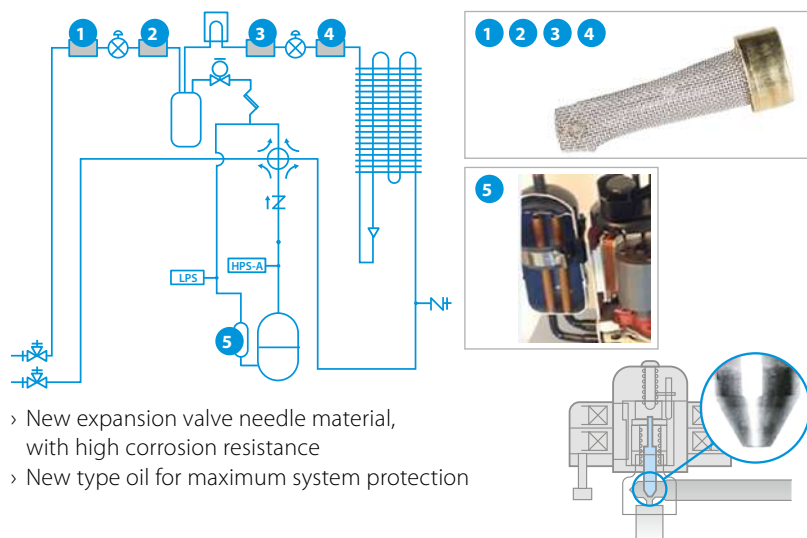

- > New expansion valve needle material, with high corrosion resistance
- > New type oil for maximum system protection

# Sky Air Alpha-series

Industry leading technology for commercial applications and even for technical rooms

- › Unique, low-height single fan range
- › Compact dimensions allow almost unnoticeable installation
- › Market-leading serviceability and handling, thanks to wide access area, 7-segment display and additional handle
- › The perfect balance in efficiency and comfort thanks to Variable Refrigerant Temperature: top seasonal efficiency throughout most of the year and quick reaction speed on the hottest days.
- › Suits high sensible, infrastructure cooling applications
- › Replace existing systems with R-32 technology without needing to replace the piping
- › Guarantees operation in both heating and cooling mode down to -20°C
- › Refrigerant cooled PCB guarantees reliable cooling, as it is not influenced by ambient temperature.
- › Maximum piping length up to 85m (50m for RZAG-A)
- › Outdoor units for pair, twin, triple, double twin application
- › Combines with EKLN-A low sound enclosure



## Comfort cooling combination table

	FCAHG-H				FCAG-B				FFA-A9				FDA-A				FDXM-F9				FBA-A(9)				FHA-A(9)				FAA-B				FTXM-R				FUA-A				FNA-A9				FVA-A				
capacity class	71	100	125	140	35	50	60	71	100	125	140	35	50	60	71	100	125	140	35	50	60	71	100	125	140	35	50	60	71	100	125	140	35	50	60	71	100	125	140	35	50	60	71	100	125	140			
RZAG35A					P							P							P							P							P							P									
RZAG50A						P							P							P							P							P							P								
RZAG60A							P							P							P							P							P							P							
RZAG71NV1	P						2				P			2						2				P			2					P							2				P						
RZAG100NV1		P				3	2				P			3	2					3	2			P			3	2				P							3	2			P						
RZAG125NV1			P			4	3	2			P			4	3	2				4	3	2			P			4	3	2			P							4	3	2			P				
RZAG140NV1	2					P	4	3	2			P	4	3	2				P	4	3	2			P	4	3	2				P	2						2				P	2					

P = pair application; 2/3/4 = twin/triple/double twin application

## Infrastructure cooling combination table

	FTXM-R				FAA-B				FHA-A(9)				FBA-A(9)				FDXM-F9				FUA-A				FNA-A9				FVA-A				FFA-A9				FCAHG-H				FCAG-B							
capacity class	35	50	60	71	100	35	50	60	71	100	125	140	35	50	60	71	100	125	140	35	50	60	71	100	125	140	35	50	60	71	100	125	140	35	50	60	71	100	125	140								
RZAG35A																																																
RZAG50A																																																
RZAG60A																																																
RZAG71NV1							P	3	2			P			3	2				3	2			P			3	2				P							3	2			P					
RZAG100NV1						2	4	3	2			2			P	4	3	2			P	4	3	2			P	4	3	2			P	4	3	2			P	4	3	2			P	4	3	2
RZAG125NV1						2	4	3	2			2			P	4	3	2			P	4	3	2			P	4	3	2			P	4	3	2			P	4	3	2			P	4	3	2
RZAG140NV1						2	4	3	2			2			P	4	3	2			P	4	3	2			P	4	3	2			P	4	3	2			P	4	3	2			P	4	3	2

P = Pair, 2 = Twin, 3 = Triple, 4 = Double twin; For more information on infrastructure cooling options refer to infrastructure cooling catalogue.

More details and final information can be found by scanning or clicking the QR codes.

RZAG-A

RZAG-NV1

RZAG-NY1

Outdoor unit		RZAG				RZAG-NV1				RZAG-NY1				
Dimensions	Unit	HeightxWidthxDepth	mm	734x870x373	81	85	95	81	85	94				
Weight	Unit	kg	52	64	66	69	70	64	66	69	70			
Sound power level	Cooling	dBA	62.0	63.0	64.0	64	66	69	70	64	66	69	70	
	Heating	dBA	62.0	63.0	64.0	-	-	68(1)	71(1)	-	-	68(1)	71(1)	
Sound pressure level	Cooling	Nom.	dBA	48.0	49.0	50.0	46	47	49	50	46	47	49	50
	Heating	Nom.	dBA	48.0	49.0	50.0	48	50	52	48	50	52		
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20~52	-20~52	-20~52	-20~52	-20~52	-20~52	-20~52	-20~52	-20~52	
	Heating	Ambient	Min.~Max.	°CWB	-20~24	-20~24	-20~18	-20~18	-20~18	-20~18	-20~18	-20~18	-20~18	
Refrigerant	Type/GWP			R-32/675.0	R-32/675.0	R-32/675.0	R-32/675.0	R-32/675.0	R-32/675.0	R-32/675.0	R-32/675.0	R-32/675.0		
	Charge	kg/TCO2Eq		1.55/1.05	3.20/2.16	3.70/2.50	3.20/2.16	3.70/2.50	3.20/2.16	3.70/2.50	3.20/2.16	3.70/2.50		
Piping connections	Liquid/Gas	OD	mm	6.35/9.52	6.35/12.7	9.52/15.9	9.52/15.9	9.52/15.9	9.52/15.9	9.52/15.9	9.52/15.9	9.52/15.9		
	Piping length	OU - IU	Max.	m	50	55	85	55	85	55	85			
	System	Equivalent	m	-	75	100	75	100	75	100				
	Chargeless	m	30	30	40	40								
	Level difference	IU - OU	Max.	m	30.0	30	30	30						
Additional refrigerant charge	kg/m		0.02 (for piping length exceeding 30m)	See installation manual	See installation manual	See installation manual	See installation manual	See installation manual	See installation manual	See installation manual	See installation manual			
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50 /220-240	1~/50 /220-240	1~/50 /220-240	1~/50 /220-240	1~/50 /220-240	1~/50 /220-240	1~/50 /220-240	1~/50 /220-240			
Current - 50Hz	Maximum fuse amps (MFA)	A		-	20	32	16	20	32	16	20	32		

(1)According to ENER Lot 21 | Contains fluorinated greenhouse gases

# Sky Air Advance-series

Technology and comfort combined for commercial applications

- › High efficiency:
  - Energy labels up to A++ (cooling) / A+ (heating)
  - Compressor offers substantial efficiency improvements
- › Very compact and easy to install
- › Replace existing systems with R-32 technology without needing to replace the piping
- › Guarantees operation in both heating and cooling mode down to -15°C
- › Refrigerant cooled PCB guarantees reliable cooling, as it is not influenced by ambient temperature.
- › Maximum piping length up to 50m, minimum piping length has no limitation
- › Outdoor units for pair, twin, triple, double twin application



## Pair, twin, triple and double twin application

capacity class		FCAG-B						FFA-A9			FDXM-F9			FBA-A(9)							
		35	50	60	71	100	125	140	35	50	60	35	50	60	35	50	60	71	100	125	140
RZASG71MV1		2			P			2			2			2				P			
RZASG100MV(1)	RZASG100MY(1)	3	2			P		3	2		3	2		3	2			P			
RZASG125MV(1)	RZASG125MY(1)	4	3	2			P	4	3	2	4	3	2	4	3	2				P	
RZASG140MV(1)	RZASG140MY(1)	4	3		2			P	4	3		4	3		4	3		2			P

capacity class		FDA-A		FHA-A(9)						FUA-A			FAA-B		FVA-A				FNA-A9				
		125	35	50	60	71	100	125	140	71	100	125	71	100	71	100	125	140	35	50	60		
RZASG71MV1			2			P				P			P		P						2		
RZASG100MV(1)	RZASG100MY(1)		3	2			P				P			P		P					3	2	
RZASG125MV(1)	RZASG125MY(1)	P	4	3	2			P				P					P				4	3	2
RZASG140MV(1)	RZASG140MY(1)		4	3		2			P	2			2		2				P		4	3	

P = Pair, 2 = Twin, 3 = Triple, 4 = Double twin

More details and final information can be found by scanning or clicking the QR codes.

RZASG-MV1

RZASG-MY1

RZASG-MV

RZASG-MY

Outdoor unit		RZASG		71MV1	100MV(1)	125MV(1)	140MV(1)	100MY(1)	125MY(1)	140MY(1)		
Dimensions	Unit	HeightxWidthxD	mm	770x900x320			990x940x320					
Weight	Unit		kg	60	70 (MY1) / 72 (MY)		78 (MV1) / 79 (MV)	70 (MY1) / 72 (MY)		78 (MV1) / 79 (MV)		
Sound power level	Cooling		dBA	65	70	71	73	70	71	73		
	Heating		dBA			71(1)	73(1)		71(1)	73(1)		
Sound pressure level	Cooling	Nom.	dBA	46	53		54	53		54		
	Heating	Nom.	dBA	47	57							
Operation range	Cooling	Ambient	Min.~Max.	°CDB			-15~46					
	Heating	Ambient	Min.~Max.	°CWB			-15~-15.5					
Refrigerant	Type/GWP			R-32/675								
	Charge		kg/TCO2Eq	2.45/1.65	2.60/1.76		2.90/1.96	2.60/1.76		2.90/1.96		
Piping connections	Liquid/Gas	OD	mm	9.52/15.9								
	Piping length	OU - IU	Max.	m								
		System	Equivalent	m								
			Chargeless	m								
		Additional refrigerant charge		kg/m	See installation manual							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /220-240					3~/50 /380-415			
	Current - 50Hz	Maximum fuse amps (MFA)	A	20	25	32		16				

(1)According to ENER Lot 21 | Contains fluorinated greenhouse gases

## Sky Air Advance-series

Large Sky Air system for commercial applications in the most compact casing ever

- › Compact (870mm high) and lightweight single fan design makes the unit unobtrusive, saves space and is easy to install
- › Market-leading serviceability and handling, thanks to wide access area, 7-segment display and additional handle
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A, leads directly to lower energy consumption thanks to its high energy efficiency and has a lower refrigerant charge
- › Replace existing systems with R-32 technology without needing to replace the piping
- › Guarantees operation in heating mode down to -20°C
- › Refrigerant cooled PCB guarantees reliable cooling, as it is not influenced by ambient temperature.
- › Maximum piping length up to 100m
- › Maximum installation height difference up to 30m
- › Outdoor units for pair, twin, triple, double twin application
- › Combines with EKLN-A low sound enclosure



### Comfort cooling combination table

capacity class	FCAG-B					FFA-A9		FDXM-F9				FBA-A(9)					FHA-A(9)					FDA-A			FUA-A			FAA-B			FVA-A			FNA-A9		
	50	60	71	100	125	50	60	50	60	50	60	71	100	125	50	60	71	100	125	125	200	250	71	100	125	71	100	71	100	71	100	125	50	60		
RZA200D	4	3	3	2		4	3	4	3	4	3	4	3	2			4	3	3	2		P		3	2		3	2	3	2	3	2			4	3
RZA250D		4			2		4		4		4			2		4			2	2		P			2							2		4	3	

P = pair application

More details and final information can be found by scanning or clicking the QR codes.

RZA-D

Outdoor unit		RZA		200D		250D	
Dimensions	Unit	HeightxWidthxDepth	mm	870x1,100x460			
Weight	Unit		kg	117			
Sound power level	Cooling		dBA	73		76	
	Heating		dBA	76		79	
Sound pressure level	Cooling	Nom.	dBA	53		57	
	Heating	Nom.	dBA	60		63	
Operation range	Cooling	Ambient	Min.~Max.	°CDB			
	Heating	Ambient	Min.~Max.	°CWB			
Refrigerant	Type/GWP			R-32/675			
	Charge		kg/TCO <sub>2</sub> Eq	5/3.38			
Piping connections	Liquid/Gas	OD	mm	9.52/22.2			
	Piping length	OU - IU	Max.	m			
		System	Chargeless	m			
			Additional refrigerant charge	kg/m			
Power supply	Phase/Frequency/Voltage		Hz/V				
Current - 50Hz	Maximum fuse amps (MFA)		A				

Contains fluorinated greenhouse gases

# Sky Air Active-series

Ideal solution for busy environments and small shops

- › High efficiency:
  - Energy labels up to A+ (cooling) / A (heating)
  - compressor offers substantial efficiency improvements
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Very compact and easy to install
- › Replace existing systems with R-32 technology without needing to replace the piping



- › Guarantees operation in heating mode down to -15°C and in cooling mode down to -10°C
- › Refrigerant cooled PCB guarantees reliable cooling, as it is not influenced by ambient temperature.
- › Piping length up to 30m
- › Exclusively offered for pair applications



AZAS100-140MV\_MY

## Pair application

capacity class	FCAG-B				FBA-A(9)				FAA-B				NEW FHA-A(9)				NEW FVA-A				ADEA-A		
	71	100	125	140	71	100	125	140	71	100	125	140	71	100	125	140	71	100	125	140	71	100	125
ARXM-R	P				P				P												P		
AZAS-MV		P	P	P		P	P	P		P				P	P	P		P	P	P		P	P
AZAS-MY		P	P	P		P	P	P		P				P	P	P		P	P	P			

P = pair application

More details and final information can be found by scanning or clicking the QR codes.

ARXM-R                      AZAS-MV                      AZAS-MY

Outdoor Unit				ARXM71R	AZAS100MV	AZAS125MV	AZAS140MV	AZAS100MY	AZAS125MY	AZAS140MY	
Dimensions	Unit	HeightxWidthxDepth	mm	734x954x401	990x940x320						
Weight	Unit		kg	49.0	72		79	72		79	
Sound power level	Cooling		dBA	-	70	71	72	70	71	72	
	Heating		dBA	-	70	71	72	70	71	72	
Sound pressure level	Cooling	Nom.	dBA	52.0	53	54	55	53	54	55	
	Heating	Nom.	dBA	52.0	57	58	59	57	58	59	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~46						
	Heating	Ambient	Min.~Max.	°CWB	-15~24	-15~15.5					
Refrigerant	Type/GWP				R-32/675						
	Charge		kg/TCO2Eq	1.15/0.780	2.60/1.76		2.90/1.96	2.60/1.76		2.90/1.96	
Piping connections	Liquid/Gas	OD	mm	9.52/15.9							
	Piping length	OU - IU	Max.	m	30						
		System	Equivalent	m	-	50					
			Chargeless	m	-	30					
		Additional refrigerant charge		kg/m	0.035	See installation manual					
	Level difference	IU - OU	Max.	m	20.0						
Power supply	Phase/Frequency/Voltage				1~/50/220-240				3~/50/380-415		
	Current - 50Hz	Maximum fuse amps (MFA)	A	-	25	32		16			

Contains fluorinated greenhouse gases

		FCAHG-H FCAG-B	FFA-A9	FDXM-F9	FBA-A(9)		
<b>INDOOR UNITS</b>							
<b>Panels</b>	Decoration panel (obligatory for cassette units, optional for others)		Standard panels: BYCQ140E (white) / BYCQ140EW (full white)(1) / BYCQ140EB (black) Auto cleaning panels(2) (4): BYCQ140EGF (white) / BYCQ140EGFB (black) Designer panels: BYCQ140EP (white) / BYCQ140EPB (black)	BYFQ60C2W1W (white panel) BYFQ60C2W1S (grey panel) BYFQ60B3W1 (standard panel)			
	Panel spacer for reducing required installation height			KDBQ44B60 (only for standard panel)			
	Sealing kit for 3- or 2-directional air discharge		KDBHQ56B140 (11)	BDBHQ44C60			
	Sensor kit		BRYQ140B (white) BRYQ140BB (black) BRYQ140C (white designer) BRYQ140CB (black designer)	BRYQ60AW (white)(9) BRYQ60AS (silver)(9)			
<b>Individual control systems</b>	Onecta app		BRP069C82 (14) (18)	BRP069C81 (18)	BRP069C81	BRP069C81 (18)	
	Infrared remote control (incl. receiver)		BRC7FA532F (white) (11) (16) BRC7FA532FB (black) (11) (16) BRC7F8532F (designer white) (11) (16) BRC7F8532FB (designer black) (11) (16)	BRC7EB530W for standard panel (5)(6) BRC7F530W for white panel (5)(6) BRC7F530S - for silver panel (5)(6)	BRC4C65	BRC4C65	
	<b>Madoka</b> BRC1H52W (9) (White) / BRC1H52S (9) (Silver) / BRC1K552K (9) (Black) User-friendly wired remote controller with premium design		•	•	•	•	
	BRC1E53A/B/C (3) (13) - Wired remote controller with full-text interface and back-light		•	•	•	•	
<b>Centralised control systems</b>	DIII-net connection - for connection to centralized control		standard	standard	standard	standard	
	DCC601A51 - intelligent Tablet Controller		•	•	•	•	
	DCS601C51 (13) - intelligent Touch Controller		•	•	•	•	
	DCS302C51 (13) - Central remote controller		•	•	•	•	
	DCS301B51 (13) - Unified ON/OFF controller		•	•	•	•	
	<b>Building Management System &amp; Standard protocol interfaces</b>	<b>for individual control</b>	EKMBPP1 - Modbus interface for monitoring and control	•	•	•	•
			RTD-10 - Modbus interface for infrastructure cooling	•	•	•	•
			RTD-20 - Modbus interface for retail	•	•	•	•
			RTD-HO - Modbus interface for hotel	•	•	•	•
			KLIC-DI_V2 - KNX Interface	•	•	•	•
<b>for central control</b>		DCM601B51 - intelligent Touch Manager	•	•	•	•	
		DGE601A51 - Edge adapter for connection to Daikin Cloud Plus	•	•	•	•	
		DGE602A51 - Edge lite adapter for connection to Daikin Cloud Plus	•	•	•	•	
		EKMBDXB - Modbus interface	•	•	•	•	
		DCM010A51 - Daikin PMS interface	•	•	•	•	
DMS502A51 - BACnet Interface	•	•	•	•			
DMS504B51 - LonWorks Interface	•	•	•	•			
<b>Filters</b>	Auto cleaning filter		see deco panel		BAE20A62 (25 - 35) BAE20A102 (50 - 60)		
	UV Streamer kit (purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy indoor environment)	UV Streamer kit	BAEF125AWB (22)				
		Replacement filter	BAF55A125				
	High efficiency filter		ePM10 60% BAF552AA160 (23) (BAF552AA160-5: box of 5 filters) (BAF552AA160-10: box of 10 filters)				
	Replacement long-life filter, non-woven type		KAF5511D160	KAF441C60			
<b>Wiring and sensors</b>	Extension wire auto cleaning panel (required when auto cleaning panel AND Onecta app are both installed)						
	K.RCS - External wired temperature sensor		KRCS01-5B	KRCS01-4	KRCS01-4	KRCS01-4	
	K.RSS - External wireless temperature sensor		SB.K.RSS_RFC (EKEWTSC-2 + K.RSS)	•		•	
<b>Wiring and sensors Adapters</b>	Wiring adapter with 2 output signals (compressor / Error, Fan output)		KRP1BA58 (10)(11)	KRP1B57 (10)	KRP1B56 (10)		
	Adapter (interlock for fresh air intake fan)					KRP1B54	
	Adapter with 4 output signals (compressor / Error, Fan, Aux, heater, Humidifier output)		EKRP1C12 (10)(11)	EKRP1B2		EKRP1B2 (7)	
	Adapter for centralised external monitoring/control (controls 1 entire DIII-NET system)				KRP2A53 (10)	KRP2A51 (7)(10)	
	Adapter for centralised external monitoring/control via dry contacts and setpoint control via 0-140Ω (for dedicated indoor)		KRP4A53 (10)(11)(17)	KRP4A51	KRP4A54-9	KRP4A52 (10)	
	Adapter for keycard and/or window contact connection (in combination with BRC1H*, BRC1/2/3E* only)		BRP7A53	BRP7A53	BRP7A54 (10)	BRP7A51 (12)	
	Installation box/Mounting plate for adapter PCBs (when there is no space in the switchbox, an installation box is required)		KRP1H98A (11)	KRP4A93	KRP1BC101	KRP1BC101	
Wiring kit for Remote ON/OFF or Forced OFF		standard	standard	standard	standard		
<b>Others</b>	Drain pump kit						
	Multi zoning kit (for detailed model code overview refer to multizoning argue card in this catalogue)				•	•	
	L-type piping kit (upward direction)						
	Fresh air intake kit (direct installation type)		KDDP55C160-1 (chamber) KDDP55D160-2 (diffuser) (11)	KDDQ44XA60			
	Air discharge adapter for round duct					KDAP25A56A (35-50) KDAP25A71A (60-71) KDAP25A140A (100-140)	

- Dirt formation is more easily visible on white insulation. It is recommended not to install this option in environments with a high concentration of dirt.
- To be able to control option BYCQ140EG(F)/EGFB, controller BRC1H\*, BRC1E\* is needed. These options cannot be combined with RXY5Q\*, multi or non-inverter split units
- Included languages are:  
A: English, German, French, Dutch, Spanish, Italian and Portuguese  
B: English, Bulgarian, Croatian, Czech, Hungarian, Romanian and Slovenian  
C: English, Greek, Polish, Russian, Albanian, Slovak and Turkish

- The option is intended exclusively for use in fine dust environments (e.g. Clothing shops). Do not use it in environments that are greasy or have high humidity. F = finer mesh
- Sensing function is not available
- Individual flap control function not available
- If installing an electrical heater, an option PCB for external electrical heater (EKRP1B2) for each indoor unit is required. These options require mounting plate KRP4A96. Electrical heaters and humidifiers are field-supplied. Do not install them inside the equipment.
- Mounting plate KRP4A96 is required for these options. Maximum 2 option PCB's can be mounted.
- This option cannot be used with RR and RQ models





		R-32				
		RZAG-A	RZAG-NV1/NY1	RZASG-MV(1)/MY(1)	RZA-D	AZAS-MV/MY
Refrigerant branch piping (3)	for twin		KHRQ58T (imperial size)	KHRQ58T (imperial size)	KHRQ22M20TA (imperial size)	
	for triple		KHRQ58H (imperial size)	KHRQ58H (100 - 140) (imperial size)	KHRQ250H7 (imperial size)	
	for double twin		KHRQ58T (3x) (125 - 140) (imperial size)	KHRQ58T (3x) (125 - 140) (imperial size)	KHRQ22M20TA (x3) (imperial size)	
	Asymmetric combinations piping reducer	ASYCPIR (see table below)				
<b>Demand adapter kit</b>			SB.KRP58M52 (1)	SB.KRP58M52 (1)	KRP58M51 (2)	
<b>Bottom plate heater - To keep drain holes ice-free in extreme weather conditions</b>			EKBPH140N		EKBPH250D	
<b>Sound enclosure</b>			EKLN140A		EKLN140A	

(1) Contains KRP58M1 and obligatory mounting kit EKMKSA2  
 (2) To mount KRP58M51, an additional mounting kit (EKMKSA3) needs to be used (obligatory)  
 (3) For metric size refrigerant branching contact your local sales representative

**EKLN140A - Sound enclosure**

Drain pan	EKLN140-DP
Drain pan heater tape	EKLN140-DPHT (1)


(1) Only in combination with EKLN140-DP

**Option for asymmetric combination (Asymmetric combinations piping reducer)**

ASYCPIR		Liquid	GAS	
		ø 9.52 → ø 6.4	ø 12.7 → ø 9.52	ø 15.9 → ø 12.7
RZAG35A	FDXM50F9		•	
	FFA50A9		•	
	FBA50A9		•	
	FCAG50B		•	
	FNA50A9		•	
	FTXM50R		•	
	FHA50A9		•	
RZAG60A	FBA71A9	•		
	FCAG71B	•		•
	FTXM71R			•
	FHA71A9	•		•

Example of using:

1) Connecting a pipe of ø12.7 to a gas pipe connection port for ø15.9:

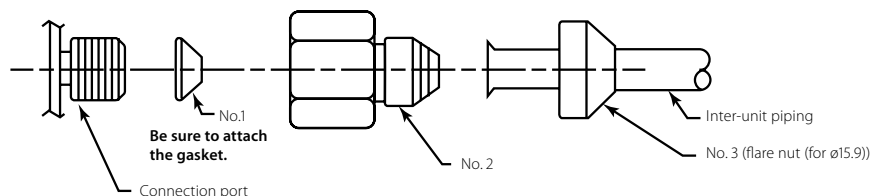




Wide range  
of R-32 rooftop units  
to cover your needs

## Rooftop

Why choose Daikin Rooftop series	458
UATYA-BBAY1	460
UATYA-BFC2Y1	460
UATYA-BFC3Y1	461
UATYA-BRS4	461
Options & Accessories	464




### Made-To-Stock units (MTS)

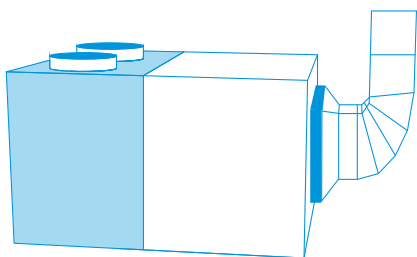

48 predefined units readily available from stock

- › Fast delivery
- › 3 versions: Base, 2 dampers and 3 dampers
  - › Thermodynamic heat recovery available on full FC3 range
- › Capacity up to 190 kW!
- › Comes with a wide range of standard integrated features

### Made-To-Order units (MTO)

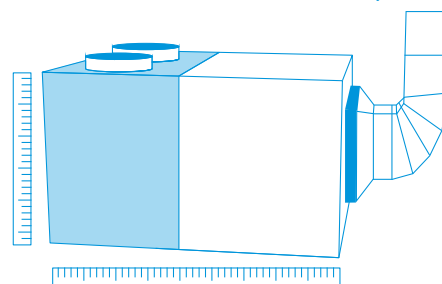

Fully customizable units for maximum flexibility

- › Almost infinite configuration possibilities thanks to wide choice of options
- › 4 versions: Base, 2 dampers, 3 dampers and 4 dampers
  - › Thermodynamic heat recovery available on full FC3 range
  - › Premium efficiency plate heat exchanger available on RS4 range
- › Capacity up to 190 kW!
- › Comes with a wide range of standard integrated features
- › Easy selection via selection software: [rooftop.daikin.eu](http://rooftop.daikin.eu)

## Products overview rooftops

Capacity class (kW)

Type	Model	MTS Product name	Refrigerant	Version	25	30	40	50	60	70	80	90	100	110	120	140	150	160	180	190
Air cooled Heat pump	<b>Rooftop unit</b> With extensive base package for high installation flexibility and easy servicing - 'Plug and play' for easy installation - High efficiency - Flexible supply and return air direction - Direct integration with Daikin or third party BMS - Factory pre-charged refrigerant	UATYA-BBAY1	<b>R-32</b>	MTS	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	<b>Rooftop unit</b> 2 damper version with integrated fresh air - Free cooling with up to 100% fresh air intake - Comes with all Base model features	UATYA-BFC2Y1		MTO	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	<b>Rooftop unit</b> 3 damper version with integrated fresh air and extraction - Integrated extraction damper eliminates over-pressure - Thermodynamic heat recovery, recovering waste heat - Comes with all FC2 model features	UATYA-BFC3Y1		MTO	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	<b>Rooftop unit</b> 4 damper version with integrated fresh air, extraction and plate heat exchanger - Premium efficiency plate heat exchanger, recovering waste heat - Comes with all FC3 model features	UATYA-BRS4*		MTO	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

\* Indicative model name. Correct model name to be retrieved from selection software.

## Standard integrated features on all Made-To-Stock and Made-To-Order units

### 1 R-32 refrigerant

- › Top sustainability thanks to the use of low GWP (675) refrigerant
- › Single component refrigerant, easy to re-use and recycle



**BLUEEVOLUTION**

### 2 Inverter driven compressors

- › Great year-round seasonal efficiency
- › Available up to 120 kW models

### 3 Capacity range up to 190 kW!

- › More flexibility to tackle larger projects with a small footprint



### 4 25 mm double skinned panels

- › Ensuring long-lasting life and providing good thermal and sound insulation

## More standard integrated features

- › ISO Coarse 75% filter (G4) (standard for MTS only)
- › Standard clogged filter alarm
- › Flexible air delivery
- › Hydrophilic aluminum fins on indoor and outdoor unit side
- › Mesh coil guard on outdoor heat exchanger
- › Factory mounted drain pan with heater
- › Single operation voltage-free contact
- › Power supply connection safety through max/min voltage relay and reversed phase connection

### 5 Full color touch display

- › Intuitive to use
- › Better visualisation of unit parameters



### 6 Integrated connectivity

- › Integration into Daikin intelligent Touch Manager BMS (via BACNET protocol)
- › Integration in 3rd party BMS systems via Ethernet port (BACnet TCP/IP & Modbus TCP/IP) or 3-cable port (Modbus over RS485)




### 7 Selection software

- › Easy selection of the correction unit and options based on location conditions
- › Direct availability of technical drawings



### 8 BIM objects

- › All made to stock units available as Revit, IFC, Archicad and AutoCAD files
- › All made to order units available as Revit




Download our objects now!  
[bim.daikin.eu](http://bim.daikin.eu)

# 4 versions to choose from


## UATYA-BBAY1

### High installation flexibility and easy servicing

- › Easy to install 'plug and play' concept plus single installation configuration; no additional piping is required since indoor and outdoor sides are pre-connected
- › High efficiency and reliable scroll compressor
- › Factory pre-charged refrigerant ensures clean and efficient operation




Made-To-Stock units (MTS)



Made-To-Order units (MTO)


### HEATING OPERATION EXAMPLE

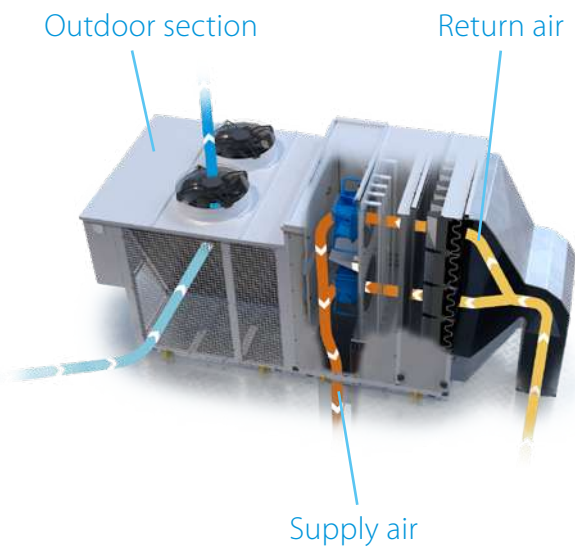


## UATYA-BFC2Y1

### 2 damper version, with integrated fresh air

- › Free cooling with up to 100% fresh air possible
  - › Improved air quality
  - › Energy saving using fresh outdoor air to cool the building
- › Includes all Base model features




Made-To-Stock units (MTS)





Made-To-Order units (MTO)

### HEATING OPERATION EXAMPLE

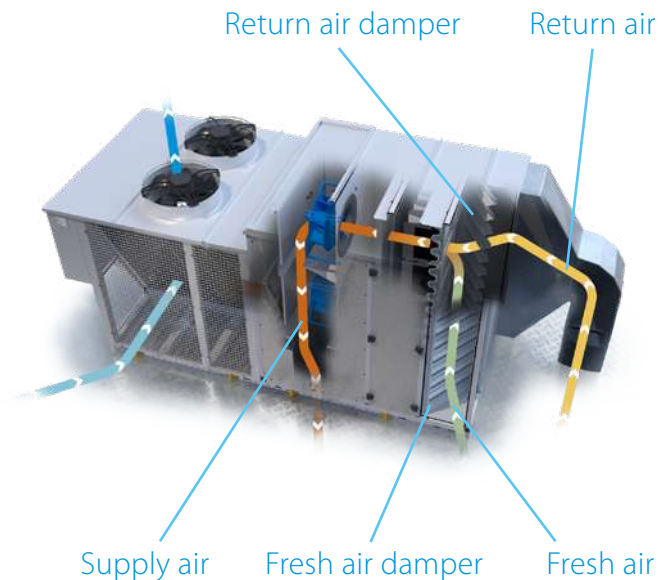

### 3 damper version, with integrated fresh air and extraction

- > Extraction damper integrated
  - > Eliminates excessive overpressure in the building
  - > Including high efficient extraction fan for optimum air circulation in larger buildings
- > Thermodynamic heat recovery
  - > Saves energy by recovering waste heat through the outdoor heat exchanger
  - > Available on all models
- > Includes all FC2 model features

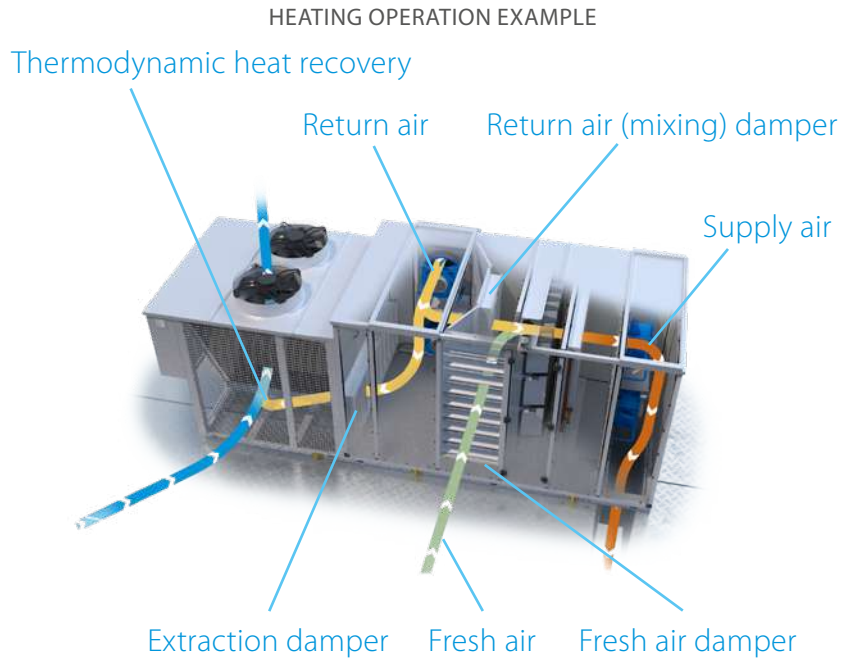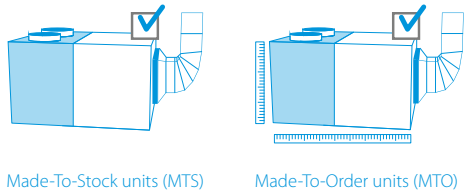


### UATYA-BRS4\*


### 4 damper version, with integrated fresh air, extraction and plate heat recovery

- > Premium efficiency counter flow plate heat exchanger
  - > Recovers up to 58% waste heat from the return air
  - > Available in 50% and 100% return air heat recovery
- > Bypass damper to allow plate heat exchange or free cooling
- > Additional thermodynamic heat recovery available up to 50kW models
- > Includes all FC3 model features
- > Only available as Made-To-Order model


\* Indicative model name. Correct model name to be retrieved from selection software.



Made-To-Order units (MTO) only

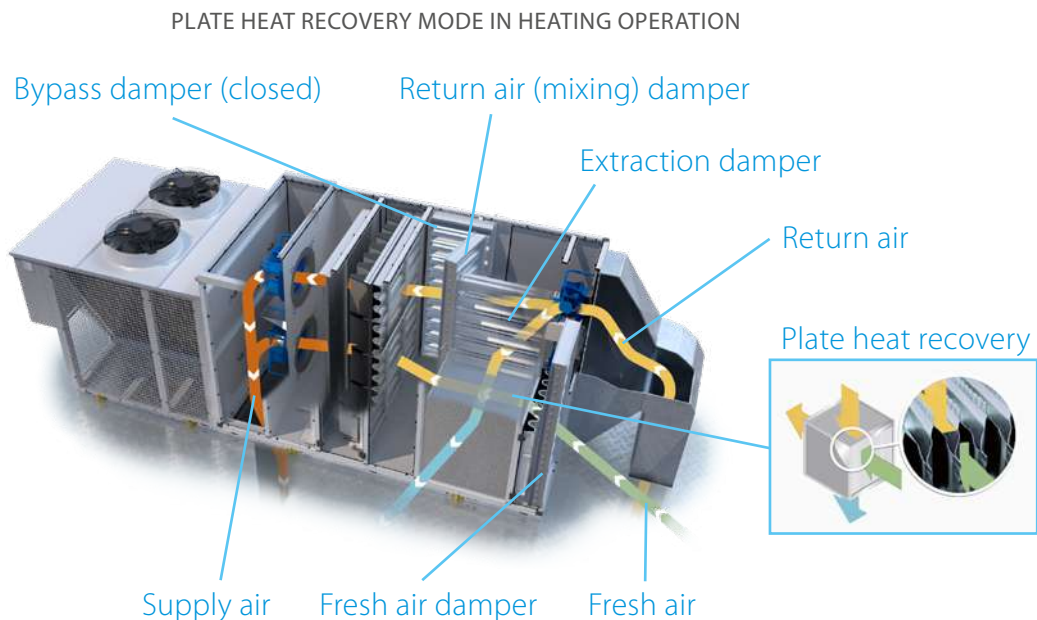

# Specifications Made-To-Stock units



## UATYA-BBAY1

More details and final information can be found by scanning or clicking the QR codes.



UATYA-BBAY1

UATYA20-30BBAY1



Indoor Unit			UATYA	25	30	40	50	60	70	80	90	100	110	120	140	150	160	180	190
Cooling capacity	Nom.		kW	24.1	31.3	38.7	45.7	58.8	65.3	74.8	89.8	95.8	108.9	115.0	133.4	144.7	154.6	171.9	187.0
Heating capacity	Nom.		kW	24.0	29.5	36.3	46.2	55.1	64.9	68.5	84.2	92.8	101.5	108.0	123.1	136.4	147.1	157.1	176.9
EER				2.83	3.09	3.06	2.96	3.12	2.92	3.09	3.06	2.97	2.99	2.91	3.14	3.02	3.05	3.07	2.97
COP				3.22	3.31	3.26	3.24	3.25	3.21	3.37	3.22	3.20	3.35	3.25	3.44	3.33	3.26	3.33	3.27
Space cooling	Capacity	Pdesign	kW	24.1	31.3	38.7	45.7	58.8	65.3	74.8	89.8	95.8	108.9	115.0	133.4	144.7	154.6	171.9	187.0
	SEER			4.52	4.79	5.39	5.26	5.50	4.53	5.56	5.47	5.17	5.29	5.15	4.38	4.26	4.27	4.15	4.08
Space heating (Average climate)	Capacity	Pdesign	kW	24.0	29.5	36.3	46.2	55.1	64.9	68.5	84.2	92.8	101.5	108.0	123.1	136.4	147.1	157.1	176.9
	SCOP/A			3.35	3.38	3.67	3.65	3.47	3.41	3.70	3.65	3.62	3.56	3.53	3.39	3.36	3.34	3.31	3.34
Evaporator	Supply side	Air discharge direction		Bottom, Right, Left															
	Fan	Air flow rate	m <sup>3</sup> /h	4,500	5,800	7,500	9,000	11,000	13,000	14,500	16,500	18,000	19,800	21,600	25,000	26,500	28,000	30,500	31,500
Return side	Air intake direction	Air discharge direction	Pa	300															
	Supply side	Thermodynamic heat recovery - Air discharge direction		Rear															
Fresh air - Supply side	Standard	Air discharge direction		No															
	Ratio	In free cooling	%	No															
Condenser	Air flow rate	Cooling	m <sup>3</sup> /h	17,275	16,038	16,374	16,341	31,183	32,203	35,774	37,285	36,195	38,143	36,865	70,704	72,395	67,733	70,200	72,005
	Refrigerant	GWP		675															
Dimensions	Unit	Height	mm	1,924			2,374			1,924			2,250			2,374			
	Width	mm	2,427						4,317						5,117				
Weight	Unit	kg	852	908	966	986	1,551	1,651	1,798	1,856	1,922	2,008	2,018	2,454	2,462	2,504	2,558	2,636	
	Casing	Colour	RAL 7035																
Sound pressure level	Cooling	dB(A)	63.9	66.0	68.0	67.3	69.0	68.1	72.6	68.7	69.9	70.6	74.2	68.3	68.7	69.1	70.0		
Sound power level	Cooling	dB(A)	82.2	84.3	86.8	86.1	88.5	87.5	92.5	88.6	89.8	90.5	94.1	88.6	89.0	89.3	90.2		
Operation range	Cooling	Min. ~ Max.	°CDB	-10 ~ 48															
	Heating	Min. ~ Max.	°CWB	-15 ~ 26															
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400																
Current	Recommended fuses	A	25	40	50	63	80	100						160			200		

## UATYA-BFC2Y1

More details and final information can be found by scanning or clicking the QR codes.



UATYA-BFC2Y1

UATYA60-70BFC2Y1



Indoor Unit			UATYA	25	30	40	50	60	70	80	90	100	110	120	140	150	160	180	190
Cooling capacity	Nom.		kW	24.1	31.3	38.7	45.7	58.8	65.3	74.8	89.8	95.8	108.9	115.0	133.4	144.7	154.6	171.9	187.0
	With 30% fresh air		kW	25.8	33.6	41.5	48.9	63.0	69.9	80.7	96.6	102.7	117.0	122.7	143.1	154.9	165.7	184.2	200.5
Heating capacity	Nom.		kW	24.0	29.5	36.3	46.2	55.1	64.9	68.5	84.2	92.8	101.5	108.0	123.1	136.4	147.1	157.1	176.9
	With 30% fresh air		kW	24.3	29.6	36.5	46.3	55.1	65.1	69.2	84.7	94.8	102.1	108.7	124.2	137.5	148.4	158.7	180.2
EER				2.83/2.96	3.09/3.26	3.06/3.21	2.96/3.10	3.12/3.28	2.92/3.06	3.09/3.26	3.06/3.24	2.97/3.13	2.99/3.13	2.91/3.03	3.14/3.29	3.02/3.16	3.05/3.19	3.07/3.21	2.97/3.10
COP				3.22/3.43	3.31/3.53	3.26/3.48	3.24/3.51	3.25/3.47	3.21/3.44	3.37/3.62	3.22/3.47	3.20/3.46	3.35/3.60	3.25/3.48	3.44/3.69	3.33/3.57	3.26/3.50	3.33/3.58	3.27/3.55
Space cooling	Capacity	Pdesign	kW	24.1	31.3	38.7	45.7	58.8	65.3	74.8	89.8	95.8	108.9	115.0	133.4	144.7	154.6	171.9	187.0
	SEER			4.52	4.79	5.39	5.26	5.50	4.53	5.56	5.47	5.17	5.29	5.15	4.38	4.26	4.27	4.15	4.08
Space heating (Average climate)	Capacity	Pdesign	kW	24.0	29.5	36.3	46.2	55.1	64.9	68.5	84.2	92.8	101.5	108.0	123.1	136.4	147.1	157.1	176.9
	SCOP/A			3.35	3.38	3.67	3.65	3.47	3.41	3.70	3.65	3.62	3.56	3.53	3.39	3.36	3.34	3.31	3.34
Evaporator	Supply side	Air discharge direction		Frontal, Left															
	Fan	Air flow rate	m <sup>3</sup> /h	4,500	5,800	7,500	9,000	11,000	13,000	14,500	16,500	18,000	19,800	21,600	25,000	26,500	28,000	30,500	31,500
Return side	Air intake direction	Air discharge direction	Pa	300															
	Supply side	Thermodynamic heat recovery - Air discharge direction		Rear, Left, Right															
Fresh air - Supply side	Standard	Air discharge direction		No															
	Ratio	In free cooling	%	Yes															
Condenser	Air flow rate	Cooling	m <sup>3</sup> /h	17,275	16,038	16,374	16,341	31,183	32,203	35,774	37,285	36,195	38,143	36,865	70,704	72,395	67,733	70,200	72,005
	Refrigerant	GWP		675															
Dimensions	Unit	Height	mm	1,924			2,374			1,924			2,250			2,374			
	Width	mm	2,943						4,879						5,679				
Weight	Unit	kg	981	1,014	1,084	1,143	1,703	1,803	1,984	2,040	2,110	2,196	2,206	2,658	2,668	2,708	2,746	2,828	
	Casing	Colour	RAL 7035																
Sound pressure level	Cooling	dB(A)	63.9	66.0	68.0	67.3	69.0	68.1	72.6	68.7	69.9	70.6	74.2	68.3	68.7	69.1	70.0		
Sound power level	Cooling	dB(A)	82.2	84.3	86.8	86.1	88.5	87.5	92.5	88.6	89.8	90.5	94.1	88.6	89.0	89.3	90.2		
Operation range	Cooling	Min. ~ Max.	°CDB	-10 ~ 48															
	Heating	Min. ~ Max.	°CWB	-15 ~ 26															
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400																
Current	Recommended fuses	A	25	40	50	63	80	100						160			200		



## UATYA-BFC3Y1

More details and final information can be found by scanning or clicking the QR codes.




UATYA-BFC3Y1



UATYA80-120BFC3Y1


Indoor Unit		UATYA	25	30	40	50	60	70	80	90	100	110	120	140	150	160	180	190			
Cooling capacity	Nom.	kW	24.1	31.3	38.7	45.7	58.8	65.3	74.8	89.8	95.8	108.9	115.0	133.4	144.7	154.6	171.9	187.0			
	With 30% fresh air	kW	26.0	33.9	42.5	49.6	63.7	70.5	81.3	96.8	104.3	118.0	124.5	145.6	156.8	168.3	186.5	204.4			
Heating capacity	Nom.	kW	24.0	29.5	36.3	46.2	55.1	64.9	68.5	84.2	92.8	101.5	108.0	123.1	136.4	147.1	157.1	176.9			
	With 30% fresh air	kW	25.0	31.0	38.3	47.7	57.1	68.6	71.6	87.2	97.9	107.0	112.3	132.0	147.5	160.0	173.5	191.6			
EER			2.83/2.96	3.09/3.20	3.06/3.27	2.96/3.12	3.12/3.23	2.92/3.00	3.09/3.21	3.06/3.22	2.97/3.14	2.99/3.11	2.91/3.01	3.14/3.26	3.02/3.14	3.05/3.18	3.07/3.21	2.97/3.14			
COP			3.22/3.41	3.31/3.50	3.26/3.51	3.24/3.46	3.25/3.40	3.21/3.39	3.37/3.56	3.22/3.45	3.20/3.42	3.35/3.57	3.25/3.40	3.44/3.62	3.33/3.57	3.26/3.49	3.33/3.63	3.27/3.50			
Space cooling	Capacity Pdesign	kW	24.1	31.3	38.7	45.7	58.8	65.3	74.8	89.8	95.8	108.9	115.0	133.4	144.7	154.6	171.9	187.0			
	SEER		4.52	4.79	5.39	5.26	5.50	4.53	5.56	5.47	5.17	5.29	5.15	4.38	4.26	4.27	4.15	4.08			
Space heating	Capacity Pdesign	kW	24.0	29.5	36.3	46.2	55.1	64.9	68.5	84.2	92.8	101.5	108.0	123.1	136.4	147.1	157.1	176.9			
	SCOP/A		3.35	3.38	3.67	3.65	3.47	3.41	3.70	3.65	3.62	3.56	3.53	3.39	3.36	3.34	3.31	3.34			
Evaporator	Supply side	Air discharge direction	Frontal, Left						Bottom, Right, Left, Frontal												
	Fan	Air flow rate	4,500	5,800	7,500	9,000	11,000	13,000	14,500	16,500	18,000	19,800	21,600	25,000	26,500	28,000	30,500	31,500			
Return side	Air intake direction	Air discharge direction	Rear						Right												
	Fan	Air flow rate	4,500	5,800	7,500	9,000	11,000	13,000	14,500	16,500	18,000	19,800	21,600	25,000	26,500	28,000	30,500	31,500			
Supply side	Nominal ESP	Pa	300																		
	Thermodynamic heat recovery - Air discharge direction		Yes																		
Fresh air	Standard - Air discharge direction		Yes																		
	Ratio	Standard	30																		
Condenser	In free cooling	%	100																		
	Air flow rate Cooling Refrigerant	m <sup>3</sup> /h	15,725	16,038	16,374	16,341	31,183	32,203	35,774	37,285	36,195	38,143	36,865	70,704	72,395	67,733	70,200	72,005			
Dimensions	Unit	Charge	kg	7.0	10.0	12.0	15.0	18.0	23.0	24.0	28.0	30.0	36.0	38.0	46.0	50.0					
	Height	mm	1,924			2,374			1,924			2,250									
Weight	Unit	Depth	mm	3,514						6,317						7,117					
	Colour	kg	1,166	1,196	1,310	1,329	1,996	2,094	2,336	2,382	2,452	2,548	2,558	3,024	3,035	3,074	3,192	3,271			
Sound pressure level	Cooling	dB(A)	63.9	66.0	68.0	67.3	69.0	68.1	72.6	68.7	69.9	70.6	74.2	68.3	68.7	69.1	70.0				
Sound power level	Cooling	dB(A)	82.2	84.3	86.8	86.1	88.5	87.5	92.5	88.6	89.8	90.5	94.1	88.6	89.0	89.3	90.2				
Operation range	Cooling	Min. ~ Max.	°CDB																		
	Heating	Min. ~ Max.	°CWB																		
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50 /400																		
	Recommended fuses	A	25	40	50	63	80	100						160			200				

## Specifications Made-To-Order units



All naming in the tables above is valid for Made-To-Stock units only.

For specifications and configuration of Made-To-Order units refer to our selection software.

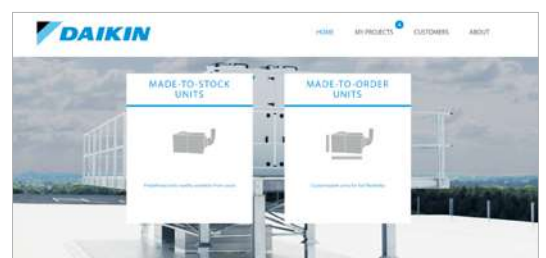



## Field applied accessories for Made-To-Stock units

	BASE series (UATYA-BBAY1)					FC2 series (UATYA-BFC2Y1)					FC3 series (UATYA-BF3Y1)									
	25-30	40-50	60-70	80-120	140-190	25-30	40-50	60-70	80-90	100-120	140-190	25-30	40-50	60-70	80-100	110-120	140-180	190		
Air treatment	Filter ISO Coarse 75% (G4)	2x UATYAC75A + 2x UATYAC75B (Standard for MTS)	3x UATYAC75A + 3x UATYAC75B (Standard for MTS)	6x UATYAC75B (Standard for MTS)	12x UATYAC75C (Standard for MTS)	12x UATYAC75C (Standard for MTS)	2x UATYAC75A + 2x UATYAC75B (Standard for MTS)	3x UATYAC75A + 3x UATYAC75B (Standard for MTS)	6x UATYAC75B (Standard for MTS)	12x UATYAC75C (Standard for MTS)	12x UATYAC75C (Standard for MTS)	12x UATYAC75C (Standard for MTS)	2x UATYAC75A + 2x UATYAC75B (Standard for MTS)	3x UATYAC75A + 3x UATYAC75B (Standard for MTS)	6x UATYAC75B (Standard for MTS)	12x UATYAC75C (Standard for MTS)	12x UATYAC75C (Standard for MTS)	12x UATYAC75C (Standard for MTS)	12x UATYAC75C (Standard for MTS)	12x UATYAC75C (Standard for MTS)
	Filter ISO ePM10 50% (M5/F5)	2x UATYAEPM1050A + 2x UATYAEPM1050B	3x UATYAEPM1050A + 3x UATYAEPM1050B	3x UATYAEPM1050B	12x UATYAEPM1050C	12x UATYAEPM1050C	2x UATYAEPM1050A + 2x UATYAEPM1050B	3x UATYAEPM1050A + 3x UATYAEPM1050B	3x UATYAEPM1050B	12x UATYAEPM1050C	12x UATYAEPM1050C	12x UATYAEPM1050C	2x UATYAEPM1050A + 2x UATYAEPM1050B	3x UATYAEPM1050A + 3x UATYAEPM1050B	3x UATYAEPM1050B	12x UATYAEPM1050C	12x UATYAEPM1050C	12x UATYAEPM1050C	12x UATYAEPM1050C	12x UATYAEPM1050C
	Filter ISO ePM10 75% (M6)	2x UATYAEPM1075PA + 2x UATYAEPM1075PB	3x UATYAEPM1075PA + 3x UATYAEPM1075PB	3x UATYAEPM1075PB	12x UATYAEPM1075PC	12x UATYAEPM1075PC	2x UATYAEPM1075PA + 2x UATYAEPM1075PB	3x UATYAEPM1075PA + 3x UATYAEPM1075PB	3x UATYAEPM1075PB	12x UATYAEPM1075PC	12x UATYAEPM1075PC	12x UATYAEPM1075PC	2x UATYAEPM1075PA + 2x UATYAEPM1075PB	3x UATYAEPM1075PA + 3x UATYAEPM1075PB	3x UATYAEPM1075PB	12x UATYAEPM1075PC	12x UATYAEPM1075PC	12x UATYAEPM1075PC	12x UATYAEPM1075PC	12x UATYAEPM1075PC
	Filter ISO ePM1 50% (F7)	2x UATYAEPM150PA + 2x UATYAEPM150PB	3x UATYAEPM150PA + 3x UATYAEPM150PB	3x UATYAEPM150PB	12x UATYAEPM150PC	12x UATYAEPM150PC	2x UATYAEPM150PA + 2x UATYAEPM150PB	3x UATYAEPM150PA + 3x UATYAEPM150PB	3x UATYAEPM150PB	12x UATYAEPM150PC	12x UATYAEPM150PC	12x UATYAEPM150PC	2x UATYAEPM150PA + 2x UATYAEPM150PB	3x UATYAEPM150PA + 3x UATYAEPM150PB	3x UATYAEPM150PB	12x UATYAEPM150PC	12x UATYAEPM150PC	12x UATYAEPM150PC	12x UATYAEPM150PC	12x UATYAEPM150PC
	Rigid bag filter ISO ePM10 70% (M6)	2x UATYAEPM1070A + 2x UATYAEPM1070B	3x UATYAEPM1070A + 3x UATYAEPM1070B	6x UATYAEPM1070B	12x UATYAEPM1070C	12x UATYAEPM1070C	2x UATYAEPM1070A + 2x UATYAEPM1070B	3x UATYAEPM1070A + 3x UATYAEPM1070B	6x UATYAEPM1070B	12x UATYAEPM1070C	12x UATYAEPM1070C	12x UATYAEPM1070C	2x UATYAEPM1070A + 2x UATYAEPM1070B	3x UATYAEPM1070A + 3x UATYAEPM1070B	6x UATYAEPM1070B	12x UATYAEPM1070C	12x UATYAEPM1070C	12x UATYAEPM1070C	12x UATYAEPM1070C	12x UATYAEPM1070C
	Rigid bag filter ISO ePM1 50% (F7)	2x UATYAEPM150A + 2x UATYAEPM150B	3x UATYAEPM150A + 3x UATYAEPM150B	6x UATYAEPM150B	12x UATYAEPM150C	12x UATYAEPM150C	2x UATYAEPM150A + 2x UATYAEPM150B	3x UATYAEPM150A + 3x UATYAEPM150B	6x UATYAEPM150B	12x UATYAEPM150C	12x UATYAEPM150C	12x UATYAEPM150C	2x UATYAEPM150A + 2x UATYAEPM150B	3x UATYAEPM150A + 3x UATYAEPM150B	6x UATYAEPM150B	12x UATYAEPM150C	12x UATYAEPM150C	12x UATYAEPM150C	12x UATYAEPM150C	12x UATYAEPM150C
Rigid bag filter ISO ePM1 85% (F9)	2x UATYAEPM185A + 2x UATYAEPM185B	3x UATYAEPM185A + 3x UATYAEPM185B	6x UATYAEPM185B	12x UATYAEPM185C	12x UATYAEPM185C	2x UATYAEPM185A + 2x UATYAEPM185B	3x UATYAEPM185A + 3x UATYAEPM185B	6x UATYAEPM185B	12x UATYAEPM185C	12x UATYAEPM185C	12x UATYAEPM185C	2x UATYAEPM185A + 2x UATYAEPM185B	3x UATYAEPM185A + 3x UATYAEPM185B	6x UATYAEPM185B	12x UATYAEPM185C	12x UATYAEPM185C	12x UATYAEPM185C	12x UATYAEPM185C	12x UATYAEPM185C	
Control	UATYAC02P - Duct air quality CO <sub>2</sub> probe	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	UATYACAP - Constant air pressure control airflow transducer	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	UATYAWRC - Remote touch screen wired remote controller	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	UATYARRP - Room temperature return probe (incl. housing)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	UATYASA - Fire and smoke alarm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Other	Rainproof hood with anti-intrusion grille	not possible	not possible	not possible	not possible	not possible	UATYARPH3	UATYARPH4	UATYARPH5	UATYARPH6	UATYARPH6	UATYARPH6	UATYARPH1	UATYARPH2	UATYARPH8	UATYARPH7	UATYARPH7	UATYARPH7	UATYARPH7	
	Rubber antivibration mounts	2x UATYAIVM1	2x UATYAIVM1	2x UATYAIVM1 + 1x UATYAIVM2	4x UATYAIVM1	2x UATYAIVM1 + 2x UATYAIVM2	2x UATYAIVM1	2x UATYAIVM1	3x UATYAIVM1 + 1x UATYAIVM2	4x UATYAIVM1	3x UATYAIVM1 + 1x UATYAIVM2	2x UATYAIVM1 + 2x UATYAIVM2	1x UATYAIVM1 + 2x UATYAIVM2	3x UATYAIVM1 + 1x UATYAIVM2	3x UATYAIVM1 + 2x UATYAIVM2	2x UATYAIVM1 + 2x UATYAIVM2	4x UATYAIVM1 + 1x UATYAIVM2	3x UATYAIVM1 + 2x UATYAIVM2	4x UATYAIVM1 + 2x UATYAIVM2	
	Rubber antivibration mounts when gas heater is used	1x UATYAIVM1 + 1x UATYAIVM2	1x UATYAIVM1 + 1x UATYAIVM2	1x UATYAIVM1 + 2x UATYAIVM2	5x UATYAIVM1	2x UATYAIVM1	1x UATYAIVM1 + 1x UATYAIVM2	4x UATYAIVM1	5x UATYAIVM1	5x UATYAIVM1	5x UATYAIVM1	5x UATYAIVM1	1x UATYAIVM1 + 1x UATYAIVM2	2x UATYAIVM1 + 1x UATYAIVM2	4x UATYAIVM1	5x UATYAIVM1	4x UATYAIVM1 + 1x UATYAIVM2	3x UATYAIVM1 + 2x UATYAIVM2	3x UATYAIVM1 + 2x UATYAIVM2	

# Wide choice of factory-mounted **options** on **Made-To-Order** units

## Indoor air treatment



- › Filters and rigid bag filters
- › Multistage filtration possible
- › From ISO Coarse 75% (G4) up to ISO ePM1 85% (F9)



- › Auxiliary heat sources for additional or complementary heating
- › Gas burner
- › Electric coil
- › Hot water coil

- › Pre-heater from heat recovery water coil, to recover waste heat from applications where heat is rejected



- › Steam humidifier and post-heating

- › Oversized and extraoversized supply and return radial EC plug fans to provide a higher ESP



- › Spring return dampers in case of power failure and/or fire alarm

## Outdoor air treatment

- › Anticorrosion treatment on heat exchanger

- › Standard or EC axial fan

- › Softstarter on compressor for units  $\geq 140\text{kW}$



- › Soundproof compartment on compressor

## Control options

- › BMS gateway via Ethernet:
  - › SNMP & Modbus TCP/IP (standard BACnet TCP/IP connection can not be used anymore)

- › BMS gateway via 3-cable port:
  - › BACnet MS/TP OR Lonworks (standard Modbus RS485 connection can not be used anymore)

## Field applied **accessories** for **Made-To-Order** units

	MTO - BASE series	MTO - FC2 series	MTO - FC3 series	MTO - RS4 series
Control	UATYACO2P - Duct air quality CO <sub>2</sub> probe	•	•	•
	UATYACAP - Constant air pressure control airflow transducer	•	•	•
	UATYAWRC - Remote touch screen wired remote controller	•	•	•
	UATYARRP - Room temperature return probe (incl. housing)	•	•	•
	UATYASA - Fire and smoke detector	•	•	•
Other	Rubber antivibration mounts	• (1)	• (1)	• (1)
	Rainproof hood with anti-intrusion grille	• (1)	• (1)	• (1)

<sup>(1)</sup> Reference code to be selected in selection software

# Launching VRV 5 heat pumps

Continuing our path to lower CO<sub>2</sub> equivalent solutions



**VRV 5** S-series

**VRV 5** Heat Recovery

**VRV 5** Heat Pump

## Decarbonisation of buildings made easy: Benefit from leading VRV 5 technology!

### Adapts to any building

- › Extensive piping lengths & heights
- › 5 low sound steps down to 41 dB(A)

### Reduces the CO<sub>2</sub> footprint significantly

- › High, real life seasonal efficiency
- › Lower GWP refrigerant R-32

### Shirudo Technology provides peace of mind

- › Easy installation of R-32 VRV in any size of room
- › Factory-integrated refrigerant control measures avoids time-consuming studies
- › 3<sup>rd</sup> party certification according to the product standard IEC60335-2-40

### Widest R-32 portfolio to match any application

- › 11 indoor unit models in 96 variations
- › Plug & Play ventilation solutions from 150 up to 140,000 m<sup>3</sup>/h
- › Strong range of intuitive, cloud based controls

### Specialised advice and support

- › Maximise BREEAM, LEED, ... scores thanks to VRV 5 and our expert support
- › Online support software to ensure compliance with product standards

Learn more by visiting [www.daikin.eu/vrv5](http://www.daikin.eu/vrv5)

Find out more about the new  
VRV 5 heat pumps on page 488



# VRV

## Commercial air-to-air heat pumps

Building a sustainable legacy together	468
Why choose Daikin VRV?	472
Total solution concept	476

### VRV 5 BLUEEVOLUTION 478

VRV 5 Outdoor units	480
Shirudo technology	481



Heat recovery	482
<b>UNIQUE</b> REYA-A	484

Branch Selector (BSSV box)	486
<b>UNIQUE</b> BS-A14AV1B	486

Heat pump	488
<b>NEW</b> RXYA-A	488

<b>Range extension</b> RXYSA-AV1/AY1	490
--------------------------------------	-----

<b>NEW</b> SV-A	491
-----------------	-----

#### VRV 5 Indoor units 492

Ceiling mounted cassette units	496
--------------------------------	-----

<b>UNIQUE</b> FXFA-A	497
----------------------	-----

<b>UNIQUE</b> FXZA-A	498
----------------------	-----

<b>NEW</b> FXKA-A	499
-------------------	-----

Concealed ceiling units	500
-------------------------	-----

<b>UNIQUE</b> Auto cleaning filter for concealed ceiling units	500
--	-----

FXDA-A	501
--------	-----

FXSA-A	502
--------	-----

FXMA-A	503
--------	-----

Wall mounted	504
--------------	-----

FXAA-A	504
--------	-----

Ceiling suspended units	505
-------------------------	-----

FXHA-A	505
--------	-----

<b>UNIQUE</b> FXUA-A	506
----------------------	-----

### VRV IV LOOP BY DAIKIN 508

VRV IV outdoor units	510
----------------------	-----

Heat recovery	512
---------------	-----

REYQ-U	512
--------	-----

Heat pump	514
-----------	-----

RYYQ-U*/RXYQ-U*	514
-----------------	-----

RXYSCQ-TV1	516
------------	-----

RXYSQ-TV9/TY9/TY1	517
-------------------	-----

<b>UNIQUE</b> SB.RKXYQ-T(8)	518
-----------------------------	-----

RXYLQ-T	520
---------	-----

Replacement VRV	524
-----------------	-----

RQCEQ-P3	526
----------	-----

RQYQ-P / RXYQQ-U	527
------------------	-----

Water-cooled VRV	528
------------------	-----

RWEYQ-T9	530
----------	-----

Branch selector (BS box)	533
--------------------------	-----

BS1Q-A	533
--------	-----

BS-Q14AV1B	533
------------	-----

#### VRV IV indoor units 534

Ceiling mounted cassette units	538
--------------------------------	-----

<b>UNIQUE</b> FXFQ-B	538
----------------------	-----

<b>UNIQUE</b> FXZQ-A	539
----------------------	-----

FXCQ-A	540
--------	-----

<b>NEW</b> FXKQ-A	541
-------------------	-----

Concealed ceiling units	542
-------------------------	-----

Multi zoning kit	542
------------------	-----

FXDQ-A3	543
---------	-----

FXSQ-A	544
--------	-----

FXMQ-P7 / FXMQ-A	545
------------------	-----

Wall mounted unit	547
-------------------	-----

FXAQ-A	547
--------	-----

Ceiling suspended units	548
-------------------------	-----

FXHQ-A	548
--------	-----

<b>UNIQUE</b> FXUQ-A	549
----------------------	-----

Floor standing units	550
----------------------	-----

FXNQ-A	550
--------	-----

FXLQ-P	551
--------	-----

Hot water	552
-----------	-----

HXY-A8	552
--------	-----

HXHD-A8	553
---------	-----

Accessories for hot water	554
---------------------------	-----

#### Biddle Air Curtains 556

<b>NEW</b> Unified air curtain for R-32 and R-410A	557
--	-----

Options & accessories	558
-----------------------	-----



# Daikin, your partner in green buildings

Team up with our experts to achieve your green objectives, while staying within budget

Every building requires a different solution to match its unique properties. That's why it is important to have an HVAC-R partner with expert knowledge and a wide product portfolio to achieve your goals.



We continuously develop products with lower CO<sub>2</sub> footprints



We reuse materials where possible, including refrigerants



We maximise real life seasonal efficiencies, delivered in a transparent and trustworthy way



Our team of experts provide in-depth knowledge in the use of EPDs, green building schemes, etc.



We provide continuous monitor our systems, keeping running costs low and maximising uptime



We help to make the right choice based on the total lifecycle impact of the solutions

“A landmark project meeting the highest standards, the Meylan Arteparc sets the bar for designing future-proof buildings that consistently deliver on energy performance and comfort”



## Arteparc office complex

Daikin VRV heat pumps contribute to low carbon footprint and is awarded with the HQE excellent label

Location: [Grenoble, France](#)

Type: [New built, commercial complex](#)

Project size: [25,000m<sup>2</sup>](#)


Total outdoor units: [115](#)

### Challenges:

- › Achieve HQE BBC (Low Carbon Building) certification label
- › Provide an HVAC system to offset the increased CO<sub>2</sub> emissions, caused by additional use of concrete

### Daikin solution:

- › **Close co-operation** between design office and Daikin design support
- › In-depth study to **optimize the air flows** of the full installation to maximize system performance and user experience
- › Daikin's VRV5 with R-32 was crucial to support the required offsetting of CO<sub>2</sub> with a **whole life carbon reduction of 27%** compared to R-410A solutions

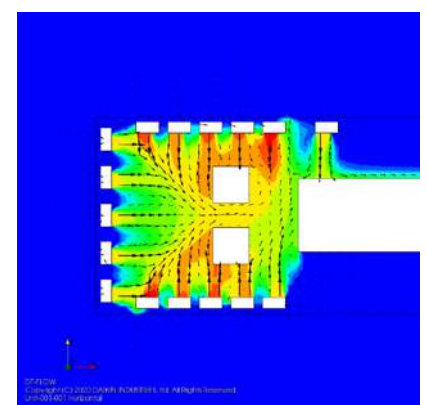

“Daikin offers 24/7 monitoring with predictive maintenance for complete peace-of-mind. Issues are solved before they occur, maximizing room availability and customer satisfaction.”



## Victoria hotel, Park Plaza

Location: [Amsterdam, The Netherlands](#)

Type: [Refurbishment, Hotel](#)

Project size: [7 floors, 150 rooms, 25m<sup>2</sup>/room](#)

Total outdoor units: [12](#)

### Challenges:

- › Provide a future proof, low carbon solution
- › Keep historical building outlook intact
- › Provide total peace of mind

### Daikin solution:

- › Implementation of **VRV 5 heat recovery**, using lower GWP refrigerant R-32 boosting efficiency thanks to the re-use of excessive heat from rooms in cooling, to heat up rooms in need of heating
- › The **modular and compact** concept of VRV outdoor units and very small piping made it the best solution to keep the historical value of the building.
- › With **Shirudo Technology** all legislative requirements are factory integrated, keeping additional design work to a minimum





“L∞P by Daikin has minimised both the direct and indirect impact of the building, not only through appearance and system efficiency but also resource reuse”



## Perial Asset Management

L∞P by Daikin is assisting clients in creating their own circular economy of refrigerants

Location: Paris, France

Type: Refurbishment, Multipurpose

Project size: 8 floors, 4,200m<sup>2</sup>

Total outdoor units: 8



### Challenges:

- › Maximize re-use and minimize energy consumption
- › Improve visual and acoustic comfort for the tenants
- › Achieve BREEAM certification

### Daikin solution:

- › **Recovery and recycling of R-410A** refrigerant from the old units, to re-use as field charge
- › Installation of **L∞P by Daikin** VRV outdoor units with reclaimed refrigerant, resulting in a saving of 156kg of virgin refrigerant production
- › **Compact and low noise** VRV heat pumps we sited behind screens to avoid any disturbance



# 9 reasons why VRV is unique in the market

## 1 Leader in sustainability

- NEW** › VRV 5: dedicated R-32 VRV design
- Less refrigerant charge
  - Higher efficiency
  - Lower CO<sub>2</sub> equivalent
- › L∞P by Daikin: the creation of a circular economy of refrigerants
- Saves over 400,000 kgs of virgin refrigerant being produced every year
  - Greatly reduces the CO<sub>2</sub> footprint of refrigerant production
  - For all VRV units produced and sold in Europe\*

\* EU member states, UK, Bosnia-Herzegovina, Serbia, Montenegro, Kosovo, Albania, North Macedonia, Iceland, Norway, Switzerland



## 2 Efficiency


- › Variable Refrigerant Temperature for high seasonal efficiency
- › Round flow cassette and concealed ceiling units with auto cleaning filter
- › The best partner for your BREEAM, LEED or Well project

BREEAM®



## 3 Comfort

- NEW** › Provide high Indoor Air Quality through seamless integration of AHU's (For R-32 and R-410A)
- › Variable Refrigerant Temperature preventing cold draughts in cooling thanks to high outblow temperatures
  - › True continuous heating during defrost
  - › Presence and floor sensors direct the air flow away from persons, while ensuring an even temperature distribution
  - › Auto cleaning filters to ensure optimum air quality
- NEW** › UV Streamer kit, purifies the air of pollutants such as viruses, bacteria, fine dust (PM1), odours, allergens, etc

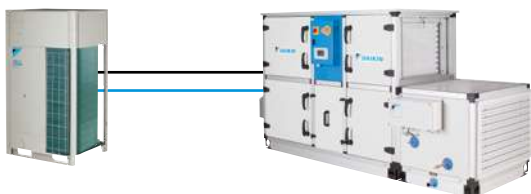

## 4 Reliability

- › Refrigerant cooled PCB
- › Most extensive testing before new units leave the factory
- › Widest sales network with all spare parts available in Europe
- › Preventive maintenance via Daikin Cloud Plus
- › Auto cleaning filters to further enhance reliability thanks to clean air-filters
- › True technical cooling



## 5 Design

- › Widest ever range of cassette panels
  - Available in white and black
  - Sleek designer panel range
- › Daikin Emura, unique iconic design
- › Fully flat cassette, fully integrated in the ceiling



## 6 Controls

- › Voice control via Amazon Alexa and Google Assistant through BRP069C51 Onecta app (For VRV 5 models)
- › Madoka: a sleek wired remote controller with intuitive touch button control
- › Intelligent Touch manager: A cost-effective mini BMS integrating all Daikin products
- › Easy integration in third party BMS via BACnet, LonWorks, Modbus, KNX
- › Dedicated control solutions for applications such as technical cooling, shops, hotels, ...
- › Daikin Cloud Plus for online control, energy monitoring, comparison of multiple sites and predictive maintenance



## 7 Installation

- › Automatic refrigerant charge and refrigerant containment check
- › Unique 4-way blow ceiling suspended cassette (FXUQ)
- › Plug & play Daikin Air Handling Unit
- › VRV configurator software for the fastest commissioning, configuration and customisation
- › Outdoor unit display for quick on-site settings and detailed error readouts for improved customer support



7-segment display

## 8 Inventor of VRV with over 40 years of history

- › Market leader of VRV systems since 1982
- › Over 90 years of expertise in heat pump technology
- › Designed for and produced in Europe
- › Innovator setting the market standard with technologies such as Variable Refrigerant Temperature, continuous heating, Shirudo technology, ...



## 9 For every application a solution

- › Heat recovery for simultaneous cooling and heating
- › Maximum flexibility for geothermal applications with water-cooled systems
- › Hot and cold climate solutions offering efficient cooling up to 52°C and heating down to -25°C
- › Space saving mini VRV solutions, offering the most compact VRV
- › The invisible VRV, a unique solution when the outdoor unit must be compact and completely invisible
- › Replacement solutions to replace existing systems in the most cost-effective way



But VRV is more...

## Advantages of direct expansion (DX) systems

### Highly efficient

- › Only 2 energy transfer steps maximise efficiency. Running costs of a water-based fan coil unit can be 40 to 72% higher compared to a VRV heat recovery system




29%  
less space

### Limited space requirements

- › Units have all components integrated
- › Small piping diameters
- › Up to 20% less space required compared to traditional water-based systems, offering more lettable space

max. 398kg for a 20HP unit

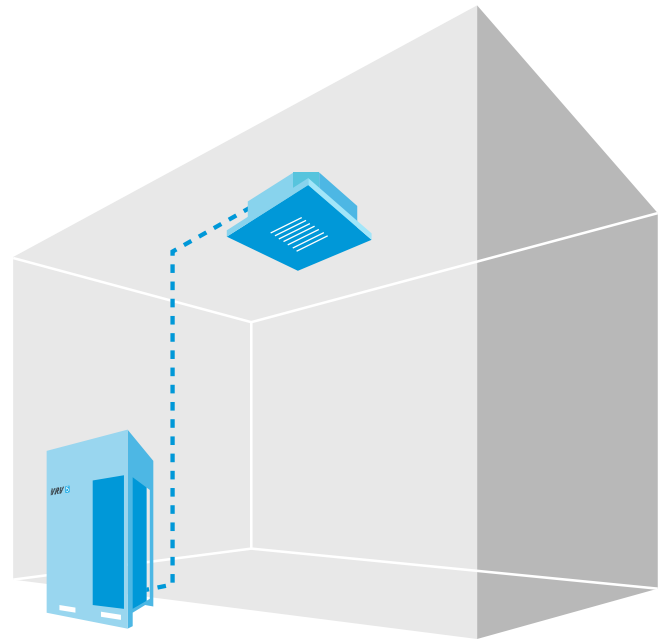


### Quick and easy to install

- › All-in-one box solution without any requirement for field supplied equipment (e.g. gauges, pumps and valves)


### Quick response to changing conditions

- › Immediate reaction to changing conditions and precise control to 0.5°C thanks to electronic expansion valves, room thermostats, all inverter compressors and Variable Refrigerant Temperature



### Precise zone control

- › Only condition areas in need for cooling or heating

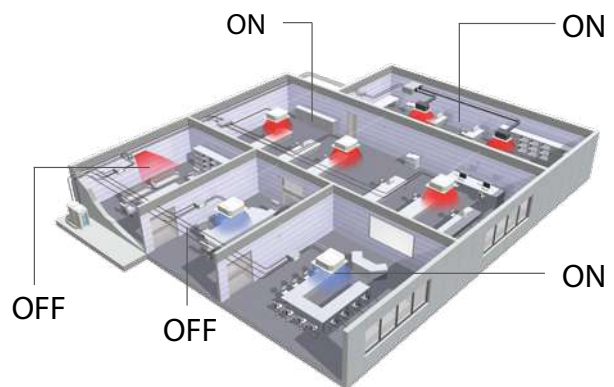

### Very low indoor unit sound levels

- › Levels with a limited capacity drop in case of lower fan speeds, thanks to their Electronic Expansion Valves.

### Compact units


- › Avoid the need for structural reinforcement or special equipment to lift units in place



# Daikin VRV strong points

## Great design flexibility


- › Solutions for every climate, from -25 to +52°C

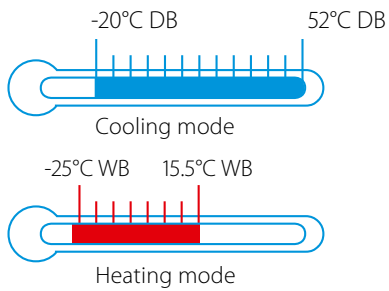

- › Long refrigerant piping
- › Zone by zone phased installation
- › Use one outdoor unit for multiple tenants



multi tenant

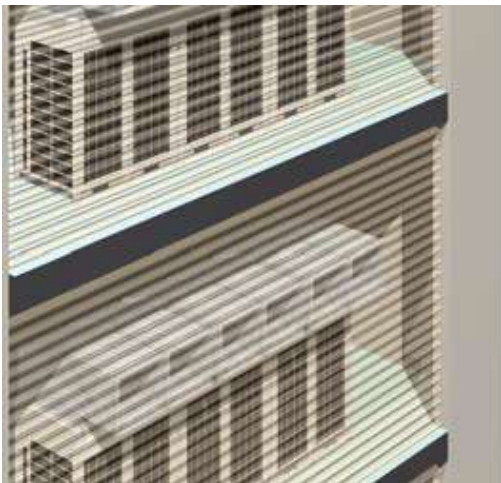

## Indoor Installation of outdoor units

- › 3 options
  - › ESP up to 78pa for standard air-cooled outdoor units
  - › VRV IV i-series air cooled heat pump for indoor installation
  - › VRV IV W-series water cooled unit for indoor installation

## Reliable

- › Special anti corrosion treatment of the heat exchanger provides 5 to 6 times greater resistance against corrosion
- › Duty cycling extends operation life
- › Sequential start
- › Only brazed connections

## High comfort levels

- › Individual control and simultaneous cooling and heating for perfect personal environment
- › Night quiet mode on outdoor units to ensure low outdoor operation sound
- › Back-up function
- › Low indoor sound levels down to 19 dBA



Simultaneous cooling and heating with heat recovery systems









# VRV total solution

Typically, many buildings today rely on several separate systems for heating, cooling, air curtain heating and hot water. As a result energy is wasted. To provide a much more efficient alternative, VRV technology has been developed into


a total solution managing up to

# 70%


of a buildings energy consumption giving large potential to cost saving.

-  › **Heating and cooling** for year round comfort
-  › **Hot water** for efficient production of hot water
-  › **Underfloor heating / cooling** for efficient space heating/cooling
-  › **Fresh air ventilation** for high quality environments
-  › **Air curtains** for optimum air separation
-  › **Controls** for maximum operating efficiency
-  › **Cooling** for server rooms, telecom shelters, ... via VRV heat recovery or Sky Air units
-  › **Refrigeration** via our VRV based refrigeration units

Average hotel energy consumption

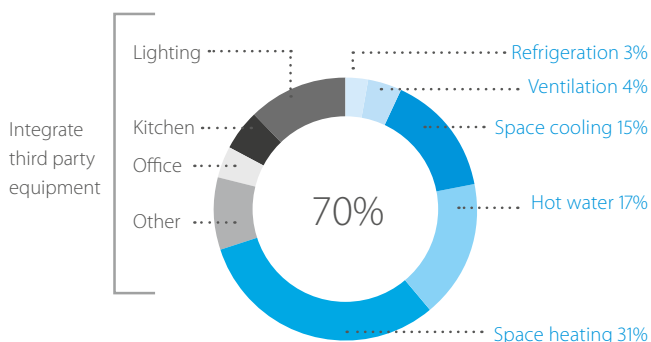

Average office energy consumption

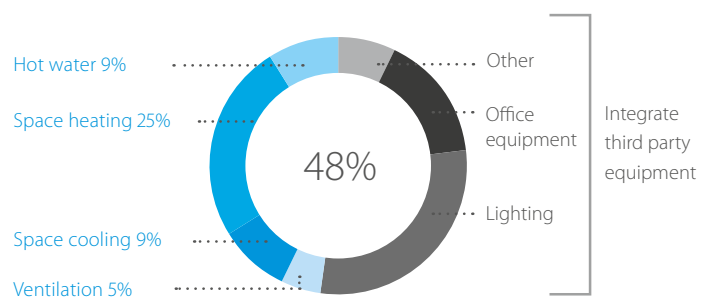

# Offices

Efficiency in the workplace

*"Leading edge design in harmony with the construction and interior design."*

Architect



# Hotel

Hospitality with economy

*"With Daikin we could perfectly combine the authenticity of the hotel with the latest technology and comfort."*

Owner of a 5-star hotel



# Shops

reducing retail costs

*"Together with Daikin's technical team we have optimised the design of our HVAC system, reducing investment levels and operational costs. Daikin has offered us access to the most up to date technology."*

Retail shop representative



# Residential

there is no place like home

*"A cost effective, low energy consumption heat pump system for home owners, offering maximum comfort"*



# VRV 5

R-32 BLUEVOLUTION

An R-32 system for every VRV application



**VRV 5** S-series

**VRV 5** Heat Recovery

**VRV 5** Heat Pump



12.1kW



80kW



14.2kW



90kW

## The most extensive range:

Indoor ventilation & control systems



BACnet Interface  
 Modbus Interface LonWorks Interface



# Start to decarbonize commercial buildings today!



Market-leading seasonal efficiency makes VRV5 more sustainable over its entire lifecycle, reducing the indirect CO<sub>2</sub> eq. impact



Specifically built for lower GWP R-32 refrigerant, greatly reducing the potential direct CO<sub>2</sub> impact with 71% compared to R-410A systems




The perfect partner for BREEAM, LEED and other green building schemes

## Ultra-flexible climate control



Wide piping flexibility to tackle any VRV application



Widest range of dedicated R-32 indoor units on the market




Easily integrates HRV and AHU ventilation units



Connectable to all known Daikin smart controls, including Onecta app



5 low sound steps



High ESP fans allowing concealed installation






### Shîrudo Technology truly sets VRV 5 apart

- › Complete peace of mind as Daikin provides all required tools to ensure compliance to the IEC product standard
- › Factory supplied refrigerant control measures make the VRV 5 quick and flexible to design without the need for complex and time consuming calculations
- › For stress free design of any commercial building, validate your project in our Xpress software, featuring floor plan integration

# VRV 5 outdoor unit overview

Capacity class (kW)

Model	Product name	4	5	6	8	10	12	13	14	16	18	20	22	24	26	28	VRV indoor units	Residential indoor units	Hydrobox	HRV units VAM	HRV units EKVDX	AHU connection	Air curtains	Remarks	
<b>Cooling Capacity</b>					22.4	28.0	33.5	36.4	40.0	45.0	50.4	56.0	61.5	67.4	73.5	78.5									
<b>Heating Capacity</b>					25.0	31.5	37.5	41.0	45.0	50.0	56.5	63.0	69.0	75.0	82.5	87.5									
Air-cooled heat recovery <b>VRV 5 heat recovery</b>	<ul style="list-style-type: none"> <li>Reduced CO<sub>2</sub> equivalent thanks to the use of lower GWP refrigerant R-32</li> <li>Top sustainability over the entire lifecycle</li> <li>„Free“ heating through heat recovery</li> <li>Tackle small room applications thanks to Shirudo Technology</li> <li>The perfect personal comfort thanks to simultaneous cooling and heating</li> </ul>	REYA-A																							
Air-cooled heat pump <b>NEW VRV 5 heat pump</b>	<ul style="list-style-type: none"> <li>Reduced CO<sub>2</sub> equivalent thanks to the use of lower GWP refrigerant R-32</li> <li>Top sustainability over the entire lifecycle</li> <li>Tackle any room thanks to Shirudo Technology</li> </ul>	RXYA-A																							
Air-cooled heat pump <b>VRV 5 S-series</b>	<ul style="list-style-type: none"> <li>Reduced CO<sub>2</sub> equivalent thanks to the use of lower GWP refrigerant R-32</li> <li>Top sustainability over the entire lifecycle</li> <li>Unique low -height single fan range</li> <li>Tackle small room applications thanks to Shirudo technology</li> </ul>	RXYS-A AV1/AY1		1~																					
				3~																					

● Single unit, ● Multi combination

## Sound enclosure for VRV5 S-series

- ✓ Specially designed for RXYS-A4-5-6AV1/AY1
- ✓ Fully optimized and tested in Daikin Factory
- ✓ Outdoor unit sound reduction up to -10 dB(A) on Sound Power values
- ✓ Very low capacity and pressure drop
- ✓ Fast & easy installation & servicing



## Shirudo Technology truly sets VRV 5 apart

- Complete peace of mind as Daikin provides all required tools to ensure compliance to the IEC product standard
- Factory-integrated refrigerant control measures make the VRV 5 quick and flexible to design without the need for complex and time consuming calculations
- For stress free design of any commercial building, validate your project in our Xpress software, featuring floor plan integration

Shîrudo  
Technology  
ensures full  
peace of mind



**Best in class design versatility:**  
Shîrudo Technology allows  
easy installation  
of R-32 VRV in any room



**Maximum installation  
flexibility,** thanks to  
factory provided refrigerant  
control measures



**3<sup>rd</sup> party certification**  
according to the product  
standard IEC60335-2-40

Check out  
the Shîrudo  
Technology video!




# Did you know...

## different standards regarding safety exist?

Refrigerants can be classified according to 2 safety groups:

- > Toxicity (A or B): covered by the generic standard on refrigerants **EN378:2016**.
- > Flammability (1, 2L, 2, 3): covered by the specific heat pump standard **IEC60335-2-40** as it prevails over EN378:2016. Shîrudo Technology ensures full peace of mind with the IEC60335-2-40 standard.

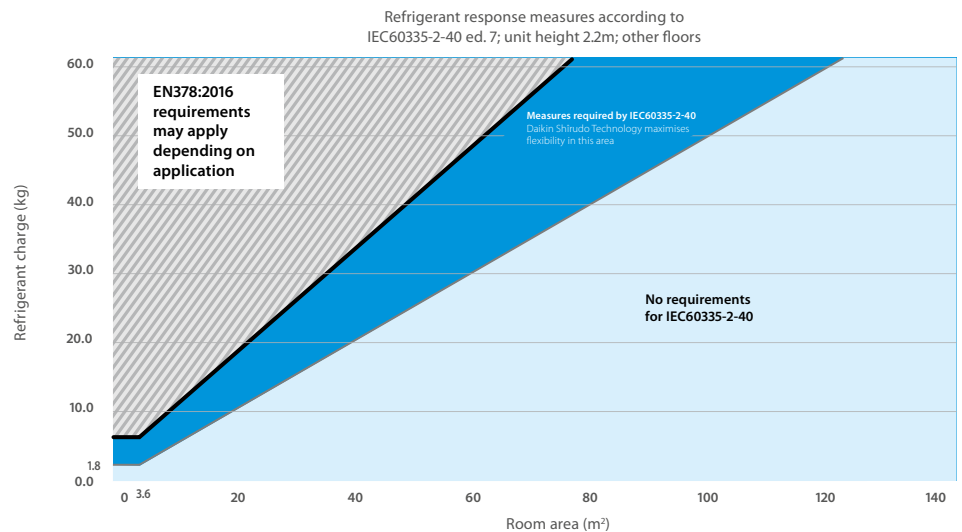

## With Shîrudo Technology you avoid:

- > Additional installation and commissioning work
  - > What type of safety measures to choose?
  - > Where to place them?
  - > What about the visual impact?
- > Additional work and considerations in case of layout changes
- > Periodic maintenance checks



## What is included in Shîrudo Technology?



Leak detection  
sensor in every  
indoor unit



Audible  
& visual alarm  
in Madoka controller



Shutoff valves  
in the outdoor unit  
or SV box



Specially  
developed algorithms

# Meet our superhero: VRV 5 Heat Recovery



## Purpose-built to support the decarbonisation of commercial buildings

**Support your customers in future-proofing their buildings with  
a breakthrough solution for sustainable climate control.**

Now, more than ever, we all have a part to play in reducing our environmental impact. That's why Daikin is introducing the VRV 5 Heat Recovery unit with innovative new superpowers that make it a future-proof climate solution. Smarter and more responsive than ever – it offers you and your customers complete peace of mind.

Help your customers reduce their CO<sub>2</sub> footprint now while enjoying maximum comfort and ease of use. Visit [www.daikin.eu/VRV5HR](http://www.daikin.eu/VRV5HR) to learn more about the VRV 5 Heat Recovery unit.



# Advantages of 3-pipe technology


## “Free” heat production

An integrated heat recovery system reuses heat from offices and server rooms to warm other areas.

## Maximum comfort

A VRV heat recovery system allows simultaneous cooling and heating.


- › For hotel owners, this means they can freely choose between cooling or heating to create a perfect environment for guests.
- › For offices, it means a perfect working indoor climate for both north and south-facing offices.

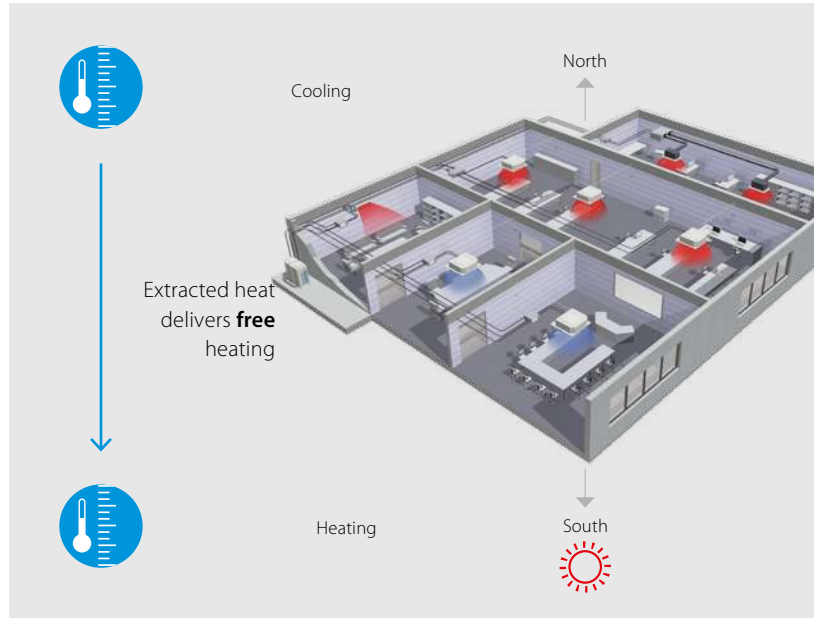

## More “free” heat


Daikin 3-pipe technology needs less energy to recover heat, meaning significantly higher efficiency during heat recovery mode. Our system can recover heat at a low condensing temperature because it has dedicated gas, liquid and discharge pipes.

In a 2-pipe system, gas and liquid travel as a mixture so the condensing temperature needs to be higher in order to separate the mixed gas and liquid refrigerant. The higher condensing temperature means more energy is used to recover heat resulting in lower efficiency.

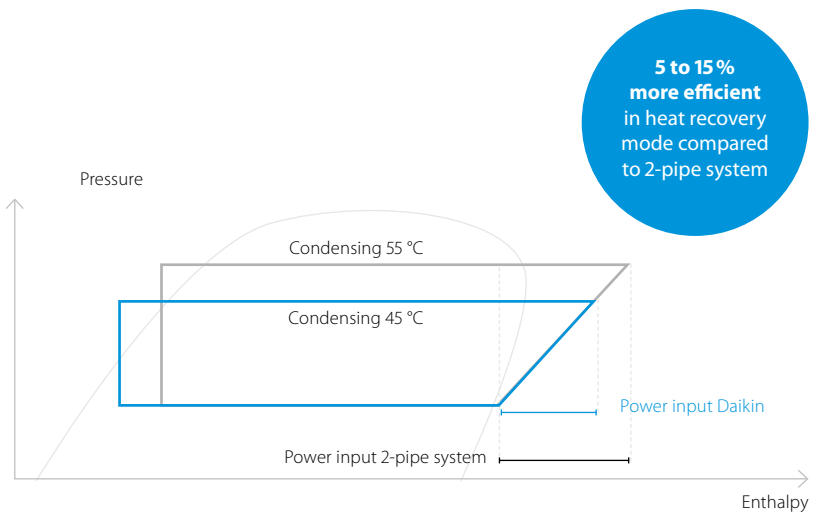

## Lower pressure drop means more efficiency


- › Smooth refrigerant flow in 3-pipe system thanks to 2 smaller gas pipes results in higher energy efficiency
- › Disturbed refrigerant flow in large gas pipe on 2-pipe system results in larger pressure drop

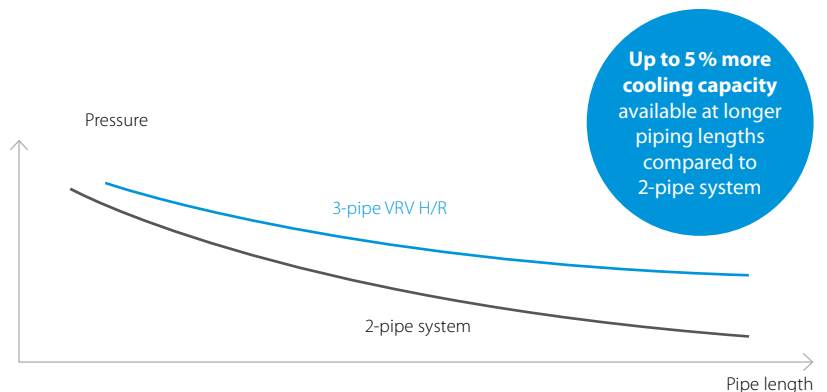

# VRV 5 Heat Recovery

Purpose-built to support the decarbonisation of commercial buildings

- › Reduced CO<sub>2</sub> equivalent thanks to the use of lower GWP R-32 refrigerant and lower refrigerant charge
- › Single component refrigerant, easy to re-use and recycle
- › Greatest sustainability over the entire lifecycle, thanks to market leading real-life seasonal efficiency
- › “Free” heating through efficient 3-pipe heat recovery, transferring heat from areas requiring cooling to areas requiring heating
- › Tackle small room applications without any additional measures, thanks to Shīrudo technology
- › Specially designed indoor units for R-32, ensuring low sound and maximum efficiency
- › Simultaneous cooling and heating for the perfect personal comfort of guests/tenants
- › Like for like R-410A installation flexibility with piping lengths up to 165 meters and a total length of 1,000 meters
- › Sound pressure down to 40 dB(A) thanks to 5 low sound steps
- › ESP up to 78 Pa to allow ducting
- › Wide operation range of up to +46°C in cooling and down to -20°C in heating
- › Incorporates VRV IV standards & technologies: Variable Refrigerant Temperature, continuous heating, VRV configurator, 7 segment display and full inverter compressors, 4-side heat exchanger, refrigerant cooled PCB, new DC fan motor



Lower CO<sub>2</sub> equivalents



5 low sound steps

More details and final information can be found by scanning or clicking the QR codes.



REYA-A

Outdoor unit		REYA	8A	10A	12A	14A	16A	18A	20A	
Capacity range	HP		8	10	12	14	16	18	20	
Cooling capacity	Prated,c	kW	22.4	28.0	33.5	40.0	45.0	50.4	56.0	
Heating capacity	Prated,h	kW	22.4	28.0	33.5	40.0	45.0	50.4	56.0	
	Max. 6°CWB	kW	25.0	31.5	37.5	45.0	50.0	56.5	63.0	
Recommended combination			4 x FXFA50A2VEB	4 x FXFA63A2VEB	6 x FXFA50A2VEB	1 x FXFA50A2VEB + 5 x FXFA63A2VEB	4 x FXFA63A2VEB + 2 x FXFA80A2VEB	3 x FXFA50A2VEB + 5 x FXFA63A2VEB	8 x FXFA63A2VEB	
ηs,c	%		290.8	282.6	285.3	306.1	281.0	280.6	262.2	
ηs,h	%		161.5	170.2	176.4	168.3	167.5	172.5	162.7	
SEER			7.35	7.14	7.21	7.73	7.10	7.09	6.63	
SCOP			4.11	4.33	4.49	4.28	4.26	4.39	4.14	
Maximum number of connectable indoor units			64							
Indoor index connection	Min.		100	125	150	175	200	225	250	
	Max.		260	325	390	455	520	585	650	
Dimensions	Unit	HeightxWidthxDepth	mm			1,685x930x765			1,685x1,240x765	
Weight	Unit		kg			213		296		319
Sound power level	Cooling	Nom.	dBA	78.3	78.8	82.5	78.7	83.7	83.4	87.9
Sound pressure level	Cooling	Nom.	dBA	56.3	58.0	60.8	58.1	61.4	63.0	67.0
Operation range	Cooling	Min.~Max.	°CDB	-5~46						
	Heating	Min.~Max.	°CWB	-20~16						
Refrigerant	Type/GWP		R-32/675.0							
	Charge	kg/TCO <sub>2</sub> Eq	9.00/6.08			10.6/7.16				
Piping connections	Liquid	OD	mm	9.52			12.7			
	Gas	OD	mm	19.1			22.2			28.6
	HP/LP gas	OD	mm	15.9			19.1			22.2
	Total piping length	System Actual	m	1,000						
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415							
Current - 50Hz	Maximum fuse amps (MFA)	A	20	25	32	40		50		



Completely redesigned BSSV boxes for faster installation and easier servicing



Widest R-32 VRV range in the market


Outdoor unit System		REYA	10A	13A	16A	18A	20A	22A	24A	26A	28A
System	Outdoor unit module 1	REMA5A		REYA8A		REYA10A	REYA12A		REYA16A	REYA12A	
	Outdoor unit module 2	REMA5A	REYA8A		REYA10A		REYA12A		REYA14A	REYA16A	
Capacity range		HP	10	13	16	18	20	22	24	26	28
Cooling capacity	Prated,c	kW	28.0	36.4	44.8	50.4	55.9	61.5	67.4	73.5	78.5
Heating capacity	Prated,h	kW	28.0	36.4	44.8	50.4	55.9	61.5	67.4	73.5	78.5
	Max. 6°CWB	kW	32.0	41.0	50.0	56.5	62.5	69.0	75.0	82.5	87.5
Recommended combination			4 x FXFA63A2VEB	3 x FXFA50A2VEB + 3 x FXFA63A2VEB	4 x FXFA63A2VEB + 2 x FXFA80A2VEB	4 x FXFA50A2VEB + 4 x FXFA63A2VEB	10 x FXFA50A2VEB	6 x FXFA50A2VEB + 4 x FXFA63A2VEB	4 x FXFA50A2VEB + 4 x FXFA63A2VEB + 2 x FXFA80A2VEB	7 x FXFA50A2VEB + 5 x FXFA63A2VEB	6 x FXFA50A2VEB + 4 x FXFA63A2VEB + 2 x FXFA80A2VEB
ηs,c		%	301.9	296.5	293.0	287.5	287.6	283.6	283.4	296.2	282.8
ηs,h		%	160.6	161.5	170.9	170.5	172.2	173.3	165.2	172.0	171.5
SEER			7.62	7.49	7.40	7.26	7.27	7.17	7.16	7.48	7.15
SCOP			4.09	4.11	4.35	4.34	4.38	4.41	4.20	4.38	4.36
Maximum number of connectable indoor units			64								
Indoor index connection	Min.		125	163	200	225	250	275	300	325	350
	Max.		325	423	520	585	650	715	780	845	910
Piping connections	Liquid	OD	mm	9.52		12.7				15.9	
	Gas	OD	mm	19.1		22.2		28.6			
	HP/LP gas	OD	mm	15.90		19.10		22.20			
	Total piping length	System	Actual	m				500		1,000	
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415								
Current - 50Hz	Maximum fuse amps (MFA)	A	40			50		63			
<b>Outdoor unit module</b>			<b>REMA</b>				<b>5A</b>				
Dimensions	Unit	HeightxWidthxDepth	mm		1,685x930x765						
Weight	Unit		kg		213						
Fan	External static pressure	Max.	Pa		78						
Sound power level	Cooling	Nom.	dBA		78.3						
Sound pressure level	Cooling	Nom.	dBA		56.3						
Operation range	Cooling	Min.~Max.	°CDB		-5~46						
	Heating	Min.~Max.	°CWB		-20~16						
Refrigerant	Type/GWP		R-32/675.0								
	Charge		kg		9.00/6.08						
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415								
Current - 50Hz	Maximum fuse amps (MFA)	A	20								

Actual number of connectable indoor units depends on the indoor unit type and the connection ratio restriction for the system (50% ≤ CR ≤ 120%) | Contains fluorinated greenhouse gases

# Multi branch selector (BSSV) for VRV 5 Heat Recovery

Specifically developed for lower GWP R-32

- › **Reduced CO<sub>2</sub> equivalent** thanks to the use of lower GWP R-32 refrigerant and lower refrigerant charge
- › Unique range of multi BS boxes allowing **efficient 3-pipe** heat recovery
- › No limitation on room size, thanks to **Shîrudo Technology** (1)  
The integrated shut-off valves in the BSSV box ensure that in case of a refrigerant leak only the specific branch is closed off.



Reduced CO<sub>2</sub> equivalent




Flexibility to take care of every room


Completely redesigned for faster installation and easier servicing

- › Faster installation thanks to **Refrigerant Flow Through** reducing the number of brazing points and joint kits


VRV 5: only 24 brazings point and no joint kits

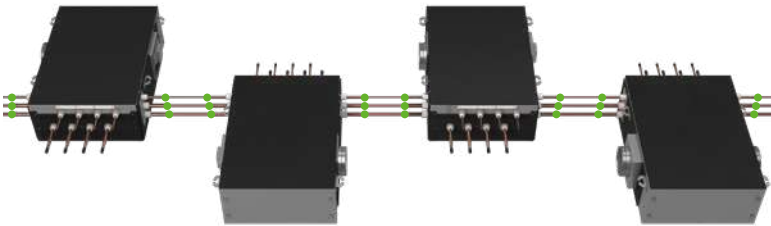


VRV IV: 39 brazing points and 3 joint kits

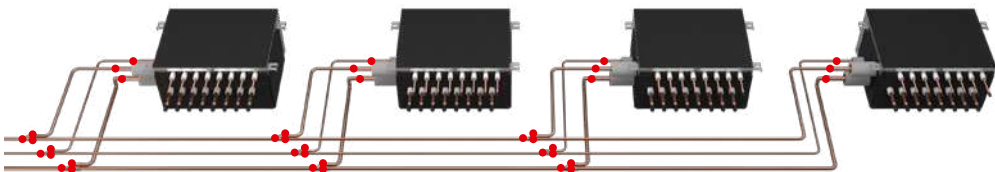

- › Easy servicing in false ceilings thanks to **sliding down PCB**

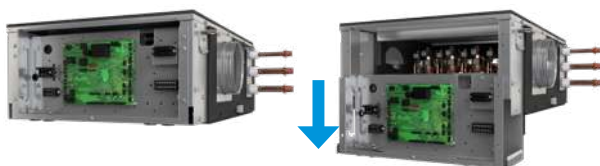

- › Limited ceiling void required as the box can be installed at just 5mm from the ceiling

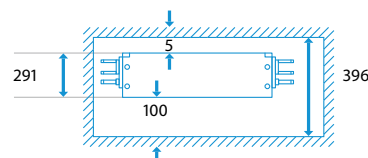

(1) Refer to Xpress selection software to ensure compliance to specific product standard. Field supplied duct and fan might be required to install the BS box in very small spaces



- › Unique range of multi BS boxes allowing efficient 3-pipe heat recovery
- › **NEW** No limitation on room size, thanks to Shîrudo Technology (1)
- › **NEW** Faster installation thanks to Refrigerant Flow Through reducing the number of brazing points and joint kits
- › **NEW** Easy servicing in false ceilings thanks to sliding down PCB
- › **NEW** Limited ceiling void required as the box can be installed at just 5mm from the ceiling
- › **NEW** Quick on-site settings, indication of service parameters and easy read out of errors thanks to 7 segment display
- › Up to 16kW capacity available per port
- › Connect up to 250 class unit (28kW) by combining 2 ports
- › No limit on unused ports allowing phased installation
- › Faster installation thanks to open port connection
- › Allows multi tenant applications
- › Connectable to REYA-A heat recovery units



More details and final information can be found by scanning or clicking the QR codes.



BS-A14AV1B


Branch selector				BS	4A14AV1B	6A14AV1B	8A14AV1B	10A14AV1B	12A14AV1B
Maximum number of connectable indoor units					20	30	40	50	60
Maximum number of connectable indoor units per branch							5		
Number of branches					4	6	8	10	12
Maximum capacity index of connectable indoor units					400	600		750	
Maximum capacity index of connectable indoor units per branch					140 (250 if 2 ports are combined)				
Dimensions		Unit	HeightxWidthxDepth	mm	291x600x845	291x1,000x845		291x1,400x845	
Weight		Unit		kg	40	56	65	83	89
Casing		Material			Galvanised steel plate				
Piping connections	Outdoor unit or Refrigerant Flow Through	Liquid	Type		Brazing connection				
			OD	mm	9.52(2)/12.7(2)/15.9				
		Gas	Type		Brazing connection				
	OD		mm	15.9(2)/19.1(2)/22.2(2)/28.6					
	Discharge gas	Type		Brazing connection					
		OD	mm	12.7(2)/15.9(2)/19.1(2)/22.2					
	Indoor unit	Liquid	Type		Brazing connection				
OD			mm	6.35(3)/9.52(4)					
	Gas	Type		Brazing connection					
		OD	mm	9.52(5)/12.7(6)/15.9(4)					
Drain					VP20 (I.D. 20/O.D. 26)				
BS units connected in Refrigerant Flow Through	Maximum allowed amount of BS units				4				
	Maximum total number of ports of BS units				16				
	Maximum total capacity index of indoor unit				750				
Sound absorbing thermal insulation					Urethane foam, polyethylene foam				
BS box system safety requirements	Dust connection diameter on unit			mm	160.0				
	Dust connection positions				Left/Right				
Power supply	Phase				1~				
	Frequency			Hz	50				
	Voltage			V	220-440				
	Maximum fuse amps (MFA)			A	15				

Contains fluorinated greenhouse gases | (1) Refer to Xpress selection software to ensure compliance to specific product standard. Field supplied duct and fan might be required to install the BS box in very small spaces | (2) Accessory pipe required | (3) When connecting indoor units smaller or equal to 80 class (no need to cut the outlet pipe) | (4) When connecting indoor units larger or equal to 100 class (the outlet pipe needs to be cut) | (5) When connecting indoor units smaller or equal to 32 class (no need to cut the outlet pipe) | (6) When connecting indoor units between 40 & 80 class (the outlet pipe needs to be cut)

# VRV 5 Heat Pump

Purpose-built to support the decarbonisation of commercial buildings

- › Reduced CO<sub>2</sub> equivalent thanks to the use of lower GWP R-32 refrigerant and lower refrigerant charge
- › Single component refrigerant, easy to re-use and recycle
- › Greatest sustainability over the entire lifecycle, thanks to market leading real-life seasonal efficiency
- › Tackle small room applications without any additional measures, thanks to Shīrudo Technology
- › Specially designed indoor units for R-32, ensuring low sound and maximum efficiency
- › Like for like R-410A installation flexibility with piping lengths up to 165 meters and a total length of 1,000 meters
- › Sound pressure down to 40 dB(A) thanks to 5 low sound steps
- › ESP up to 78 Pa to allow ducting
- › Wide operation range of up to +46°C in cooling and down to -20°C in heating
- › Incorporates VRV standards & technologies: Variable Refrigerant Temperature, continuous heating, VRV configurator, 7 segment display and full inverter compressors, 4-side heat exchanger, refrigerant cooled PCB



Lower CO<sub>2</sub> equivalents



5 low sound steps

More details and final information can be found by scanning or clicking the QR codes.



RXYA-A

Outdoor unit		RXYA	8A	10A	12A	14A	16A	18A	20A	
Capacity range	HP	8	10	12	14	16	18	20		
Cooling capacity	Prated,c kW	22.4	28.0	33.5	40.0	45.0	50.4	56.0		
Heating capacity	Prated,h Max. kW	22.4	28.0	33.5	40.0	45.0	50.4	56.0		
Recommended combination		4xFXFA50A2VEB	4xFXFA63A2VEB	6xFXFA50A2VEB	1xFXFA50A2VEB + 5xFXFA63A2VEB	4xFXFA63A2VEB + 2xFXFA80A2VEB	3xFXFA50A2VEB + 5xFXFA63A2VEB	8xFXFA63A2VEB		
ηs,c	%	287.3	279.3	278.7	302.2	276.6	271.6	257.6		
ηs,h	%	161.1	170.4	179.5	170.2	170.2	170.2	161.4		
SEER		7.26	7.06	7.04	7.67	6.99	6.87	6.52		
SCOP		4.11	4.33	4.49	4.28	4.26	4.39	4.14		
Maximum number of connectable indoor units					64					
Indoor index connection	Min. Max.	100 260	125 325	150 390	175 455	200 520	225 585	250 650		
Dimensions	Unit	HeightxWidthxDepth			mm	1,685x930x765			1,685x1,240x765	
Weight	Unit	kg			214	297	320			
Sound power level	Cooling Heating	Nom. Nom.	dB dB	78.3 79.4	78.8 80.7	82.5 83.3	79.5 82.9	83.7 86.3	83.4 85.1	87.9 89.6
Sound pressure level	Cooling	Nom.	dB	56.3	58.0	60.8	59.0	61.6	63.0	67.0
Operation range	Cooling Heating	Min.~Max. Min.~Max.	°CDB °CWB				-5 ~46 -20 ~16			
Refrigerant	Type/GWP Charge				R-32/675.0					
		kg/TCO2Eq	9.00/6.08			10.6/7.16				
Piping connections	Liquid Gas	OD OD	mm mm	9.52 19.1	22.2		12.7	28.6		
	Total piping length	System Actual	m	1,000						
	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415							
Current - 50Hz	Maximum fuse amps (MFA)	A	20	25	32	40		50		



RXYA8-12A

Widest R-32  
VRV range in  
the market

Outdoor unit System		RXYA	10A	13A	16A	18A	20A	
System	Outdoor unit module 1	RYMA5A			RXYA8A			
	Outdoor unit module 2	RYMA5A	RXYA8A		RXYA10A	RXYA12A		
Capacity range		HP	10	13	16	18	20	
Cooling capacity	Prated,c	kW	28	36.4	44.8	50.4	55.9	
Heating capacity	Prated,h	kW	28	36.4	44.8	50.4	55.9	
	Max.	kW	32	41	50	56.5	62.5	
Recommended combination			4xFXFA63A2VEB	3xFXFA50A2VEB + 3xFXFA63A2VEB	4xFXFA63A2VEB + 2xFXFA80A2VEB	4xFXFA50A2VEB + 4xFXFA63A2VEB	10xFXFA50A2VEB	
ηs,c		%	299.1%	293.8%	281.9%	284.1%	283.2%	
ηs,h		%	160.6%	161.5%	170.9%	170.5%	172.2%	
SEER			7.55	7.42	7.12	7.18	7.16	
SCOP			4.09	4.11	4.35	4.34	4.38	
Maximum number of connectable indoor units					64			
Indoor index connection	Min.		125	163	200	225	250	
	Max.		325	423	520	585	650	
Sound power level	Cooling	dB(A)	81.3	81.3	81.3	81.6	83.9	
Sound pressure level	Cooling	dB(A)	59.3	59.3	59.3	60.2	62.1	
Piping connections	Liquid	OD	mm	9.5	12.7	12.7	12.7	12.7
		Gas	OD	mm	19.1	22.2	28.6	28.6
	Equilizing pipe			19.1	19.1	19.1	19.1	19.1
Total piping length	System				500			
	Actual length	m						
Power supply	Name				Y1			
	Phase/Frequency/Voltage	Hz/V			3N~/50/380-415			
Current - 50Hz	Maximum fuse amps (MFA)	A	40	40	40	50	50	
Outdoor unit		RXMA	5A					
Dimensions	Unit	HeightxWidthxDepth	mm					
			1,685x930x765					
Weight	Unit		kg					
			214					
Sound power level	Cooling	Nom.	dB(A)					
			78.3					
Sound pressure level	Cooling	Nom.	dB(A)					
			79.4					
Operation range	Cooling	Min.~Max.	°CDB					
			-5 ~46					
Refrigerant	Type/GWP		R-32/675.0					
		Charge	kg/TCO2Eq	9.00/6.08				
Current - 50Hz	Phase/Frequency/Voltage		Hz/V					
			3N~/50/380-415					
	Maximum fuse amps (MFA)	A	20					

Actual number of connectable indoor units depends on the indoor unit type and the connection ratio restriction for the system (50% ≤ CR ≤ 120%) | Contains fluorinated greenhouse gases

# VRV 5 S-series

## Lower CO<sub>2</sub> equivalent and market-leading flexibility

- › Reduced CO<sub>2</sub> equivalent thanks to the use of lower GWP R-32 refrigerant and lower refrigerant charge
- › Top sustainability over the entire lifecycle, thanks to market leading real-life seasonal efficiency
- › Low-height single fan range
- › Easy to transport thanks to lightweight and compact design
- › Wide access area to easily reach all key components
- › Tackle small room applications without any additional measures, thanks to Shirudo technology
- › Specially designed indoor units for R-32, ensuring low sound and maximum efficiency



5 low sound steps



Flexibility to take care of every room



- 10 dB(A)!

## Sound enclosure for VRV5 S-series

- › Specially designed for RXYSА4-5-6AV1/AY1
- › Fully optimized and tested in Daikin Factory
- › Outdoor unit sound reduction up to -10 dB(A) on Sound Power values
- › Very low capacity and pressure drop
- › Fast & easy installation & servicing



More details and final information can be found by scanning or clicking the QR codes.



RXYSА-AV1



RXYSА-AY1

		4AV1	5AV1	6AV1	4AY1	5AY1	6AY1	8AY1	10AY1	12AY1	
Capacity range	HP	4	5	6	4	5	6	8	10	12	
Cooling capacity	Prated,c kW	12.1	14.0	15.5	12.1	14.0	15.5	22.4	28.0	33.5	
Heating capacity	Prated,h kW	12.1	14.0	15.5	12.1	14.0	15.5	22.4	28.0	33.5	
	Max. kW	14.2	16.0	18.0	14.2	16.0	18.0	25.0	31.5	37.5	
Recommended combination		3x FXSA25A2VEB + 1x FXSA32A2VEB	4x FXSA32A2VEB	2x FXSA32A2VEB + 2x FXSA40A2VEB	3x FXSA25A2VEB + 1x FXSA32A2VEB	4x FXSA32A2VEB	2x FXSA32A2VEB + 2x FXSA40A2VEB	4x FXSA50A2VEB	4x FXSA63A2VEB	6x FXSA50A2VEB	
SEER		8.2	7.7	7.6	7.9	7.4	7.3	6.4	6.9	6.5	
SCOP		5.1	4.7	4.9	4.5	4.4	4.6				
ηs,c	%	324.5	306.1	301.0	312.5	294.8	289.9	251.4	274.2	255.8	
ηs,h	%	200.5	185.7	183.6	193.1	178.8	176.8	173.8	182.6		
Dimensions	HxWxD mm	869x1,100x460						1,430x940x320		1,615x940x460	
Weight	kg	102						144		180	
Sound power level	Cooling dB(A)	67.0	68.1	69.0	67.0	68.1	69.0	73.2	74.0	76.1	
	Heating dB(A)	69.0	70.0	71.0	69.0	70.0	71.0	73.5	74.0	76.0	
Sound pressure level	Cooling dB(A)	49.0	51.0		49.0	51.0		58.1	57.0	60.0	
Operation range	Cooling Min °C °CDB	-5 ~ 46						-5 ~ 52			
	Heating Max °C °CWB	-20 ~ 16						-20 ~ 15.5			
Refrigerant	Type/GWP	R-32 / 675.0						R-32 / 675.0			
	Charge tCO <sub>2</sub> eq/ kg	3.40/2.30						5.2/3.51	7/4.73	7.1/4.79	
Piping connections	Liquid OD mm	9.52						9.5		12.7	
	Gas OD mm	15.9						19.1		22.2	
	H/P/LP gas OD mm										
	Tot. pip. length Sys. actual m	300						300			
Power supply	Phase/Freq./ Voltage Hz/V	1~/50/220-240				3N~/50/380-415				3N~/50/380-415	
Current - 50Hz	Max. fuse amps (MFA) A	32				16				25	
										32	

# Optional Shut off valve box (SV) for VRV 5 Heat Pump

To tackle even the most stringent applications in a future proof way

- › For the vast majority of applications the factory integrated measures tackle the IEC requirements.
- › In case of very small rooms an optional SV box ensures compliance to IEC60335-2-40 for any room. No limitation on room size
- › Fast installation thanks to Refrigerant Flow through reducing the number of brazing points and joint kits
- › Easy servicing in false ceilings thanks to sliding down PCB
- › Limited ceiling void required as the box can be installed at just 5mm from the ceiling
- › Connect up to 250 class unit (28kW) to 1-port SV box or by combing 2 ports on multi SV box
- › Connectable to RXYA-A and RXYSA8-10-12AY1 units



## Combination table

	RXYSA8-10-12AY1	RXYA-A
SV1A25A	✓	✓
SV4A14A	✓	✓
SV6A14A	✓	✓
SV8A14A	✓	✓

More details and final information can be found by scanning or clicking the QR codes.



SV-A

		SV1A25AJV1B	SV*A14AJV1B		
Maximum number of connectable indoor units		5	20		
Maximum number of connectable indoor units per branch		5			
Number of branches		1	4		
Maximum capacity index of connectable indoor units		250	400		
Maximum capacity index of connectable indoor units per branch		250	140		
Dimensions	Unit	291x600x845			
Piping connections	Outdoor unit or Refrigerant Flow Through	Liquid	Type	Brazing connection 9.52 (1), 12.7 (1), 15.9	
		Gas	Type		Brazing connection 15.9 (1), 19.1 (1), 22.2, 28.6 (1)
			OD		
		Indoor unit	Liquid		Type
	Gas		Type	Brazing connection 9.52 (4), 12.7 (5), 15.9 (3)	
			OD		mm
	Drain		VP20 (I.D. 20/O.D. 26)		
	Units connected in Refrigerant Flow Through	Maximum allowed amount of BS/SV units.			4
Maximum total number of ports of BS/SV units			16		
Maximum total capacity index of indoor unit			650		
Sound absorbing thermal insulation		Polyethylene foam			
Power supply	Phase	1~			
	Frequency	Hz	50		
	Voltage	V	220-440		
	Maximum fuse amps (MFA)	A	6		

Contains fluorinated greenhouse gases



## VRV 5 indoor unit overview


Capacity class (kW)

Type	Model	Product name	10	15	20	25	32	40	50	63	71	80	100	125	140	200	250	
Ceiling mounted cassette	<b>UNIQUE</b> Round flow cassette	<b>360° air discharge for optimum efficiency and comfort</b> <ul style="list-style-type: none"> <li>&gt; Auto cleaning function ensures high efficiency</li> <li>&gt; Intelligent sensors save energy and maximize comfort</li> <li>&gt; Flexibility to suit every room layout</li> <li>&gt; Lowest installation height in the market!</li> <li>&gt; Widest choice ever in decoration panel designs and colors</li> </ul>			•	•	•	•	•	•			•	•	•			
	<b>UNIQUE</b> Fully flat cassette	<b>Unique design that integrates fully flat into the ceiling</b> <ul style="list-style-type: none"> <li>&gt; Perfect integration in standard architectural ceiling tiles</li> <li>&gt; Blend of iconic design and engineering excellence</li> <li>&gt; Intelligent sensors save energy and maximize comfort</li> <li>&gt; Small capacity unit developed for small or well-insulated rooms</li> <li>&gt; Flexibility to suit every room layout</li> </ul>		•	•	•	•	•	•									
	<b>NEW</b> 1-way blow cassette	<b>1-way blow unit for corner installation</b> <ul style="list-style-type: none"> <li>&gt; Compact dimensions enable installation in narrow ceiling voids</li> <li>&gt; Flexible installation thanks to different air discharge options</li> <li>&gt; New modern decoration panel</li> </ul>			•	•	•	•	•									
Concealed ceiling	<b>Slim concealed ceiling unit</b>	<b>Slim design for flexible installation</b> <ul style="list-style-type: none"> <li>&gt; Compact dimensions enable installation in narrow ceiling voids</li> <li>&gt; Medium external static pressure up to 44Pa</li> <li>&gt; Only grilles are visible</li> <li>&gt; Small capacity unit developed for small of well-insulated rooms</li> <li>&gt; Reduced energy consumption thanks to DC fan motor</li> </ul>	•	•	•	•	•	•	•	•								
	<b>Concealed ceiling unit with medium ESP</b>	<b>Slimmest yet most powerful medium static pressure unit on the market!</b> <ul style="list-style-type: none"> <li>&gt; Slimmest unit in class, only 245mm</li> <li>&gt; Low operating sound level</li> <li>&gt; Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths</li> <li>&gt; Automatic air flow adjustment function measures the air volume and static pressure and adjusts it towards the nominal air flow, guaranteeing comfort</li> </ul>		•	•	•	•	•	•	•		•	•	•	•			
	<b>NEW</b> Concealed ceiling unit with high ESP	<b>ESP up to 270 Pa, ideal for extra large sized spaces</b> <ul style="list-style-type: none"> <li>&gt; Optimum comfort guaranteed no matter the length of ductwork or type of grilles, thanks to automatic air flow adjustment</li> <li>&gt; Large capacity unit: up to 31.5 kW heating capacity</li> </ul>								•	•		•	•	•	•	•	•
Wall mounted	<b>Wall mounted unit</b>	<b>For rooms with no false ceilings nor free floor space</b> <ul style="list-style-type: none"> <li>&gt; Flat, stylish front panel is more easy to clean</li> <li>&gt; Small capacity unit developed for small of well-insulated rooms</li> <li>&gt; Reduced energy consumption thanks to DC fan motor</li> <li>&gt; The air is comfortably spread up- and downwards thanks to 5 different discharge angles</li> </ul>		•	•	•	•	•	•									
Ceiling suspended	<b>NEW</b> Ceiling suspended unit	<b>For wide rooms with no false ceilings nor free floor space</b> <ul style="list-style-type: none"> <li>&gt; Ideal for comfortable air flow in wide rooms thanks to Coanda effect</li> <li>&gt; Rooms with ceilings up to 3.8m can be heated or cooled very easily!</li> <li>&gt; Can easily be installed in both new and refurbishment projects</li> <li>&gt; Can even be mounted in corners or narrow spaces without any problem</li> </ul>					•		•	•			•					
	<b>NEW &amp; UNIQUE</b> 4-way blow ceiling suspended unit	<b>Unique Daikin unit for high rooms with no false ceilings nor free floor space</b> <ul style="list-style-type: none"> <li>&gt; Rooms with ceilings up to 3.5m can be heated up or cooled down very easily!</li> <li>&gt; Can easily be installed in both new and refurbishment projects</li> <li>&gt; Flexibility to suit every room layout</li> </ul>							•			•	•					
Cooling capacity (kW) <sup>1</sup>				1.1	1.7	2.2	2.8	3.6	4.5	5.6	7.1	8.0	9.0	11.2	14.0	16.0	22.4	28.0
Heating capacity (kW) <sup>2</sup>				1.3	1.9	2.5	3.2	4.0	5.0	6.3	8.0	9.0	10.0	12.5	16.0	18.0	25.0	31.5

(1) Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m  
 (2) Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m

## Biddle air curtains

Type	Product name	Model
Free-hanging	CYA-S/M/L-DK-F	<b>Easy wall mounted installation</b> <ul style="list-style-type: none"> <li>&gt; Connectable to ERQ and VRV units</li> <li>&gt; Unified range for R-32 and R-410A refrigerant</li> <li>&gt; Payback period of less than 1.5 years compared to installing an electric air curtain</li> </ul>
Cassette	CYA-S/M/L-DK-C	<b>Mounted into a false ceiling leaving only the decoration panel visible</b> <ul style="list-style-type: none"> <li>&gt; Connectable to ERQ and VRV units</li> <li>&gt; Unified range for R-32 and R-410A refrigerant</li> <li>&gt; Payback period of less than 1.5 years compared to installing an electric air curtain</li> </ul>
Recessed	HXHD-A8	<b>Neatly concealed in the ceiling</b> <ul style="list-style-type: none"> <li>&gt; Connectable to ERQ and VRV units</li> <li>&gt; Unified range for R-32 and R-410A refrigerant</li> <li>&gt; Payback period of less than 1.5 years compared to installing an electric air curtain</li> </ul>

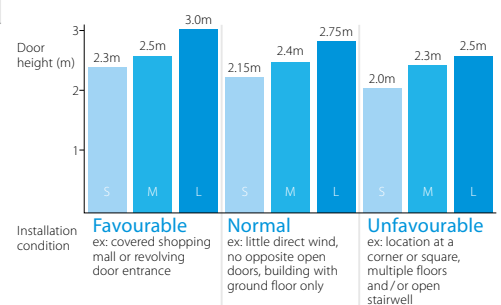

# VRV 5 indoor unit

## benefit overview

	Ceiling mounted cassette units			Concealed ceiling units			Wall mounted unit	Ceiling suspended units	
	FXFA-A	FXZA-A	<b>NEW</b> FXKA-A	FXDA-A	FXSA-A	FXMA-A	FXAA-A	FXHA-A	FXUA-A



We care	Home leave operation	Maintains the indoor temperature at your specified comfort level during absence, thus saving energy.	●	●	●	●	●	●	●	●	●
	Fan only	The unit can be used as fan, blowing air without heating or cooling.	●	●	●	●	●	●	●	●	●
	Auto cleaning filter	The filter automatically cleans itself. Simplicity of upkeep means optimum energy efficiency and maximum comfort without the need for expensive or time-consuming maintenance.	○			○					
	Floor and presence sensor	The presence sensor directs the air away from any person detected in the room, when the air flow control is on. The floor sensor detects the average floor temperature and ensures an even temperature distribution between ceiling and floor.	○	○							<b>NEW</b> ○
Comfort	Draught prevention	When starting to warm up or when the thermostat is off, the air discharge direction is set horizontally and the fan to low speed, to prevent draught. After warming up, air discharge and fan speed are set as desired.	●	●	●						●
	Whisper quiet	Daikin indoor units are whisper quiet. Also the outdoor units are guaranteed not to disturb the quiet of the neighbourhood.	●	●		●	●		●		
	Auto cooling-heating changeover	Automatically selects cooling or heating mode to achieve the set temperature.	●	●	●	●	●	●	●	●	●
Air treatment	UV Streamer kit	Purifies the air of pollutants such as viruses, bacteria, fine dust (PM1.0), odours, allergens, etc ensuring a healthy and hygienic indoor environment	●								
	Air filter	Removes airborne dust particles to ensure a steady supply of clean air.	○ (2)	● (2)	● (2)	● (2)	● (2)	● (2)	● (2)	● (2)	● (2)
Humidity control	Dry programme	Allows humidity levels to be reduced without variations in room temperature.	●	●	●	●	●	●	●	●	●
	Ceiling soiling prevention	Prevents air from blowing out too long in horizontal position, to prevent ceiling stains.	●	●	●						
Air flow	Vertical auto swing	Possibility to select automatic vertical moving of the air discharge flaps for efficient air and temperature distribution throughout the room.	●	●	●			●	●	●	
	Fan speed steps	Allows to select up to the given number of fan speed.	5 + auto	3 + auto	3 + auto	3	3 + auto	3 (50-125) 3 + auto (200-250)	3 + auto	3	3 + auto
	Individual flap control	Individual flap control via the wired remote controller enables you to easily fix the position of each flap individually, to suit any new room configuration. Optional closure kits are available as well.	●	●							●
	Onecta controller (BRP069C51)	Control your indoor climate from any location via smartphone or tablet.	○	○	○	○	○	○	○	○	○
Remote control & timer	Weekly timer	Can be set to start heating or cooling anytime on a daily or weekly basis.	○	○	○	○	○	○	○	○	○
	Infrared remote control	Starts, stops and regulates the air conditioner from a distance.	○ (1)	○ (1)		○ (1)	○ (1)	○ (1)	○ (1)	○ (1)	○ (1)
	Wired remote control	Starts, stops and regulates the air conditioner.	● (3)	● (3)	● (3)	● (3)	● (3)	● (3)	● (3)	● (3)	● (3)
	Centralised control	Starts, stops and regulates several air conditioners from one central point.	○	○	○	○	○	○	○	○	○
Other functions	Auto-restart	The unit restarts automatically at the original settings after power failure.	●	●	●	●	●	●	●	●	●
	Self-diagnosis	Simplifies maintenance by indicating system faults or operating anomalies.	●	●	●	●	●	●	●	●	●
	Drain pump kit	Facilitates condensation draining from the indoor unit.	●	●	●	●	●	○	○	○	●
	Multi tenant	The indoor unit's main power supply can be turned off when leaving the hotel or office building.	○ (4)	○ (4)	○ (4)	○ (4)	○ (4)	○ (4)	○ (4)	○ (4)	○ (4)

(1) Must be combined with Madoka wired remote controller.  
(2) Pre filter

(3) BRC1H52W/S/K is a required option  
(4) Only in combination with REYA outdoors

● standard ○ optional







4-way blow ceiling suspended unit




Fully flat cassette

Complete indoor  
comfort, including  
pure air

## The round flow cassette

› Maximum comfort thanks to **360° air discharge and intelligent sensors**

› **Widest ever choice in panels** to match any interior

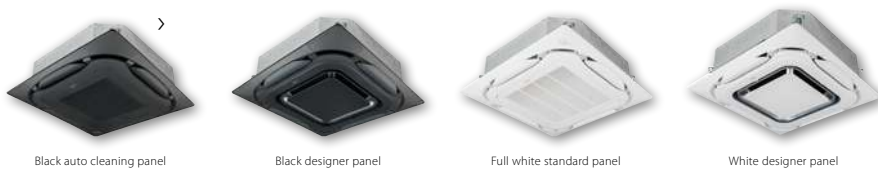


Black auto cleaning panel

Black designer panel

Full white standard panel

White designer panel



presence sensor

floor sensor

› **Auto cleaning panel** keeps the filter free of dust for maximum efficiency



› **UV streamer kit**

**NEW** › Purifies the air of pollutants such as viruses, bacteria, fine dust PM1, odeurs, allergens, etc ensuring a healthy and hygienic indoor environment

› Unique catch & clean approach includes an ISO ePM1 60% (F7) filter, UV-C light and Streamer technology

› Can be **retrofitted** into existing installations



**99.9%**

of viruses removed in 30 minutes,  
thanks to Daikin's unique  
Catch & Clean approach



### Tested at Intertek

Results based on tests performed in the laboratories of Intertek, in a 28m<sup>3</sup> room. Daikin's Round flow cassette (FXFQ125B) removes more than 99.9% of enveloped viruses such as Corona viruses.

\* Additional details regarding this function can be found in the unit technical manual.

Tested according to  
real life sized room

28m<sup>3</sup>



View full  
test report:




# Round flow cassette

360° air discharge for optimum efficiency and comfort

- › Optimised design for R-32 refrigerant
- › Optional automatic filter cleaning panel results in higher efficiency & comfort and lower maintenance costs.
- › Two optional intelligent sensors improve energy efficiency and comfort
- › Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- › Bigger flaps and unique swing pattern improve equal air distribution
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- › Lowest installation height in the market: 214mm for class 20-63
- › UV streamer kit, purifies the air of pollutants such as viruses, bacteria, fine dust (PM1.0), odeurs, allergens, etc ensuring a healthy and hygienic indoor environment
- › Optional fresh air intake
- › Standard drain pump with 675mm lift increases flexibility and installation speed

**NEW**



More details and final information can be found by scanning or clicking the QR codes.



FXFA-A


Indoor Unit			FXFA	20A	25A	32A	40A	50A	63A	80A	100A	125A	
Cooling capacity	Total capacity	At high fan speed	kW	2.20	2.80	3.60	4.50	5.60	7.10	9.00	11.20	14.00	
	Heating capacity	Total capacity	At high fan speed	kW	2.50	3.20	4.00	5.00	6.30	8.00	10.00	12.50	16.00
Power input - 50Hz	Cooling	At high fan speed	kW	0.017			0.018	0.023	0.028	0.045	0.078	0.103	
	Heating	At high fan speed	kW	0.017			0.018	0.023	0.028	0.045	0.078	0.103	
Dimensions	Unit	HeightxWidthxDepth	mm	204x840x840						246x840x840		288x840x840	
Weight	Unit		kg	18			19	21		24		26	
Casing	Material			Galvanised steel plate									
Decoration panel	Model			Standard panels: BYCQ140E2W1 - white with grey louvers / BYCQ140E2W1W - full white / BYCQ140E2W1B - black Auto cleaning panels: BYCQ140E2GFW1 - white / BYCQ140E2GFW1B - black Designer panels: BYCQ140E2P - white / BYCQ140E2PB - black									
	Dimensions	HeightxWidthxDepth	mm	Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950									
Fan	Weight		kg	Standard panels: 5.5 / Auto cleaning panels: 10.3 / Designer panels: 6.5									
	Air flow rate - 50Hz	Cooling	At high / medium high / medium / medium low / low fan speed	m <sup>3</sup> /min	12.8/11.8/10.7/9.8/8.9			14.8/13.7/12.6/11.5/10.4	15.1/14.0/12.8/11.8/10.7	16.6/15.0/13.3/12.0/10.7	23.3/21.7/19.3/16.5/13.8	28.8/25.1/21.2/17.5/13.8	33.0/30.2/27.4/24.0/20.6
		Heating	At high / medium high / medium / medium low / low fan speed	m <sup>3</sup> /min	12.8/11.8/10.7/9.8/8.9			14.8/13.7/12.6/11.5/10.4	15.1/14.0/12.8/11.8/10.7	16.6/15.0/13.3/12.0/10.7	23.3/21.7/19.3/16.5/13.8	29.0/25.1/21.2/17.5/13.8	33.0/30.2/27.4/24.0/20.6
Air filter	Type			Resinnet									
Sound power level	Cooling	At high fan speed	dBA	49.0			51.0		53.0	55.0	60.0	61.0	
		At high / medium high / medium / medium low / low fan speed	dBA	31.0/30.0/29.0/29.5/28.0			33.0/32.0/31.0/30.0/29.0		35.0/34.0/33.0/32.0/30.0	38.0/36.0/34.0/32.0/30.0	43.0/41.0/37.0/34.0/30.0	45.0/43.0/41.0/39.0/36.0	
	Heating	At high fan speed	dBA	49.0			51.0		53.0	55.0	60.0	61.0	
		At high / medium high / medium / medium low / low fan speed	dBA	31.0/30.0/29.0/29.5/28.0			33.0/32.0/31.0/30.0/29.0		35.0/34.0/33.0/32.0/30.0	38.0/36.0/34.0/32.0/30.0	43.0/41.0/37.0/34.0/30.0	45.0/43.0/41.0/39.0/36.0	
Refrigerant	Type/GWP			R-32/675.0									
Piping connections	Liquid	OD	mm				6.35					9.52	
	Gas	OD	mm	9.52			12.70			15.90			
	Drain			VP25 (O.D. 32 / I.D. 25)									
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50/60/220-240/220									
Current - 50Hz	Maximum fuse amps (MFA)	A		6									
Control systems	Infrared remote control			BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB									
	Wired remote control			BRC1H52W/S/K									

Contains fluorinated greenhouse gases


# Fully flat cassette

Unique design in the market that integrates fully flat into the ceiling

- › Optimised design for R-32 refrigerant
- › Fully flat integration in standard architectural ceiling tiles, leaving only 8mm
- › Remarkable blend of iconic design and engineering excellence with an elegant finish in white or a combination of silver and white
- › Two optional intelligent sensors improve energy efficiency and comfort
- › 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices, etc.
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!



- › Optional fresh air intake
- › Standard drain pump with 630mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.



FXZA-A

Indoor Unit		FXZA	15A	20A	25A	32A	40A	50A		
Cooling capacity	Total capacity		1.70	2.20	2.80	3.60	4.50	5.60		
	At high fan speed									
Heating capacity	Total capacity		1.90	2.50	3.20	4.00	5.00	6.30		
	At high fan speed									
Power input - 50Hz	Cooling		0.018		0.020	0.019	0.029	0.048		
	At high fan speed		0.018		0.020	0.019	0.029	0.048		
Dimensions	Unit	HeightxWidthxDepth	mm 260x575x575							
Weight	Unit		15.5		16.5		18.5			
Casing	Material		Galvanised steel plate							
Decoration panel	Model		BYFQ60C4W1W							
	Colour		White (N9.5)							
	Dimensions	HeightxWidthxDepth	mm 46x620x620							
	Weight		kg 2.8							
Decoration panel 2	Model		BYFQ60C4W1S							
	Colour		SILVER							
	Dimensions	HeightxWidthxDepth	mm 46x620x620							
	Weight		kg 2.8							
Decoration panel 3	Model		BYFQ60B3W1 + wire harness EKRS23							
	Colour		WHITE (RAL9010)							
	Dimensions	HeightxWidthxDepth	mm 55x700x700							
	Weight		kg 2.7							
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed	m <sup>3</sup> /min	8.5/7.0/6.5	8.7/7.5/6.5	9.0/8.0/6.5	10.0/8.5/7.0	11.5/9.5/8.0	14.0/12.5/10.0
		Heating	At high / medium / low fan speed	m <sup>3</sup> /min	8.5/7.0/6.5	8.7/7.5/6.5	9.0/8.0/6.5	10.0/8.5/7.0	11.5/9.5/8.0	14.0/12.5/10.0
Air filter	Type		Resin net							
Sound power level	Cooling	At high fan speed	dBA	49		50	51	54	60	
	At high / medium / low fan speed	dBA	31.5/28.0/25.5	32.0/29.5/25.5	33.0/30.0/25.5	33.5/30.0/26.0	37.0/32.0/28.0	43.0/40.0/33.0		
Sound pressure level	Cooling	At high / medium / low fan speed	dBA	31.5/28.0/25.5		32.0/29.5/25.5	33.0/30.0/25.5	33.5/30.0/26.0	37.0/32.0/28.0	43.0/40.0/33.0
	Heating	At high / medium / low fan speed	dBA	31.5/28.0/25.5		32.0/29.5/25.5	33.0/30.0/25.5	33.5/30.0/26.0	37.0/32.0/28.0	43.0/40.0/33.0
Refrigerant	Type/GWP		R-32/675.0							
Piping connections	Liquid	OD	mm 6.35							
	Gas	OD	mm 9.52		12.70					
	Drain		VP20 (I.D. 20/O.D. 26)							
Power supply	Phase/Frequency/Voltage		Hz/V 1~/50/60/220-240/220							
Current - 50Hz	Maximum fuse amps (MFA)		A 6							
Control systems	Infrared remote control		BRC7F530W (white panel) / BRC7F530S (grey panel) / BRC7EB530W (standard panel) (1)							
Control systems	Wired remote control		BRC1H52W/S/K							

Dimensions do not include control box | (1) Must be combined with Madoka wired remote controller | Contains fluorinated greenhouse gases

# Ceiling mounted corner cassette

## 1-way blow unit for corner installation

- › Optimised design for R-32 refrigerant
- › Compact dimensions enable installation in narrow ceiling voids (only 200mm height)
- › New modern decoration panel
- › The air is comfortably spread up- and downwards thanks to 5 different discharge angles that can be programmed via the remote control
- › Optional fresh air intake
- › Standard drain pump increases flexibility and installation speed

New design!



More details and final information can be found by scanning or clicking the QR codes.




FXKA-A

Indoor Unit			FXKA		20	25	32	40	50	63	
Cooling capacity	Total capacity	At high fan speed	kW	2.2	2.8	3.6	4.5	5.6	7.1		
		At high fan speed	kW	2.5	3.2	4	5	6.3	8		
Heating capacity	Total capacity	At high fan speed	kW	0.024	0.024	0.033	0.038	0.055	0.118		
		At high fan speed	kW	0.024	0.024	0.033	0.038	0.055	0.118		
Power input - 50Hz	Cooling	At high fan speed	kW	200x840x470							
	Heating	At high fan speed	kW	200x1.240x470							
Dimensions	Unit	HeightxWidthxDepth	mm								
Weight	Unit		kg	17	17	18	23	23	23		
Casing	Material	Galvanised steel plate									
Decoration panel	Model	BYK32G				BYK63G					
	Dimensions	HeightxWidthxDepth	mm	80x950x550				80x1.350x550			
	Weight		kg								
Fan	Airflow rate	Cooling	At high / medium / low fan speed	m <sup>3</sup> /min	7.1/6/5		8.5/7.3/6	12.9/11/9.1	15.5/13.2/11	21.5/17/14.1	
		At high / medium / low fan speed	m <sup>3</sup> /min								
Air filter	Type	Resin net									
Sound power level	Cooling	At high fan speed	dB(A)	52	53	54	56	58	68		
		At high / medium / low fan speed	dB(A)	36/33/30	37/34/31	38/35/32	40/37/34	42/40/37	54/51/48		
		At high / medium / low fan speed	dB(A)	38/35/32	39/36/33	40/37/34	42/39/36	44/42/39	55/52/49		
Refrigerant	Type/GWP	R-32/675									
Piping connections	Liquid	OD	mm	6.35							
		Gas	OD	mm	9.52				12.7		
	Drain			VP25 (O.D. 32/I.D. 25)							
Power supply			Hz/V	1~/50/60/220-240/220							
Current - 50Hz	Maximum fuse amps (MFA)		A	6							

Contains fluorinated greenhouse gases

\*Note: blue cells contain preliminary data



# Auto cleaning filter for concealed ceiling units

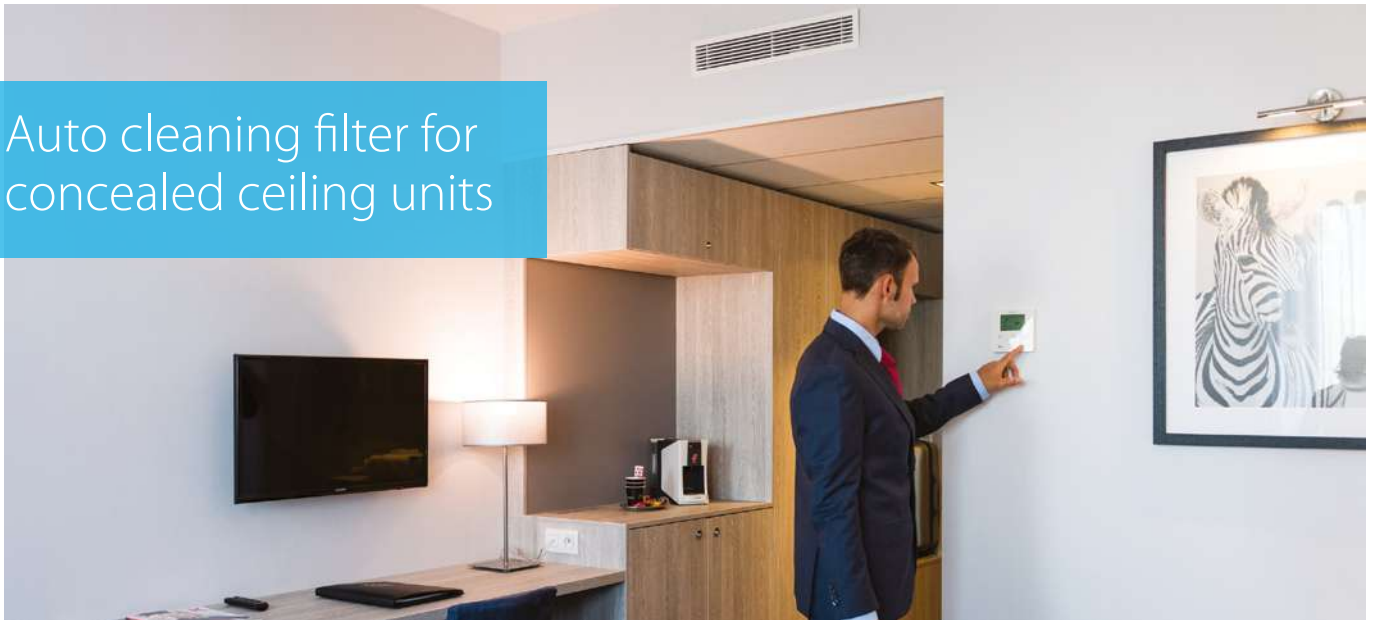

The unique automatic cleaning filter achieves higher efficiency and comfort with lower maintenance costs

### Reduce running costs

- › Automatic filter cleaning ensures low maintenance costs because the filter is always clean

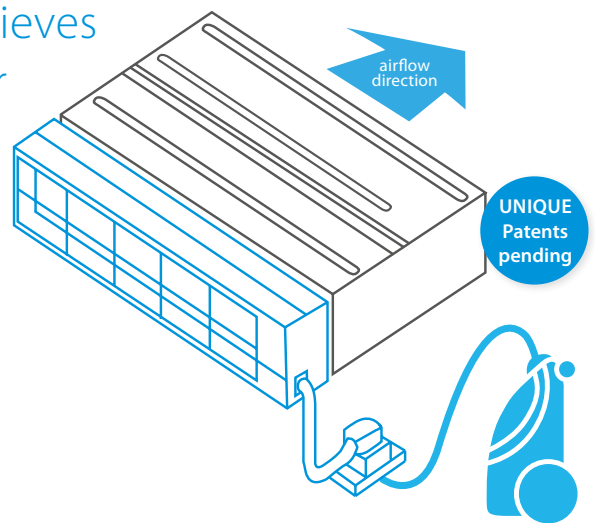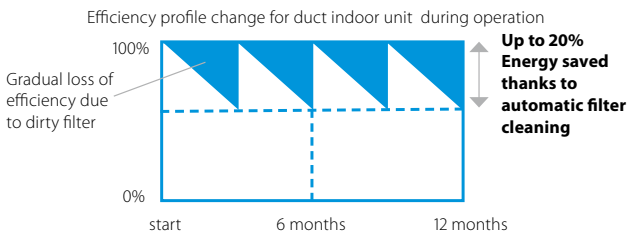

### Minimal time required for filter cleaning

- › The dust box can be emptied with a vacuum cleaner for fast and easy cleaning
- › No more dirty ceilings

### Improved indoor air quality

- › Optimum airflow eliminates draft and insulates sound

### Superb reliability

- › Prevents clogged filters for seamless operation

### Unique technology

- › Unique and innovative filter technology inspired by the Daikin auto cleaning cassette



## How does it work?

- 1 Scheduled automatic filter cleaning
- 2 Dust collects in a dust box that's integrated into the unit
- 3 The dust can easily be removed with a vacuum cleaner



### Combination table

	Split / Sky Air				VRV						
	FDXM-F9				FXDA-A/FXDQ-A3						
	25	35	50	60	15	20	25	32	40	50	63
BAE20A62	•	•			•	•	•	•			
BAE20A82									•	•	
BAE20A102			•	•							•

### Specifications


	BAE20A62	BAE20A82	BAE20A102
Height (mm)	210		
Width (mm)	830	1,030	1,230
Depth (mm)	188		

# Slim concealed ceiling unit


## Slim design for flexible installation

- › Optimised design for R-32 refrigerant
- › 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices, etc.
- › Compact dimensions, can easily be mounted in a ceiling void of only 240mm



SERIE A (15, 20, 25, 32)



- › Medium external static pressure up to 44Pa facilitates unit use with flexible ducts of varying lengths
- › Discretely concealed in the wall: only the suction and discharge grilles are visible
- › Optional auto cleaning filter option ensures maximum efficiency, comfort and reliability by regular filter cleaning
- › Flexible installation, as the air suction direction can be altered from rear to bottom suction

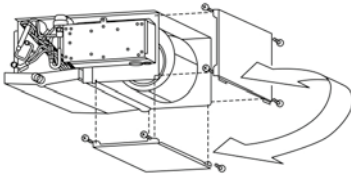

- › Standard drain pump with 600mm lift increases flexibility and installation speed

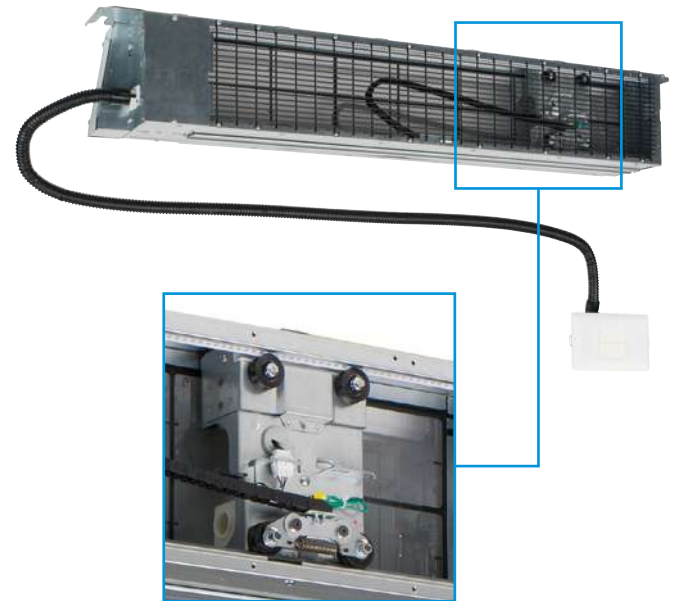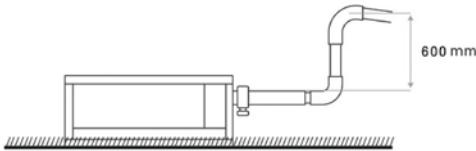

Auto cleaning filter option

More details and final information can be found by scanning or clicking the QR codes.



FXDA-A

Indoor Unit				FXDA	10A	15A	20A	25A	32A	40A	50A	63A		
Cooling capacity	Total capacity	At high fan speed	kW	1.10	1.70	2.20	2.80	3.60	4.50	5.60	7.10			
	Heating capacity	Total capacity	At high fan speed	kW	1.30	1.90	2.50	3.20	4.00	5.00	6.30	8.00		
Power input - 50Hz		Cooling	At high fan speed	kW	0.026	0.035	0.030		0.035	0.038	0.049	0.058		
	Heating	At high fan speed	kW	0.026	0.035	0.030		0.035	0.038	0.049	0.058			
Required ceiling void >				mm 240										
Dimensions	Unit	HeightxWidthxD	mm	200x750x620					200x950x620		200x1,150x620			
	Weight	Unit	kg	22.0					23.0		26.5		30.5	
Casing	Material			Galvanised steel										
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed	m <sup>3</sup> /min	5.2/4.9/4.7	6.5/6.2/5.8	8.0/7.2/6.4		10.5/9.5/8.5	12.5/11.0/10.0	16.5/14.5/13.0			
		Heating	At high / medium / low fan speed	m <sup>3</sup> /min	5.2/4.9/4.7	6.5/6.2/5.8	8.0/7.2/6.4		10.5/9.5/8.5	12.5/11.0/10.0	16.5/14.5/13.0			
	External static pressure - 50Hz	Factory set / High	Pa	10/30					15/44					
Air filter	Type			Removable / washable										
Sound power level	Cooling	At high fan speed	dBA	48	50	51			52	53	54			
	Sound pressure level	Cooling	At high / medium / low fan speed	dBA	29.0/28.0/26.0	32.0/31.0/27.0	33.0/31.0/27.0		34.0/32.0/28.0	35.0/33.0/29.0	36.0/34.0/30.0			
Refrigerant	Heating	At high / medium / low fan speed	dBA	29.0/28.0/26.0	32.0/31.0/27.0	33.0/31.0/27.0		34.0/32.0/28.0	35.0/33.0/29.0	36.0/34.0/30.0				
	Type/GWP	R-32/675.0												
Piping connections	Liquid	OD	mm	6										
	Gas	OD	mm	9.52					12.70					
	Drain	VP20 (I.D. 20/O.D. 26)												
Power supply	Phase/Frequency/Voltage	Hz/V			1~/50/60/220-240/220									
Current - 50Hz	Maximum fuse amps (MFA)	A			6									
Control systems	Infrared remote control	BRC4C65 (1)												
	Wired remote control	BRC1H52W/S/K												

(1) Must be combined with Madoka wired remote controller | Contains fluorinated greenhouse gases

# Concealed ceiling unit with medium ESP


Slimmest yet most powerful medium static pressure unit on the market

- Optimised design for R-32 refrigerant
- Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge





- Quiet operation: down to 25dBA sound pressure level
- Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths
- Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- Discretely concealed in the wall: only the suction and discharge grilles are visible
- 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices, etc.
- Optional fresh air intake
- Fresh air intake integrated in the same system thus reducing installation cost as no additional ventilation device is required
- Standard built-in drain pump with 625mm lift increases flexibility and installation speed

Fresh air intake opening in casing

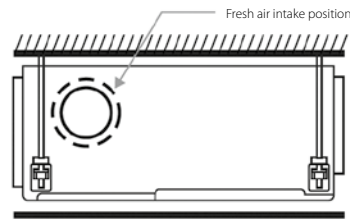

\* Brings in up to 10% of fresh air into the room

- Standard built-in drain pump with 625mm lift increases flexibility and installation speed

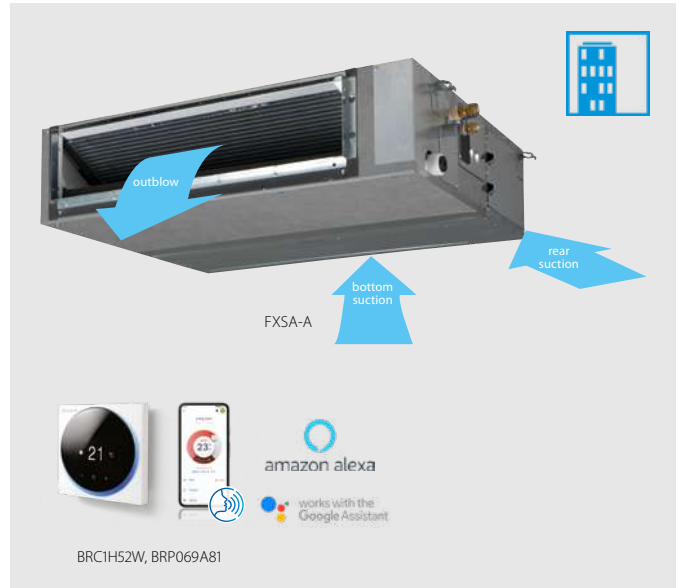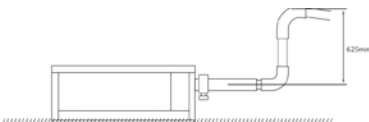


## Automatic Airflow Adjustment function

Automatically selects the most appropriate fan speed to achieve the units' nominal air flow within ±10%

### Why?

After installation the real ducting will frequently differ from the initially calculated air flow resistance \* the real air flow may be much lower or higher than nominal, leading to a lack of capacity or uncomfortable air temperature  
Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically (10 or more fan curves are available on every model), making installation much faster



More details and final information can be found by scanning or clicking the QR codes.



FXSA-A

Indoor Unit		FXSA	15A	20A	25A	32A	40A	50A	63A	80A	100A	125A	140A	
Cooling capacity	Total capacity	At high fan speed	kW	1.70	2.20	2.80	3.60	4.50	5.60	7.10	9.00	11.20	14.00	16.00
	At high fan speed	kW	1.90	2.50	3.20	4.00	5.00	6.30	8.00	10.00	12.50	16.00	18.00	
Power input - 50Hz	Cooling	At high fan speed	kW	0.046		0.049	0.094	0.096	0.106	0.143	0.176	0.216	0.272	
	Heating	At high fan speed	kW	0.046		0.049	0.094	0.096	0.106	0.143	0.176	0.216	0.272	
Dimensions	Unit	HeightxWidthxDepth	mm	245x550x800			245x700x800			245x1,000x800		245x1,400x800		245x1,550x800
Weight	Unit		kg	23.5		24.0	28.5	29.0	35.5	36.5	46.0	47.0	51.0	
Casing	Material		Galvanised steel plate											
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed	m <sup>3</sup> /min	8.7/7.5/6.5	9.0/7.5/6.5	9.5/8.0/7.0	15.0/12.5/11.0	15.2/12.5/11.0	21.0/18.0/15.0	23.0/19.5/16.0	32.0/27.0/23.0	36.0/31.5/26.0	39.0/34.0/28.0
		Heating	At high / medium / low fan speed	m <sup>3</sup> /min	8.7/7.5/6.5	9.0/7.5/6.5	9.5/8.0/7.0	15.0/12.5/11.0	15.2/12.5/11.0	21.0/18.0/15.0	23.0/19.5/16.0	32.0/27.0/23.0	36.0/31.5/26.0	42.5/34.0/28.0
	External static pressure - 50Hz	Factory set / High	Pa	30/150			40/150			50/150				
Air filter	Type		Resin net											
Sound power level	Cooling	At high fan speed	dBA	54		55	60	59	61		64			
	Heating	At high / medium / low fan speed	dBA	29.5/28.0/25.0	30.0/28.0/25.0	31.0/29.0/26.0	35.0/32.0/29.0	33.0/30.0/27.0	35.0/32.0/29.0	36.0/34.0/31.0	39.0/36.0/33.0	41.5/38.0/34.0		
Refrigerant	Heating	At high / medium / low fan speed	dBA	31.5/29.0/26.0	32.0/29.0/26.0	33.0/30.0/27.0	37.0/34.0/29.0	35.0/32.0/28.0	37.0/34.0/30.0	37.0/34.0/31.0	40.0/37.0/33.0	42.0/38.5/34.0		
	Type/GWP		R-32/675.0											
Piping connections	Liquid	OD	mm	6.35			9.52			15.90				
	Gas	OD	mm	9.52			12.70			15.90				
	Drain			VP20 (I.D. 20/O.D. 26), drain height 625 mm										
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/60/220-240/220											
Current - 50Hz	Maximum fuse amps (MFA)	A	6											
Control systems	Infrared remote control		BRC4C65 / BRC4C66 (1)											
	Wired remote control		BRC1H52W/S/K											

(1) Must be combined with Madoka wired remote controller | Contains fluorinated greenhouse gases




# Concealed ceiling unit with high ESP

Ideal for large sized spaces ESP up to 250 Pa


- › Optimised design for R-32 refrigerant
- › High external static pressure up to 250Pa facilitates extensive duct and grille network
- › Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- › Discretely concealed in the wall: only the suction and discharge grilles are visible
- › Fresh air intake integrated in the same system thus reducing installation cost as no additional ventilation device is required (50-125 class)

Fresh air intake opening in casing




\* Brings in up to 10% of fresh air into the room

- › Flexible installation, as the air suction direction can be altered from rear to bottom suction (50-125 class)



- › Standard built-in drain pump with 625mm lift increases flexibility and installation speed (optional for 200-250)



- › Large capacity unit: up to 31.5 kW heating capacity




### Automatic Airflow Adjustment function

Automatically selects the most appropriate fan curve to achieve the units' nominal air flow within ±10%

#### Why?

After installation the real ducting will frequently differ from the initially calculated air flow resistance \* the real air flow may be much lower or higher than nominal, leading to a lack of capacity or uncomfortable air temperature  
Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically (10 or more fan curves are available on every model), making installation much faster



More details and final information can be found by scanning or clicking the QR codes.



FXMA-A

Indoor Unit			FXMA	50A	63A	80A	100A	125A	200A	250A	
Cooling capacity	Total capacity	At high fan speed	kW	5.6	7.1	9.0	11.2	14.0	22.4	28.0	
	Nom.		kW			-			22.4	28.0	
Heating capacity	Total capacity	At high fan speed	kW	6.3	8.0	10.0	12.5	16.0	25.0	31.5	
	Nom.		kW			-			25.0	31.5	
Power input - 50Hz	Cooling	At high fan speed	kW	0.125	0.140	0.198	0.191	0.254	0.54	0.65	
	Heating	At high fan speed	kW	0.125	0.140	0.198	0.191	0.254	0.54	0.65	
Required ceiling void >			mm	350					-		
Dimensions	Unit	HeightxWidthxDepth	mm	300x1,000x700			300x1,400x700		470x1,490x1,100		
Weight	Unit		kg	35			46		105	115	
Casing	Material			Galvanised steel plate							
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed	m <sup>3</sup> /min	18.0/16.5/15.0	19.5/17.5/16.0	25.0/22.5/20.0	32.0/27.0/23.0	36.0/30.0/26.0	62/48/41	74/64/52
		Heating	At high / medium / low fan speed	m <sup>3</sup> /min	18.0/16.5/15.0	19.5/17.5/16.0	25.0/22.5/20.0	32.0/27.0/23.0	36.0/30.0/26.0	62/48/41	74/64/52
	External static pressure - 50Hz	Factory set / High / Low	Pa	100/200/-					150/250/50		
Air filter	Type			Resin net							
Sound power level	Cooling	At high / medium / low fan speed	dBA	61.0/60.0/58.0	64.0/61.0/59.0	67.0/64.0/62.0	65.0/61.0/56.0	70.0/66.0/62.0	75/74/72	76/75/73	
	Heating	At high / medium / low fan speed	dBA	41.0/39.0/37.0	42.0/40.0/38.0	43.0/41.0/39.0		44.0/42.0/40.0	48/46.5/45		
Sound pressure level	Cooling	At high / medium / low fan speed	dBA	41.0/39.0/37.0	42.0/40.0/38.0	43.0/41.0/39.0		44.0/42.0/40.0	48/46.5/45		
	Heating	At high / medium / low fan speed	dBA	41.0/39.0/37.0	42.0/40.0/38.0	43.0/41.0/39.0		44.0/42.0/40.0	48/46.5/45		
Refrigerant	Type/GWP			R-32/675							
Piping connections	Liquid	OD	mm	6.35					9.52		
	Gas	OD	mm	12.70			15.90		19.1		
	Drain			VP25 (I.D. 25/O.D. 32)					BSP1		
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50/60/220-240/220					1~/50/60/220-240/220-230		
Current - 50Hz	Maximum fuse amps (MFA)	A					6				
Control systems	Infrared remote control			BRC4C65 / BRC4C66					BRC4C65		
	Wired remote control			BRC1H52W/S/K							

Contains fluorinated greenhouse gases

# Wall mounted unit

For rooms with no false ceilings nor free floor space

- › Optimised design for R-32 refrigerant
- › Flat, stylish front panel blends easily within any interior décor and is easier to clean
- › Can easily be installed in both new and refurbishment projects
- › The air is comfortably spread up- and downwards thanks to 5 different discharge angles that can be programmed via the remote control
- › Maintenance operations can be performed easily from the front of the unit



More details and final information can be found by scanning or clicking the QR codes.



FXAA-A


Indoor Unit				FXAA	15A	20A	25A	32A	40A	50A	63A	
Cooling capacity	Total capacity	At high fan speed	kW	1.7	2.2	2.8	3.6	4.5	5.6	7.1		
	At high fan speed											
Heating capacity	Total capacity	At high fan speed	kW	1.9	2.5	3.2	4.0	5.0	6.3	8.0		
	At high fan speed											
Power input – 50Hz	Cooling	At high fan speed	kW	0.017	0.019	0.028	0.030	0.025	0.033	0.050		
	Heating	At high fan speed	kW	0.025	0.029	0.034	0.035	0.030	0.039	0.060		
Dimensions	Unit	HeightxWidthxDepth	mm	290x795x266					290x1,050x269			
Weight	Unit		kg	12					15			
Fan	Air flow rate – 50Hz	Cooling	At high/medium/low fan speed	m <sup>3</sup> /min	7.1/6.8/6.5	7.9/7.2/6.5	8.3/7.4/6.5	9.4/8.0/6.5	12.2/11.0/9.8	14.2/12.6/10.9	18.2/15.5/12.9	
		Heating	At high/medium/low fan speed	m <sup>3</sup> /min	7.8/7.1/6.5	8.6/7.5/6.5	9.0/7.7/6.5	9.9/8.2/6.5	12.2/11.0/9.8	15.2/13.7/12.1	18.7/16.4/14.1	
Air filter	Type			Removable / washable								
Sound power level	Cooling	At high fan speed	dB(A)	51.0	52.0	53.0	55.0	58.0	63.0			
	At high/medium/low fan speed											
Sound pressure level	Cooling	At high/medium/low fan speed	dB(A)	32.0/30.5/28.5	33.0/31.0/28.5	35.0/32.0/28.5	37.5/33.0/28.5	37.0/35.5/33.5	41.0/38.5/35.5	46.5/42.5/38.5		
	Heating	At high/medium/low fan speed	dB(A)	33.0/31.0/28.5	34.0/31.5/28.5	36.0/32.5/28.5	38.5/33.5/28.5	38.0/36.0/33.5	42.0/39.0/35.5	47.0/43.0/38.5		
Refrigerant	Type/GWP			R-32/675.0								
Piping connections	Liquid	OD	mm	6.35								
	Gas	OD	mm	9.52				12.70				
	Drain			VP13 (I.D. 15/O.D. 18)								
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240									
Current – 50Hz	Maximum fuse amps (MFA)	A	6									
Control systems	Infrared remote control		BRC7EA630 (1)									
	Wired remote control		BRC1H52W/S/K									

(1) Must be combined with Madoka wired remote controller | Contains fluorinated greenhouse gases


# Ceiling suspended unit

For wide rooms with no false ceilings nor free floor space


- › Optimised design for R-32 refrigerant
- › Ideal for comfortable air flow in wide rooms thanks to Coanda effect: up to 100° discharge angle

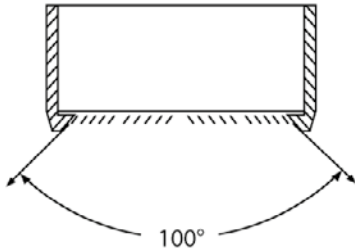

- › Even rooms with ceilings up to 3.8m can be heated up or cooled down very easily without capacity loss
- › Can easily be installed in both new and refurbishment projects
- › Can easily be mounted in corners and narrow spaces, as it only needs 30mm lateral service space

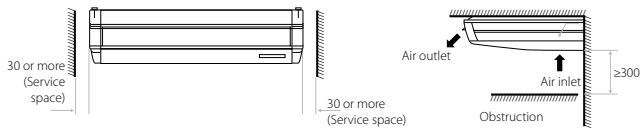

- › Fresh air intake integrated in the same system thus reducing installation cost as no additional ventilation device is required
- Fresh air intake opening in casing



\* Brings in up to 10% of fresh air into the room

- › Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating.



More details and final information can be found by scanning or clicking the QR codes.



FXHA-A


Indoor Unit		FXHA		32A	50A	63A	100A		
Cooling capacity	Total capacity	At high fan speed		kW	3.6	5.6	7.1	11.2	
	Nom.			kW	3.6	5.6	7.1	11.2	
Heating capacity	Total capacity	At high fan speed		kW	4.0	6.3	8.0	12.5	
	Nom.			kW	4.0	6.3	8.0	12.5	
Power input - 50Hz	Cooling	At high fan speed		kW	0.033	0.037	0.051	0.086	
	Heating	At high fan speed		kW	0.033	0.037	0.051	0.086	
Dimensions	Unit	Height	Width	Depth	mm	235x1,270x690		235x1,590x690	
Weight	Unit			kg	28	36	43		
Casing	Material	Resin, sheet metal							
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed		m <sup>3</sup> /min	12.5/11.0/10.0	16.0/14.0/12.5	17.5/15.0/13.0	27.0/22.0/19.0
		Heating	At high / medium / low fan speed		m <sup>3</sup> /min	12.5/11.0/10.0	16.0/14.0/12.5	17.5/15.0/13.0	27.0/22.0/19.0
Air filter	Type	Resinnet							
Sound power level	Cooling	At high / medium / low fan speed		dBA	54.0/52.0/49.0	54.0/52.0/50.0	55.0/53.0/52.0	62.0/55.0/52.0	
		At high / medium / low fan speed		dBA	36.0/34.0/31.0	36.5/34.5/33.0	37.0/35.0/34.0	44.0/37.0/34.0	
		At high / medium / low fan speed		dBA	36.0/34.0/31.0	36.5/34.5/33.0	37.0/35.0/34.0	44.0/37.0/34.0	
Refrigerant	Type/GWP	R-32/675							
Piping connections	Liquid	OD			mm	6.35		9.52	
	Gas	OD			mm	9.52	12.7	15.9	
	Drain	VP20							
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220				
Current - 50Hz	Maximum fuse amps (MFA)			A	6				
Control systems	Infrared remote control		BRC7GA56 / BRC7GA53-9						
	Wired remote control		BRC1H52W/S/K / BRC1H82W/S/K						

Contains fluorinated greenhouse gases


# 4-way blow ceiling suspended unit

Unique Daikin unit for high rooms with no false ceilings nor free floor space



- › Optimised design for R-32 refrigerant
- › Even rooms with ceilings up to 3.5m can be heated up or cooled down very easily without capacity loss
- › Can easily be installed in both new and refurbishment projects
- › Two optional intelligent sensors improve energy efficiency and comfort
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!



- › Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating.
- › Optimum comfort guaranteed with automatic air flow adjustment to the required load
- › 5 different discharge angles between 0 and 60° can be programmed via the remote control



- › Standard drain pump with 720mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.



FXUA-A

Indoor Unit		FXUA		50A	71A	100A		
Cooling capacity	Total capacity	At high fan speed		kW	5.6	8.0	11.2	
	Nom.			kW	5.6	8.0	11.2	
Heating capacity	Total capacity	At high fan speed		kW	6.3	9.0	12.5	
	Nom.			kW	6.3	9.0	12.5	
Power input - 50Hz	Cooling	At high fan speed		kW	0.029	0.055	0.117	
	Heating	At high fan speed		kW	0.029	0.055	0.117	
Dimensions	Unit	Height	Width	Depth	198x950x950			
Weight	Unit					27	28	
Casing	Material					Resin		
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed		m <sup>3</sup> /min	17.0/14.5/13.0	22.5/18.5/16.0	31.0/25.5/21.0
		Heating	At high / medium / low fan speed		m <sup>3</sup> /min	17.0/14.5/13.0	22.5/18.5/16.0	31.0/25.5/21.0
Air filter	Type					Resin net		
Sound power level	Cooling	At high / medium / low fan speed		dBA	55.0/53.0/51.0	58.0/56.0/54.0	65.0/62.0/58.0	
	Heating	At high / medium / low fan speed		dBA	37.0/35.0/33.0	40.0/38.0/36.0	47.0/44.0/40.0	
Sound pressure level	Cooling	At high / medium / low fan speed		dBA	37.0/35.0/33.0	40.0/38.0/36.0	47.0/44.0/40.0	
	Heating	At high / medium / low fan speed		dBA	37.0/35.0/33.0	40.0/38.0/36.0	47.0/44.0/40.0	
Refrigerant	Type/GWP					R-32/675		
Piping connections	Liquid	OD			mm	6.35	9.52	
	Gas	OD			mm	12.7	15.9	
	Drain					VP20		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220			
Current - 50Hz	Maximum fuse amps (MFA)			A	6			
Control systems	Infrared remote control					BRC7CB58 / BRC7CB59		
	Wired remote control					BRC1H52W/S/K		

Contains fluorinated greenhouse gases



# Supporting a circular economy of refrigerants

LOOP

B Y D A I K I N

## Towards a circular economy of refrigerants

With L∞P by Daikin we want to step away from producing more waste. Instead we will reuse what is already available, in a qualitative way.

- › **Saves over 400,000 kg of virgin refrigerant** being produced every year
- › Greatly **reduces the CO<sub>2</sub> footprint of refrigerant production with 72%!**

## For units produced and sold in Europe

- › Exclusive to Daikin reclaimed gas is now used in our units
- › Administratively allocated to VRV and chillers produced and sold in Europe

# The most extensive VRV range on the market




VRV i-series

VRV S-series

VRV W-series

Heat recovery, heat pump and replacement series

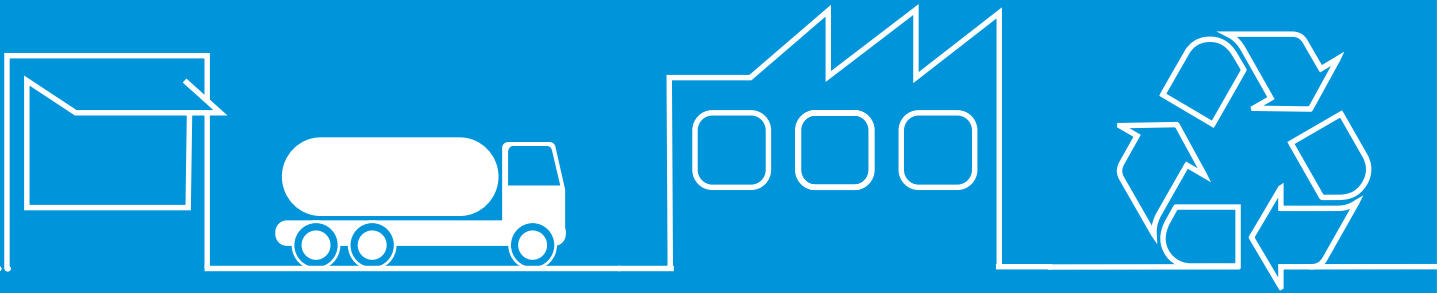

## Recover

We recover your **old refrigerant** for you from any unit and any brand.

## Reclaim

The refrigerant is reclaimed in Europe, meaning regenerated in a **high-quality** way, in line with F-gas regulation definition.

## Reuse

The reclaimed refrigerant is mixed with virgin refrigerant. The refrigerant's quality is **certified** by an independent laboratory. It meets AHRI 700 certified standards.



400,000kgs/year



72% lower CO<sub>2</sub> footprint for production


For every application, a solution



Heat recovery with unique 3-pipe technology



Heat pump models with unique continuous heating during defrost



Dedicated hot and cold climate heat pumps offering efficient cooling up to 52°C and heating down to -25°C



Space saving mini VRV solutions, offering the most compact VRV



The invisible VRV, a unique solution when the outdoor unit must be compact and completely invisible



Replacement solutions to replace existing systems in the most cost-effective way



Water-cooled heat recovery and heat pump units, ideal for high rise buildings using water as heat source



A complete total solution integrating a wide range of indoor units, air curtains, hot water hydroboxes and ventilation units including air handling units

# Products overview **VRV IV**

**LOOP** <sup>(1)</sup>  
BY DAIKIN

**R-410A**

Model	Product name	4	5	6	8	10	12	13	14	16	18	20	22	24	26	28	30
Air cooled - heat recovery	<b>UNIQUE</b> <b>VRV IV heat recovery</b> <b>Best efficiency &amp; comfort solution</b> <ul style="list-style-type: none"> <li>Fully integrated solution with heat recovery for maximum efficiency</li> <li>Covers all thermal needs of a building via a single point of contact: accurate temperature control, ventilation, hot water, air handling units and Biddle air curtains</li> <li>"Free" heating and hot water through heat recovery</li> <li>The perfect personal comfort for guests/tenants via simultaneous cooling and heating</li> <li>Incorporates VRV IV standards &amp; technologies such as Variable Refrigerant temperature and continuous heating</li> <li>Allows technical cooling</li> <li>Widest range of BS boxes on the market</li> </ul>	REYQ-U <b>VRV IV+</b>															
	<b>VRV IV heat pump with continuous heating</b> <b>Daikin's optimum solution with top comfort</b> <ul style="list-style-type: none"> <li>Continuous heating during defrost</li> <li>Covers all thermal needs of a building via a single point of contact: accurate temperature control, ventilation, hot water, air handling units and Biddle air curtains</li> <li>Connectable to stylish indoor units (Daikin Emura, Stylish,...)</li> <li>Incorporates VRV IV standards &amp; technologies such as Variable Refrigerant temperature and continuous heating</li> </ul>	RYYQ-U* <b>VRV IV+</b>															
	<b>VRV IV heat pump without continuous heating</b> <b>Daikin's solution for comfort &amp; low energy consumption</b> <ul style="list-style-type: none"> <li>Covers all thermal needs of a building via a single point of contact: accurate temperature control, ventilation, hot water, air handling units and Biddle air curtains</li> <li>Connectable to stylish indoor units (Daikin Emura, Stylish,...)</li> <li>Incorporates VRV IV standards &amp; technologies such as Variable Refrigerant temperature</li> </ul>	RXYQ-U* <b>VRV IV+</b>															
Air cooled - heat pump	<b>VRV IV S-series Compact</b> <b>The most compact VRV</b> <ul style="list-style-type: none"> <li>Compact and lightweight single fan design saves space and is easy to install</li> <li>Covers all thermal needs of a building via a single point of contact: accurate temperature control, ventilation, air handling units and Biddle air curtains</li> <li>Either connect VRV of stylish indoor units (Daikin Emura, Stylish,...)</li> <li>Incorporates VRV IV standards &amp; technologies such as Variable Refrigerant temperature</li> </ul>	RXYSQ-TV1 <b>VRV IV S-series Compact</b>															
	<b>UNIQUE</b> <b>VRV IV S-series</b> <b>Space saving solution without compromising on efficiency</b> <ul style="list-style-type: none"> <li>Space saving trunk design for flexible installation</li> <li>Covers all thermal needs of a building via a single point of contact: accurate temperature control, ventilation, air handling units and Biddle air curtains</li> <li>Either connect VRV of stylish indoor units (Daikin Emura, Stylish,...)</li> <li>Incorporates VRV IV standards &amp; technologies such as Variable Refrigerant temperature</li> </ul>	RXYSQ-TV9/ TY9/TY1 <b>VRV IV S-series</b>				TV9											
	<b>VRV IV heat pump for indoor installation</b> <b>The invisible VRV</b> <ul style="list-style-type: none"> <li>Unique VRV heat pump for indoor installation</li> <li>Total flexibility for any shop location and building type as the outdoor unit is invisible and split up in 2 parts</li> <li>Incorporates VRV IV standards &amp; technologies such as Variable Refrigerant temperature</li> <li>Covers all thermal needs of a building via a single point of contact: accurate temperature control, ventilation and Biddle air curtains</li> </ul>	SB.RKXYQ-T(8) <b>VRV IV i-series</b>															
<b>VRV IV heat pump optimised for cold climates</b> <b>Where heating is priority without compromising on efficiency</b> <ul style="list-style-type: none"> <li>Suitable for single source heating</li> <li>Extended operation range down to -25°C in heating</li> <li>Stable heating capacity without any capacity loss down to -15°C</li> <li>Very economical solution as a smaller outdoor unit model can be used compared to the standard series</li> </ul>	RXYLQ-T <b>VRV IV C-series</b>																
Replacement	<b>heat recovery</b> <b>Quick &amp; quality replacement for R-22 and R-407C systems</b> <ul style="list-style-type: none"> <li>Cost-effective and fast replacement through re-use of existing piping</li> <li>Drastically improve your comfort, efficiency and reliability</li> <li>No interruption of daily business while replacing your system</li> <li>Replace Daikin and other manufacturers systems safely</li> </ul>	RQCEQ-P3 <b>VRV III Q</b>															
	<b>heat pump</b> <b>Quick &amp; quality replacement for R-22 and R-407C systems</b> <ul style="list-style-type: none"> <li>Cost-effective and fast replacement through re-use of existing piping</li> <li>Drastically improve your comfort, efficiency and reliability</li> <li>No interruption of daily business while replacing your system</li> <li>Replace Daikin and other manufacturers systems safely</li> <li>Incorporates VRV IV standards &amp; technologies such as Variable Refrigerant temperature</li> </ul>	RXYQQ-U <b>VRV IV Q-series</b>															
Water cooled	<b>Water cooled VRV IV</b> <b>Ideal for high rise buildings, using water as heat source</b> <ul style="list-style-type: none"> <li>Reduced CO<sub>2</sub> emissions thanks to the use of geothermal energy as a renewable energy source</li> <li>No need for an external heating or cooling source when used in geothermal mode</li> <li>Compact &amp; lightweight design can be stacked for maximum space saving</li> <li>Incorporates VRV IV standards &amp; technologies such as Variable Refrigerant temperature</li> <li>Variable Water Flow control option increases flexibility and control</li> <li>Mixed connection of HT hydroboxes and VRV indoor units</li> <li>Either connect VRV of stylish indoor units (Daikin Emura, Stylish,...)</li> <li>2 analogue input signals allowing external control</li> </ul>	RWEYQ-T9 <sup>(2)</sup> <b>VRV IV W+series</b>															

(1) LOOP by Daikin is applicable for VRV units produced and sold in Europe (EU member states, UK, Bosnia-Herzegovina, Serbia, Montenegro, Kosovo, Albania, North Macedonia, Iceland, Norway, Switzerland). RXYSQ-TV1, RXYSQ8-10-12TY1 and RQCEQ-P3 are not part of the LOOP by Daikin programme.

(2) Range not Eurovent certified.

(3) Multi combinations are not in scope of the Eurovent certification programme

● Single unit  
● Multi combination



Capacity (HP)													NEW model	NEW model								
32	34	36	38	40	42	44	46	48	50	52	54	Description / Combination			VRV indoor units	Residential indoor units	LT Hydrobox HXY-A	HT Hydrobox HXHD-A	HRV units VAM-, VKM-	AHU connection	Air curtains CVV-DK	Remarks
													<b>VRV IV* Heat Recovery REYQ</b>	○		○	○	○	○	○	○	› Standard total system connection ratio limit: 50 ~ 130%
													with only VRV indoor units	✓								
													with LT/HT Hydroboxes	✓		✓	✓	✓				› Max 32 indoor units, even on 16HP and larger systems › Total system connection ratio with HT hydroboxes up to 200% possible
													HRV units VAM-, VKM-	✓		✓	✓	✓	✓	✓		› Dedicated systems (with only ventilation units) not allowed – a mix with standard VRV indoor units is always necessary
●	●	●	●	●	●	●	●	●	●	●	●	●	AHU connection	✓					✓	✓	✓	
													Biddle air curtain	✓					✓	✓	✓	› Total system connection ratio with AHU is 50 ~ 110%
													<b>VRV IV* Heat Pump (RYYQ/RXYQ)</b>	○	○	○			○	○	○	› Standard total system connection ratio limit: 50 ~ 130%
													with only VRV indoor units	✓								› 200% total system connection ratio possible under special circumstances
●	●	●	●	●	●	●	●	●	●	●	●	●	with residential indoor units	✓	✓				✓			› Only single-module systems (RYYQ 8~20 T / RXYQ 8~20 T) › Max 32 indoor units, even on 16HP, 18HP and 20HP systems › Connection ratio: 80 ~ 130%
													with LT Hydroboxes	✓		✓		✓				› Max 32 indoor units, even on 16HP and larger systems › Contact Daikin in case of multi-module systems (>20HP)
													HRV units VAM-, VKM-	✓	✓	✓		✓	✓	✓		
													AHU connection	✓				✓	✓	✓	› Total system connection ratio with AHU is 50 ~ 110%	
●	●	●	●	●	●	●	●	●	●	●	●	●	Biddle air curtain	✓					✓	✓	✓	
													<b>VRV IV-S RXYSQ-/RXYSCQ-</b>	○	○				○	○	○	› Standard total system connection ratio limit: 50 ~ 130%
													with VRV indoor units only	✓					✓	✓	✓	
													with residential indoor units only		✓							› With residential indoor: connection ratio limit: 80 ~ 130%
													<b>VRV IV i series SB.RKXYQ</b>	✓					✓	✓	✓	› Standard total system connection ratio limit: 50 ~ 130%
●	●	●	●	●	●								<b>VRV IV-C* series RXYLQ</b>	○	○	○			○	○	○	› Standard total system connection ratio limit: 70 ~ 130%
													with VRV indoor units only	✓					✓	✓		
													with residential indoor units only		✓							› With residential indoor: connection ratio limit: 80 ~ 130%
													with LT hydroboxes	✓		✓		✓				› Max. 32 indoor units, contact Daikin in case of multi-module systems (> 14HP)
													AHU connection	✓				✓	✓	✓	› Total system connection ratio is 70~110% › with AHU only, connection ratio = 130%	
													<b>VRV III-Q* series Replacement H/R RQCEQ</b>	✓					✓			› Standard total system connection ratio limit: 50 ~ 130%
●	●	●	●	●	●								<b>VRV IV-Q Replacement H/P RXYQQ</b>	✓					✓	✓	✓	› Standard total system connection ratio limit: 50 ~ 130%
●	●	●	●	●	●								<b>VRV IV-W* series Water-cooled VRV RWEYQ</b>	○	○				○	○	○	› Standard total system connection ratio limit: 50 ~ 130%
													with VRV indoor units	✓				✓	✓	✓		
													with split indoor units	✓	✓			✓				› Only single-module systems (RWEYQ8-14T9) › Max 32 indoor units › Connection ratio: 80 ~ 130% › only in heat pump version
													with HT hydrobox	✓		✓						
													AHU connection	✓					✓			› Total system connection ratio with AHU + X indoor is 50 ~ 110% › Total system connection ratio with AHU only is 90~110%

○ ... connection of indoor unit possible, but not necessarily simultaneously with other allowed indoor units  
 ✓ ... connection of indoor unit possible even simultaneously with other checked units in the same row  
 × ... connection of indoor not possible on this outdoor unit system

# VRV IV+ heat recovery

## Best efficiency & comfort solution

- › Fully integrated solution with heat recovery for maximum efficiency with COPs of up to 8!
- › Covers all thermal needs of a building via a single point of contact: accurate temperature control, ventilation, hot water, air handling units and Biddle air curtains
- › “Free” heating and hot water production provided by transferring heat from areas requiring cooling to areas requiring heating or hot water
- › The perfect personal comfort for guests/tenants via simultaneous cooling and heating
- › Incorporates VRV IV standards & technologies: Variable Refrigerant Temperature, continuous heating, VRV configurator, 7 segment display and full inverter compressors, 4-side heat exchanger, refrigerant cooled PCB, new DC fan motor
- › Outdoor unit display for quick on-site settings and easy read out

- of errors together with the indication of service parameters for checking basic functions
- › Free combination of outdoor units to meet installation space or efficiency requirements
- › Wide piping flexibility: 30m indoor height difference, maximum piping length: 190m, total piping length: 1,000m
- › Possibility to extend the operation range in cooling down to -20°C for technical cooling operation such as server rooms
- › Contains all standard VRV features



Outdoor unit		REYQ	8U	10U	12U	14U	16U	18U	20U	
Capacity range		HP	8	10	12	14	16	18	20	
Cooling capacity	Prated,c	kW	22.4	28.0	33.5	40.0	45.0	50.4	52.0	
Heating capacity	Prated,h	kW	22.4	28.0	33.5	40.0	45.0	50.4	56.0	
	Max. 6°CWB	kW	25.0	31.5	37.5	45.0	50.0	56.5	63.0	
Recommended combination			4 x FXFQ50AVEB	4 x FXFQ63AVEB	6 x FXFQ50AVEB	1 x FXFQ50AVEB + 5 x FXFQ63AVEB	4 x FXFQ63AVEB + 2 x FXFQ80AVEB	3 x FXFQ50AVEB + 5 x FXFQ63AVEB	2 x FXFQ50AVEB + 6 x FXFQ63AVEB	
ηs,c		%	286.1	264.8	257.0	255.8	243.1	250.6	246.7	
ηs,h		%	165.1	169.7	183.8	168.3	167.5	172.5	162.7	
SEER			7.2	6.7	6.5		6.2	6.3	6.2	
SCOP			4.2	4.3	4.7		4.3	4.4	4.1	
Maximum number of connectable indoor units									64(1)	
Indoor index connection	Min.		100.0	125.0	150.0	175.0	200.0	225.0	250.0	
	Max.		260.0	325.0	390.0	455.0	520.0	585.0	650.0	
Dimensions	Unit	HeightxWidthxDPTH	mm			1,685x930x765				
Weight	Unit		kg			230		314		
Sound power level	Cooling	Nom.	78.0	79.1	83.4	80.9	85.6	83.8	87.9	
	Heating	Prated,h	79.6	80.9	83.5	83.9	86.9	85.3	89.8	
Sound pressure level	Cooling	Nom.	79.0		61.0	60.0	63.0	62.0	65.0	
Operation range	Cooling	Min.-Max.	°CDB			-5.0~43.0				
	Heating	Min.-Max.	°CWB			-20.0~-15.5				
Refrigerant	Type/GWP		R-410A/2,087.5							
	Charge	kg/TCO2Eq	9.7/20.2	9.8/20.5	9.9/20.7	11.8/24.6				
Piping connections	Liquid	OD	mm		9.52		12.7		15.9	
	Gas	OD	mm	19.1	22.2	28.6				
	HP/LP gas	OD	mm	15.9	19.1		22.2		28.6	
	Total piping System	Actual length	m	1,000						
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415							
Current - 50Hz	Maximum fuse amps (MFA)	A	20	25	32	40				

Outdoor unit System		REYQ	10U	13U	16U	18U	20U	22U	24U	26U	28U	30U	32U	
System	Outdoor unit module 1		REMQ5U		REYQ8U		REYQ10U		REYQ8U		REYQ12U		REYQ16U	
	Outdoor unit module 2		REMQ5U	REYQ8U	REYQ10U	REYQ12U	REYQ16U	REYQ14U	REYQ16U	REYQ18U	REYQ16U			
Capacity range		HP	10	13	16	18	20	22	24	26	28	30	32	
Cooling capacity	Prated,c	kW	28.0	36.4	44.8	50.4	55.9	61.5	67.4	73.5	78.5	83.9	90.0	
Heating capacity	Prated,h	kW	28.0	36.4	44.8	50.4	55.9	61.5	67.4	73.5	78.5	83.9	90.0	
	Max. 6°CWB	kW	32.0	41.0	50.0	56.5	62.5	69.0	75.0	82.5	87.5	94.0	100.0	
Recommended combination			4 x FXFQ63AVEB	3 x FXFQ50AVEB + 3 x FXFQ63AVEB	4 x FXFQ63AVEB + 2 x FXFQ80AVEB	4 x FXFQ50AVEB + 4 x FXFQ63AVEB	10 x FXFQ50AVEB	6 x FXFQ50AVEB + 4 x FXFQ63AVEB	4 x FXFQ63AVEB + 2 x FXFQ80AVEB	7 x FXFQ50AVEB + 5 x FXFQ63AVEB	6 x FXFQ50AVEB + 2 x FXFQ80AVEB	9 x FXFQ50AVEB + 5 x FXFQ63AVEB	8 x FXFQ63AVEB + 4 x FXFQ80AVEB	
ηs,c		%	275.1	301.3	288.6	272.9	266.0	260.4	257.7	257.5	251.9	266.8	243.1	
ηs,h		%	158.8	160.6	168.2	167.9	175.7	178.5	167.6	175.5	174.8	179.4	169.1	
SEER			7.0	7.6	7.3	6.9	6.7	6.6	6.5		6.4	6.7	6.2	
SCOP			4.0	4.1	4.3		4.5		4.3	4.5	4.4	4.6	4.3	
Maximum number of connectable indoor units			64 (1)											
Indoor index connection	Min.		125.0	163.0	200.0	225.0	250.0	275.0	300.0	325.0	350.0	375.0	400.0	
	Max.		325.0	423.0	520.0	585.0	650.0	715.0	780.0	845.0	910.0	975.0	1,040.0	
Piping connections	Liquid	OD	mm	9.5	12.7		15.9				19.1			
	Gas	OD	mm	22.2	28.6				34.9					
	HP/LP gas	OD	mm	19.1		22.2		28.6						
	Total piping System	Actual length	m	500				1,000						
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415											
Current - 50Hz	Maximum fuse amps (MFA)	A	40			50			63			80		




REYQ10,13,16,18,20,22U

More details and final information can be found by scanning or clicking the QR codes.



REYQ-U

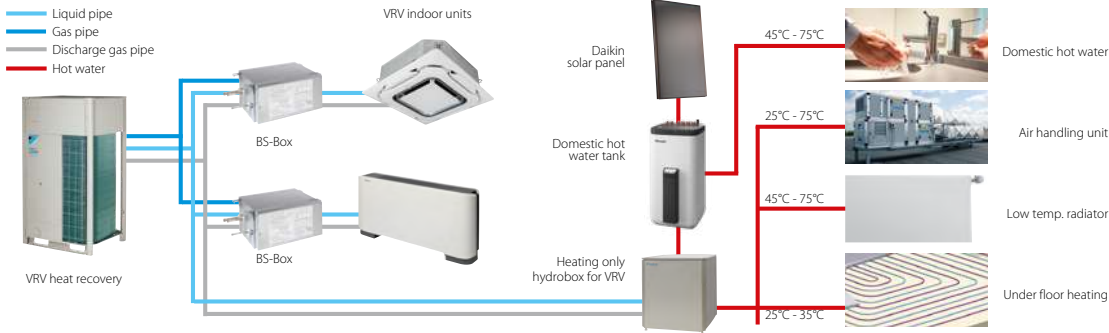

Outdoor unit System		REYQ	34U	36U	38U	40U	42U	44U	46U	48U	50U	52U	54U		
System	Outdoor unit module 1		REYQ16U		REYQ8U	REYQ10U	REYQ12U	REYQ14U	REYQ16U	REYQ18U					
	Outdoor unit module 2		REYQ18U	REYQ20U	REYQ12U		REYQ16U			REYQ18U					
	Outdoor unit module 3		-		REYQ18U		REYQ16U			REYQ18U					
Capacity range	HP		34	36	38	40	42	44	46	48	50	52	54		
Cooling capacity	Prated,c	kW	95.4	97.0	106.3	111.9	118.0	123.5	130.0	135.0	140.4	145.8	151.2		
Heating capacity	Prated,h	kW	95.4	101.0	106.4	111.9	118.0	123.5	130.0	135.0	140.4	145.8	151.2		
	Max. 6°CWB	kW	106.5	113.0	119.0	125.5	131.5	137.5	145.0	150.0	156.5	163.0	169.5		
Recommended combination			3x FXFQ630AVEB + 2x FXFQ80AVEB + 9x FXFQ63AVEB + 2x FXFQ80AVEB		6x FXFQ630AVEB + 10x FXFQ63AVEB + 2x FXFQ80AVEB		9x FXFQ630AVEB + 9x FXFQ63AVEB		12x FXFQ63AVEB + 8x FXFQ63AVEB + 4x FXFQ80AVEB		6x FXFQ630AVEB + 13x FXFQ63AVEB + 4x FXFQ80AVEB		12x FXFQ63AVEB + 13x FXFQ63AVEB + 4x FXFQ80AVEB		
ηs,c	%		259.2	255.3	269.2	259.6	250.2	249.3	246.8	243.1	254.4	265.7	275.2		
ηs,h	%		172.0	166.3	176.0	176.1	167.8	171.9	168.8	168.5	170.3	171.7	173.3		
SEER			6.6	6.5	6.8	6.6	6.3		6.2		6.4	6.7	7.0		
SCOP			4.4	4.2	4.5		4.3	4.4	4.3		4.4				
Maximum number of connectable indoor units								64(1)							
Indoor index connection	Min.		425.0	450.0	475.0	500.0	525.0	550.0	575.0	600.0	625.0	650.0	675.0		
	Max.		1,105.0	1,170.0	1,235.0	1,300.0	1,365.0	1,430.0	1,495.0	1,560.0	1,625.0	1,690.0	1,755.0		
Piping connections	Liquid	OD	mm												
			19.1												
	Gas	OD	mm		34.9										
	HP/LP gas	OD	mm		28.6										
Total piping length	System		m												
	Actual		1,000												
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415												
Current - 50Hz	Maximum fuse amps (MFA)	A	80				100				125				

Outdoor unit module		REM	Q	5U
Dimensions	Unit	HeightxWidthxD	mm	
			1,685x930x765	
Weight	Unit		kg	
			230	
Fan	External static pressure	Max.	Pa	
			78	
Sound power level	Cooling	Nom.	dBA	
			78.0	
Sound pressure level	Cooling	Nom.	dBA	
			57.0	
Operation range	Cooling	Min.~Max.	°CDB	
			-5.0~43.0	
Refrigerant	Heating	Min.~Max.	°CWB	
			-20.0~15.5	
Type/GWP	Type/GWP		R-410A/2,087.5	
	Charge	kg/TCO2Eq	9.7/20.2	
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415	
Current - 50Hz	Maximum fuse amps (MFA)	A	20	

(1) Actual number of connectable indoor units depends on the indoor unit type and the connection ratio restriction for the system (50% ≤ CR ≤ 120%) | Contains fluorinated greenhouse gases \* EU member states, UK, Bosnia-Herzegovina, Serbia, Montenegro, Kosovo, Albania, North Macedonia, Iceland, Norway, Switzerland


# VRV IV+ heat pump

## Daikin's optimum solution with top comfort

- › By choosing a LOOP by Daikin product you support the reuse of refrigerant, for more information visit [www.daikin.eu/loop-by-daikin](http://www.daikin.eu/loop-by-daikin)
- › Covers all thermal needs of a building via a single point of contact: accurate temperature control, ventilation, hot water, air handling units and Biddle air curtains
- › Wide range of indoor units: possibility to combine VRV with stylish indoor units (Daikin Emura, Perfera)
- › Incorporates VRV IV standards & technologies: Variable Refrigerant Temperature, continuous heating (RYYQ\* models), VRV configurator, 7 segment display and full inverter compressors, 4-side heat exchanger, refrigerant cooled PCB, new DC fan motor
- › Outdoor unit display for quick on-site settings and easy read out of errors together with the indication of service parameters for checking basic functions.
- › Free combination of outdoor units to meet installation space or efficiency requirements
- › Available as heating only by irreversible field setting
- › Contains all standard VRV features



Outdoor unit		RYYQ/RXYQ	8U*	10U*	12U*	14U*	16U*	18U*	20U*		
Capacity range		HP	8	10	12	14	16	18	20		
Cooling capacity	Prated,c	kW	22.4	28.0	33.5	40.0	45.0	50.4	52.0		
Heating capacity	Prated,h	kW	22.4	28.0	33.5	40.0	45.0	50.4	56.0		
	Max. 6°CWB	kW	25.0	31.5	37.5	45.0	50.0	56.5	63.0		
Recommended combination			4 x FXFQ50AVEB	4 x FXFQ63AVEB	6 x FXFQ50AVEB	1 x FXFQ50AVEB + 5 x FXFQ63AVEB	4 x FXFQ63AVEB + 2 x FXFQ80AVEB	3 x FXFQ50AVEB + 5 x FXFQ63AVEB	2 x FXFQ50AVEB + 6 x FXFQ63AVEB		
ηs,c		%	302.4	267.6	247.8	250.7	236.5	238.3	233.7		
ηs,h		%	167.9	168.2	161.4	155.4	157.8	163.1	156.6		
SEER			7.6	6.8		6.3		6.0	5.9		
SCOP			4.3		4.1	4.0		4.2	4.0		
Maximum number of connectable indoor units			64(1)								
Indoor index connection	Min.		100.0	125.0	150.0	175.0	200.0	225.0	250.0		
	Max.		260.0	325.0	390.0	455.0	520.0	585.0	650.0		
Dimensions	Unit	HeightxWidthxD	mm			1,685x930x765					
Weight	Unit		kg			RXYQ-U: 198 RXYQ-U5/UD: 201 RYYQ: 252		RXYQ-U: 275 RXYQ-U5/UD: 281 RYYQ: 319		RXYQ-U: 308 RXYQ-U5/UD: 314 RYYQ: 378	
Sound power level	Cooling	Nom.	dBA	78.0	79.1	83.4	80.9	85.6	83.8	87.9	
	Heating	Prated,h	dBA	79.6	80.9	83.5	83.1	86.5	85.3	89.8	
Sound pressure level	Cooling	Nom.	dBA	57.0		61.0	60.0	63.0	62.0	65.0	
	Operation range	Cooling	Min.-Max.	°CDB		-5.0~43.0					
Refrigerant	Heating	Min.-Max.	°CWB		-20.0~15.5						
	Type/GWP		R-410A/2,087.5								
Piping connections	Charge		kg/TCO2Eq	5.9/12.3	6.0/12.5	6.3/13.2	10.3/21.5	10.4/21.7	11.7/24.4	11.8/24.6	
	Liquid	OD	mm	9.52		12.7		15.9			
Power supply	Gas	OD	mm	19.1	22.2	28.6					
	Total piping System	Actual length	m	1,000							
Phase/Frequency/Voltage		Hz/V	3N~/50/380-415								
Current - 50Hz	Maximum fuse amps (MFA)	A	20	25	32		40		50		
Outdoor unit system		RYYQ/RXYQ	22U*	24U*	26U*	28U*	30U*	32U*	34U*	36U*	38U*
System	Outdoor unit module 1		10	8	12			16			8
	Outdoor unit module 2		12	16	14	16	18	16	18	20	10
	Outdoor unit module 3		20								
Capacity range		HP	22	24	26	28	30	32	34	36	38
Cooling capacity	Prated,c	kW	61.5	67.4	73.5	78.5	83.9	90.0	95.4	97.0	102.4
Heating capacity	Prated,h	kW	61.5	67.4	73.5	78.5	83.9	90.0	95.4	101.0	106.4
	Max. 6°CWB	kW	69.0	75.0	82.5	87.5	94.0	100.0	106.5	113.0	119.5
Recommended combination			6 x FXFQ50AVEB + 4 x FXFQ63AVEB	4 x FXFQ50AVEB + 4 x FXFQ63AVEB + 2 x FXFQ80AVEB	7 x FXFQ50AVEB + 5 x FXFQ63AVEB	6 x FXFQ50AVEB + 4 x FXFQ63AVEB + 2 x FXFQ80AVEB	9 x FXFQ50AVEB + 5 x FXFQ63AVEB	8 x FXFQ63AVEB + 4 x FXFQ80AVEB	3 x FXFQ50AVEB + 9 x FXFQ63AVEB + 2 x FXFQ80AVEB	2 x FXFQ50AVEB + 10 x FXFQ63AVEB + 2 x FXFQ80AVEB	6 x FXFQ50AVEB + 10 x FXFQ63AVEB
ηs,c		%	274.5	269.9	264.2	257.8	256.8	251.7	253.3	250.8	272.4
ηs,h		%	171.2	167.0	164.6	166.0	169.8	163.1	166.2	162.4	167.5
SEER			6.9	6.8	6.7	6.5		6.4		6.3	6.9
SCOP			4.4	4.3	4.2		4.3	4.2		4.1	4.3
Maximum number of connectable indoor units			64(1)								
Indoor index connection	Min.		275.0	300.0	325.0	350.0	375.0	400.0	425.0	450.0	475.0
	Max.		715.0	780.0	845.0	910.0	975.0	1,040.0	1,105.0	1,170.0	1,235.0
Piping connections	Liquid	OD	mm	15.9			19.1			41.3	
	Gas	OD	mm	28.6	34.9				41.3		
Total piping System	Actual length	m	1,000								
Phase/Frequency/Voltage		Hz/V	3N~/50/380-415								
Current - 50Hz	Maximum fuse amps (MFA)	A	63			80			100		

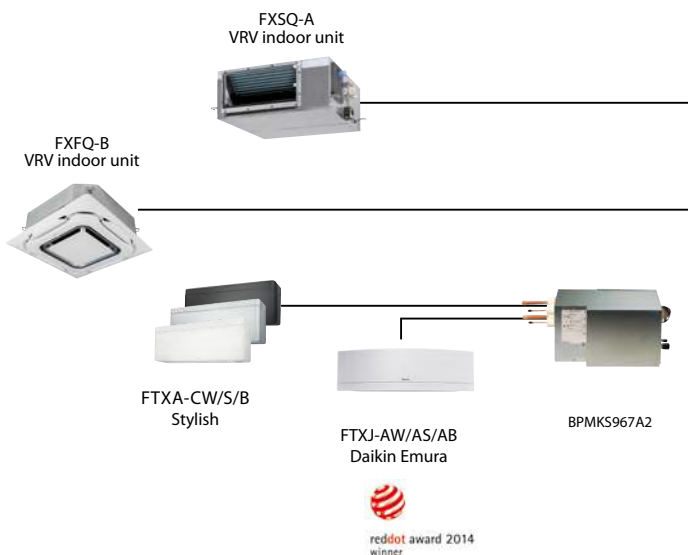

Connectable stylish indoor units

		20 CLASS	25 CLASS	35 CLASS	42 CLASS	50 CLASS	60 CLASS	71 CLASS
Daikin Emura - Wall mounted unit	FTXJ-AW/AS/AB	●	●	●	●	●		
Stylish - Wall mounted unit	FTXA-CW/B/S	●	●	●	●	●		
Perfera wall mounted	FTXM-A	●	●	●	●		●*	●*
Perfera floor standing	C/FVXM-A9	●	●	●		●		

BPMKS box needed to connect RA indoors to VRV IV (RYYQ / RXYQ)  
 \* Units available in August 2024

More details and final information can be found by scanning or clicking the QR codes.



RYYQ-U



RXYQ-U

Outdoor unit system		RYYQ/RXYQ	40U*	42U*	44U*	46U*	48U*	50U*	52U*	54U*
System	Outdoor unit module 1		10		12	14	16		18	
	Outdoor unit module 2		12		16			18		
	Outdoor unit module 3		18	16			18			
Capacity range	HP	40	42	44	46	48	50	52	54	
Cooling capacity	Prated,c kW	111.9	118.0	123.5	130.0	135.0	140.4	145.8	151.2	
Heating capacity	Prated,h kW	111.9	118.0	123.5	130.0	135.0	140.4	145.8	151.2	
	Max. 6°CWB kW	125.5	131.5	137.5	145.0	150.0	156.5	163.0	169.5	
Recommended combination			9 x FXFQ50AVEB + 9 x FXFQ63AVEB	12 x FXFQ63AVEB + 4 x FXFQ80AVEB	6 x FXFQ50AVEB + 8 x FXFQ63AVEB + 4 x FXFQ80AVEB	1 x FXFQ50AVEB + 13 x FXFQ63AVEB + 4 x FXFQ80AVEB	12 x FXFQ63AVEB + 6 x FXFQ80AVEB	3 x FXFQ50AVEB + 13 x FXFQ63AVEB + 4 x FXFQ80AVEB	6 x FXFQ50AVEB + 14 x FXFQ63AVEB + 2 x FXFQ80AVEB	9 x FXFQ50AVEB + 15 x FXFQ63AVEB
ηs,c	%	263.5	261.2	255.9	254.9	251.7	252.8	253.7	254.1	
ηs,h	%	170.0	165.5	164.5	162.0	162.8	165.2	167.2	169.4	
SEER		6.7	6.6	6.5	6.4		6.4			
SCOP		4.3	4.2		4.1		4.2	4.3		
Maximum number of connectable indoor units			64(1)							
Indoor index connection	Min.		500.0	525.0	550.0	575.0	600.0	625.0	650.0	675.0
	Max.		1,300.0	1,365.0	1,430.0	1,495.0	1,560.0	1,625.0	1,690.0	1,755.0
Piping connections	Liquid OD	mm	19.1							
	Gas OD	mm	41.3							
	Total piping System Actual length	m	1,000							
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415							
Current - 50Hz	Maximum fuse amps (MFA)	A	100				125			

Outdoor unit module for RYYQ combinations		RYMQ	8U*	10U*	12U*	14U*	16U*	18U*	20U*
Dimensions	Unit HeightxWidthxDPTH	mm	1,685x930x765			1,685x1,240x765			
Weight	Unit	kg	RYMQ-U: 198 RYMQ-U5: 204			RYMQ-U: 275 RYMQ-U5: 283		RYMQ-U: 308 RYMQ-U5: 320	
Fan	External static Max. pressure	Pa	78						
Sound power level	Cooling Nom.	dBA	78.0	79.1	83.4	80.9	85.6	83.8	87.9
Sound pressure level	Cooling Nom.	dBA	57.0	57.0	61.0	60.0	63.0	62.0	65.0
Operation range	Cooling Min.-Max.	°CDB	-5.0~43.0						
	Heating Min.-Max.	°CWB	-20.0~15.5						
Refrigerant	Type/GWP		R-410A/2,087.5						
	Charge	kg/TCO2Eq	5.9/12.3	6.0/12.5	6.3/13.2	10.3/21.5	11.3/23.6	11.7/24.4	11.8/24.6
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415						
Current - 50Hz	Maximum fuse amps (MFA)	A	20	25	32	32	40	40	50

(1) Actual number of connectable indoor units depends on the indoor unit type (VRV indoor, Hydrobox, RA indoor, etc.) and the connection ratio restriction for the system (50% <= CR <= 130%) | Contains fluorinated greenhouse gases

\* Depending on the region different model codes are sold: Continuous heating: RYYQ-U, RYYQ-U5, RYMQ-U, RYMQ-U5, standard heat pump RXYQ-U, RXYQ-U5, RXYQ-UD

\*\* U and U5 models in EU member states, UK, Bosnia-Herzegovina, Serbia, Montenegro, Kosovo, Albania, North Macedonia, Iceland, Norway, Switzerland

# VRV IV S-series compact heat pump

## The most compact VRV

- › Compact & lightweight single fan design makes the unit almost unnoticeable
- › Covers all thermal needs of a building via a single point of contact: accurate temperature control, ventilation, air handling units and Biddle air curtains
- › Wide range of indoor units: either connect VRV or stylish indoor units such as Daikin Emura, Perfera ...
- › Incorporates VRV IV standards & technologies: Variable Refrigerant Temperature and full inverter compressors
- › Possibility to limit peak power consumption between 30 and 80%, for example during periods with high power demand
- › Night quiet mode reduces sound pressure with up to 8dBa
- › Contains all standard VRV features



## Connectable stylish indoor units

		15 CLASS	20 CLASS	25 CLASS	35 CLASS	42 CLASS	50 CLASS	60 CLASS	71 CLASS
Round flow cassette	FCAG-B				•		•	•	•
Fully flat cassette	FFA-A9			•	•		•	•	
Slim concealed ceiling unit	FDXM-F9			•	•		•	•	
Concealed ceiling unit with inverter driven fan	FBA-A(9)			•	•		•	•	
Daikin Emura - Wall mounted unit	FTXJ-AW/AS/AB		•	•	•	•	•		
Stylish - Wall mounted unit	FTXA-CW/B/S		•	•	•	•	•		
Perfera wall mounted	C/FTXM-A	•	•	•	•	•	•	•*	•*
Ceiling suspended unit	FHA-A(9)				•		•	•	•
Perfera floor standing	C/FVXM-A9		•	•	•		•		
Concealed floors tanding unit	FNA-A9			•	•		•	•	

\* Units available in August 2024

More details and final information can be found by scanning or clicking the QR codes.



RXYSCQ-TV1

Outdoor unit		RXYSCQ	4TV1	5TV1	6TV1
Capacity range	HP		4	5	6
Cooling capacity	Prated,c kW		12.1	14.0	15.5
Heating capacity	Prated,h kW		12.1	14.0	15.5
	Max. 6°CWB kW		14.2	16.0	18.0
Recommended combination			3 x FXSQ25A2VEB + 1 x FXSQ32A2VEB	4 x FXSQ32A2VEB	2 x FXSQ32A2VEB + 2 x FXSQ40A2VEB
ηs,c	%		322.8	303.4	281.3
ηs,h	%		182.3	185.1	186.0
SEER			8.1	7.7	7.1
SCOP			4.6		4.7
Maximum number of connectable indoor units				64(1)	
Indoor index connection	Min.		50.0	62.5	70.0
	Max.		130.0	162.5	182.0
Dimensions	Unit HeightxWidthxDPTH	mm	823x940x460		
Weight	Unit	kg	89		
Sound power level	Cooling Nom.	dBA	68.0	69.0	70.0
	Heating Prated,h	dBA	69.0	70.0	71.0
Sound pressure level	Cooling Nom.	dBA	51.0	52.0	53.0
Operation range	Cooling Min.~Max.	°CDB	-5.0~46.0		
	Heating Min.~Max.	°CWB	-20.0~15.5		
Refrigerant	Type/GWP		R-410A/2,087.5		
	Charge	kg/TCO2Eq	3.7/7.7		
Piping connections	Liquid OD	mm	9.52		
	Gas OD	mm	15.9		19.1
	Total piping System Actual length	m	300		
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240		
Current - 50Hz	Maximum fuse amps (MFA)	A	32		

(1)Actual number of units depends on the indoor unit type (VRV DX indoor, RA DX indoor, etc.) and the connection ratio restriction for the system (being; 50% ≤ CR ≤130%). | Contains fluorinated greenhouse gases

# VRV IV S-series heat pump

Space saving solution without compromising on efficiency

- › By choosing this product with LOOP by Daikin you support the reuse of refrigerant
- › Space saving trunk design for flexible installation
- › Covers all thermal needs of a building via a single point of contact: accurate temperature control, ventilation, air handling units and Biddle air curtains
- › Wide range of indoor units: either connect VRV or stylish indoor units such as Daikin Emura, Perfera ...
- › Wide range of units (4 to 12HP) suitable for projects up to 200m<sup>2</sup> with space limitations
- › Incorporates VRV IV standards & technologies: Variable Refrigerant Temperature and full inverter compressors
- › Possibility to limit peak power consumption between 30 and 80%, for example during periods with high power demand
- › Contains all standard VRV features



For units made and sold in Europe\*

## Connectable stylish indoor units

		15 CLASS	20 CLASS	25 CLASS	35 CLASS	42 CLASS	50 CLASS	60 CLASS	71 CLASS
Round flow cassette	FCAG-B				•		•	•	•
Fully flat cassette	FFA-A9			•	•		•	•	
Slim concealed ceiling unit	FDXM-F9			•	•		•	•	
Concealed ceiling unit with inverter driven fan	FBA-A(9)			•	•		•	•	
Daikin Emura - Wall mounted unit	FTXJ-AW/AS/AB		•	•	•	•	•		
Stylish - Wall mounted unit	FTXA-CW/B/S		•	•	•	•	•		
Perfera wall mounted	C/FTXM-A	•	•	•	•	•	•	•*	•*
Ceiling suspended unit	FHA-A(9)				•		•	•	•
Perfera floor standing	C/FVXM-A9		•	•	•		•		
Concealed floors standing unit	FNA-A9			•	•		•	•	

\* Units available in August 2024

More details and final information can be found by scanning or clicking the QR codes.



RXYSQ-TV9



RXYSQ-TY9



RXYSQ-TY1

Outdoor unit		RXYSQ	4TV9	5TV9	6TV9	4TY9	5TY9	6TY9	8TY1	10TY1	12TY1	
Capacity range	HP	4	5	6	4	5	6	8	10	12	12	
Cooling capacity	Prated,c kW	12.1	14.0	15.5	12.1	14.0	15.5	22.4	28.0	33.5	33.5	
Heating capacity	Prated,h kW	12.1	14.0	15.5	12.1	14.0	15.5	22.4	28.0	33.5	33.5	
	Max. 6°CWB kW	14.2	16.0	18.0	14.2	16.0	18.0	25.0	31.5	37.5	37.5	
Recommended combination		3x FXSQ25A2VEB + 1x FXSQ32A2VEB	4x FXSQ32A2VEB	2x FXSA32A2VEB + 2x FXSA40A2VEB	3x FXSQ25A2VEB + 1x FXSQ32A2VEB	4x FXSQ32A2VEB	2x FXSQ32A2VEB + 2x FXSQ40A2VEB	4x FXMQ50P7VEB	4x FXMQ63P7VEB	6x FXMQ50P7VEB	6x FXMQ50P7VEB	
ηs,c	%	278.9	270.1	278.0	269.2	260.5	268.3	247.3	247.4	256.5	256.5	
ηs,h	%	171.6	182.9	192.8	154.4	164.5	174.1	165.8	162.4	169.6	169.6	
SEER		7.0	6.8	7.0	6.8	6.6	6.8	6.3		6.5	6.5	
SCOP		4.4	4.6	4.9	3.9	4.2	4.4	4.2	4.1	4.3	4.3	
Maximum number of connectable indoor units		64(1)										
Indoor index connection	Min.	50.0	62.5	70.0	50.0	62.5	70.0	100.0	125.0	150.0	150.0	
	Max.	130.0	162.5	182.0	130.0	162.5	182.0	260.0	325.0	390.0	390.0	
Dimensions	Unit	HeightxWidthxDepth					mm		1,345x900x320		1,430x940x320	1,615x940x460
Weight	Unit	kg										
Sound power level	Cooling	Nom.	dBA	68.0	69.0	70.0	68.0	69.0	70.0	73.0	74.0	76.0
	Heating	Prated,h	dBA	68.0	69.0	70.0	68.0	69.0	70.0	73.0	74.0	76.0
Sound pressure level	Cooling	Nom.	dBA	50.0	51.0	50.0	51.0	55.0	57.0	57.0	57.0	
Operation range	Cooling	Min.~Max.	°CDB	-5.0~46.0					-5.0~52.0			
	Heating	Min.~Max.	°CWB	-20.0~15.5								
Refrigerant	Type/GWP	R-410A/2,087.5										
	Charge	kg/TCO2Eq	3.6/7.5					5.5/11.5	7.0/14.6	8.0/16.7		
Piping connections	Liquid	OD	mm		9.52						12.7	
	Gas	OD	mm	15.9	19.1	15.9	19.1	22.2	25.4			
	Total piping length	System Actual	m	300								
Power supply	Phase/Frequency/Voltage	Hz/V	1N~/50/220-240				3N~/50/380-415					
Current - 50Hz	Maximum fuse amps (MFA)	A	32				16		25		32	

(1) Actual number of units depends on the indoor unit type (VRV DX indoor, RA DX indoor, etc.) and the connection ratio restriction for the system (being: 50% ≤ CR ≤ 130%). | Contains fluorinated greenhouse gases  
\* EU member states, UK, Bosnia-Herzegovina, Serbia, Montenegro, Kosovo, Albania, North Macedonia, Iceland, Norway, Switzerland



VRV IV heat pump  
for indoor installation

**SB.RKXYQ-T(8)**

Keep looking  
you'll never find me

You can install highly efficient, reliable Daikin air conditioning systems in the most demanding locations while remaining invisible from street level.

**Invisible**


- › Completely invisible only the grilles are visible
- › Seamless integration into surrounding architecture
- › Highly suited to densely populated areas thanks to the low operation sound

**Intuitive**

- › Total flexibility as the outdoor unit is split up in 2 parts
- › Easy and quick to transport and install by just 2 persons
- › Easy servicability, all components can be easily reached

**Intelligent**


- › Patented V-shape heat exchanger for the most compact unit (400 mm high) ever
- › Connectable to all VRV indoor units
- › Provides a total solution when combined with ventilation units, Biddle air curtains and controls



**Invisible**



**Unique outdoor unit in 2 parts**

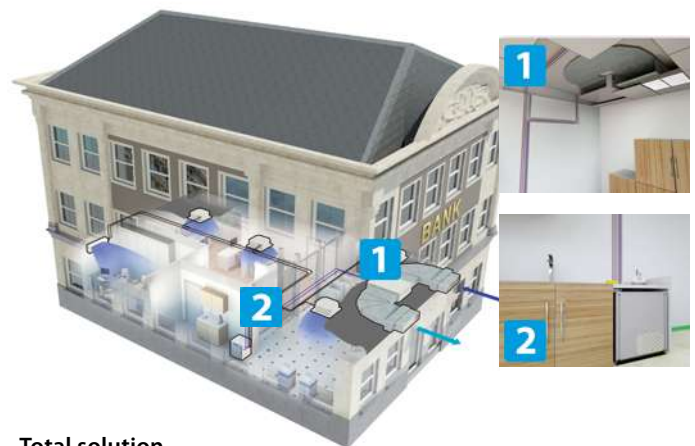

**Total solution**







# VRV IV heat pump for indoor installation

## The invisible VRV

› Unique VRV heat pump for indoor installation



› Unrivalled flexibility because the unit is split up into two elements: the heat exchanger and the compressor

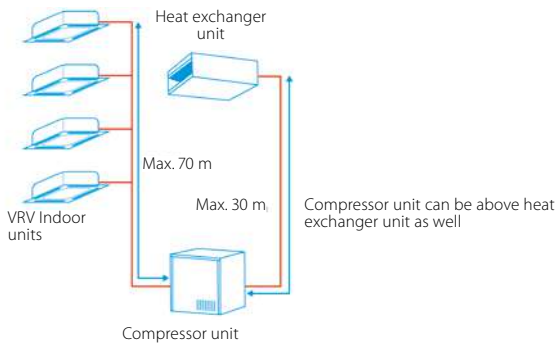

- › Highly suited to densely populated areas thanks to the low operation sound and seamless integration into surrounding architecture as only the grille is visible
- › Incorporates VRV IV standards & technologies: Variable Refrigerant Temperature, VRV configurator and full inverter compressors
- › Covers all thermal needs of a building via a single point of contact: accurate temperature control, ventilation, air handling units and Biddle air curtains



- › Lightweight units (max. 105kg) can be installed by two people
- › Unique V-shape heat exchanger results in compact dimensions (h/e unit only 400mm high) allowing false ceiling installation, while ensuring top efficiency
- › Super efficient centrifugal fans (over 50% efficiency increase compared to sirocco fan)
- › Small footprint compressor unit (760 x 554 mm) maximizing useable floor space
- › Connectable to all VRV control systems

More details and final information can be found by scanning or clicking the QR codes.



Already fully compliant to LOT 21 - Tier 2

Published data with real-life indoor units



SB.RKXYQ-T



SB.RKXYQ-T8

Outdoor unit system		SB.RKXYQ		5T8		8T	
System	Heat exchanger unit						
	Compressor unit						
Capacity range		HP		5		8	
Cooling capacity	Prated,c	kW		14.0		22.4	
Heating capacity	Prated,h	kW		10.4		12.9	
	Max.	6°CWB	kW	16.0		25.0	
Recommended combination				4x FXSQ32A2VEB		4x FXMQ50P7VEB	
ηs,c		%		200.1		191.1	
ηs,h		%		149.3		140.9	
SEER				5.1		4.9	
SCOP				3.8		3.6	
Maximum number of connectable indoor units				10 (1)		17 (1)	
Indoor index connection	Min.			62.5		100.0	
	Max.			162.5		260.0	
Piping connections	Between Compressor module (CM) and heat exchanger module (HM)	Liquid	OD	mm	12.7		
		Gas	OD	mm	19.1		22.2
	Between Compressor module (CM) and indoor units (IU)	Liquid	OD	mm		9.52	
		Gas	OD	mm	15.9		19.1
Total piping length		System	Actual	m	140		300

Outdoor unit module		Heat exchanger module - RDXYQ				Compressor module - RKXYQ			
		5T8		8T		5T8	8T		
Dimensions	Unit	Height	Width	Depth	mm	397x1,456x1,044	701x600x554	701x760x554	
Weight	Unit				kg	95	103	79	105
Sound power level	Cooling	Nom.			dBA	77.0	81.0	60.0	64.0
						47.0	54.0	47.0	48.0
Refrigerant	Type/GWP	R-410A/-				R-410A/2,0875			
	Charge				kg/TCO2Eq	-/-	2.00/4.20	4.00/8.35	
Power supply	Phase/Frequency/Voltage		Hz/V			1N~/50/220-240	3N~/50/380-415		
Current - 50Hz	Maximum fuse amps (MFA)		A			10	16	20	

(1) Actual number of units depends on the indoor unit type (VRV DX indoor, etc.) and the connection ratio restriction for the system (being; 50% ≤ CR ≤ 130%).



VRV IV+ heat pump, optimised for cold climates

## RXYLQ-T




Where heating is priority without compromising on efficiency



### High heating capacity at low ambient temperatures

- › Stable heating capacity available down to -15°C WB!

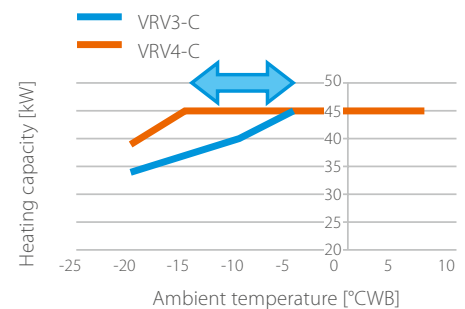

### High partial load efficiency

- › New vapour injection scroll compressor optimised for low load
  - UNIQUE back-pressure control: Pressure port increases pressure below the scroll in low load operation, preventing refrigerant leak and increasing efficiency
  - UNIQUE Injection structure with check valve: Prevents volume backflow during low load operation typically occurring with standard vapour injection compressors
- › Variable Refrigerant Temperature adjusts refrigerant temperature to match the load



### High reliability down to -25°C WB

- › Hot gas bypass prevents ice buildup at the bottom of the heat exchanger



## High seasonal efficiency

- › **Measured with indoor units for real applications!**
- › ALL information for indoor units used available on our eco-design website:  
Already fully compliant [https://energylabel.daikin.eu/eu/en\\_US/lot21.html](https://energylabel.daikin.eu/eu/en_US/lot21.html)



## The known VRV IV standards

- Variable Refrigerant Temperature
- VRV configurator

## Total solution



Daikin Emura  
Wall mounted unit



Fully flat cassette



Biddle air curtain



Intelligent Manager



Air handling unit for ventilation



Low temperature hydrobox

# VRV IV heat pump, optimised for heating


Where heating is priority without compromising on efficiency

- › By choosing this product with LOOP by Daikin you support the reuse of refrigerant
- › Specifically developed for heating operation in low ambient conditions, making it suitable for single source heating
- › Stable heating capacity down to -15°C, thanks to vapour injection compressor
- › Extended operation range down to -25°C in heating
- › High reliability in severe conditions, thanks to hot gas bypass circuit in the heat exchanger
- › 15% increased heating capacity at high relative humidity (2°CDB/1°CWB and RH=83%) vs previous model
- › Shorter defrost and heat up time, compared to standard VRV heat pump
- › Very economical solution as a smaller outdoor unit model can be used compared to the standard series
- › Covers all thermal needs of a building via a single point of contact: accurate temperature control, ventilation, air handling units and Biddle air curtains
- › Wide range of indoor units: possibility to combine VRV with stylish indoor units (Daikin Emura, Perfera)
- › Incorporates VRV IV standards & technologies: Variable Refrigerant Temperature, VRV configurator, 7 segment display and full inverter compressors, 4-side heat exchanger, refrigerant cooled PCB, new DC fan motor, ...
- › Free combination of outdoor units to meet installation space or efficiency requirements
- › Wide piping flexibility: 30m indoor height difference, maximum piping length: 190m, total piping length: 500m
- › Very economical solution as a smaller outdoor unit model can be used compared to the standard series
- › Less installation time and smaller footprint compared to previous model thanks to removal of function unit



Outdoor unit		RXYLQ	10T	12T	14T
Capacity range		HP	10	12	14
Cooling capacity	Prated,c	kW	28.0	33.5	40.0
Heating capacity	Prated,h	kW	28.0	33.5	40.0
	Max. 6°CWB	kW	31.5	37.5	45.0
Recommended combination			4 x FXMQ63P7VEB	6 x FXMQ50P7VEB	1 x FXMQ50P7VEB + 5 x FXMQ63P7VEB
ηs,c		%	251.4	274.4	270.1
ηs,h		%	144.3	137.6	137.1
SEER			6.4	6.9	6.8
SCOP			3.7	3.5	
Maximum number of connectable indoor units				64(1)	
Indoor index connection	Min.		175	210	245
	Nom.		250	300	350
	Max.		325	390	455
Dimensions	Unit	HeightxWidthxDepth	mm		
Weight	Unit		kg		
Sound power level	Cooling	Nom.	77.0		81.0
	Sound pressure level	Cooling	56.0		59.0
Operation range	Cooling	Min.-Max.	°CDB		
	Heating	Min.-Max.	°CWB		
Refrigerant	Type/GWP		R-410A/2,087.5		
	Charge		kg/TCO2Eq		
Piping connections	Liquid	OD	9.52		12.7
	Gas	OD	22.2		28.6
	Total piping System	Actual length	m		
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415		
Current - 50Hz	Maximum fuse amps (MFA)	A	25	32	

Outdoor unit system		RXYLQ	16T	18T	20T	22T	24T	26T	28T
System	Outdoor unit module 1		RXMLQ8T		RXYLQ10T		RXYLQ12T		RXYLQ14T
	Outdoor unit module 2		RXMLQ8T			RXYLQ12T			RXYLQ14T
Capacity range		HP	16	18	20	22	24	26	28
Cooling capacity	Prated,c	kW	44.8	50.4	56.0	61.5	67.0	73.5	80.0
Heating capacity	Prated,h	kW	44.8	50.4	56.0	61.5	67.0	73.5	80.0
	Max. 6°CWB	kW	50.0	56.5	63.0	69.0	75.0	82.5	90.0
Recommended combination			4 x FXMQ63P7VEB + 2 x FXMQ80P7VEB	3 x FXMQ50P7VEB + 5 x FXMQ63P7VEB	2 x FXMQ50P7VEB + 6 x FXMQ63P7VEB	6 x FXMQ50P7VEB + 4 x FXMQ63P7VEB	4 x FXMQ50P7VEB + 4 x FXMQ63P7VEB + 2 x FXMQ80P7VEB	7 x FXMQ50P7VEB + 5 x FXMQ63P7VEB	6 x FXMQ50P7VEB + 4 x FXMQ63P7VEB + 2 x FXMQ80P7VEB
ηs,c		%	261.8	255.7	251.4	263.0	274.4	270.8	270.1
ηs,h		%	138.0	140.5	144.3	140.3	137.6	137.1	
SEER			6.6	6.5	6.4	6.6	6.9	6.8	
SCOP			3.5	3.6	3.7	3.6	3.5		
Maximum number of connectable indoor units			64(1)						
Indoor index connection	Min.		280	315	350	385	420	455	490
	Nom.		400	450	500	550	600	650	700
	Max.		520	585	650	715	780	845	910
Piping connections	Liquid	OD	12.7	15.9			19.1		
	Gas	OD	28.6			34.9			
	Total piping System	Actual length	m						
Current - 50Hz	Maximum fuse amps (MFA)	A	40	45	50	60			

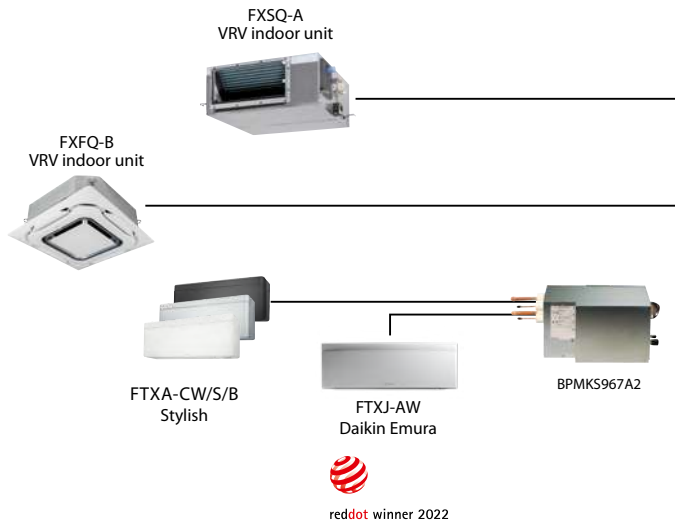

### Connectable stylish indoor units

		20 CLASS	25 CLASS	35 CLASS	42 CLASS	50 CLASS	60 CLASS	71 CLASS
Daikin Emura - Wall mounted unit	FTXJ-AW/AS/AB	●	●	●	●	●		
Stylish - Wall mounted unit	FTXA-CW/B/S	●	●	●	●	●		
Perfera wall mounted	FTXM-A	●	●	●	●	●	●*	●*
Perfera floor standing	C/FVXM-A9	●	●	●		●		

BPMKS box needed to connect RA indoors to VRV IV (RYYQ / RXYQ)

\* Units available in August 2024

More details and final information can be found by scanning or clicking the QR codes.



RXYLQ-T

Outdoor unit system		RXYLQ	30T	32T	34T	36T	38T	40T	42T
System	Outdoor unit module 1		RXYLQ10T				RXYLQ12T		RXYLQ14T
	Outdoor unit module 2		RXYLQ10T			RXYLQ12T		RXYLQ14T	
	Outdoor unit module 3		RXYLQ10T		RXYLQ12T		RXYLQ14T		
Capacity range	HP	30	32	34	36	38	40	42	
Cooling capacity	Prated,c	kW	84.0	89.5	95.0	100.5	107.0	113.5	120.0
Heating capacity	Prated,h	kW	84.0	89.5	95.0	100.5	107.0	113.5	120.0
	Max. 6°CWB	kW	94.5	100.5	106.5	112.5	120.0	127.5	135.0
Recommended combination		9 x FXMQ50P7VEB + 5 x FXMQ63P7VEB	8 x FXMQ63P7VEB + 4 x FXMQ80P7VEB	3 x FXMQ50P7VEB + 9 x FXMQ63P7VEB + 2 x FXMQ80P7VEB	2 x FXMQ50P7VEB + 10 x FXMQ63P7VEB + 2 x FXMQ80P7VEB	6 x FXMQ50P7VEB + 10 x FXMQ63P7VEB	9 x FXMQ50P7VEB + 9 x FXMQ63P7VEB	12 x FXMQ63P7VEB + 4 x FXMQ80P7VEB	
ηs,c	%	251.4	259.1	266.8	274.4	271.6	270.3	270.1	
ηs,h	%	144.3	141.6	139.2	137.6		137.1		
SEER		6.4	6.6	6.7		6.9		6.8	
SCOP		3.7		3.6			3.5		
Maximum number of connectable indoor units					64(1)				
Indoor index connection	Min.	525	560	595	630	665	700	735	
	Nom.	750	800	850	900	950	1,000	1,050	
	Max.	975	1,040	1,105	1,170	1,235	1,300	1,365	
Piping connections	Liquid OD	mm				19.1			
	Gas OD	mm		34.9			41.3		
	Total piping System Actual length	m				500			
Current - 50Hz	Maximum fuse amps (MFA)	A		80			90		
Outdoor unit module		RXMLQ	8T						
Dimensions	Unit HeightxWidthxDepth	mm	1,685x1,240x765						
Weight	Unit	kg	302						
Fan	External static pressure	Pa	78						
Sound power level	Cooling Nom.	dBA	75.0						
Sound pressure level	Cooling Nom.	dBA	55.0						
Operation range	Cooling Min.~Max.	°CDB	-5~43						
	Heating Min.~Max.	°CWB	-25~16						
Refrigerant	Type/GWP		R-410A/2,087.5						
	Charge	kg/TCO2Eq	11.8/24.6						
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415						
Current - 50Hz	Maximum fuse amps (MFA)	A	20						

(1) Actual number of connectable indoor units depends on the indoor unit type (VRV indoor, Hydrobox, RA indoor, etc.) and the connection ratio restriction for the system (70% ≤ CR ≤ 130%) | Contains fluorinated greenhouse gases

\* EU member states, UK, Bosnia-Herzegovina, Serbia, Montenegro, Kosovo, Albania, North Macedonia, Iceland, Norway, Switzerland

# Replacement technology



## The quick and quality way of upgrading R-22, R-407C and R-410A systems

These benefits will convince your customer:

Drastically improve your efficiency, comfort and reliability

### No disturbance of daily operations

- › Reuse of existing pipework results in fast installation
- › Plan phases to avoid loss of business
- › Replace any VRF system

### Lower installation costs


- › Shorter installation time
- › Use of existing piping and wiring
- › Reuse of materials

### Lower investment and reduced running costs

- › CAPEX: Lower initial investment
- › OPEX: Lower energy consumption and maintenance costs
- › Keep your business running seamlessly

### Higher property value

- › Higher property value
- › Improved facilities
  - Subsidies
  - Certifications (BREEAM, LEED and WELL)

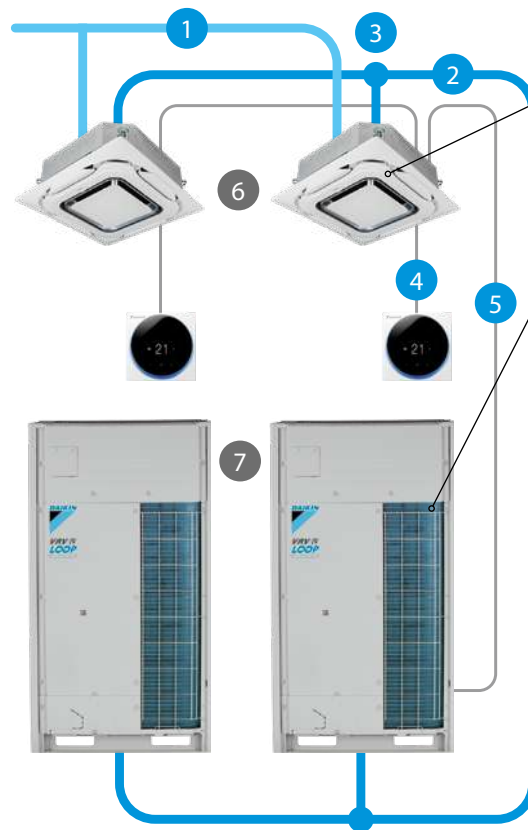


The Daikin upgrade solution:


### Replace indoor units (optional)

- › Depending on model type and condition the indoor units can be kept.

### Replace outdoor units



∨ 31 %  
(VRV II) (VRV IV)  
31 % less energy used

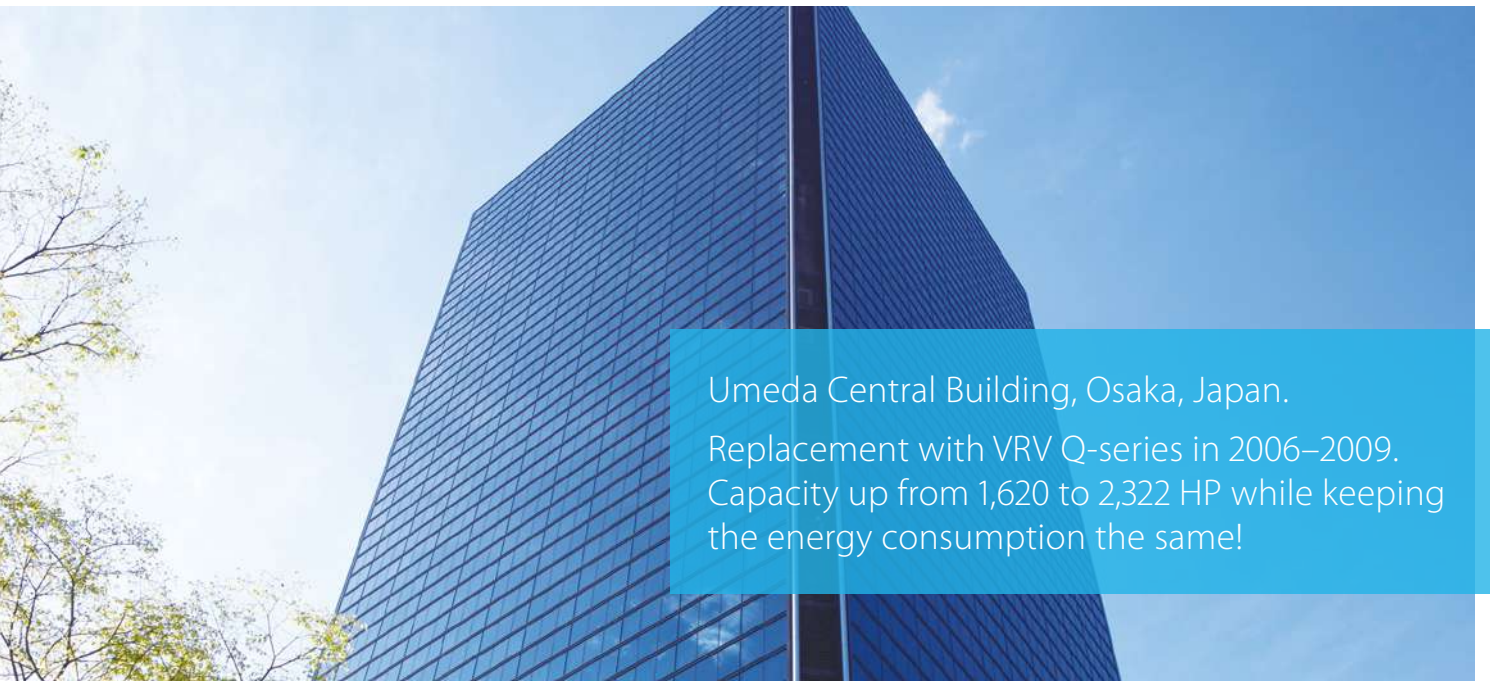

Umeda Central Building, Osaka, Japan.  
 Replacement with VRV Q-series in 2006–2009.  
 Capacity up from 1,620 to 2,322 HP while keeping  
 the energy consumption the same!

## VRV-Q benefits to increase your profit:

### Optimise your business

#### Less installation time

Tackle more projects in less time thanks to faster installation. It is more profitable than replacing the full system with new piping.

#### Lower installation costs

Reducing installation costs enables you to offer customers the most cost-effective solution and improve your competitive edge.

#### Replace non-Daikin systems

**NON DAIKIN** → **DAIKIN**

It is a trouble-free replacement solution for Daikin systems and for systems made by other manufacturers.

#### Easy as one-two-three

A simple solution for replacement technology enables you to handle more projects for more customers in less time and offer them the best price! Everybody wins.

Watch our online seminar  
 on replacement VRV now!



	VRV-Q, keeping indoor units	VRV-Q, replacing indoor units	Completely new installation with standard VRV
Remove outdoor unit	21 %	21 %	21 %
Install new outdoor unit	14 %	14 %	14 %
Clean cooling circuit and leak test	14 %	14 %	14 %
Remove indoor units	–	8 %	8 %
Remove refrigerant pipes and other tasks	–	–	8 %
Install new refrigerant pipes	–	–	14 %
Install new indoor units and other tasks	–	21 %	21 %
<b>Total installation time</b>	<b>49 %</b>	<b>78 %</b>	<b>100 %</b>

## Technology insight – Pipe cleaning and automatic refrigerant charging

Pipe cleaning and automatic refrigerant charging ensures a trouble-free operation.

Thanks to the pipe cleaning, possible contamination in the pipes is collected ensuring a trouble-free operation as with a completely new system.

The automatic charging ensures the correct amount of refrigerant is charged, so knowledge of the exact piping layout is not needed!

#### One touch convenience:

- › Measure and charge refrigerant
- › Test operation





# Replacement VRV, heat recovery

## Quick & quality replacement for R-22 and R-407C systems

- › Cost effective and fast replacement as only the outdoor and indoor unit needs to be replaced, meaning almost no work has to be carried out inside the building
- › Efficiency gains of more than 40% can be realized, thanks to technological developments in heat pump technology and the more efficient R-410A refrigerant
- › Less intrusive and time consuming installation compared to installing a new system, as the refrigerant piping can be maintained
- › Unique automatic refrigerant charge eliminates the need to calculate refrigerant volume and allows safe replacement of competitor replacement
- › Automatic cleaning of refrigerant piping ensures a clean piping network, even when a compressor breakdown has occurred
- › Possibility to add indoor units and increase capacity without changing the refrigerant piping
- › Possibility to spread the various stages of replacement thanks to the modular design of the VRV system
- › Accurate temperature control, fresh air provision, air handling units and Biddle air curtains all integrated in a single system requiring only one single point of contract (RXYQQ-U only)
- › Incorporates VRV IV standards & technologies: Variable Refrigerant
- › Temperature and full inverter compressors (RXYQQ-U only)
- › Free combination of outdoor units to meet installation space or efficiency requirements (RXYQQ-U only)



RQCEQ712-848P3

More details and final information can be found by scanning or clicking the QR codes.



RQCEQ-P3

Outdoor unit System		RQCEQ	280P3	460P3	500P3	540P3	712P3	744P3	816P3
System	Outdoor unit module 1		RQEQ140P3			RQEQ180P3	RQEQ140P3		RQEQ180P3
	Outdoor unit module 2		RQEQ140P3		RQEQ180P3				RQEQ212P3
	Outdoor unit module 3		-	RQEQ180P3			RQEQ212P3		
	Outdoor unit module 4		-			RQEQ212P3			
Capacity range	HP	10	16	18	20	24	26	28	
Cooling capacity	Prated,c kW	28.0 32.0	46.0 52.0	50.0 56.0	54.0 60.0	70.0 78.4	72.0 80.8	78.0 87.2	
Heating capacity	Prated,h kW								
Recommended combination		4 x FXMQ63P7VEB	4 x FXMQ63P7VEB + 2 x FXMQ80P7VEB	4 x FXSQ32A2VEB + 8 x FXSQ40A2VEB	12 x FXSQ40A2VEB	4 x FXSQ32A2VEB + 9 x FXSQ40A2VEB + 3 x FXSQ50A2VEB	4 x FXSQ32A2VEB + 6 x FXSQ40A2VEB + 6 x FXSQ50A2VEB	7 x FXSQ40A2VEB + 9 x FXSQ50A2VEB	
ηs,c	%	200	191	201	198	194		204	
ηs,h	%	159	161	150	148	153	155		
Maximum number of connectable indoor units		21	34	39	43	52	56	60	
Indoor index connection	Min.	140	230	250	270	356	372	408	
	Nom.	280	500		540	712	744	816	
	Max.	364	598	650	702	926	967.0	1,061	
Piping connections	Liquid	OD	mm	9.52	12.7	15.9			19.1
	Gas	OD	mm	22.2	28.6				34.9
	Total piping length	System	Actual	m	300				
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400						
Current - 50Hz	Maximum fuse amps (MFA)	A	30	50	60	80		90	
Outdoor unit module		RQEQ-P3	140P3	180P3	212P3				
Dimensions	Unit	HeightxWidthxDpeth	mm	1,680x635x765					
Weight	Unit	kg	175		179				
Fan	Air flow rate	Cooling	Nom.	m <sup>3</sup> /min	95	110			
	Type	Propeller fan							
Sound power level	Cooling	Nom.	dB(A)	79	83			87	
	Heating	According to ENER LOT21	dB(A)	79	84				
Sound pressure level	Cooling	Nom.	dB(A)	-					
Operation range	Cooling	Min.~Max.	°CDB	-5~43					
	Heating	Min.~Max.	°CWB	-20~-15.5					
Refrigerant	Type/GWP	R-410A/2,087.5							
	Charge	kg/TCO2Eq	10.3/21.5	10.6/22.1			11.2/23.4		
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/380-415						
Current - 50Hz	Maximum fuse amps (MFA)	A	15	20			22.5		

Contains fluorinated greenhouse gases





# Replacement VRV, heat pump



For units made and sold in Europe\*



RXYQQ8-12U

More details and final information can be found by scanning or clicking the QR codes.



RQYQ-P



RXYQQ-U

Outdoor unit		RXYQQ	RQYQ140P	8U	10U	12U	14U	16U	18U	20U
Capacity range		HP	5	8	10	12	14	16	18	20
Cooling capacity	Prated,c	kW	14.0	22.4	28.0	33.5	40.0	45.0	50.4	52.0
Heating capacity	Prated,h	kW	16.0	22.4	28.0	33.5	40.0	45.0	50.4	56.0
	Max. 6°CWB	kW	-	25.0	31.5	37.5	45.0	50.0	56.5	63.0
Recommended combination			4 x FXSQ32A2VEB	4 x FXFQ50AVEB	4 x FXFQ63AVEB	6 x FXFQ50AVEB	1 x FXFQ50AVEB + 5 x FXFQ63AVEB	4 x FXFQ63AVEB + 2 x FXFQ80AVEB	3 x FXFQ50AVEB + 5 x FXFQ63AVEB	2 x FXFQ50AVEB + 6 x FXFQ63AVEB
ηs,c		%	194	302.4	267.6	247.8	250.7	236.5	238.3	233.7
ηs,h		%	137	167.9	168.2	161.4	155.4	157.8	163.1	156.6
SEER			-	7.6	6.8	6.3		6.0		5.9
SCOP			-	4.3		4.1		4.0	4.2	4.0
Maximum number of connectable indoor units			10				64			
Indoor index connection	Min.		62.5	100.0	125.0	150.0	175.0	200.0	225.0	250.0
	Nom.		125							
	Max.		162.5	260.0	325.0	390.0	455.0	520.0	585.0	650.0
Dimensions	Unit HeightxWidthxDepth	mm	1,680x635x765			1,685x930x765		1,685x1,240x765		
Weight	Unit	kg	175	198			275		308	
Fan	Air flow rate Cooling Nom.	m <sup>3</sup> /min	95							
Sound power level	Cooling Nom.	dB(A)	79	78.0	79.1	83.4	80.9	85.6	83.8	87.9
	Heating Prated,h - According to ENER LOT21	dB(A)	-79	79.6--	80.9--	83.5--	83.1--	86.5--	85.3--	89.8--
Sound pressure level	Cooling Nom.	dB(A)	-	57.0		61.0	60.0	63.0	62.0	65.0
Operation range	Cooling Min.-Max.	°CDB	-5~43			-5.0~43.0				
	Heating Min.-Max.	°CWB	-20~15.5			-20.0~15.5				
Refrigerant	Type/GWP		R-410A/2,0875							
	Charge	kg/TCO2Eq	11.1/23.2	5.9/12.3	6.0/12.5	6.3/13.2	10.3/21.5	11.3/23.6	11.7/24.4	11.8/24.6
Piping connections	Liquid OD	mm	9.52				12.7		15.9	
	Gas OD	mm	15.9	19.1	22.2				28.6	
	Total piping length	System Actual	300					300		
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/380-415			3N~/50/380-415				
Current - 50Hz	Maximum fuse amps (MFA)	A	15	20	25	32	40		50	

Outdoor unit System		RXYQQ	22U	24U	26U	28U	30U	32U	34U	36U	38U	40U	42U	
System	Outdoor unit module 1		RXYQQ10U	RXYQQ8U	RXYQQ12U			RXYQQ16U			RXYQQ8U	RXYQQ10U		
	Outdoor unit module 2		RXYQQ12U	RXYQQ16U	RXYQQ14U	RXYQQ16U	RXYQQ18U	RXYQQ16U	RXYQQ18U	RXYQQ20U	RXYQQ10U	RXYQQ12U	RXYQQ16U	
	Outdoor unit module 3											RXYQQ20U	RXYQQ18U	RXYQQ16U
Capacity range		HP	22	24	26	28	30	32	34	36	38	40	42	
Cooling capacity	Prated,c	kW	61.5	67.4	73.5	78.5	83.9	90.0	95.4	97.0	102.4	111.9	118.0	
Heating capacity	Prated,h	kW	61.5	67.4	73.5	78.5	83.9	90.0	95.4	101.0	106.4	111.9	118.0	
	Max. 6°CWB	kW	69.0	75.0	82.5	87.5	94.0	100.0	106.5	113.0	119.5	125.5	131.5	
Recommended combination			6 x FXFQ50AVEB + 4 x FXFQ63AVEB	4 x FXFQ50AVEB + 4 x FXFQ63AVEB + 2 x FXFQ80AVEB	7 x FXFQ50AVEB + 5 x FXFQ63AVEB	6 x FXFQ50AVEB + 4 x FXFQ63AVEB + 2 x FXFQ80AVEB	9 x FXFQ50AVEB + 5 x FXFQ63AVEB	8 x FXFQ50AVEB + 4 x FXFQ63AVEB	3 x FXFQ50AVEB + 9 x FXFQ63AVEB + 2 x FXFQ80AVEB	2 x FXFQ50AVEB + 10 x FXFQ63AVEB + 2 x FXFQ80AVEB	6 x FXFQ50AVEB + 9 x FXFQ63AVEB	9 x FXFQ50AVEB + 9 x FXFQ63AVEB	12 x FXFQ50AVEB + 4 x FXFQ80AVEB	
ηs,c		%	274.5	269.9	264.2	257.8	256.8	251.7	253.3	250.8	272.4	263.5	261.2	
ηs,h		%	171.2	167.0	164.6	166.0	169.8	163.1	166.2	162.4	167.5	170.0	165.5	
SEER			6.9	6.8	6.7	6.5		6.4	6.3	6.3	6.9	6.7	6.6	
SCOP			4.4	4.3	4.2	4.3		4.2	4.1		4.3	4.2		
Maximum number of connectable indoor units			64											
Indoor index connection	Min.		275.0	300.0	325.0	350.0	375.0	400.0	425.0	450.0	475.0	500.0	525.0	
	Nom.													
	Max.		715.0	780.0	845.0	910.0	975.0	1,040.0	1,105.0	1,170.0	1,235.0	1,300.0	1,365.0	
Piping connections	Liquid OD	mm	15.9					19.1						
	Gas OD	mm	28.6				34.9			41.3				
	Total piping length	System Actual	300						300					
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415											
Current - 50Hz	Maximum fuse amps (MFA)	A	63			80			100					

(1) Actual number of connectable indoor units depends on the indoor unit type (VRV indoor, Hydrobox, RA indoor, etc.) and the connection ratio restriction for the system (50% ≤ CR ≤ 130%) | Contains fluorinated greenhouse gases

\* EU member states, UK, Bosnia-Herzegovina, Serbia, Montenegro, Kosovo, Albania, North Macedonia, Iceland, Norway, Switzerland



## Water-to-air heat pump

### Welcome a new range of features

#### More flexibility

- › Mixed connection of HT hydroboxes and VRV indoor units
- › Connects to stylish indoor units such as Daikin Emura, ... (no mixed connection with other indoors possible)
- › Extension of the range: 8-10-12-14HP, combinable up to 42HP while keeping the most compact casing in the market
- › Extended piping length up 165m (actual)
- › Extended indoor unit height difference to 30m

#### More capacity

- › Up to 72% increased capacity (!) per model thanks to new compressor and larger heat exchanger

#### Easier commissioning & customisation

- › 7 segment display
- › 2 analogue input signals allowing external control of
  - ON-OFF (e.g. compressor)
  - Operation mode (cooling / heating)
  - Limit of capacity
  - Error signal

#### Most compact casing in the market!



8 to 14 HP

16 to 28 HP

30 to 42 HP

#### Unique zero heat dissipation principle



- › No need for ventilation or cooling in the technical room
- › Control heat dissipation to achieve maximum efficiency; set target technical room temperature and unit regulates actual heat dissipation

#### Total solution



Daikin Emura wall mounted unit



Stylish wall mounted unit



Fully flat cassette



Intelligent Manager



Biddle air curtain



Air handling unit for ventilation



Low temperature hydrobox



High temperature hydrobox

# With all existing standard functions



**VRV IV W<sup>+</sup> series**


## Indoor installation makes unit invisible from the outside

- > Seamless integration in the surrounding architecture as you cannot see the unit
- > Highly suited for sound sensitive areas as there is no external operation sound
- > Very flexible indoor installation as there is no heat dissipation
- > Superior efficiency, even in the most extreme outside conditions, especially in geothermal operation



## Variable water flow control

- > The variable water flow control option reduces excessive energy use by the circulation pump.
- > By controlling a variable water valve, the water flow is reduced when possible, saving energy.
- > Via 0~10 volt

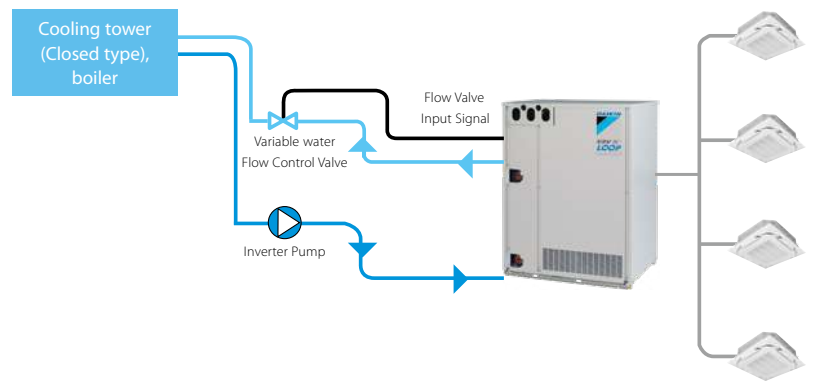

## Lower refrigerant concentration levels

Water-cooled VRV systems typically have less refrigerant per system making it ideal to comply with the EN378 legislation limiting the amount of refrigerant in hospitals and hotels.

### The refrigerant levels remain limited thanks to:

- > limited distance between outdoor and indoor unit
- > modularity: enabling small systems per floor instead of one big system. Thanks to the water circuit heat recovery is still possible in the entire building

### Single port



BS1Q 10,16,25A

### Multi port: 4 – 6 – 8 – 10 – 12 – 16



BS 4 Q14 A



BS 6, 8 Q14 A



BS 10, 12 Q14 A




BS 16 Q14 A


## Maximum design flexibility and installation speed

- > Quickly and flexibly design your system with a unique range of single and multi BS boxes.
- > A wide variety of compact and lightweight multi BS boxes greatly reduces installation time.
- > Free combination of single and multi BS boxes

## 2-stage heat recovery

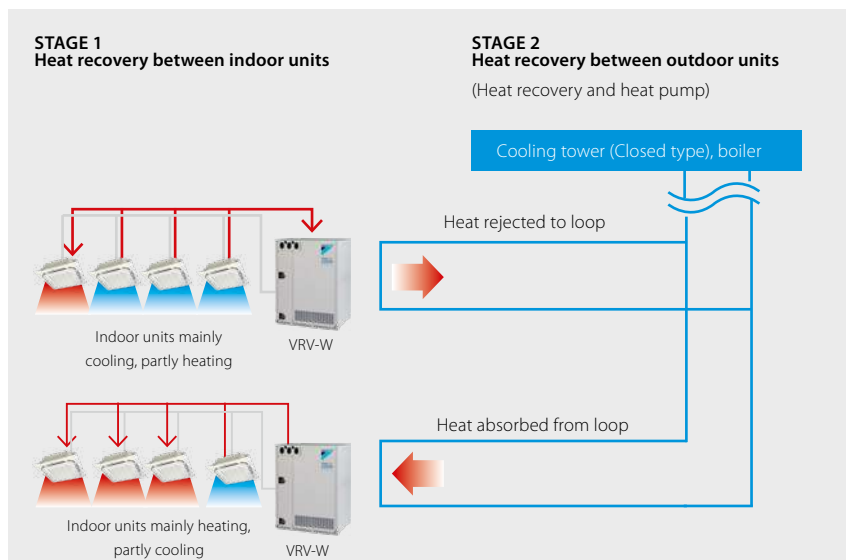

## Stacked configuration

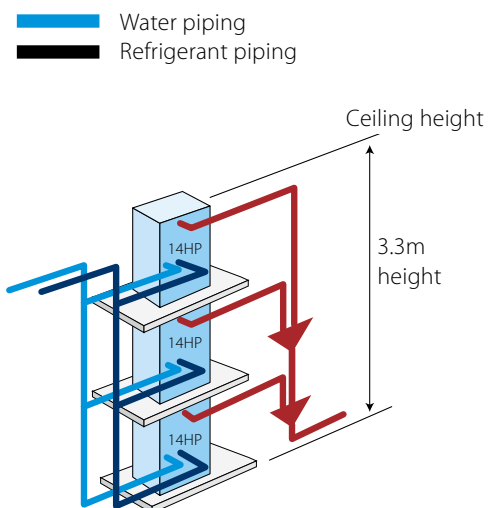


# VRV IV water cooled+ series

## Ideal for high rise buildings, using water as heat source

- › Environmental conscious solution: reduced CO<sub>2</sub> emissions thanks to the use of geothermal energy as a renewable energy source and typical lower refrigerant levels making it ideal to comply with EN378
- › Covers all thermal needs of a building via a single point of contact: accurate temperature control, ventilation, air handling units, Biddle air curtains and hot water
- › Unique zero heat dissipation principle obviates the need for ventilation or cooling in the technical room, maximising installation flexibility
- › Wide range of indoor units: possibility to combine VRV with stylish indoor units (Daikin Emura, Perfera)
- › Incorporates VRV IV standards & technologies: Variable Refrigerant Temperature, VRV configurator, 7-segment display and full inverter compressors
- › Developed for easy installation and servicing: choice between top or front connection for refrigerant piping and rotating switch box for easy access to serviceable parts
- › Compact & lightweight design can be stacked for maximum space saving: 42HP can be installed in less than 0.5m<sup>2</sup> floorspace
- › 2-stage heat recovery: first stage between indoor units, second stage between outdoor units thanks to the storage of energy in the water circuit

- › Unified model for heat pump and heat recovery version and geothermal and standard operation
- › Variable Water Flow control option increases flexibility and control
- › 2 analogue input signals allowing external control of ON-OFF, operation mode, error signal, ...
- › Contains all standard VRV features

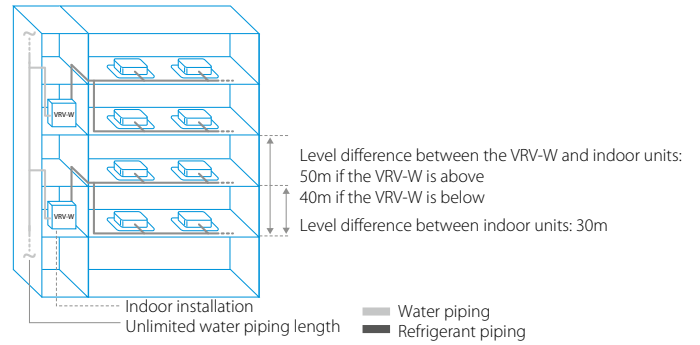

## Connectable stylish indoor units

		20 CLASS	25 CLASS	35 CLASS	42 CLASS	50 CLASS	60 CLASS	71 CLASS
Daikin Emura - Wall mounted unit	FTXJ-AW/AS/AB	•	•	•	•	•		
Stylish - Wall mounted unit	FTXA-CW/B/S	•	•	•	•	•		
Perfera wall mounted	FTXM-A	•	•	•	•	•	•*	•*
Perfera floor standing	C/FVXM-A9	•	•	•		•		

BPMKS box needed to connect RA indoors to VRV IV (RYYQ / RXYQ)  
\* Units available in August 2024


More details and final information can be found by scanning or clicking the QR codes.




RWEYQ-T9

Outdoor unit		RWEYQ	8T9	10T9	12T9	14T9
Capacity range		HP	8	10	12	14
Cooling capacity	Prated,c	kW	22.4	28.0	33.5	40.0
Heating capacity	Prated,h	kW	25.0	31.5	37.5	45.0
	Max. 6°CWB	kW	25.0	31.5	37.5	45.0
Recommended combination			4 x FXMQ50P7VEB	4 x FXMQ63P7VEB	6 x FXMQ50P7VEB	1 x FXMQ50P7VEB + 5 x FXMQ63P7VEB
ηs,c		%	326.8	307.8	359.0	330.7
ηs,h		%	524.3	465.9	436.0	397.1
SEER			8.4	7.9	9.2	8.5
SCOP			13.3	11.8	11.1	10.1
Maximum number of connectable indoor units			64(1)			
Indoor index connection	Min.		100.0	125.0	150.0	175.0
	Max.		300.0	375.0	450.0	525.0
Dimensions	Unit	HeightxWidthxDepth	mm			
Weight	Unit		kg			
Sound power level	Cooling	Nom.	195			
			980x767x560			
Sound pressure level	Cooling	Nom.	65.0	71.0	72.0	74.0
			48.0	50.0	56.0	58.0
Operation range	Inlet water temperature	Cooling	10~45			
		Heating	10~45			
	Temperature around casing	Min.~Max.	°CWB			
			0~40			
Humidity around casing	Cooling	80~80				
	Heating					
Refrigerant	Type/GWP		R-410A/2,087.5			
	Charge	kg/TCO2eq	7.9/16.5		9.6/20.0	
Piping connections	Liquid OD		9.52		12.7	
			19.1		28.6	
	Gas OD		19.1		22.2	
			15.9/19.1		19.1/22.2	
	HP/LP gas OD		15.9/19.1		19.1/28.6	
Drain Size		14mm OD/ 10mm ID				
Water Inlet/Outlet	Size		ISO 228-G1 1/4 B/ISO 228-G1 1/4 B			
	Total piping length	System Actual	m			
			500			
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415			
Current - 50Hz	Maximum fuse amps (MFA)	A	20		25	

Stage 1 heat recovery between indoor units

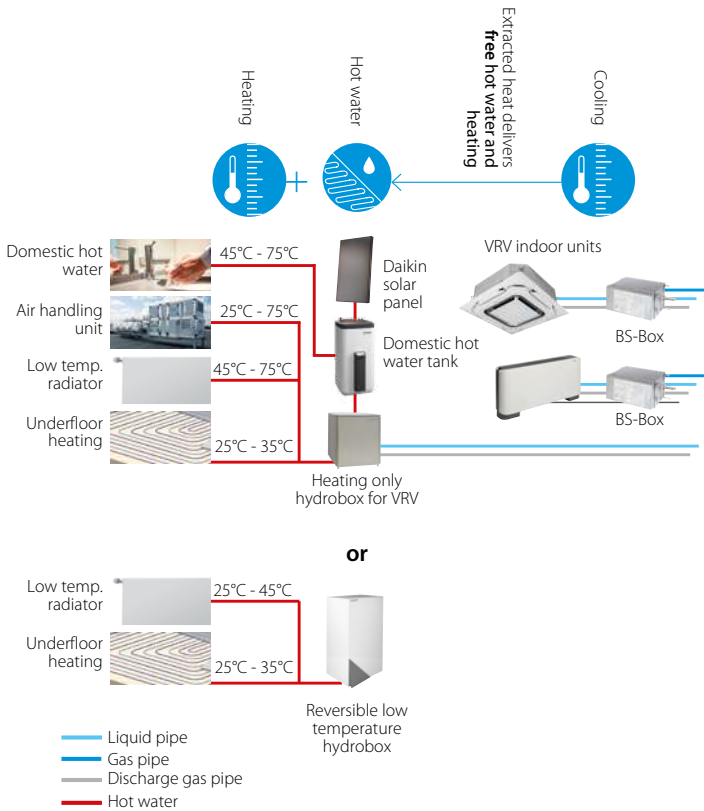

Stage 2 heat recovery between outdoor units

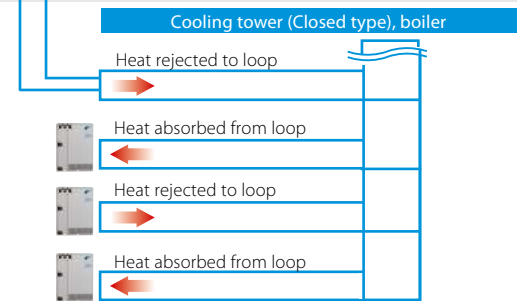

\* Above system configuration are for illustration purpose only.

Outdoor unit system		RWEYQ	16T9	18T9	20T9	22T9	24T9	26T9	28T9
System	Outdoor unit module 1		RWEYQ8T		RWEYQ10T		RWEYQ12T		RWEYQ14T
	Outdoor unit module 2		RWEYQ8T	RWEYQ10T		RWEYQ12T		RWEYQ14T	
Capacity range		HP	16	18	20	22	24	26	28
Cooling capacity	Prated,c	kW	44.8	50.4	56.0	61.5	67.0	73.5	80.0
Heating capacity	Prated,h	kW	50.0	56.5	62.5	69.0	75.0	82.5	90.0
	Max. 6°CWB	kW	50.0	56.5	62.5	69.0	75.0	82.5	90.0
Recommended combination			4 x FXMQ63P7VEB + 2 x FXMQ80P7VEB	4 x FXMQ50P7VEB + 4 x FXMQ63P7VEB	8 x FXMQ63P7VEB	6 x FXMQ50P7VEB + 4 x FXMQ63P7VEB	12 x FXMQ50P7VEB	7 x FXMQ50P7VEB + 5 x FXMQ63P7VEB	2 x FXMQ50P7VEB + 10 x FXMQ63P7VEB
ηs,c		%	307.6	308.7	298.1	311.3	342.6	322.5	306.1
ηs,h		%	459.2	491.1	466.8	447.9	434.5	406.9	387.9
SEER			7.9		7.7	8.0	8.8	8.3	7.9
SCOP			11.7	12.5	11.9	11.4	11.1	10.4	9.9
Maximum number of connectable indoor units					64(1)				
Indoor index connection	Min.		200.0	225.0	250.0	275.0	300.0	325.0	350.0
	Max.		600.0	675.0	750.0	825.0	900.0	975.0	1,050.0
Piping connections	Liquid OD	mm	12.7			15.9		19.1	
	Gas OD	mm			28.6		34.9		
	HP/LP gas OD	mm	22.2/28.6		28.6/28.6		28.6/34.9		
	Total piping System Actual length	m			500				
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415						
Current - 50Hz	Maximum fuse amps (MFA)	A	32		35	40		50	
Outdoor unit system		RWEYQ	30T9	32T9	34T9	36T9	38T9	40T9	42T9
System	Outdoor unit module 1		RWEYQ10T		RWEYQ12T		RWEYQ14T		RWEYQ14T
	Outdoor unit module 2		RWEYQ10T		RWEYQ12T		RWEYQ14T		
	Outdoor unit module 3		RWEYQ10T	RWEYQ12T		RWEYQ14T			
Capacity range		HP	30	32	34	36	38	40	42
Cooling capacity	Prated,c	kW	84.0	89.5	95.0	100.5	107.0	113.5	120.0
Heating capacity	Prated,h	kW	94.5	100.5	106.5	112.5	120.0	127.5	135.0
	Max. 6°CWB	kW	94.5	100.5	106.5	112.5	120.0	127.5	135.0
Recommended combination			12 x FXMQ63P7VEB	6 x FXMQ50P7VEB + 8 x FXMQ63P7VEB	12 x FXMQ50P7VEB + 4 x FXMQ63P7VEB	18 x FXMQ50P7VEB	13 x FXMQ50P7VEB + 5 x FXMQ63P7VEB	8 x FXMQ50P7VEB + 10 x FXMQ63P7VEB	3 x FXMQ50P7VEB + 15 x FXMQ63P7VEB
ηs,c		%	308.3	318.2	342.5	352.3	338.8	341.4	332.9
ηs,h		%	467.2	456.1	447.0	438.5	419.4	404.4	391.2
SEER			7.9	8.2	8.8	9.0	8.7		8.5
SCOP			11.9	11.6	11.4	11.2	10.7	10.3	10.0
Maximum number of connectable indoor units			64(1)						
Indoor index connection	Min.		375.0	400.0	425.0	450.0	475.0	500.0	525.0
	Max.		1,125.0	1,200.0	1,275.0	1,350.0	1,425.0	1,500.0	1,575.0
Piping connections	Liquid OD	mm			19.1		41.3		
	Gas OD	mm	34.9				41.3		
	HP/LP gas OD	mm	28.6/34.9		28.6/41.3		41.3/34.9		
	Total piping System Actual length	m			500				
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415						
Current - 50Hz	Maximum fuse amps (MFA)	A	50		63		80		

(1) Actual number of connectable indoor units depends on the indoor unit type (VRV indoor, Hydrobox, RA indoor, etc.) and the connection ratio restriction for the system (50% ≤ CR ≤ 130%) | Contains fluorinated greenhouse gases

\* EU member states, UK, Bosnia-Herzegovina, Serbia, Montenegro, Kosovo, Albania, North Macedonia, Iceland, Norway, Switzerland



Individual and multi branch selector box installation

## BS1Q-A

# Individual branch selector for VRV IV heat recovery

- › Unique range of single and multi BS boxes for flexible and fast design
- › Compact & light to install
- › Ideal for remote rooms as no drain piping is needed
- › Allows integration of server rooms into the heat recovery solution thanks to technical cooling function
- › Connect up to 250 class unit (28kW)
- › **UNIQUE** Faster installation thanks to open port connection
- › Allows multi tenant applications
- › Connectable to REYQ-T, RQCEQ-P3 and RWEYQ-T8 heat recovery units



BS1Q-A

More details and final information can be found by scanning or clicking the QR codes.



BS1Q-A

Indoor Unit		BS1Q	1Q10A	1Q16A	1Q25A
Power input	Cooling Nom.	kW		0.005	
	Heating Nom.	kW		0.005	
Maximum number of connectable indoor units			6		8
Maximum capacity index of connectable indoor units			15<x≤100	100<x≤160	160<x≤250
Dimensions	Unit HeightxWidthxD	mm	207x388x326		
Weight	Unit	kg	12		15
Casing	Material		Galvanised steel plate		
Piping connections	Outdoor unit	Liquid OD	9.52		
		Gas OD	15.9		22.2
		Discharge gas OD	12.7		19.1
	Indoor unit	Liquid OD	9.52		
		Gas OD	15.9		22.2
Sound absorbing thermal insulation			Foamed polyurethane Flame-resistant needle felt		
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240		
	Maximum fuse amps (MFA)	A	15		

Contains fluorinated greenhouse gases

## BS-Q14AV1B

# Multi branch selector for VRV IV heat recovery

- › Unique range of single and multi BS boxes for flexible and fast design
- › Major reduction in installation time thanks to wide range, compact size and light weight multi BS boxes
- › Up to 70% smaller and 66% lighter than previous series
- › Faster installation thanks to a reduced number of brazing points and wiring
- › All indoor units connectable to one BS box
- › Less inspection ports needed compared to installing single BS boxes
- › Up to 16kW capacity available per port
- › Connect up to 250 class unit (28kW) by combining 2 ports
- › No limit on unused ports allowing phased installation
- › **UNIQUE** Faster installation thanks to open port connection
- › **UNIQUE** Refrigerant filters for high reliability
- › Allows multi tenant applications
- › Connectable to REYQ-T, RQCEQ-P3 and RWEYQ-T8 heat recovery units



BS10Q14AV1B

More details and final information can be found by scanning or clicking the QR codes.

















BS-Q14AV1B

Indoor Unit		BS	4Q14AV1B	6Q14AV1B	8Q14AV1B	10Q14AV1B	12Q14AV1B	16Q14AV1B
Maximum number of connectable indoor units			20	30	40	50	60	64
Maximum capacity index of connectable indoor units			400	600		750		
Dimensions	Unit HeightxWidthxD	mm	298x370x430	298x580x430		298x820x430		298x1,060x430
Weight	Unit	kg	17.0	24.0	26.0	35.0	38.0	50.0
Casing	Material		Galvanised steel plate					
Piping connections	Outdoor unit	Liquid OD	9.52	12.7	12.7/15.9	15.9	15.9/19.1	19.1
		Gas OD	22.2/19.1	28.6/22.2	28.6	28.6/34.9		34.9
		Discharge gas OD	19.1/15.9	19.1/22.2	19.1/22.2/28.6	28.6		
	Indoor unit	Liquid OD	6.35/9.52					
		Gas OD	12.7/15.9					
Sound absorbing thermal insulation			Urethane foam, polyethylene foam					
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240					
	Maximum fuse amps (MFA)	A	15					

Contains fluorinated greenhouse gases

# Products overview **VRV IV**



Capacity class (kW)

Type	Model	Product name	15	20	25	32	40	50	63	71	80	100	125	140	200	250			
Ceiling mounted cassette	<p><b>UNIQUE</b> Round flow cassette</p> <p>360° air discharge for optimum efficiency and comfort</p> <ul style="list-style-type: none"> <li>Auto cleaning function ensures high efficiency</li> <li>Intelligent sensors save energy and maximize comfort</li> <li>Flexibility to suit every room layout</li> <li>Lowest installation height in the market!</li> <li>Widest choice ever in decoration panel designs and colors</li> </ul>	 <p>FXFQ-B</p> 		●	●	●	●	●	●		●	●	●						
	<p><b>UNIQUE</b> Fully flat cassette</p> <p>Unique design that integrates fully flat into the ceiling</p> <ul style="list-style-type: none"> <li>Perfect integration in standard architectural ceiling tiles</li> <li>Blend of iconic design and engineering excellence</li> <li>Intelligent sensors save energy and maximize comfort</li> <li>Small capacity unit developed for small or well-insulated rooms</li> <li>Flexibility to suit every room layout</li> </ul>	<p>FXZQ-A</p> 	●	●	●	●	●	●											
	<p>2-way blow ceiling mounted cassette</p> <p>Thin, lightweight design installs easily in narrow ceiling spaces</p> <ul style="list-style-type: none"> <li>Depth of all units is 620mm, ideal for narrow ceiling spaces</li> <li>Flexibility to suit every room layout</li> <li>Reduced energy consumption thanks to DC fan motor</li> <li>The flaps close entirely when the unit is not operating</li> <li>Optimum comfort with automatic air flow adjustment to the required load</li> </ul>	<p>FXCQ-A</p> 		●	●	●	●	●	●			●		●					
	<p><b>NEW</b> 1-way blow cassette</p> <p>1-way blow unit for corner installation</p> <ul style="list-style-type: none"> <li>Compact dimensions enable installation in narrow ceiling voids</li> <li>Flexible installation thanks to different air discharge options</li> <li>New modern decoration panel</li> </ul>	<p>FXKQ-A</p> 		●	●	●	●	●	●										Available summer '24
Concealed ceiling	<p>Slim concealed ceiling unit</p> <p>Slim design for flexible installation</p> <ul style="list-style-type: none"> <li>Compact dimensions enable installation in narrow ceiling voids</li> <li>Medium external static pressure up to 44Pa</li> <li>Only grilles are visible</li> <li>Small capacity unit developed for small of well-insulated rooms</li> <li>Reduced energy consumption thanks to DC fan motor</li> </ul>	<p>FXDQ-A3</p> 	●	●	●	●	●	●	●									Auto cleaning filter option	Multi zoning option
	<p>Concealed ceiling unit with medium ESP</p> <p>Slimmest yet most powerful medium static pressure unit on the market!</p> <ul style="list-style-type: none"> <li>Slimmest unit in class, only 245mm</li> <li>Low operating sound level</li> <li>Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths</li> <li>Automatic air flow adjustment function measures the air volume and static pressure and adjusts it towards the nominal air flow, guaranteeing comfort</li> </ul>	<p>FXSQ-A</p> 	●	●	●	●	●	●	●	●		●	●	●	●			Multi zoning option	
	<p>Concealed ceiling unit with high ESP</p> <p>ESP up to 200, ideal for large sized spaces</p> <ul style="list-style-type: none"> <li>Optimum comfort guaranteed no matter the length of ductwork or type of grilles, thanks to automatic air flow adjustment</li> <li>Reduced energy consumption thanks to DC fan motor</li> <li>Flexible installation as the air suction direction can be altered from rear to bottom suction</li> </ul>	<p>FXMQ-P7</p> 							●	●		●	●	●					
	<p>Concealed ceiling unit with high ESP</p> <p>ESP up to 250, ideal for extra large sized spaces</p> <ul style="list-style-type: none"> <li>Only grilles are visible</li> <li>Large capacity unit: up to 31.5 kW heating capacity</li> </ul>	<p>FXMQ-A</p> 														●	●		
Wall mounted	<p>Wall mounted unit</p> <p>For rooms with no false ceilings nor free floor space</p> <ul style="list-style-type: none"> <li>Flat, stylish front panel is more easy to clean</li> <li>Small capacity unit developed for small of well-insulated rooms</li> <li>Reduced energy consumption thanks to DC fan motor</li> <li>The air is comfortably spread up- and downwards thanks to 5 different discharge angles</li> </ul>	<p>FXAQ-A</p> 	●	●	●	●	●	●	●										
Ceiling suspended	<p>Ceiling suspended unit</p> <p>For wide rooms with no false ceilings nor free floor space</p> <ul style="list-style-type: none"> <li>Ideal for comfortable air flow in wide rooms thanks to Coanda effect</li> <li>Rooms with ceilings up to 3.8m can be heated or cooled very easily!</li> <li>Can easily be installed in both new and refurbishment projects</li> <li>Can even be mounted in corners or narrow spaces without any problem</li> <li>Reduced energy consumption thanks to DC fan motor</li> </ul>	<p>FXHQ-A</p> 				●			●		●								
	<p><b>UNIQUE</b> 4-way blow ceiling suspended unit</p> <p>Unique Daikin unit for high rooms with no false ceilings nor free floor space</p> <ul style="list-style-type: none"> <li>Rooms with ceilings up to 3.5m can be heated up or cooled down very easily!</li> <li>Can easily be installed in both new and refurbishment projects</li> <li>Flexibility to suit every room layout</li> <li>Reduced energy consumption thanks to DC fan motor</li> </ul>	<p>FXUQ-A</p> 									●		●						
Floor standing	<p>Floor standing unit</p> <p>For perimeter zone air conditioning</p> <ul style="list-style-type: none"> <li>Can be installed in front of glass walls or free standing as both the front and the back are finished</li> <li>Ideal for installation beneath a window</li> <li>Requires very little installation space</li> <li>Wall mounted installation facilitates cleaning beneath the unit</li> </ul>	<p>FXLQ-P</p> 		●	●	●	●	●	●										
	<p>Concealed floor standing unit</p> <p>Ideal for installation in offices, hotels and residential applications</p> <ul style="list-style-type: none"> <li>Discretely concealed in the wall, leaving only the suction and discharge grilles visible</li> <li>Can even be installed underneath a window</li> <li>Requires very little installation space as the depth is only 200mm</li> <li>High ESP allows flexible installation</li> </ul>	<p>FXNQ-A</p> 		●	●	●	●	●	●										
Cooling capacity (kW) <sup>(1)</sup>			1.7	2.2	2.8	3.6	4.5	5.6	7.1	8.0	9.0	11.2	14.0	16.0	22.4	28.0			
Heating capacity (kW) <sup>(2)</sup>			1.9	2.5	3.2	4.0	5.0	6.3	8.0	9.0	10.0	12.5	16.0	18.0	25.0	31.5			




(1) Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m  
 (2) Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m




# Hydrobox range

Type	Product name	Model	80	125	200	Leaving water temperature range
Low temperature hydrobox	HXY-A8	 <p><b>For high efficiency space heating and cooling</b></p> <ul style="list-style-type: none"> <li>&gt; Ideal for hot or cold water in underfloor, air handling units, low temperature radiators ...</li> <li>&gt; Hot/cold water from 5° to 45°C</li> <li>&gt; Large operation range (down to -20°C and up to 43°C)</li> <li>&gt; Fully integrated water-side components save time on system design</li> <li>&gt; Space saving contemporary wall hung design</li> </ul>	●	●		5°C - 45°C
High temperature hydrobox	HXHD-A8	 <p><b>For efficient hot water production and space heating</b></p> <ul style="list-style-type: none"> <li>&gt; Ideal for hot water in bathrooms, sinks and for underfloor heating, radiators, air handling units, ...</li> <li>&gt; Hot water from 25 to 80°C</li> <li>&gt; "Free" heating and hot water through heat recovery</li> <li>&gt; Uses heat pump technology to produce hot water efficiently, providing up to 17% savings compared to a gas boiler</li> <li>&gt; Possibility to connect thermal solar collectors</li> </ul>		●	●	25°C - 80°C





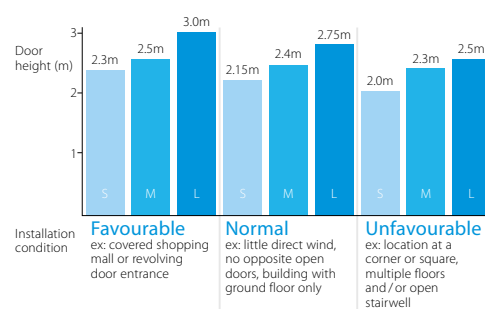





# Biddle air curtains

Type	Product name	Model
Free-hanging	CYA-S/M/L-DK-F	 <p><b>Easy wall mounted installation</b></p> <ul style="list-style-type: none"> <li>&gt; Connectable to ERQ and VRV units</li> <li>&gt; Unified range for R-32 and R-410A refrigerant</li> <li>&gt; Payback period of less than 1.5 years compared to installing an electric air curtain</li> </ul>
Cassette	CYA-S/M/L-DK-C	 <p><b>Mounted into a false ceiling leaving only the decoration panel visible</b></p> <ul style="list-style-type: none"> <li>&gt; Connectable to ERQ and VRV units</li> <li>&gt; Unified range for R-32 and R-410A refrigerant</li> <li>&gt; Payback period of less than 1.5 years compared to installing an electric air curtain</li> </ul>
Recessed	HXHD-A8	 <p><b>Neatly concealed in the ceiling</b></p> <ul style="list-style-type: none"> <li>&gt; Connectable to ERQ and VRV units</li> <li>&gt; Unified range for R-32 and R-410A refrigerant</li> <li>&gt; Payback period of less than 1.5 years compared to installing an electric air curtain</li> </ul>


























# Products overview Stylish indoor units

Depending on the application, Split and Sky Air indoor units can be connected to our VRV IV and VRV IV S-series outdoor units. Refer to the **outdoor unit portfolio** for combination restrictions.

Type	Model	Product name	Capacity class (kW)									Connectable outdoor unit					
			15	20	25	35	42	50	60	71	RYYQ-U	RXYQ-U	RXYSCQ-TV1 <sup>2</sup> RXYSQ-TV9 <sup>2</sup>	RXYTQ-TV9 <sup>2</sup> RXYTQ-TV9 <sup>2</sup>	RWEYQ-T9 <sup>3</sup>	RXYLQ-T	
Ceiling mounted cassette	Round flow cassette (incl. auto-cleaning function)	 FCAG-B				●			●	●					✓		
	Fully flat cassette	 FFA-A9			●	●			●	●		●	●	UV Streamer kit	✓		
Concealed ceiling	Slim concealed ceiling unit	 FDXM-F9			●	●			●	●				✓			
	Concealed ceiling unit with inverter-driven fan	 FBA-A(9)				●			●	●		●	●	Auto cleaning filter option	✓		
Wall mounted	Daikin Emura Wall mounted unit	 FTXJ-AW/AS/AB		●	●	●	●	●	●	●			✓	✓	✓	✓	✓
	Stylish Wall mounted unit	 FTXA-CW/S/B		●	●	●	●	●	●	●			✓	✓	✓	✓	✓
	Perfera Wall mounted unit	 CTXM-A / FTXM-A		●	●	●	●	●	●	● <sup>4</sup>	● <sup>4</sup>	✓	✓	✓	✓	✓	✓
Ceiling suspended	Ceiling suspended unit	 FHA-A(9)				●			●	●	●			✓			
Floor standing	Perfera Floor standing unit	 CVXM-A9 / FVXM-A9		●	●	●			●				✓	✓	✓	✓	✓
	Concealed floor standing unit	 FNA-A9			●	●			●	●				✓			

1 To connect stylish indoor units a BPMKS unit is needed  
 2 A mix of RA indoor units and VRV indoor units is not allowed.  
 3 Only in heat pump operation  
 4 Units available in August 2024

Benefits overview **VRV IV**

We care		Home leave operation	Maintains the indoor temperature at your specified comfort level during absence, thus saving energy
		Fan only	The unit can be used as fan, blowing air without heating or cooling
		Auto cleaning filter	The filter automatically cleans itself. Simplicity of upkeep means optimum energy efficiency and maximum comfort without the need for expensive or time-consuming maintenance
		Presence & floor sensor	The presence sensor directs the air away from any person detected in the room, when the air flow control is on. The floor sensor detects the average floor temperature and ensures an even temperature distribution between ceiling and floor
Comfort		Draught prevention	When starting to warm up or when the thermostat is off, the air discharge direction is set horizontally and the fan to low speed, to prevent draught. After warming up, air discharge and fan speed are set as desired
		Whisper quiet	Daikin indoor units are whisper quiet. Also the outdoor units are guaranteed not to disturb the quiet of the neighbourhood
		Auto cooling-heating changeover	Automatically selects cooling or heating mode to achieve the set temperature
Air treatment		UV Streamer kit	Purifies the air of pollutants such as viruses, bacteria, fine dust (PM1.0), odours, allergens, etc ensuring a healthy and hygienic indoor environment
		Air filter	Removes airborne dust particles to ensure a steady supply of clean air
Humidity control		Dry programme	Allows humidity levels to be reduced without variations in room temperature
Air flow		Ceiling soiling prevention	Prevents air from blowing out too long in horizontal position, to prevent ceiling stains
		Vertical auto swing	Possibility to select automatic vertical moving of the air discharge flaps for efficient air and temperature distribution throughout the room
		Fan speed steps	Allows to select up to the given number of fan speed
		Individual flap control	Individual flap control via the wired remote controller enables you to easily fix the position of each flap individually, to suit any new room configuration. Optional closure kits are available as well
		Weekly timer	Can be set to start heating or cooling anytime on a daily or weekly basis
		Infrared remote control	Starts, stops and regulates the air conditioner from a distance
		Wired remote control	Starts, stops and regulates the air conditioner
		Centralised control	Starts, stops and regulates several air conditioners from one central point
		Multi zoning	Allows up to 6 individual climate zones with one indoor unit
Other functions		Auto-restart	The unit restarts automatically at the original settings after power failure
		Self-diagnosis	Simplifies maintenance by indicating system faults or operating anomalies
		Drain pump kit	Facilitates condensation draining from the indoor unit
		Multi tenant	The indoor unit's main power supply can be turned off when leaving the hotel or office building

Ceiling mounted cassette units				Concealed ceiling units				Wall mounted unit	Ceiling suspended units		Floor standing units	
FXFQ-B	FXZQ-A	FXCQ-A	NEW FXKQ-A	FXDQ-A3	FXSQ-A	FXMQ-P7	FXMQ-A	FXAQ-A	FXHQ-A	FXUQ-A	FXNQ-A	FXLQ-P
●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●	●	●	●
○												
○	○									○		
●	●		●							●		
●	●	●		●	●			●				
●	●	●	●	●	●	●	●	●	●	●	●	●
○												
● (2) (Optional high efficiency filter ePM10 60%)	● (1)	● (1)	● (1)	● (1)	● (1)	● (1)	● (1)	● (1)	● (1)	● (1)	● (1)	● (1)
●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●									
●	●	●	●					●	●	●		
5 + auto	3 + auto	3 + auto	3 + auto	3	3 + auto	3	3 + auto	2	3	3 + auto	2	3
●	●									●		
○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○		○	○	○	○	○	○	○	○	○
○	○	○	●	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○
				○	○							
●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	○	○	○	●		
○	○		○	○	○	○		○			○	○

● standard, ○ optional


(1) Pre filter




# Round flow cassette

360° air discharge for optimum efficiency and comfort

- › Optional automatic filter cleaning panel results in higher efficiency & comfort and lower maintenance costs.
- › Two optional intelligent sensors improve energy efficiency and comfort
- › Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- › Bigger flaps and unique swing pattern improve equal air distribution
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- › Lowest installation height in the market: 214mm for class 20-63
- › **NEW** UV streamer kit, purifies the air of pollutants such as viruses, bacteria, fine dust (PM1.0), oudeurs, allergens, etc ensuring a healthy and hygienic indoor environment
- › Optional fresh air intake
- › Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms



- › Standard drain pump with 675mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.



FXFQ-B


Indoor Unit				FXFQ	20B	25B	32B	40B	50B	63B	80B	100B	125B
Cooling capacity	Total capacity	At high fan speed	kW	2.20	2.80	3.60	4.50	5.60	7.10	9.00	11.20	14.00	
Heating capacity	Total capacity	At high fan speed	kW	2.50	3.20	4.00	5.00	6.30	8.00	10.00	12.50	16.00	
Power input - 50Hz	Cooling	At high fan speed	kW	0.017			0.018	0.023	0.028	0.045	0.071	0.103	
	Heating	At high fan speed	kW	0.017			0.018	0.023	0.028	0.045	0.071	0.103	
Dimensions	Unit	HeightxWidthxDepth	mm	204x840x840						246x840x840		288x840x840	
Weight	Unit		kg	18			19	21		24		26	
Casing	Material			Galvanised steel plate									
Decoration panel	Model			Standard panels: BYCQ140E - white with grey louvers / BYCQ140EW - full white / BYCQ140EB - black Auto cleaning panels: BYCQ140EGF - white / BYCQ140EGFB - black Designer panels: BYCQ140EP - white / BYCQ140EPB - black									
	Dimensions	HeightxWidthxDepth	mm	Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950									
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed	12.8/10.7/8.9			14.8/12.6/10.4	15.1/12.9/10.7	16.6/13.4/10.7	23.3/19.2/13.5	27.8/20.4/13.0	31.6/26.0/19.8	
		Heating	At high / medium / low fan speed	12.8/10.7/8.9			14.8/12.6/10.4	15.1/12.9/10.7	16.6/13.4/10.7	22.5/18.5/13.0	27.8/20.4/13.0	30.3/24.9/18.9	
Air filter	Type			Resin net									
Sound power level	Cooling	At high fan speed	dBA	49.0			51.0		53.0	55.0	60.0	61.0	
		At high / medium / low fan speed	dBA	31.0/29.0/28.0			33.0/31.0/29.0		35.0/33.0/30.0	38.0/34.0/30.0	43.0/37.0/30.0	45.0/41.0/36.0	
Sound pressure level	Heating	At high / medium / low fan speed	dBA	31.0/29.0/28.0			33.0/31.0/29.0		35.0/33.0/30.0	38.0/34.0/30.0	43.0/37.0/30.0	45.0/41.0/36.0	
		At high / medium / low fan speed	dBA	31.0/29.0/28.0			33.0/31.0/29.0		35.0/33.0/30.0	38.0/34.0/30.0	43.0/37.0/30.0	45.0/41.0/36.0	
Refrigerant	Type/GWP			R-410A/2,087.5									
Piping connections	Liquid	OD	mm	6.35					9.52				
	Gas	OD	mm	12.7					15.9				
	Drain			VP25 (O.D. 32 / I.D. 25)									
Power supply	Phase/Frequency/Voltage			1~/50/60/220-240/220									
Current - 50Hz	Maximum fuse amps (MFA)		A	16									
Control systems	Infrared remote control			BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB									
	Wired remote control			BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52									

Contains fluorinated greenhouse gases


# Fully flat cassette

Unique design in the market that integrates fully flat into the ceiling

- › Fully flat integration in standard architectural ceiling tiles, leaving only 8mm
- › Remarkable blend of iconic design and engineering excellence with an elegant finish in white or a combination of silver and white
- › Two optional intelligent sensors improve energy efficiency and comfort
- › 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices, etc.
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!



- › Optional fresh air intake
- › Standard drain pump with 630mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.



FXZQ-A


Indoor Unit			FXZQ	15A	20A	25A	32A	40A	50A	
Cooling capacity	Total capacity	At high fan speed	kW	1.70	2.20	2.80	3.60	4.50	5.60	
	Heating capacity	At high fan speed	kW	1.90	2.50	3.20	4.00	5.00	6.30	
Power input - 50Hz	Cooling	At high fan speed	kW	0.018		0.020	0.019	0.029	0.048	
	Heating	At high fan speed	kW	0.018		0.020	0.019	0.029	0.048	
Dimensions	Unit	HeightxWidthxDepth	mm	260x575x575						
Weight	Unit		kg	15.5			16.5		18.5	
Casing	Material			Galvanised steel plate						
Decoration panel	Model			BYFQ60C2W1W						
	Colour			White (N9.5)						
	Dimensions	HeightxWidthxDepth	mm	46x620x620						
	Weight		kg	2.8						
Decoration panel 2	Model			BYFQ60C2W1S						
	Colour			SILVER						
	Dimensions	HeightxWidthxDepth	mm	46x620x620						
	Weight		kg	2.8						
Decoration panel 3	Model			BYFQ60B2W1						
	Colour			White (RAL9010)						
	Dimensions	HeightxWidthxDepth	mm	55x700x700						
	Weight		kg	2.7						
Decoration panel 4	Model			BYFQ60B3W1						
	Colour			WHITE (RAL9010)						
	Dimensions	HeightxWidthxDepth	mm	55x700x700						
	Weight		kg	2.7						
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed	m <sup>3</sup> /min	8.5/7.00/6.5	8.7/7.50/6.5	9.0/8.00/6.5	10.0/8.50/7.0	11.5/9.50/8.0	14.5/12.5/10.0
		Heating	At high / medium / low fan speed	m <sup>3</sup> /min	8.5/7.0/6.5	8.7/7.5/6.5	9.0/8.0/6.5	10.0/8.5/7.0	11.5/9.5/8.0	14.5/12.5/10.0
Air filter	Type			Resin net						
Sound power level	Cooling	At high fan speed	dBA	49		50	51	54	60	
		At high / medium / low fan speed	dBA	31.5/28.0/25.5	32.0/29.5/25.5	33.0/30.0/25.5	33.5/30.0/26.0	37.0/32.0/28.0	43.0/40.0/33.0	
Sound pressure level	Heating	At high / medium / low fan speed	dBA	31.5/28.0/25.5	32.0/29.5/25.5	33.0/30.0/25.5	33.5/30.0/26.0	37.0/32.0/28.0	43.0/40.0/33.0	
		At high / medium / low fan speed	dBA	31.5/28.0/25.5	32.0/29.5/25.5	33.0/30.0/25.5	33.5/30.0/26.0	37.0/32.0/28.0	43.0/40.0/33.0	
Refrigerant	Type/GWP			R-410A/2,087.5						
Piping connections	Liquid	OD	mm	6.35						
	Gas	OD	mm	12.7						
	Drain			VP20 (I.D. 20/O.D. 26)						
Power supply	Phase/Frequency/Voltage			1~/50/60/220-240/220						
Current - 50Hz	Maximum fuse amps (MFA)			16						
Control systems	Infrared remote control			BRC7F530W (white panel) / BRC7F530S (grey panel) / BRC7EB530W (standard panel)						
Control systems	Wired remote control			BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52						

Contains fluorinated greenhouse gases

# 2-way blow ceiling mounted cassette

Thin, lightweight design installs easily in narrow corridors

- › Depth of all units is 620mm, ideal for narrow spaces
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!




- › Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating and there are no air intake grilles visible
- › Fresh air intake integrated in the same system thus reducing installation cost as no additional ventilation device is required

Fresh air intake opening in casing




\* Brings in up to 10% of fresh air into the room


- › Optimum comfort guaranteed with automatic air flow adjustment to the required load
- › Maintenance operations can be performed by removing the front panel

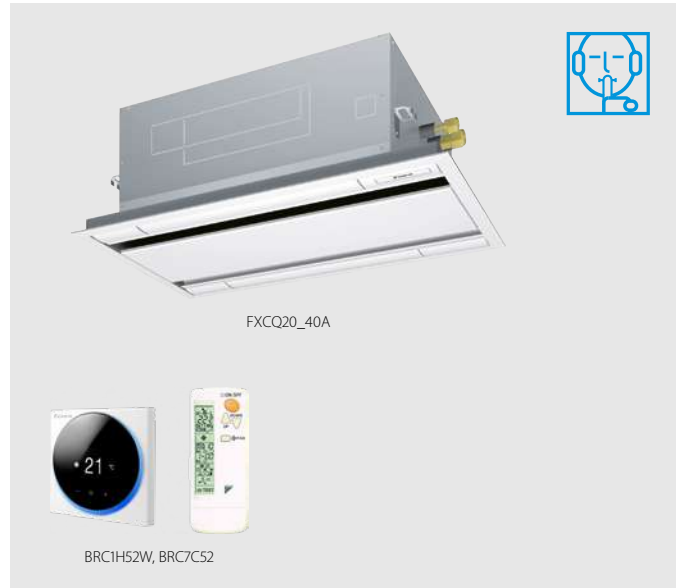

- › Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms



- › Standard drain pump with 580mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.



FXCQ-A

Indoor Unit			FXCQ	20A	25A	32A	40A	50A	63A	80A	125A
Cooling capacity	Total capacity	At high fan speed	kW	2.2	2.8	3.6	4.5	5.6	7.1	9.0	14.0
Heating capacity	Total capacity	At high fan speed	kW	2.5	3.2	4.0	5.0	6.3	8.0	10.0	16.0
Power input - 50Hz	Cooling	At high fan speed	kW	0.031	0.039		0.041	0.059	0.063	0.090	0.149
	Heating	At high fan speed	kW	0.028	0.035		0.037	0.056	0.060	0.086	0.146
Dimensions	Unit	HeightxWidthxDepth	mm	305x775x620				305x990x620		305x1,445x620	
Weight	Unit		kg	19				22	25	33	38
Casing	Material			Galvanised steel plate							
Decoration panel	Model			BYBCQ40HW1				BYBCQ63HW1		BYBCQ125HW1	
	Colour			Fresh white (6.5Y 9.5/0.5)							
	Dimensions	HeightxWidthxDepth	mm	55x1,070x700				55x1,285x700		55x1,740x700	
	Weight		kg	10				11		13	
Fan	Air flow rate - 50Hz	Cooling		10.5/9/7.5	11.5/9.5/8		12/10.5/8.5	15/13/10.5	16/14/11.5	26/22.5/18.5	32/27.5/22.5
		At high / medium / low fan speed	m <sup>3</sup> /min								
Air filter	Type			Resin net with mold resistance							
Sound power level	Cooling	At high / medium / low fan speed	dB(A)	48/46/44	50/47/45	50/48/46	52/49/47	53/51/47	55/53/48	58/54/49	62/58/54
		At high / medium / low fan speed	dB(A)	32.0/30.0/28.0	34.0/31.0/29.0	34.0/32.0/30.0	36.0/33.0/31.0	37.0/35.0/31.0	39.0/37.0/32.0	42.0/38.0/33.0	46.0/42.0/38.0
Sound pressure level	Heating	At high / medium / low fan speed	dB(A)	32.0/30.0/28.0	34.0/31.0/29.0	34.0/32.0/30.0	36.0/33.0/31.0	37.0/35.0/31.0	39.0/37.0/32.0	42.0/38.0/33.0	46.0/42.0/38.0
		At high / medium / low fan speed	dB(A)	32.0/30.0/28.0	34.0/31.0/29.0	34.0/32.0/30.0	36.0/33.0/31.0	37.0/35.0/31.0	39.0/37.0/32.0	42.0/38.0/33.0	46.0/42.0/38.0
Refrigerant	Type/GWP			R-410A/2,087.5							
Piping connections	Liquid	OD	mm	6.35						9.52	
	Gas	OD	mm	12.7						15.9	
	Drain			VP25 (O.D. 32 / I.D. 25)							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-240							
Current - 50Hz	Maximum fuse amps (MFA)		A	16							
Control systems	Infrared remote control			BRC7C52							
	Wired remote control			BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52							

Contains fluorinated greenhouse gases

# Ceiling mounted corner cassette

## 1-way blow unit for corner installation

- > Compact dimensions enable installation in narrow ceiling voids (only 200mm height)
- > New modern decoration panel
- > The air is comfortably spread up- and downwards thanks to 5 different discharge angles that can be programmed via the remote control

New design!

- NEW** > Optional fresh air intake
- NEW** > Standard drain pump increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.



FXXQ-A

<b>Indoor Unit</b>		<b>FXXQ</b>		<b>20A</b>	<b>25A</b>	<b>32A</b>	<b>40A</b>	<b>50A</b>	<b>63A</b>	
Cooling capacity	Total capacity	At high fan speed	kW	2.2	2.8	3.6	4.5	5.6	7.1	
Heating capacity	Total capacity	At high fan speed	kW	2.5	3.2	4	5	6.3	8	
Power input - 50Hz	Cooling	At high fan speed	kW	0.024	0.024	0.033	0.038	0.055	0.118	
	Heating	At high fan speed	kW	0.024	0.024	0.033	0.038	0.055	0.118	
Dimensions	Unit	HeightxWidthxDepth	mm	200x840x470			200x1.240x470			
Weight	Unit		kg	17	17	18	23	23	23	
Casing	Material	Galvanised steel plate								
Decoration panel	Model	BYK32G			BYK63G					
	Dimensions	HeightxWidthxDepth	mm	80x950x550			80x1.350x550			
	Weight		kg							
Fan	Airflow rate	Cooling	At high / medium / low fan speed	m <sup>3</sup> /min	7.1/6/5		8.5/7.3/6	12.9/11/9.1	15.5/13.2/11	21.5/17/14.1
		Type	Resin net							
Sound power level	Cooling	At high fan speed	dB(A)	52	53	54	56	58	68	
Sound pressure level	Cooling	At high / medium / low fan speed	dB(A)	36/33/30	37/34/31	38/35/32	40/37/34	42/40/37	54/51/48	
		Heating	At high / medium / low fan speed	dB(A)	38/35/32	39/36/33	40/37/34	42/39/36	44/42/39	55/52/49
Refrigerant	Type/GWP	R-32/675								
Piping connections	Liquid	OD	mm	6.35						
	Gas	OD	mm	9.52				12.7		
	Drain	VP25 (O.D. 32/I.D. 25)								
Power supply				1~/50/60/220-240/220						
Current - 50Hz	Maximum fuse amps (MFA)				6					

Contains fluorinated greenhouse gases

\*Note: blue cells contain preliminary data

# Multi zoning kit

## for concealed ceiling units



Easy selection via our NEW software!

The multi-zoning system is a room-by-room controller. It is fitted with motorised dampers, which immediately adapt using Daikin ducted solutions. This system supports control of up to 8 zones via a centralised thermostat located in the main room and individual thermostats for each of the zones.

## Benefits


### Increased comfort

- › Increases comfort levels by allowing more individual zone control
  - Up to 8 individual zones can be served thanks to separate modulating dampers
  - Individual thermostat for room-by-room or zone-by-zone control

### Easy to install

- › Automatic air flow adjustment according to the demand
- › Easy to install, integrates with the Daikin indoor units and system controls
- › Time saving as plenum comes fully pre-assembled with dampers, and control boards
- › Reduces the amount of refrigerant required in the installation

## How does it work?

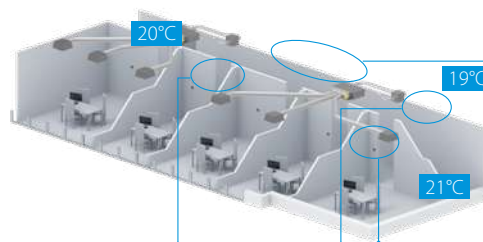

Zoning box: fully pre-assembled plenum with dampers

## Individual zone thermostats

### Bluezero - Airzone Main Thermostat

- › Color graphic interface for controlling zones



AZCE6BLUEZEROCB (Wired)

### Airzone Zone Thermostat

- › Graphic interface with low-energy e-ink screen for controlling zones



AZCE6THINKRB (Wireless)

### Airzone Zone Thermostat

- › Thermostat with buttons for controlling the temperature



AZCE6LITECB (Wired)

AZCE6LITERB (Wireless)

## Compatibility

				SkyAir					VRV IV <sup>+</sup>																															
				FDXM-F9			FBA-A(9)			ADEA-A			FXDQ-A3					FXSQ-A																						
				25	35	50	60	35	50	60	71	100	125	140	71	100	125	15	20	25	32	40	50	63	15	20	25	32	40	50	63	80	100	125	140					
Standard plenum	2	AZE(Z/R)6DAIST07XS2	300 x 930 x 454	200																																				
		AZE(Z/R)6DAIST07S2																																						
	3	AZE(Z/R)6DAIST07XS3																																						
		AZE(Z/R)6DAIST07S3																																						
	4	AZE(Z/R)6DAIST07S4																																						
		AZE(Z/R)6DAIST07M4																																						
	5	AZE(Z/R)6DAIST07M5																																						
		AZE(Z/R)6DAIST07L5																																						
	6	AZE(Z/R)6DAIST07M6																																						
		AZE(Z/R)6DAIST07L6																																						
	7	AZE(Z/R)6DAIST07L7																																						
		AZE(Z/R)6DAIST07XL7																																						
	8	AZE(Z/R)6DAIST07L8																																						
		AZE(Z/R)6DAIST07XL8																																						
Medium plenum	2	AZEZ6DAIBS07XS2	250 x 930 x 454	200																																				
		AZEZ6DAIBS07S2																																						
	3	AZEZ6DAIBS07XS3																																						
		AZEZ6DAIBS07S3																																						
	4	AZEZ6DAIBS07M3																																						
		AZEZ6DAIBS07S4																																						
	5	AZEZ6DAIBS07L4																																						
		AZEZ6DAIBS07M5																																						
	6	AZEZ6DAIBS07L5																																						
		AZEZ6DAIBS07XL5																																						
	7	AZEZ6DAIBS07M6																																						
		AZEZ6DAIBS07L6																																						
8	AZEZ6DAIBS07XL6																																							
	AZEZ6DAIBS07XL6																																							
Slim plenum	2	AZE(Z/R)6DAISL01S2	210 x 930 x 444	200																																				
		AZE(Z/R)6DAISL01S3																																						
	4	AZE(Z/R)6DAISL01M4																																						
		AZE(Z/R)6DAISL01S4																																						
	5	AZE(Z/R)6DAISL01L5																																						

(1) Z models are reversible; R models are heating only  
 (2) Medium Ceiling Void reversible units can be blocked to heating only via AZX6MCS module

For more information on options refer to page 932






# Slim concealed ceiling unit


## Slim design for flexible installation

- > Compact dimensions, can easily be mounted in a ceiling void of only 240mm




SERIE A (15, 20, 25, 32)



- > Medium external static pressure up to 44Pa facilitates unit use with flexible ducts of varying lengths
- > Discretely concealed in the wall: only the suction and discharge grilles are visible
- > 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices, etc.
- > Auto cleaning filter option ensures maximum efficiency, comfort and reliability by regular filter cleaning
- > Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit
- > Flexible installation, as the air suction direction can be altered from rear to bottom suction

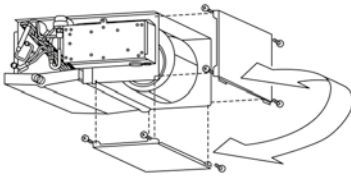

- > Standard drain pump with 600mm lift increases flexibility and installation speed

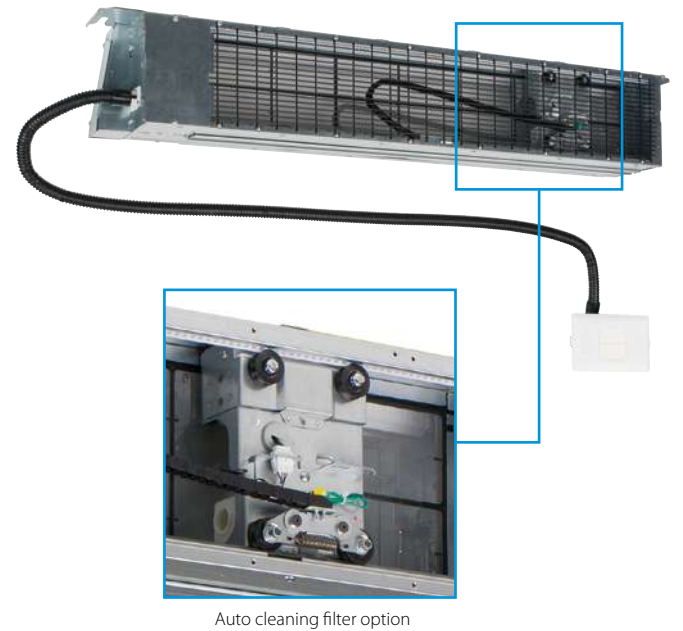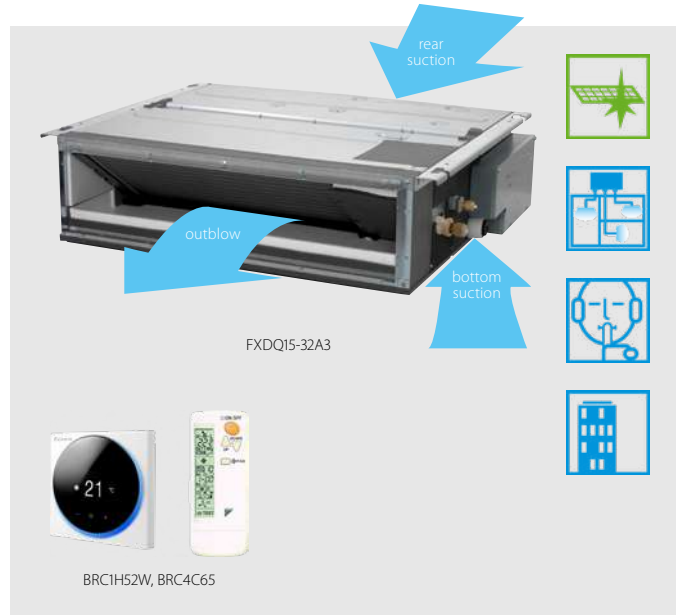

More details and final information can be found by scanning or clicking the QR codes.



FXDQ-A3

Indoor Unit		FXDQ	15A3	20A3	25A3	32A3	40A3	50A3	63A3		
Cooling capacity	Nom.	kW	1.7	2.2	2.8	3.6	4.5	5.6	7.1		
Heating capacity	Nom.	kW	1.9	2.5	3.2	4.0	5.0	6.3	8.0		
Power input - 50Hz	Cooling	At high fan speed	0.036			0.041	0.042	0.053	0.062		
	Heating	At high fan speed	0.036			0.041	0.042	0.053	0.062		
Required ceiling void >		mm	240								
Dimensions	Unit	HeightxWidthxDPTH	200x750x620			200x950x620		200x1,150x620			
Weight	Unit	kg	22			26		29			
Casing	Material		Galvanised steel								
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed		m <sup>3</sup> /min		7.5/7.0/6.4	8.0/7.2/6.4	10.5/9.5/8.5	12.5/11.0/10.0	16.5/14.5/13.0
	External static pressure - 50Hz	Factory set / High	Pa	10/30.0			15/44.0				
Air filter	Type		Removable / washable								
Sound power level	Cooling	At high fan speed	dB(A)	50	51		52	53	54		
	Sound pressure level	Cooling	At high / medium / low fan speed	dB(A)	32.0/31.0/27.0	33.0/31.0/27.0		34.0/32.0/28.0	35.0/33.0/29.0	36.0/34.0/30.0	
Refrigerant	Type/GWP		R-410A/2,087.5								
Piping connections	Liquid	OD	mm	6.35					9.52		
	Gas	OD	mm	12.7					15.9		
	Drain			VP20 (I.D. 20/O.D. 26)							
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/60/220-240/220								
Current - 50Hz	Maximum fuse amps (MFA)	A	16								
Control systems	Infrared remote control		BRC4C65 / BRC4C66								
	Wired remote control		BRC1D528 / BRC1E51								

Contains fluorinated greenhouse gases

# Concealed ceiling unit with medium ESP

Slimmest yet most powerful medium static pressure unit on the market

- › Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge




- › Quiet operation: down to 25dBA sound pressure level
- › Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths
- › Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- › Discretely concealed in the wall: only the suction and discharge grilles are visible
- › 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices, etc.
- › Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit
- › Reduced energy consumption thanks to specially developed DC fan motor and drain pump
- › Optional fresh air intake

Fresh air intake opening in casing




\* Brings in up to 10% of fresh air into the room


Optional fresh air intake kit




\* Allow larger quantities of fresh air to be brought in

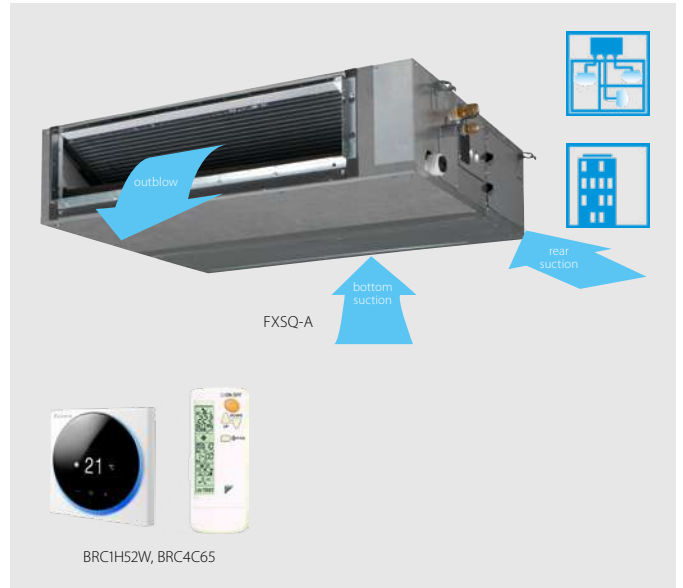

- › Flexible installation: air suction direction can be altered from rear to bottom suction and choice between free use or connection to optional suction grilles



- › Standard built-in drain pump with 625mm lift increases flexibility and installation speed




### Automatic Airflow Adjustment function

Automatically selects the most appropriate fan curve to achieve the unit's nominal air flow within ±10%

#### Why?

After installation the real ducting will frequently differ from the initially calculated air flow resistance \* the real air flow may be much lower or higher than nominal, leading to a lack of capacity or uncomfortable air temperature. Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically (10 or more fan curves are available on every model), making installation much faster.



More details and final information can be found by scanning or clicking the QR codes.



FXSQ-A


Indoor Unit				FXSQ	15A	20A	25A	32A	40A	50A	63A	80A	100A	125A	140A						
Cooling capacity	Total capacity	At high fan speed	kW	1.70	2.20	2.80	3.60	4.50	5.60	7.10	9.00	11.20	14.00	16.00							
Heating capacity	Total capacity	At high fan speed	kW	1.90	2.50	3.20	4.00	5.00	6.30	8.00	10.0	12.5	16.0	18.0							
Power input - 50Hz	Cooling	At high fan speed	kW		0.041		0.045	0.087	0.089	0.101	0.135	0.173	0.237	0.247							
		Heating	At high fan speed	kW		0.041		0.045	0.087	0.089	0.101	0.135	0.173	0.237	0.247						
Dimensions	Unit	HeightxWidthxDepth	mm	245x550x800			245x700x800			245x1,000x800			245x1,400x800			245x1,550x800					
Weight	Unit		kg	23.5			24.0			28.5			29.0			35.5	36.5	46.0	47.0	51.0	
Casing	Material			Galvanised steel plate																	
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed	m <sup>3</sup> /min	8.7/7.5/6.5	9.0/7.5/6.5	9.5/8.0/7.0	15.0/12.5/11.0	15.2/12.5/11.0	21.0/18.0/15.0	23.0/19.5/16.0	32.0/27.0/23.0	36.0/31.5/26.0	39.0/34.0/28.0							
		Heating	At high / medium / low fan speed	m <sup>3</sup> /min	8.7/7.5/6.5	9.0/7.5/6.5	9.5/8.0/7.0	15.0/12.5/11.0	15.2/12.5/11.0	21.0/18.0/15.0	23.0/19.5/16.0	32.0/27.0/23.0	36.0/31.5/26.0	39.0/34.0/28.0							
	External static pressure - 50Hz	Factory set / High	Pa	30/150			40/150			50/150											
Air filter	Type			Resin net																	
Sound power level	Cooling	At high fan speed	dBA	54			55			60			59			61			64		
		At high / medium / low fan speed	dBA	29.5/28.0/25.0	30.0/28.0/25.0	26.0/29.0/26.0	35.0/32.0/29.0	33.0/30.0/27.0	35.0/32.0/28.0	37.0/34.0/29.0	35.0/32.0/28.0	37.0/34.0/30.0	37.0/34.0/31.0	40.0/37.0/33.0	41.5/38.0/34.0						
Sound pressure level	Heating	At high / medium / low fan speed	dBA	31.5/29.0/26.0	32.0/29.0/26.0	33.0/30.0/27.0	37.0/34.0/29.0	35.0/32.0/28.0	37.0/34.0/30.0	37.0/34.0/31.0	40.0/37.0/33.0	42.0/38.5/34.0									
		Refrigerant	Type/GWP		R-410A/2,087.5																
Piping connections	Liquid	OD	mm				6.35						9.52								
		Gas	OD	mm				12.7						15.9							
	Drain			VP20 (I.D. 20/O.D. 26), drain height 625 mm																	
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220																	
Current - 50Hz	Maximum fuse amps (MFA)		A	16																	
Control systems	Infrared remote control			BRC4C65																	
	Wired remote control			BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52																	

Contains fluorinated greenhouse gases

# Concealed ceiling unit with high ESP



Ideal for large sized spaces: ESP up to 250 Pa

- > High external static pressure up to 250Pa facilitates extensive duct and grille network
- > Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- > Discretely concealed in the wall: only the suction and discharge grilles are visible
- > Fresh air intake integrated in the same system thus reducing installation cost as no additional ventilation device is required (50-125 class)

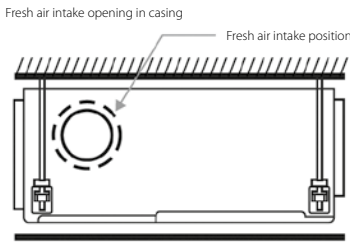


\* Brings in up to 10% of fresh air into the room

- > Flexible installation, as the air suction direction can be altered from rear to bottom suction

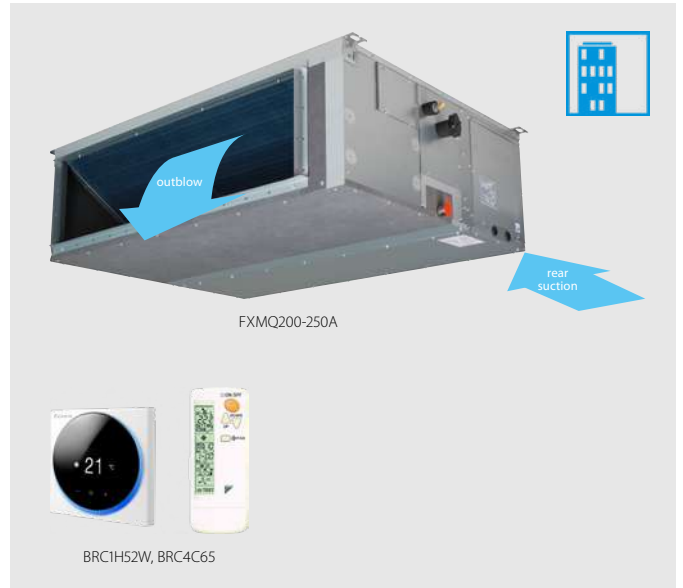

- > Standard built-in drain pump with 625mm lift increases flexibility and installation speed (optional for 200-250)




- > Large capacity unit: up to 31.5 kW heating capacity

## Automatic Airflow Adjustment function

Automatically selects the most appropriate fan curve to achieve the units' nominal air flow within ±10%

### Why?

After installation the real ducting will frequently differ from the initially calculated air flow resistance \* the real air flow may be much lower or higher than nominal, leading to a lack of capacity or uncomfortable air temperature. Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically (10 or more fan curves are available on every model), making installation much faster



More details and final information can be found by scanning or clicking the QR codes.



FXMQ-P7



FXMQ-A

Indoor Unit		FXMQ	50P7	63P7	80P7	100P7	125P7	200A	250A		
Cooling capacity	Total capacity At high fan speed	kW	-						22.4	28.0	
	Nom.	kW	5.6	7.1	9.0	11.2	14.0	22.4	28.0		
Heating capacity	Total capacity At high fan speed	kW	-						25.0	31.5	
	Nom.	kW	6.3	8.0	10.0	12.5	16.0	25.0	31.5		
Power input - 50Hz	Cooling At high fan speed	kW	0.110	0.120	0.171	0.176	0.241	0.54	0.65		
	Heating At high fan speed	kW	0.098	0.108	0.159	0.164	0.229	0.54	0.65		
Required ceiling void >		mm	350						-		
Dimensions	Unit	HeightxWidthxDepth	300x1,000x700			300x1,400x700		470x1,490x1,100			
Weight	Unit	kg	35			46		105	115		
Fan	Air flow rate - 50Hz	Cooling At high/medium/low fan speed	m <sup>3</sup> /min	18.0/16.5/15.0	19.5/17.8/16.0	25.0/22.5/20.0	32.0/27.5/23.0	39.0/33.5/28.0	62/48/41	74/64/52	
		Heating At high/medium/low fan speed	m <sup>3</sup> /min	18.0/16.5/15.0	19.5/17.8/16.0	25.0/22.5/20.0	32.0/27.5/23.0	39.0/33.5/28.0	62/48/41	74/64/52	
	External static pressure - 50Hz	Factory set / High	Pa	100/200						150/250	
Air filter	Type		Resin net						-		
Sound power level	Cooling At high/medium/low fan speed	dB(A)	61.0/-/-	64.0/-/-	67.0/-/-	65.0/-/-	70.0/-/-	75/74/72	76/75/73		
	Heating At high/medium/low fan speed	dB(A)	-						75/74/72	76/75/73	
Sound pressure level	Cooling At high/medium/low fan speed	dB(A)	41.0/39.0/37.0	42.0/40.0/38.0	43.0/41.0/39.0		44.0/42.0/40.0	48/46.5/45			
	Heating At high/medium/low fan speed	dB(A)	41.0/39.0/37.0	42.0/40.0/38.0	43.0/41.0/39.0		44.0/42.0/40.0	48/46.5/45			
Refrigerant	Type/GWP		R-410A/-						R-410A/2,087.5		
Piping connections	Liquid OD	mm	6.35	9.52							
	Gas OD	mm	12.7	15.9						19.1	22.2
	Drain		VP25 (I.D. 25/O.D. 32)						BSP1		
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/60/220-240/220 +/-10%						1~/50/220-240		
Current - 50Hz	Maximum fuse amps (MFA)	A	6								
Control systems	Infrared remote control		BRC4C65								
	Wired remote control		BRC1H52W/S/K/BRC1E53A/BRC1E53B/BRC1E53C/BRC1D52								

Contains fluorinated greenhouse gases



# Wall mounted unit

For rooms with no false ceilings nor free floor space

- › Flat, stylish front panel blends easily within any interior décor and is easier to clean
- › Can easily be installed in both new and refurbishment projects
- › The air is comfortably spread up- and downwards thanks to 5 different discharge angles that can be programmed via the remote control
- › Maintenance operations can be performed easily from the front of the unit



More details and final information can be found by scanning or clicking the QR codes.



FXAQ-A


Indoor Unit		FXAQ	15A	20A	25A	32A	40A	50A	63A	
Cooling capacity	Total capacity	kW	1.7	2.2	2.8	3.6	4.5	5.6	7.1	
	At high fan speed									
Heating capacity	Total capacity	kW	1.9	2.5	3.2	4.0	5.0	6.3	8.0	
	At high fan speed									
Power input - 50Hz	Cooling	kW	0.02		0.03		0.02	0.03	0.05	
	At high fan speed									
Dimensions	Unit	mm	290x795x266				290x1,050x269			
	HeightxWidthxDPTH									
Weight	Unit	kg	12				15			
Fan	Air flow rate - 50Hz	m <sup>3</sup> /min	8.4/7.0	9.1/7.0	9.4/7.0	9.8/7.0	12.2/9.7	14.4/11.5	18.3/13.5	
	Cooling	At high fan speed/ At low fan speed								
Air filter	Type		Washable resin net							
Sound power level	Cooling	dBA	51.0	52.0	53.0	55.0		58.0	63.0	
	At high fan speed									
Sound pressure level	Cooling	dBA	32.0/28.5	33.0/28.5	35.0/28.5	37.5/28.5	37.0/33.5	41.0/35.5	46.5/38.5	
	At high fan speed/ At low fan speed									
Refrigerant	Heating	dBA	33.0/28.5	34.0/28.5	36.0/28.5	38.5/28.5	38.0/33.5	42.0/35.5	47.0/38.5	
	At high fan speed/ At low fan speed									
Refrigerant	Type/GWP		R-410A/2,087.5							
Piping connections	Liquid	mm					6.35			9.52
	OD									
Piping connections	Gas	mm					12.7			15.9
	OD									
Piping connections	Drain		VP13 (I.D. 15/O.D. 18)							
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240							
Current - 50Hz	Maximum fuse amps (MFA)	A	16							
Control systems	Infrared remote control		BRC7EA628 / BRC7EA629							
	Wired remote control		BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52							

Contains fluorinated greenhouse gases


# Ceiling suspended unit

For wide rooms with no false ceilings nor free floor space

- › Ideal for comfortable air flow in wide rooms thanks to Coanda effect: up to 100° discharge angle

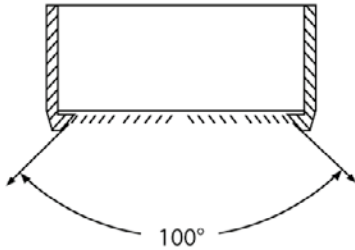

- › Even rooms with ceilings up to 3.8m can be heated up or cooled down very easily without capacity loss
- › Two optional intelligent sensors improve energy efficiency and comfort
- › Can easily be installed in both new and refurbishment projects
- › Can easily be mounted in corners and narrow spaces, as it only needs 30mm lateral service space

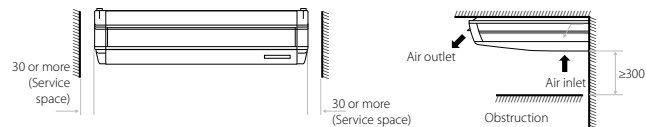

- › Fresh air intake integrated in the same system thus reducing installation cost as no additional ventilation device is required
- Fresh air intake opening in casing



\* Brings in up to 10% of fresh air into the room

- › Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating and there are no air intake grilles visible

More details and final information can be found by scanning or clicking the QR codes.



FXHQ-A


Indoor Unit		FXHQ		32A	63A	100A		
Cooling capacity	Total capacity	At high fan speed		kW	3.6	7.1	11.2	
	At high fan speed							
Heating capacity	Total capacity	At high fan speed		kW	4.0	8.0	12.5	
	At high fan speed							
Power input - 50Hz	Cooling	At high fan speed		kW	0.107	0.111	0.237	
	Heating	At high fan speed		kW	0.107	0.111	0.237	
Dimensions	Unit	Height	Width	Depth	mm	235x960x690	235x1,270x690	235x1,590x690
Weight	Unit			kg	27	35	42	
Casing	Material				Resin, sheet metal			
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed		m <sup>3</sup> /min	14.0/12.0/10.0	20.0/17.0/14.0	29.5/24.0/19.0
		Heating	At high / medium / low fan speed		m <sup>3</sup> /min	14.0/12.0/10.0	20.0/17.0/14.0	29.5/24.0/19.0
Air filter	Type				Resin net			
Sound power level	Cooling	At high / medium / low fan speed		dBA	54.0/52.0/49.0	55.0/53.0/52.0	62.0/55.0/52.0	
Sound pressure level	Cooling	At high / medium / low fan speed		dBA	36.0/34.0/31.0	37.0/35.0/34.0	44.0/37.0/34.0	
	Heating	At high / medium / low fan speed		dBA	36.0/34.0/31.0	37.0/35.0/34.0	44.0/37.0/34.0	
Refrigerant	Type/GWP				R-410A/2,087.5			
Piping connections	Liquid	OD	mm	6.35		9.52		
	Gas	OD	mm	12.7		15.9		
	Drain					VP20		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220			
Current - 50Hz	Maximum fuse amps (MFA)			A	16			
Control systems	Infrared remote control				BRC7GA53-9 / BRC7GA56			
	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52			

Contains fluorinated greenhouse gases


# 4-way blow ceiling suspended unit

Unique Daikin unit for high rooms with no false ceilings nor free floor space




- › Even rooms with ceilings up to 3.5m can be heated up or cooled down very easily without capacity loss
- › Can easily be installed in both new and refurbishment projects
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!



- › Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating and there are no air intake grilles visible
- › Optimum comfort guaranteed with automatic air flow adjustment to the required load
- › 5 different discharge angles between 0 and 60° can be programmed via the remote control



- › Standard drain pump with 720mm lift increases flexibility and installation speed

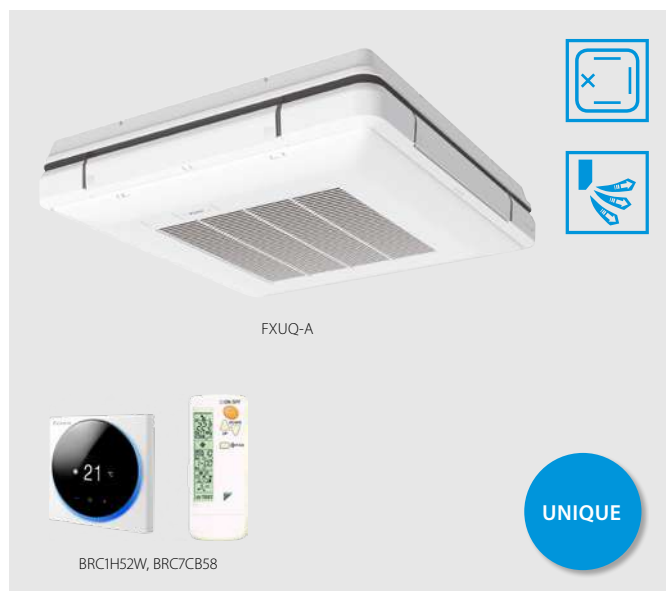

More details and final information can be found by scanning or clicking the QR codes.



FXUQ-A

Indoor Unit		FXUQ		71A	100A	
Cooling capacity	Total capacity	At high fan speed		kW	8.0	11.2
Heating capacity	Total capacity	At high fan speed		kW	9.0	12.5
Power input - 50Hz	Cooling	At high fan speed		kW	0.090	0.200
	Heating	At high fan speed		kW	0.073	0.179
Dimensions	Unit	HeightxWidthxDepth		mm	198x950x950	
Weight	Unit			kg	26	27
Casing	Material				Resin	
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed	m <sup>3</sup> /min	22.5/19.5/16.0	
		Heating	At high / medium / low fan speed	m <sup>3</sup> /min	22.5/19.5/16.0	
Air filter	Type				Resin net with mold resistance	
Sound power level	Cooling	At high / medium / low fan speed		dB(A)	58/56/54	
Sound pressure level	Cooling	At high / medium / low fan speed		dB(A)	40.0/38.0/36.0	
	Heating	At high / medium / low fan speed		dB(A)	40.0/38.0/36.0	
Refrigerant	Type/GWP				R-410A/2,087.5	
Piping connections	Liquid	OD	mm		9.52	
	Gas	OD	mm		15.9	
	Drain				I.D. 20/O.D. 26	
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220-230	
Current - 50Hz	Maximum fuse amps (MFA)			A	16	
Control systems	Infrared remote control				BRC7CB58 / BRC7CB59	
	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52	

Contains fluorinated greenhouse gases

# Concealed floor standing unit

Designed to be concealed in walls

- › Discretely concealed in the wall: only the suction and discharge grilles are visible
- › Requires very little installation space as the depth is only 200mm



- › Its low height (620 mm) enables the unit to fit perfectly beneath a window
- › High ESP allows flexible installation

More details and final information can be found by scanning or clicking the QR codes.



FXNQ-A

Indoor Unit				FXNQ	20A	25A	32A	40A	50A	63A
Cooling capacity	Total capacity	At high fan speed	kW	2.20	2.80	3.60	4.50	5.60	7.10	
Heating capacity	Total capacity	At high fan speed	kW	2.50	3.20	4.00	5.00	6.30	8.00	
Power input - 50Hz	Cooling	At high fan speed	kW	0.071			0.078	0.099	0.110	
	Heating	At high fan speed	kW	0.068			0.075	0.096	0.107	
Dimensions	Unit	HeightxWidthxDpth	mm	620/720x790x200			620/720x990x200		620/720x1,190x200	
Weight	Unit		kg	23.5			27.5		32.0	
Casing	Material Galvanised steel plate									
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed	8.0/7.20/6.4			10.5/9.50/8.5	12.5/11.0/10.0	16.5/14.5/13.0	
		Heating	At high / medium / low fan speed	8.0/7.2/6.4			10.5/9.5/8.5	12.5/11.0/10.0	16.5/14.5/13.0	
	External static pressure - 50Hz	Factory set / High	Pa	10/41.0		10/42.0	15/52.0	15/59.0	15/55.0	
Air filter	Type Resin net									
Sound power level	Cooling	At high fan speed		51			52	53	54	
		At high / medium / low fan speed	dBA	30.0/28.5/27.0			32.0/30.0/28.0	33.0/31.0/29.0	35.0/33.0/32.0	
Sound pressure level	Heating	At high / medium / low fan speed		30.0/28.5/27.0			32.0/30.0/28.0	33.0/31.0/29.0	35.0/33.0/32.0	
		Refrigerant Type/GWP R-410A/2,087.5								
Piping connections	Liquid	OD	mm	6.35					9.52	
	Gas	OD	mm	12.7					15.9	
	Drain	VP20 (I.D. 20/O.D. 26)								
Power supply	Phase/Frequency/Voltage			Hz/V 1~/50/60/220-240/220						
Current - 50Hz	Maximum fuse amps (MFA)			A 16						
Control systems	Infrared remote control			BRC4C65						
	Wired remote control			BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52						


Contains fluorinated greenhouse gases




# Floor standing unit

## For perimeter zone air conditioning

- › Unit can be installed as free standing model by use of optional back plate
- › Its low height enables the unit to fit perfectly beneath a window
- › Stylish modern casing finished in pure white (RAL9010) and iron grey (RAL7012) blends easily with any interior
- › Requires very little installation space

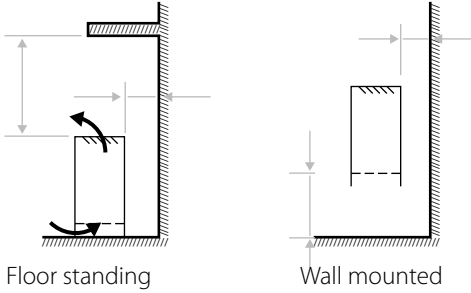

- › Wall mounted installation facilitates cleaning beneath the unit where dust tends to accumulate

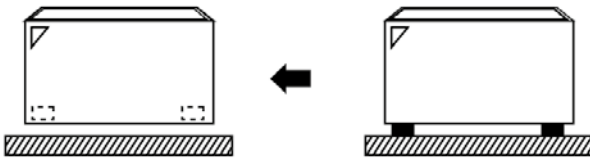

- › Wired remote control can easily be integrated in the unit

More details and final information can be found by scanning or clicking the QR codes.



FXLQ-P


Indoor Unit			FXLQ	20P	25P	32P	40P	50P	63P	
Cooling capacity	Total capacity	At high fan speed	kW	2.2	2.8	3.6	4.5	5.6	7.1	
	Heating capacity	At high fan speed	kW	2.5	3.2	4.0	5.0	6.3	8.0	
Power input - 50Hz	Cooling	At high fan speed	kW	0.05		0.09		0.11		
	Heating	At high fan speed	kW	0.05		0.09		0.11		
Dimensions	Unit	HeightxWidthxDepth	mm	600x1,000x232		600x1,140x232		600x1,420x232		
Weight	Unit		kg	27		32		38		
Fan	Air flow rate - 50Hz	Cooling	At high fan speed/ m <sup>3</sup> /min	7/6.0		8/6.0	11/8.5	14/11.0	16/12.0	
			At low fan speed							
Air filter	Type		Resin net							
Sound power level	Cooling	At high fan speed	dBA	54		57	58	59		
		At high fan speed/ At low fan speed	dBA	35/32		38/33	39/34	40/35		
Sound pressure level	Heating	At high fan speed/ At low fan speed	dBA	35/32		38/33	39/34	40/35		
Refrigerant	Type/GWP		R-410A/2,087.5							
Piping connections	Liquid	OD	mm	6.35						
	Gas	OD	mm	12.7						15.9
	Drain			O.D. 21 (Vinyl chloride)						
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220						
Current - 50Hz	Maximum fuse amps (MFA)		A	15						
Control systems	Infrared remote control		BRC4C65							
	Wired remote control		BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52							

Contains fluorinated greenhouse gases

# Low temperature hydrobox for VRV

For high efficiency space heating and cooling

- › Air to water connection to VRV for applications such as underfloor, air handling units, low temperature radiators, ...
- › Leaving water temperature range from 5°C to 45°C without electric heater
- › Super wide operating range for hot/cold water production from -20 to +43°C ambient outdoor temperature
- › Saves time on system design as all water-side components are fully integrated with direct control over leaving water temperature
- › Space saving contemporary wall mounted design
- › No gas connection or oil tank needed
- › Connectable to VRV IV heat pump and heat recovery

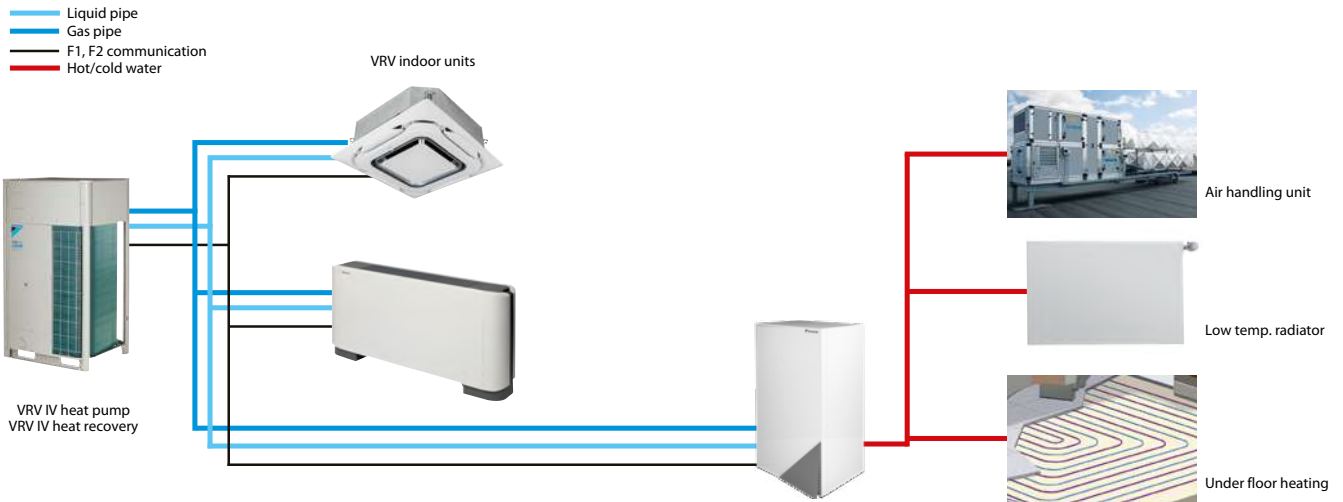

More details and final information can be found by scanning or clicking the QR codes.



HXY-A8


Indoor Unit		HXY		080A8		125A8	
Cooling capacity	Nom.	kW		8.0 (1)		12.5 (1)	
Heating capacity	Nom.	kW		9.00 (2)		14.00 (2)	
Casing	Colour	White					
	Material	Precoated sheet metal					
Dimensions	Unit	HeightxWidthxDpeth	mm				
			890x480x344				
Weight	Unit	kg					
		44.0					
Operation range	Heating	Ambient	Min.~Max.	°C			
		Water side	Min.~Max.	°C			
	Cooling	Ambient	Min.~Max.	°CDB			
		Water side	Min.~Max.	°C			
Refrigerant	Type	R-410A					
	GWP	2,087.5					
Sound pressure level	Nom.	dBA		31			
Refrigerant circuit	Gas side diameter		mm		15.9		
	Liquid side diameter		mm		9.5		
Water circuit	Piping connections diameter		inch		G 1"1/4 (female)		
Power supply	Phase / Frequency / Voltage		Hz / V		1~ / 50 / 220-240		
Current	Recommended fuses		A		6~16		

(1) Tamb 35°C - LWE 18°C (DT=5°C) | (2) DB/WB 7°C/6°C - LWC 35°C (DT=5°C) | Contains fluorinated greenhouse gases

# High temperature hydrobox for VRV

For efficient hot water production and space heating

- › Air to water connection to VRV for applications such as bathrooms, sinks, underfloor heating, radiators and air handling units
- › Leaving water temperature range from 25 to 80°C without electric heater
- › „Free“ heating and hot water production provided by transferring heat from areas requiring cooling to areas requiring heating or hot water
- › Uses heat pump technology to produce hot water efficiently, providing up to 17% savings compared to a gas boiler
- › Possibility to connect thermal solar collectors to the domestic hot water tank
- › Super wide operating range for hot water production from -20 to +43°C ambient outdoor temperature
- › Saves time on system design as all water-side components are fully integrated with direct control over leaving water temperature
- › Various control possibilities with weather dependant set point or thermostat control
- › The indoor unit and domestic hot water tank can be stacked to save space, or installed next to each other, if only limited height is available
- › No gas connection or oil tank needed
- › Connectable to VRV IV heat recovery

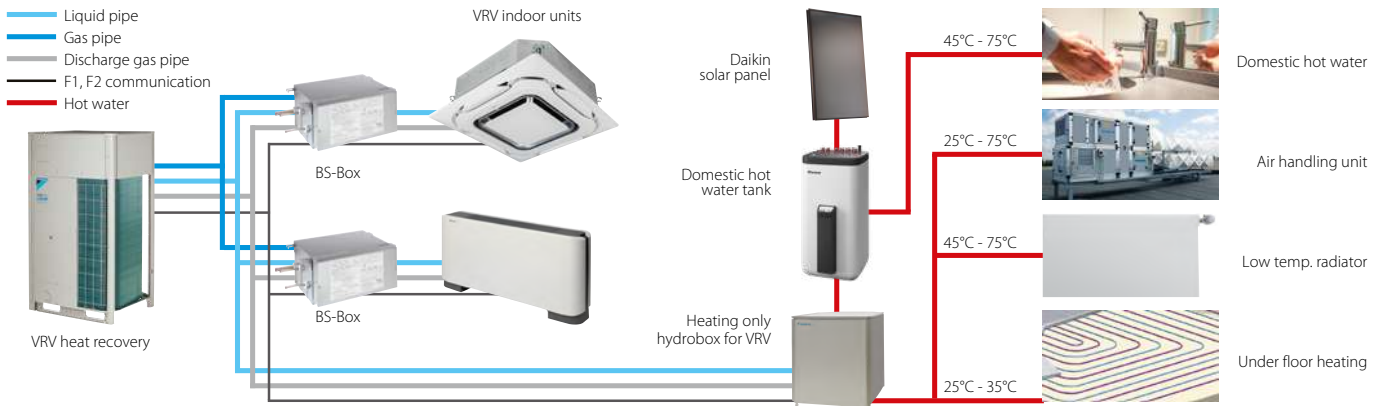

More details and final information can be found by scanning or clicking the QR codes.



HXHD-A8

Indoor Unit		HXHD		125A8		200A8		
Heating capacity	Nom.	kW		14.0		22.4		
Casing	Colour	Metallic grey						
	Material	Precoated sheet metal						
Dimensions	Unit	HeightxWidthxDepth	mm		705x600x695			
Weight	Unit	kg		92.0		147		
Operation range	Heating	Ambient	Min.~Max.	°C		-20.0~20(3)/20		
		Water side	Min.~Max.	°C		25~80.0		
	Domestic hot water	Ambient	Min.~Max.	°CDB		-20.0~43.0		
		Water side	Min.~Max.	°C		45~75		
Refrigerant	Type / GWP	R-134a/1,430						
	Charge	kg		2.00		2.60		
Sound power level	Nom.	dBA		55.0(1)		60.0(1)		
Sound pressure level	Nom.	dBA		42.0(1)/43.0(2)		46.0(1)/46.0(2)		
	Night quiet Level 1 mode	dBA		38(1)		45(1)		
Water circuit	Piping connections diameter		inch		G 1" (female)			
	Heating water system	Water volume Max. ~ Min.	l		200~20		400~20	
Power supply	Phase / Frequency / Voltage		Hz / V		1~ / 50 / 220-240		3~ / 50 / 380-415	
Current	Recommended fuses		A		20		16	

(1)Sound levels are measured at: EW 55°C; LW 65°C | (2)Sound levels are measured at: EW 70°C; LW 80°C | (3)Field setting | Contains fluorinated greenhouse gases

# Daikin Altherma ST Thermal store

Plastic domestic hot water tank with solar support

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options
- › Available in 300 and 500 liters



More details and final information can be found by scanning or clicking the QR codes.



EKHWP-B



EKHWP-PB

Accessory			EKHWP	300B	500B	300PB	500PB	54419B		
Casing	Colour		Traffic white (RAL9016) / Dark grey (RAL7011)							
	Material		Impact resistant polypropylene							
Dimensions	Unit	Width	mm	595	790	595	790			
		Depth	mm	615	790	615	790			
		Height	mm	1,646	1,658	1,646	1,658			
Weight	Unit	Empty	kg	53	76	56	82	71		
		Water volume	L	294	477	294	477			
Tank	Material		Polypropylene							
	Maximum water temperature		°C	85						
	Insulation	Heat loss		kWh/24h	1.50	1.70	1.50	1.70		
			Energy efficiency class		B					
	Standing heat loss		W	64	72	64	72			
	Storage volume		L	290	393	290	393			
	Heat exchanger	Domestic hot water	Quantity		1					
Tube material				Stainless steel (DIN 1.4404)						
Face area			m <sup>2</sup>	5.60	5.80	5.60	5.90	5.80		
Internal coil volume			L	27.80	28.90	27.80	29	28.90		
Charging		Operating pressure		bar	10					
			Quantity		1					
		Tube material		Stainless steel (DIN 1.4404)						
		Face area	m <sup>2</sup>	2.66	3.70	2.66	3.70	1.95		
		Internal coil volume	L	12.90	18.10	12.90	18.10	10		
		Operating pressure		bar	6					
Auxiliary solar heating	Tube material			-	Stainless steel (DIN 1.4404)	-	Stainless steel (DIN 1.4404)			
		Face area	m <sup>2</sup>	-	0.76	-	0.76			
		Internal coil volume	L	-	3.90	-	3.90			
		Operating pressure	bar	-	3	-	3			

# Solar collector

## Thermal solar collector for hot water production

- › Solar collectors can produce up to 70% of the energy needed for hot water production - a major cost saving
- › Horizontal solar collector for domestic hot water production
- › Vertical solar collector for domestic hot water production
- › High efficiency collectors transfer all the short-wave solar radiation into heat as a result of their highly selective coating
- › Easy to install on roof tiles
- › Can be used for drain-back and pressurised applications


More details and final information can be found by scanning or clicking the QR codes.



EKSV-P



EKSH-P

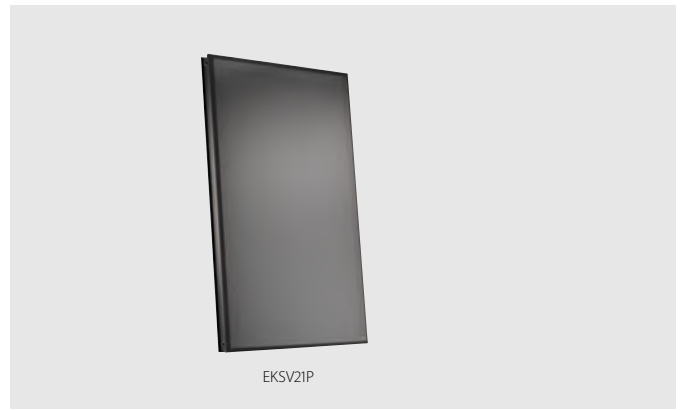

EKSV21P

Accessory				EKSV21P	EKSV26P	EKSH26P
Mounting				Vertical		Horizontal
Dimensions	Unit	HeightxWidthxDepth	mm	2,000x1,006x85	2,000x1,300x85	1,300x2,000x85
Weight	Unit			33	42	
Volume			L	1.30	1.70	2.10
Surface	Outer			2.01	2.60	
	Aperture			1,800	2,360	
	Absorber			1.80	2.36	
Coating	Micro-therm (absorption max. 96%, Emission ca. 5% +/-2%)					
Absorber	Harp-shaped copper pipe register with laser-welded highly selective coated aluminium plate					
Glazing	Single pane safety glass, transmission +/- 92%					
Allowed roof angle	Min. ~ Max.			15 ~ 80		
Operating pressure	Max.			6		
Stand still temperature	Max.			192		
Thermal performance	Collector efficiency ( $\eta_{col}$ )			53		
	Zero loss collector efficiency $\eta_0$			0.71		
	Heat loss coefficient a1	W/m <sup>2</sup> .K		4,300		
	Temperature dependence of the heat loss coefficient a2	W/m <sup>2</sup> .K <sup>2</sup>		0.006		
	Thermal capacity			4.90	6.50	

## EKSRPS4A/EKSRDS2A

# Pump station

- › Save energy and reduce CO<sub>2</sub> emissions with a solar system for domestic hot water production
- › Pump station connectable to drain-back solar system
- › Pump station and control provide the transfer of solar heat to the domestic hot water tank

More details and final information can be found by scanning or clicking the QR codes.



EKSRPS4A



EKSRDS2A



EKSRPS4A

Accessory				EKSRPS4A	EKSRDS2A
Mounting				On side of tank	On wall
Dimensions	Unit	HeightxWidthxDepth	mm	815x142x230	410x314x154
Weight	Unit			6.40	6
Operation range	Ambient temperature	Min. ~ Max.	°C	5 ~ 40	- ~ 40
Operating pressure	Max.			-	6
Stand still temperature	Max.			85	120
Control	Type	Digital temperature difference controller with plain text display			
	Power consumption			2	5
Sensor	Solar panel temperature sensor	Pt1000			
	Storage tank sensor	PTC			-
	Return flow sensor	PTC			-
	Feed temperature and flow sensor	Voltage signal (3.5V DC)			-
Power supply	Phase/Frequency/Voltage	Hz/V		1 ~/50/230	-/50/230
Power supply intake	Indoor unit				
Auxiliary	Solpump	W		37.3	23
	Annual auxiliary electricity consumption Qaux	kWh		92.1	89
	Solstandby	W		2.00	5.00




# Biddle air curtains

Biddle air curtains provide highly efficient solutions for retailers and consultants to combat the issue of climate separation across their outlet or office doorway.

## Benefits of Biddle air curtains

- > Connectable to ERQ and VRV units
- > Unified range for R-32 and R-410A refrigerant
- > payback period of less than 1.5 years compared to installing an electric air curtain

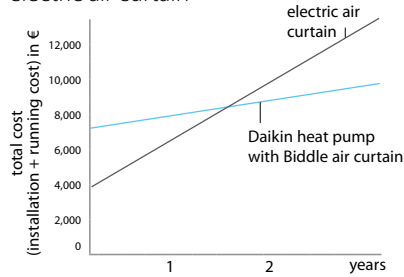

### 3 different models to choose from:



Free-hanging model (F):  
easy wall mounted installation




Cassette model (C):  
mounted into a false ceiling leaving only the decoration panel visible



Recessed model (R):  
neatly concealed in the ceiling

### Select your Biddle air curtain range

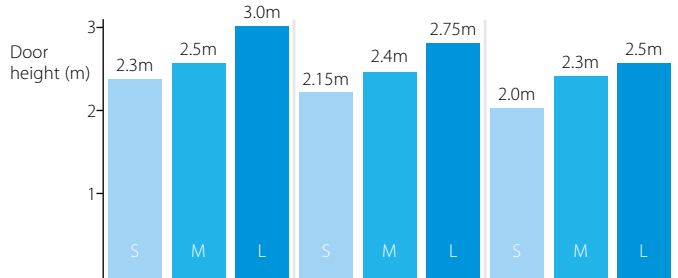

Installation condition

#### Favourable

ex: covered shopping mall or revolving door entrance


#### Normal

ex: little direct wind, no opposite open doors, building with ground floor only

#### Unfavourable



ex: location at a corner or square, multiple floors and/or open stairwell

### Biddle air curtain nomenclature

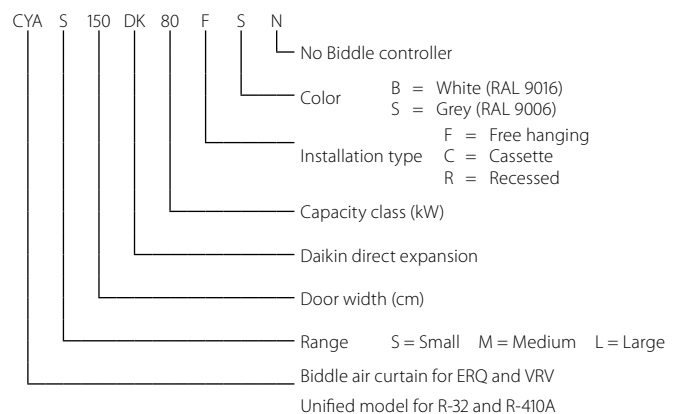

# Biddle air curtain

- › Connectable to ERQ and VRV DX outdoor units
- › Unified model for R-32 and R-410A refrigerant
- › Free-hanging model (F): easy wall mounted installation
- › Cassette model (C): mounted into a false ceiling leaving only the decoration panel visible
- › Recessed model (R): neatly concealed in the ceiling
- › A payback period of less than 1.5 years compared to installing an electric air curtain
- › Provides virtually free air curtain heating via recovered heat from indoor units in cooling mode (in case of VRV heat recovery)
- › Easy and quick to install at reduced costs since no additional water systems, boilers and gas connections are required

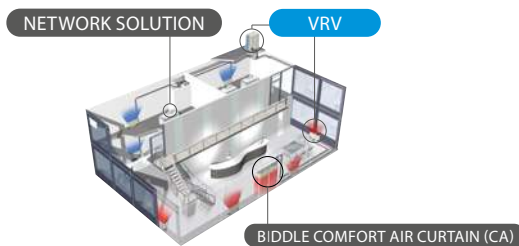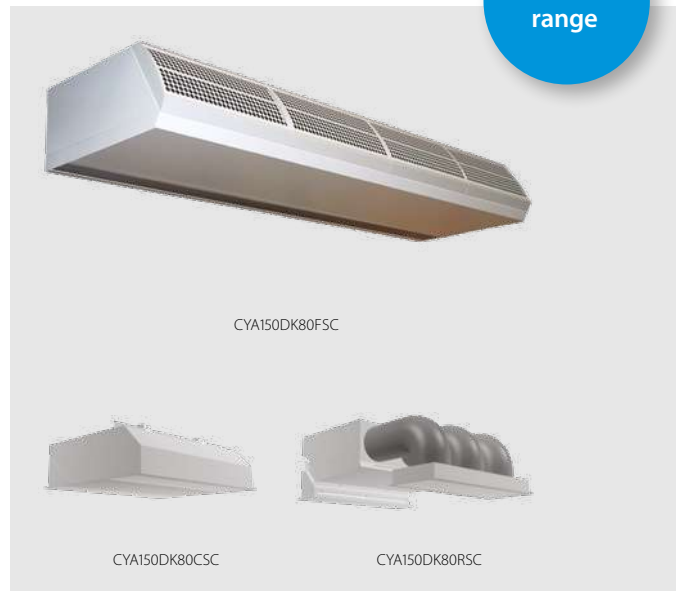

More details and final information can be found by scanning or clicking the QR codes.



CYA

				Small				Medium			
				CYAS100DK80*	CYAS150DK80*	CYAS200DK100*	CYAS250DK140*	CYAM100DK80*	CYAM150DK80*	CYAM200DK100*	CYAM250DK140*
Heating capacity	Speed 3		kW	6,94	8,6	10,9	15,2	8,65	10,5	12,5	18,6
Power input	Fan only	Nom.	kW	0,14	0,21	0,28	0,36	0,27	0,40	0,53	0,67
	Heating	Nom.	kW	0,14	0,21	0,28	0,36	0,27	0,40	0,53	0,67
Delta T	Speed 3		K	17,7	14,6	13,9	15,5	16	12,9	12,7	13,8
Casing	Colour	B: RAL9016 / S: RAL9006				B: RAL9016 / S: RAL9006					
Dimensions	Unit	Height F/C/R	mm	270/270/270				270/270/270			
		Width F/C/R	mm	1000/1000/1048	1500/1500/1548	2000/2000/2048	2500/2500/2548	1000/1000/1048	1500/1500/1548	2000/2000/2048	2500/2500/2548
		Depth F/C/R	mm	590/821/561				590/821/561			
Required ceiling void >		mm	420				420				
Door height	Max.		m	2,3				2,5			
Door width	Max.		m	1	1,5	2	2,5	1	1,5	2	2,5
Weight	Unit		kg	56/59/61	66/83/88	83/102/108	107/129/137	57/68/66	73/88/93	94/111/117	108/136/144
Fan		Speed 3	m <sup>3</sup> /h	1164	1746	2328	2910	1605	2408	2910	4013
Sound pressure level	Heating	Speed 3	dB(A)	47	49	50	51	50	51	53	54
Refrigerant	GWP	675/2087,5				675/2087,5					
	Type	R32/R410A				R32/R410A					
Piping connections	Liquid	OD	mm	6,35				6,35			
	Gas	OD	mm	12,7				12,7			
Air filter	Type	Vacuum cleanable filter G1									
Power supply	Frequency		Hz	50Hz				50Hz			
	Voltage		V	230V				230V			
	Maximum fuse amps (MFA)		A	16				16			

				Large							
				CYAL100DK125*	CYAL150DK200*	CYAL200DK250*	CYAL250DK250*				
Heating capacity	Speed 3		kW	14,4	21,5	27,6	29,7				
Power input	Fan only	Nom.	kW	0,48	0,72	0,96	1,20				
	Heating	Nom.	kW	0,48	0,72	0,96	1,20				
Delta T	Speed 3		K	13,8	13,7	13,2	11,4				
Casing	Colour	B: RAL9016 / S: RAL9006									
Dimensions	Unit	Height F/C/R	mm	370/370/370							
		Width F/C/R	mm	1000/1000/1048	1500/1500/1548	2000/2000/2048	2500/2500/2548				
		Depth F/C/R	mm	774/1105/745							
Required ceiling void >		mm	520								
Door height	Max.		m	3							
Door width	Max.		m	1	1,5	2	2,5				
Weight	Unit		kg	76/81/83	100/118/141	126/151/155	157/190/196				
Fan		Speed 3	m <sup>3</sup> /h	3100	4650	6200	7750				
Sound pressure level	Heating	Speed 3	dB(A)	53	54	56	57				
Refrigerant	GWP	675/2087,5									
	Type	R32/R410A									
Piping connections	Liquid	OD	mm	9,52							
	Gas	OD	mm	15,9	19,1	19,1	19,1				
Air filter	Type	Vacuum cleanable filter G1									
Power supply	Frequency		Hz	50Hz							
	Voltage		V	230V							
	Current	Maximum fuse amps (MFA)	A	16							

**R-32**

**R-32**

	VRV 5 heat recovery		VRV 5 heat pump	
	REYA8-20 REMA5	2 module systems	RXYA 8~20 RYMA5	2-module systems
<b>Kits</b>				
<b>Multi-module connection kit (obligatory)</b> - Connects multiple modules into a single refrigerant system		2 modules: BHFQ23P907A		2 modules: BHFA22P1007
<b>Extended level difference kit</b> - Allows outdoor unit to be more than 50m above indoor units	Special order unit			
<b>Central drain pan kit</b> - Installs onto the underside of the outdoor unit and collects drain water from all bottom plate outlets into a single outlet. In cold areas should be heated by a field-supplied heater to prevent drain water from freezing in the drain pan.				
<b>Bottom plate heater</b> - To keep drain holes ice-free in extreme weather conditions (one per outdoor unit needed)	5/8-12: EKBPH012TA 14-20: EKBPH020TA	1 kit per system	5/8-12: EKBPH012TA 14-20: EKBPH020TA	1 kit per system
<b>Adapters</b>				
<b>External control adapter for outdoor unit</b> - Allows to activate Low Noise Operation and three levels of demand control, limiting power consumption via external dry contacts. Connects to the F1/F2 communication line and requires power supply from an indoor unit, BSVQ box, or VRV-WIII outdoor unit.	DTA104A53/61/62 For installation into an indoor unit: exact adapter type depends on type of indoor unit. For 14-20 HP the demand PCB mounting plate is required (2). See Options & Accessories of indoor units			
<b>KRC19-26</b> Mechanical cool/heat selector – allows to switch an entire Heat Pump system, or one BS-box of a Heat Recovery system between cooling, heating and fan only. Connects to the A-B-C terminals of the outdoor unit / BS-box.			• (3)	
Cool/heat selector PCB (required to connect KRC19-26)			EKBRP2A81	
<b>Others</b>				
<b>EKCHSC</b> - Cool/heat selector cable				
<b>EKPCCAB4</b> VRV configurator				
<b>DTA109A51</b> DIII-net expander adapter	• (2) (4)		• (2) (4)	
<b>BPMKS967A2/A3</b> Branch provider (for connection of 2/3 RA indoor units)				
<b>EKDK04</b> Drain plug kit				
<b>EKLN140A</b> Sound enclosure				

	VRV IV S-series			
	RXYSCQ-TV1	RXYSQ4-6TV9	RXYSQ4-6TY9	RXYSQ8-12TY1
<b>Kits</b>				
<b>Multi-module connection kit (obligatory)</b> - Connects multiple modules into a single refrigerant system				
<b>Extended level difference kit</b> - Allows outdoor unit to be more than 50m above indoor units				
<b>Central drain pan kit</b> - Installs onto the underside of the outdoor unit and collects drain water from all bottom plate outlets into a single outlet. In cold areas should be heated by a field-supplied heater to prevent drain water from freezing in the drain pan.				
<b>Bottom plate heater</b> - To keep drain holes ice-free in extreme weather conditions (one per outdoor unit needed)				
<b>Adapters</b>				
<b>External control adapter for outdoor unit</b> - Allows to activate Low Noise Operation and three levels of demand control, limiting power consumption via external dry contacts. Connects to the F1/F2 communication line and requires power supply from an indoor unit, BSVQ box, or VRV-WIII outdoor unit.	DTA104A53/61/62 For installation into an indoor unit: exact adapter type depends on type of indoor unit. See Options & Accessories of indoor units			
<b>KRC19-26</b> Mechanical cool/heat selector – allows to switch an entire Heat Pump system, or one BS-box of a Heat Recovery system between cooling, heating and fan only. Connects to the A-B-C terminals of the outdoor unit / BS-box.		• (3)	• (3)	
Cool/heat selector PCB (Required to connect KRC19-26)		EBRP2B		
<b>EKCHSC</b> Cool/heat selector cable (Required to connect KRC19-26)			•	
<b>EKPCCAB4</b> VRV configurator	•	•	•	•
<b>DTA109A51</b> DIII-net expander adapter				
<b>BPMKS967A2/A3</b> Branch provider (for connection of 2/3 RA indoor units)	•	•	•	•
<b>EKDK04</b> Drain plug kit		•	•	

- (1) For installations with special requirements towards fire regulations, the insulation material can be replaced using kits EKHBFO1 and EKHBFO2. The kits contain insulation material that complies with EN13501-1:B-S3,dO and BS476-7 (class 1)
- (2) Requires mounting plate EKSB26B2\* for 14~20HP
- (3) Requires installation box KJB111A
- (4) Only possible to install 1 adapter PCB



**R-32**

VRV S-series		VRV IV+ heat recovery		VRV IV+ heat pump		VRV IV C-series	
RXYS4-6AV1/AY1	RXYS8-12AAY1	REYQ8-20 REMQ5	2/3 module systems	RYYQ8-20 RYMQ8-20 RXYQ8-20	2/3 module systems	RXYLQ RXMLQ	2/3 module systems
			2 modules: BHFQ23P907A 3 modules: BHFQ23P1357		2 modules: BHFQ22P1007 3 modules: BHFQ22P1517		2 modules: BHFQ22P1007 3 modules: BHFQ22P1517
EKBPH250D		5/8-12: EKBPH012T7A 14-20: EKBPH020T7A		8-12: EKBPH012T7A 14-20: EKBPH020T7A			
DTA104A53/61/62 For installation into an indoor unit: exact adapter type depends on type of indoor unit. See Options & Accessories of indoor units		DTA104A53/61/62 For installation into an indoor unit: exact adapter type depends on type of indoor unit. For 14-20 HP the demand PCB mounting plate is required (2). See Options & Accessories of indoor units					
• (3)	Standard on unit			• (3)	1 kit per system (3)	• (3)	1 kit per system (3)
Standard on unit	Standard on unit			BRP2A81	1 kit per system	BRP2A81	1 kit per system
•				•		•	
				•		•	
•							

VRV IV i-series SB.RKXYQ			
RDXYQ5	RDXYQ8	RKXYQ5	RKXYQ8
EKDPH1RDX	EKDPH1RDX		

DTA104A53/61/62  
For installation into an indoor unit: exact adapter type depends on type of indoor unit.  
See Options & Accessories of indoor units

		• (3)	• (3)
			BRP2A81
		•	
		•	•

		VRV III-Q Heat Pump Replacement VRV	VRV IV-Q Heat Pump Replacement VRV	
		RQYQ 140P	RXYQQ8-20	2/3-module systems
Kits	<b>Multi-module connection kit (obligatory)</b> Connects multiple modules into a single refrigerant system			2 modules: BHFQ22P1007 3 modules: BHFQ22P1517
	<b>Central drain pan kit</b> - Installs onto the underside of the outdoor unit and collects drain water from all bottom plate outlets into a single outlet. In cold areas should be heated by a field-supplied heater to prevent drain water from freezing in the drain pan.	KWC26B160		
	<b>Bottom plate heater</b> - To keep drain holes ice-free in extreme weather conditions (one per outdoor unit needed)		8-12: EKBPH012T7A 14-20: EKBPH020T7A	
Adapters	<b>External control adapter for outdoor unit</b> - Allows to activate Low Noise Operation and three levels of demand control, limiting power consumption via external dry contacts. Connects to the F1/F2 communication line and requires power supply from an indoor unit*, BSVQ box, or VRV-WIII outdoor unit.	DTA104A53/61/62 For installation into an indoor unit: exact adapter type depends on type of indoor unit. For 14-20 HP the demand PCB mounting plate is required (2). See Options & Accessories of indoor units		
	<b>KRC19-26</b> Mechanical cool/heat selector – allows to switch an entire Heat Pump system, or one BS-box of a Heat Recovery system between cooling, heating and fan only. Connects to the A-B-C terminals of the outdoor unit / BS-box.	● (3)	● (3)	1 kit per system
	<b>BRP2A81</b> Cool/heat selector PCB (required to connect KRC19-26 to VRV IV outdoor)		●	1 kit per system
Others	<b>EKPCCAB4</b> VRV configurator		●	
	<b>DTA109A51</b> DIII-net expander adapter			

- (1) For installations with special requirements towards fire regulations, the insulation material can be replaced using kits EKHBFCQ1 and EKHBFCQ2. The kits contain insulation material that complies with EN13501-1:B-S3,dO and BS476-7 (class 1)
- (2) Requires mounting plate EKSB26B2\* for 14~20HP
- (3) Requires installation box KJB111A
- (4) Only possible to install 1 adapter PCB

## Refnets & branch selector boxes

		Refnet Joints			
		Capacity index < 200	Capacity index 200 ≤ x < 290	Capacity index 290 ≤ x < 640	Capacity index > 640
Refnets	Imperial-size connections for heat recovery pump (2-pipe)	For all R-410A VRV: KHRQ22M20T For all R-410A+R-32 VRV: KHRQ22M20TA	KHRQ22M29T9	For all R-410A VRV: KHRQ22M64T For all R-32 VRV: KHRA22M65T	KHRQ22M75T
	Imperial-size connections for heat recovery pump (2-pipe) (1)	KHRQ23M20T	KHRQ23M29T	KHRQ23M64T	KHRQ23M75T
Options for Branch selector boxes (BS box) (only for connection with VRV heat recovery system)	Closed pipe kit				
	Joint kit				
	Quiet kit				
	Duct connection: To connect extraction of BSSV boxes in serial				
	Drain pump kit				

- (1) For metric size connections, contact your local sales responsible
- (2) not applicable for SVIA25A

VRV III-Q Heat Recovery Replacement VRV		VRV-W IV Water-cooled VRV		
RQEQ 140~212		RWEYQ8-14	Heat Pump application 2/3-module systems	Heat Recovery application 2/3-module systems
	2/3 modules: BHFP26P36C 4 modules: BHFP26P84C		BHFQ22P1007 / BHFQ22P1517 (1)	BHFQ23P907 / BHFQ23P1357 (1)

DTA104A53/61/62

Installation in the RWEYQ outdoor unit possible. For installation in indoor units, use appropriate type (DTA104A53/61/62) for particular indoor unit. See Options & Accessories of indoor units

		• (for H/P only) (3)	1 kit per system	
		• (for H/P only)	1 kit per system	
		•	•	•
		•	•	•

**R-32**

**R-32**

**R-410A**

Refnet Headers			VRV 5 Heat Recovery Branch Selector (BSSV) boxes	VRV 5 Heat Pump optional Shut off valve (SV) boxes	VRV IV Heat Recovery Branch Selector (BS) boxes	
Capacity index	Capacity index	Capacity index	Multi port	Single & multi port	1-port	Multi port
< 290	290 ≤ x < 640	> 640	BS-A14AV1B	SV-A	BS1Q-A	BS-Q14AV1B
KHRQ22M29H	For all R-410A VRV: KHRQ22M64H For all R-32 VRV: KHRA22M65H	KHRQ22M75H				
KHRQ23M29H	KHRQ23M64H	KHRQ23M75H				
				Accessories in the box		KHFP26A100C
			EKBSJK	EKBSJK (2)		KHRP26A250T
					EKBSVQLNP	4 port: KDDN26A4 6-8 port: KDDN26A8 10-12 port: KDDN26A12 16 port: KDDN26A16
			EKBSDCK	EKBSDCK		
			K-KDU303KVE	K-KDU303KVE		

		Ceiling mounted cassette units		
		Round flow (800x800)	4-way (600x600)	Corner (1-way)
		FXFA-A	FXZA-A	FXKA-A
Panels	Decoration panel (obligatory for cassette units, optional for others, rear panel for FXLQ)	Standard panels: BYCQ140E (white) / BYCQ140EW (full white)(3) / BYCQ140EB (black) Auto cleaning (5)(6): BYCQ140EGF (white) / BYCQ140EGFB (black) Designer panels: BYCQ140EP (white) / BYCQ140EPB (black)	BYFQ60C4W1W (white panel) (19) BYFQ60C4W1S (grey panel) (19) BYFQ60B3W1 (standard panel) (20)	20-32: BYK32G 40-63: BYK63G
	Panel spacer for reducing required installation height		KDBQ44B60 (Standard panel)	
	Sealing kit for 3- or 2-directional air discharge		BDBHQ44C60 (white & grey panel)	
	Sensor kit	KDBHQ56B140 (7) BRYQ140B (white panels) BRYQ140BB (black panels) BRYQ140C (white designer panel) BRYQ140CB (black designer panel)	BRYQ60A3W (white) BRYQ60A3S (grey)	
Individual control systems	Infrared remote control (incl. receiver)	BRC7FA532F (white panels) (7)(15) BRC7FA532FB (black panels) (7)(15) BRC7FB532F (white designer panel) (7)(15) BRC7FB532FB (black designer panel) (7)(15)	BRC7F530W (9) (10) (white panel) BRC7F530S (9) (10) (grey panel) BRC7EB530W (9) (10) (standard panel)	
	BRP069CS1 - Onecta app	●	●	●
	Madoka BRC1H52W (White) / BRC1H52S (Silver) / BRC1H52K (Black) User-friendly wired remote controller with premium design	● (mandatory)	● (mandatory)	● (mandatory)
	BRC1E53A/B/C - Wired remote control with full-text interface and back-light			
	BRC1D52 (4) - Standard wired remote control with weekly timer			
Centralised control systems	DCC601A51 - intelligent Tablet Controller	●	●	●
	DCS601CS1 (12) - intelligent Touch Controller	●	●	●
	DCS302CS1 (12) - Central remote controller	●	●	●
	DCS301B51 (12) (13) - Unified ON/OFF controller	●	●	●
Building Management System & Standard protocol interfaces	for individual control			
	EKMBPP1 - Modbus interface for monitoring and control (check compatibility)	●	●	●
	RTD-10 - Modbus interface for infrastructure cooling	●	●	●
	RTD-20 - Modbus interface for retail	●	●	●
	RTD-HO - Modbus interface for hotel	●	●	●
	KLIC-DI_V2 - KNX Interface	●	●	●
	for central control			
	DCM601B51 - intelligent Touch Manager	●	●	●
	DGE601A51 - Edge adapter for connection to Daikin Cloud Plus	●	●	●
	DGE602A51 - Edge lite adapter for connection to Daikin Cloud Plus	●	●	●
	EKMBDXB - Modbus interface	●	●	●
	DCM010A51 - Daikin PMS interface	●	●	●
DM5502A51 - BACnet Interface	●	●	●	
DM5504B51 - LonWorks Interface	●	●	●	
Filters	Auto cleaning filter	see decoration panel		
	UV Streamer kit (purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy indoor environment)	UV Streamer kit	BAEF125AWB (22)	
		Replacement filter	BAF55A125	
	High efficiency filter	ePM10 60% BAF552AA160 (23) (BAF552AA160-5: box of 5 filters) (BAF552AA160-10: box of 10 filter)		
	Replacement long life filter, non-woven type	KAF5511D160	KAF441C60	
Pre-filter Filter chamber				
Wiring and sensors	KRCS - External wired temperature sensor	KRCS01-5B	KRCS01-6B	KRCS01-6B
	K.RSS - External wireless temperature sensor	SB.K.RSS_RFC (EKEWTSC-2 + K.RSS)	SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)	SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)
Adapters	Adapter with 2 output signals (Compressor / Error, Fan output)	KRP1BA58 (2)(7)	ERP02A50 (2)	ERP02A50 (2)
	Adapter with 4 output signals (Compressor / Error, Fan, Aux. heater, Humidifier output)	EKRP1C12 (2)(7)	EKRP1C14 (2)	EKRP1C14 (2)
	Adapter for centralised external monitoring/control via dry contacts and setpoint control via 0-140Ω (for dedicated indoor)	KRP4A53 (2)(7)	KRP4A53 (2)	KRP4A53 (2)
	Adapter for external central monitoring/control (controls 1 entire system)		KRP2A52	KRP2A52
	Adapter for keypad and/or window contact connection (2)(11)	BRP7A53	BRP7A53 (2)	BRP7A51 (2)
	Adapter for multi-tenant applications (24VAC PCB power supply interface)	DTA114A61	DTA114A61	DTA114A61
	External control adapter for outdoor unit (installation on indoor unit)			
	Installation box / Mounting plate for adapter PCBs (For units where there is no space in the switchbox)	KRP1H98A (7) KRP1BC101	KRP1BC101	KRP1BC101 / KRP4B93
Wiring kit for Remote ON/OFF or Forced OFF	Standard	Standard	Standard	
Relay PCB for output signal of refrigerant sensor	ERP01A51 (2)	ERP01A50 (2)	ERP01A50 (2)	
Others	Drain pump kit	Standard	Standard	Standard
	Multi zoning kit (for detailed model code overview refer to multizoning argue card in this catalogue)			
	Fresh air intake kit (direct installation type)	KDDP55C160-1 + KDDP55D160-2 (7)(8)	KDDQ44XA60	
	Air discharge adapter for round duct			
	L-type piping kit			
Insulation kit for high humidity				

(1) pump station is necessary for this option  
 (2) Installation box is necessary for these adapters  
 (3) The BYCQ140EW has white insulation. Be informed that formation of dirt on white insulation is visibly stronger and that it is consequently not advised to install the BYCQ140EW decoration panel in environments exposed to concentrations of dirt\*  
 (4) Not recommended because of the limitation of the functions  
 (5) To be able to control the BYCQ140EGF(B) the controller BRC1E\* or BRC1H\* is needed  
 (6) The BYCQ140EGF(B) is not compatible with Multi and Split Non-Inverter Outdoor units  
 (7) Option not available in combination with BYCQ140EGF(B)  
 (8) Both parts of the fresh air intake are needed for each unit  
 (9) Cannot be combined with sensor kit  
 (10) Independently controllable flaps function not available  
 (11) Only possible in combination with BRC1H\* / BRC1E\*  
 (12) When fixing box is required, use KJB212A, KJB311A or KJB411A depending on the size of the controller

Concealed ceiling units (duct units)			Ceiling suspended units		Wall mounted units
Slim	Medium ESP	High ESP	1-way blow	4-way blow	
FXDA-A	FXSA-A	FXMA-A	FXHA-A	FXUA-A	FXAA-A
				KDBHP49B140 + KDBTP49B140	
				BRE49B2F	
BRC4C65	BRC4C65	BRC4C65	BRC7GA53-9	BRC7C58	BRC7EA630
● (mandatory)	● (mandatory)	● (mandatory)	● (mandatory)	● (mandatory)	● (mandatory)
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
15-32: BAE20A62 40-50: BAE20A82 63: BAE20A102					
		Replacement filters for 200~250: BAFM503A250 (65%) (21) BAFH504A250 (90%) (21)			
		200~250: BAFL502A250 (21)	32: KAF501B56 50~63: KAF501B80 71~100: KAF501B160	KAFP551K160	
		200~250: BAFL501A250 (21) 200~250: BDD500B250			
KRCS01-6B	KRCS01-6B	KRCS01-6B	KRCS01-6B	KRCS01-6B	KRCS01-6B
SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)	SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)	SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)	SB.K.RSS_FDA (EKEWTSC-1 + K.RSS) KRP1BA58	SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)	SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)
ERP02A50 (2)	EKRP1C14 (2)	EKRP1C14 (2)		EKRP1C14 (2)	ERP02A50 (2)
KRP4A54-9 (2)	KRP4A52(2)	50~125: KRP4A52 200~250: KRP4A51	KRP4A52 (2)	KRP4A53 (2)	KRP4A51 (2)
KRP2A53 (2)	KRP2A51(2)	KRP2A51	KRP2A62		KRP2A61(2)
BRP7A54	BRP7A51	BRP7A51	BRP7A52 (2)	BRP7A53	BRP7A51 (2)
DTA114A61	DTA114A61	DTA114A61	DTA114A61-9	DTA114A61-9	DTA114A61
DTA104A53	DTA104A61 (2)	DTA104A61 (2)	DTA104A61	DTA104A61	DTA104A51(2) / DTA104A61(2)
KRP1BC101	KRP1BC101	KRP1BC101	KRP1D93A/KRP4B93	KRP1B97 / KRP1C97	KRP4A93
	Standard	Standard	standard	standard	Standard
ERP01A51 (2)	ERP01A50 (2)	ERP01A50	ERP01A51 (2)	ERP01A51 (2)	ERP01A51 (2)
Standard	Standard	200~250: BDU510B250VM	32-50-63: KDU50R63 100: KDU50R160		K-KDU572KVE
	15~32: KDAP25A36A 40~50: KDAP25A56A 63~80: KDAP25A71A 100~125: KDAP25A140A 140: -	50~80: KDAJ25K71 100~125: KDAJ25K140 200~250: -			
			32: KHFP5M35 50~63: KHFP5N63 71~100: KHFP5N160		

KDT25N32 / KDT25N50 / KDT25N63

(13) Option KEK26-1A (Noise filter) is required when installing DCS301B51

(14) Wire harness EKEWTSC is necessary

(15) The active airflow circulation function is not available for this controller.

(16) Up to 2 adaptor PCBs can be installed per installation box

(17) Only one installation box can be installed per indoor unit

(18) VRV R-32 indoor units cannot be connected to this controller

(19) The BYFQ60C4\* R-32 panels can be connected to R-410A indoor units with wire harness EKRS22

(20) Wire harness EKRS23 is necessary

(21) Filter chamber needed

(22) Only possible in combination with BYCQ140E and BYCQ140EW. Cannot be combined with other filters, chambers, fresh air intake kits or air discharge outlet sealing member kit

(23) Only possible in combination with BYCQ140E/EW/EB. Cannot be combined with other filters, chambers, fresh air intake kits or discharge outlet sealing member kit

Options & accessories -



Ceiling mounted cassette units

		Round flow (800x800)	4-way (600x600)	2-way blow	Corner (1-way blow)	
		FXFQ-B	FXZQ-A	FXCQ-A	FXKQ-A	
Panels	Decoration panel (obligatory for cassette units, optional for others, rear panel for FXLQ)	Standard panels: BYCQ140E (white) / BYCQ140EW (full white)(3) / BYCQ140EB (black) Auto cleaning (5)(6): BYCQ140EGF (white) / BYCQ140EGFB (black) Designer panels: BYCQ140EP (white) / BYCQ140EPB (black)	BYFQ60C2W1W (white panel) BYFQ60C2W1S (grey panel) BYFQ60B3W1 (standard panel)	20~40: BYBCQ40H 50~63: BYBCQ63H 80~125: BYBCQ125H	20-32: BYK32G 40-63: BYK63G	
	Panel spacer for reducing required installation height		KDBQ44B60 (Standard panel)			
	Sealing kit for 3- or 2-directional air discharge	KDBHQ56B140 (7)	BDBHQ44C60 (white & grey panel)			
	Sensor kit	BRYQ140B (white panels) BRYQ140BB (black panels) BRYQ140C (white designer panel) BRYQ140CB (black designer panel)	BRYQ60A2W (white) BRYQ60A2S (grey)			
Individual control systems	Infrared remote control including receiver	BRC7FA532F (white panels) (7)(15) BRC7FA532FB (black panels) (7)(15) BRC7FB532F (white designer panel) (7)(15) BRC7FB532FB (black designer panel) (7)(15)	BRC7F530W (9) (10) (white panel) BRC7F530S (9) (10) (grey panel) BRC7EB530W (9) (10) (standard panel)	BRC7C52		
	BRP069C51 - Onecta app					
	Madoka BRC1H52W (White) / BRC1H52S (Silver) / BRC1H52K (Black) User-friendly wired remote controller with premium design	•	•	•	•	
	BRC1E53A/B/C - Wired remote control with full-text interface and back-light BRC1D52 (4) - Standard wired remote control with weekly timer	• • (15)	• •	• •	• •	
Centralised control systems	DCC601A51 - Intelligent Tablet Controller	•	•	•	•	
	DCS601C51 (12) - intelligent Touch Controller	•	•	•	•	
	DCS302C51 (12) - Central remote control	•	•	•	•	
	DCS301B51 (12) (13) - Unified ON/OFF control	•	•	•	•	
Building Management System & Standard protocol interfaces for individual control	EKMPPP1 - Modbus interface for monitoring and control	•	•	•	•	
	RTD-10 - Modbus interface for infrastructure cooling	•	•	•	•	
	RTD-20 - Modbus interface for retail	•	•	•	•	
	RTD-HO - Modbus interface for hotel	•	•	•	•	
	KLIC-DI_V2 - KNX Interface	•	•	•	•	
	DCM601B51 - intelligent Touch Manager	•	•	•	•	
	DGE601A51 - Edge adapter for connection to Daikin Cloud Plus	•	•	•	•	
	DGE602A51 - Edge lite adapter for connection to Daikin Cloud Plus	•	•	•	•	
	EKMDBXB - Modbus interface	•	•	•	•	
	DCM010A51 - Daikin PMS interface	•	•	•	•	
	DMS502A51 - BACnet Interface	•	•	•	•	
	DMS504B51 - LonWorks Interface	•	•	•	•	
	Filters	Auto cleaning filter	see decoration panel			
		UV Streamer kit (purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy indoor environment)	UV Streamer kit Replacement filter	BAEF125AWB (22) BAF55A125		
High efficiency filter		BAF552AA160 ePM10 60% (26) (BAF552AA160-5: box of 5 filters) (BAF552AA160-10: box of 10 filter)				
Replacement long life filter, non-woven type		KAF5511D160	KAF441C60	20~40: KAF531C50 50~63: KAF531C80 80~125: KAF531C160		
Pre-filter						
Filter chamber						
Wiring and sensors	KRCS - External wired temperature sensor	KRCS01-5B	KRCS01-4	KRCS01-4	KRCS01-6B SB. K.RSS_FDA (EKEWTSC-1 + K.RSS)	
	K.RSS - External wireless temperature sensor	K.RSS	K.RSS	•		
Adapters	Adapter with 2 output signals (Compressor / Error, Fan output)	KRP1BA58 (2)(7)	KRP1B57 (2)			
	Adapter with 4 output signals (Compressor / Error, Fan, Aux. heater, Humidifier output)	EKRP1C12 (2)(7)	EKRP1B2 (2)	EKRP1B2 (2)	EKRP1C14 (2)	
	Adapter for centralised external monitoring/control via dry contacts and setpoint control via 0-140Ω (for dedicated indoor)	KRP4A53 (2)(7)	KRP4A53 (2)	KRP4A51 (2)	KRP4A53 (2)	
	Adapter for external central monitoring/control (controls 1 entire system)		KRP2A52	KRP2A51 (2)	KRP2A52	
	Adapter for keypad and/or window contact connection (2)(11)	BRP7A53	BRP7A53 (2)	BRP7A51	BRP7A51 (2)	
	Adapter for multi-tenant applications (24VAC PCB power supply interface)	DTA114A61	DTA114A61	DTA114A61-9	DTA114A61	
	External control adapter for outdoor unit (installation on indoor unit)			DTA104A61 (2)		
	Installation box / Mounting plate for adapter PCBs (For units where there is no space in the switchbox)	KRP1H98A (7) KRP1BC101	KRP1BC101	KRP1C96 (16) (17)	KRP1BC101 / KRP4B93	
Wiring kit for Remote ON/OFF or Forced OFF	Standard	Standard	Standard	Standard		
Relay PCB for output signal of refrigerant sensor						
Others	Drain pump kit	Standard	Standard	Standard	Standard	
	Multi zoning kit (for detailed model code overview refer to multizoning argue card in this catalogue)					
	Fresh air intake kit (direct installation type)	KDDP55C160-1 + KDDP55D160-2 (7)(8)	KDDQ44XA60			
	Air discharge adapter for round duct					
	L-type piping kit					
	Filter chamber for bottom suction			20~40: KDDFP53B50 50~63: KDDFP53B80 80~125: KDDFP53B160		
Insulation kit for high humidity						

- (1) pump station is necessary for this option
- (2) Installation box is necessary for these adapters
- (3) The BYCQ140EW has white insulation. Be informed that formation of dirt on white insulation is visibly stronger and that it is consequently not advised to install the BYCQ140EW decoration panel in environments exposed to concentrations of dirt\*
- (4) Not recommended because of the limitation of the functions
- (5) To be able to control the BYCQ140EGF(B) the controller BRC1E or BRC1H\* is needed
- (6) The BYCQ140EGF(B) is not compatible with Multi and Split Non-Inverter Outdoor units
- (7) Option not available in combination with BYCQ140EGF(B)
- (8) Both parts of the fresh air intake are needed for each unit
- (9) Cannot be combined with sensor kit
- (10) Independently controllable flaps function not available
- (11) Only possible in combination with BRC1H\* / BRC1E\*
- (12) When fixing box is required, use KJB212A, KJB311A or KJB411A depending on the size of the controller
- (13) Option KEK26-1A (Noise filter) is required when installing DCS301B51
- (14) Wire harness EKEWTSC is necessary
- (15) The active airflow circulation function is not available for this controller.
- (16) Up to 2 adaptor PCBs can be installed per installation box
- (17) Only one installation box can be installed per indoor unit
- (18) VRV R-32 indoor units cannot be connected to this controller

Concealed ceiling units (duct units)				Ceiling suspended units		Wall mounted units	Floor standing units	
Slim	Medium ESP	High ESP		1-way blow	4-way blow		Concealed	Free-standing
FXDQ-A3	FXSQ-A	FXMQ-P7	FXMQ-A	FXHQ-A	FXUQ-A		FXAQ-A	FXNQ-A
								20~25: EKRPD25A5 32~40: EKRPD40A5 50~63: EKRPD63A5
					KDBHP49B140 + KDBTP49B140			
BRC4C65	BRC4C65	BRC4C65	BRC4C65	BRC7GA53-9	BRC7C58	BRC7EA629 / BRC7EA628	BRC4C65	BRC4C65
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
15-32: BAE20A62 40-50: BAE20A82 63: BAE20A102								
			Replacement filter BAFM503A250 (65%) (21) BAFH504A250 (90%) (21)					
			BAFL502A250 (21)	32: KAF501B56 63: KAF501B80 100: KAF501B160	KAF551D160			20~25: KAF361L28 32~40: KAF361L45 50~63: KAF361L71
			BAFL501A250 (21) BDD500B250					
KRCS01-4 K.RSS	KRCS01-4 K.RSS	KRCS01-4 •	KRCS01-6B SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)	KRCS01-4 •	KRCS01-4 •	KRCS01-1 K.RSS + EKEWTSC	KRSC01-4 •	KRCS01-1 •
		KRP1C64 (2)	KRP1C65	KRP1B54 (2)				
KRP1B56	EKRP1B2 (2)	EKRP1B2 (2)	EKRP1C14 (2)				KRP1B56	KRP1B61
KRP4A54-9 (2)	KRP4A52 (2)	KRP4A51 (2)	KRP4A51	KRP4A52 (2)	KRP4A53 (2)	KRP4A51 (2)	KRP4A54-9	KRP4A51
KRP2A53 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51	KRP2A62 (2)		KRP2A51 (2)/ KRP2A61(2)	KRP2A53	KRP2A51
BRP7A54	BRP7A51	BRP7A51	BRP7A51	BRP7A52	BRP7A53	BRP7A51 (2)	BRP7A54	BRP7A51
DTA114A61	DTA114A61 (2)	DTA114A61 (2)	DTA114A61	DTA114A61-9	DTA114A61-9	DTA114A61	DTA114A61	EKMTAC
DTA104A53	DTA104A61	DTA104A61 (2)	DTA104A61	DTA104A62-9		DTA104A51 / DTA104A61	DTA104A53	DTA104A61
KRP1BC101	KRP1BC101	KRP4A96	Standard	KRP1D93A (19)	KRP1B97	KRP4A93 (16/17)	KRP1BC101	Standard
	Standard	Standard	Standard	EKRORO4	EKRORO5	Standard	Standard	Standard
Standard	Standard	Standard	BDU510B250VM	32: KDU50R63 63~100: KDU50R160		K-KDU572KVE		
•	•							
	15~32: KDAP25A36A 40~50: KDAP25A56A 63~80: KDAP25A71A 100~125: KDAP25A140A 140: -	50~80: KDAJ25K71 100~125: KDAJ25K140						
				32: KHFP5N63 63~100: KHFP5N160				
KDT25N32 / KDT25N50 / KDT25N63								

## Hot water

	HXY080-125A8	HXHD125-200A8
Drain pan	EKHBDPCA2	-
Digital I/O PCB	EKRPIHBAA	EKRPIHBAA
Demand PCB - Required to connect room thermostat	EKRPIAHTA	EKRPIAHTA
Remote user interface (remocon) - Same controller as supplied with cascade unit can be mounted parallel or on other location. If 2 controllers are installed, the installer needs to select 1 master & 1 slave	EKRUAHTB	EKRUAHTB
Back-up heater	EKBUHAA6(W1/V3)	-
Wired room thermostat	EKRRTWA (23)	EKRRTWA (23)
Wireless room thermostat	EKRRT1 (23)	EKRRT1 (23)
Remote sensor for room thermostat	EKRRTETS (24)	EKRRTETS (23)
Stainless domestic hot water tank - 200L	-	EKHTS200AC (25)
Stainless domestic hot water tank - 260L	-	EKHTS260AC (25)
PP domestic hot water tank - 300L	-	EKHWP300B
PP domestic hot water tank - 500L	-	EKHWP500B
Solar collector	-	EKSV26P (vertical) EKSH26P (horizontal)
Pump station	-	EKSRPS

(19) The BYFQ60C4\* R-32 panels can be connected to R-410A indoor units with wire harness EKRS22  
(20) Wire harness EKRS23 is necessary

(21) Filter chamber needed

(22) Only possible in combination with BYCQ140E and BYCQ140EW. Cannot be combined with other filters, chambers, fresh air intake kits or air discharge outlet sealing member kit

(23) Requires demand PCB

(24) Can only be used in combination with wireless room thermostat

(25) If tank is NOT mounted on top of the HXHD unit, then option EKMAHTB is needed to install tank as stand alone

(26) Only possible in combination with BYCQ140E/EW/EB. Cannot be combined with other filters, chambers, fresh air intake kits or discharge outlet sealing member kit



Indoor Air Quality matters more than ever. Since indoor air quality can be up to 2 to 5 times worse than outdoor air quality, a correct treatment is important. Daikin offers the widest range in DX commercial ventilation from decentralised heat recovery systems to large-scale air handling units and air purification solutions in order to provide a healthy solution for your project.



# Commercial Ventilation & Air Purification

ERV / HRV - Energy/Heat recovery ventilation units	569
Why choose Daikin ventilation	570
VAM-FC9/J8	574
Electrical heater for VAM	575
EKVDX - DX coil for air processing	576
VKM-GBM	578
ALB-LBS/RBS - Modular L Smart	580
Electrical heater for Modular L Smart	581
ATB/ATB-S - Modular T Smart	582
Marketing Tools	584
Supporting tool, software and apps	585
Daikin air handling units with DX connection	588
Commercial air purifier	596
Advantages	596
BR00000554/676/749/751 - AAF Astropure 2000	597
Options & accessories	598


Want to know more about ventilation systems and how indoor air quality can be secured by ventilation? Follow our online webinar via the YouTube playlist.



# Why Indoor Air Quality?

- Indoor Air Quality (IAQ) is a measure of the air quality indoors, as breathed in by the building's occupants.
- New residential buildings, schools, offices or light commercial buildings often neglect indoor air quality.
- Because of pollutants, such as pollen, bacteria and others, the indoor air quality can be 2 to 5 times worse than outdoors.
- Since 90% of our lives is spent indoors, it is crucial to invest in good air quality.

## 5 components for ensuring good Indoor Air Quality

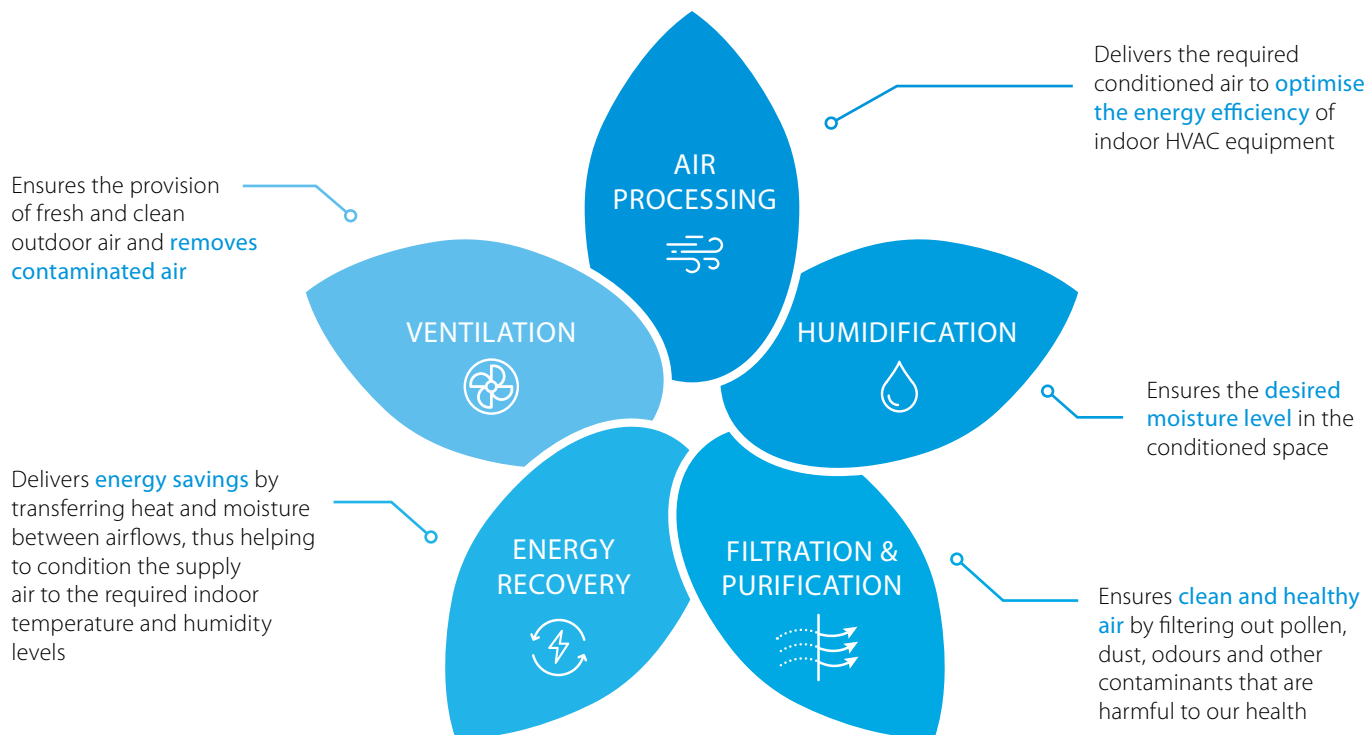


## Ventilation

Ventilation systems ensure **optimal climate conditions** by providing a **fresh, healthy and comfortable** environment for buildings of all sizes and applications. When a room is enclosed, air cannot easily enter or leave, allowing airborne pollutants to remain and accumulate within the space. This concentration could have an impact on the health of the room's occupants. **Ventilation is essential for diluting and removing these pollutants.**

A **well-maintained ventilation system** and **adequate air-exchange rate** have been demonstrated to be an effective solution to **protect people** from contaminants, including viruses.




# Products overview

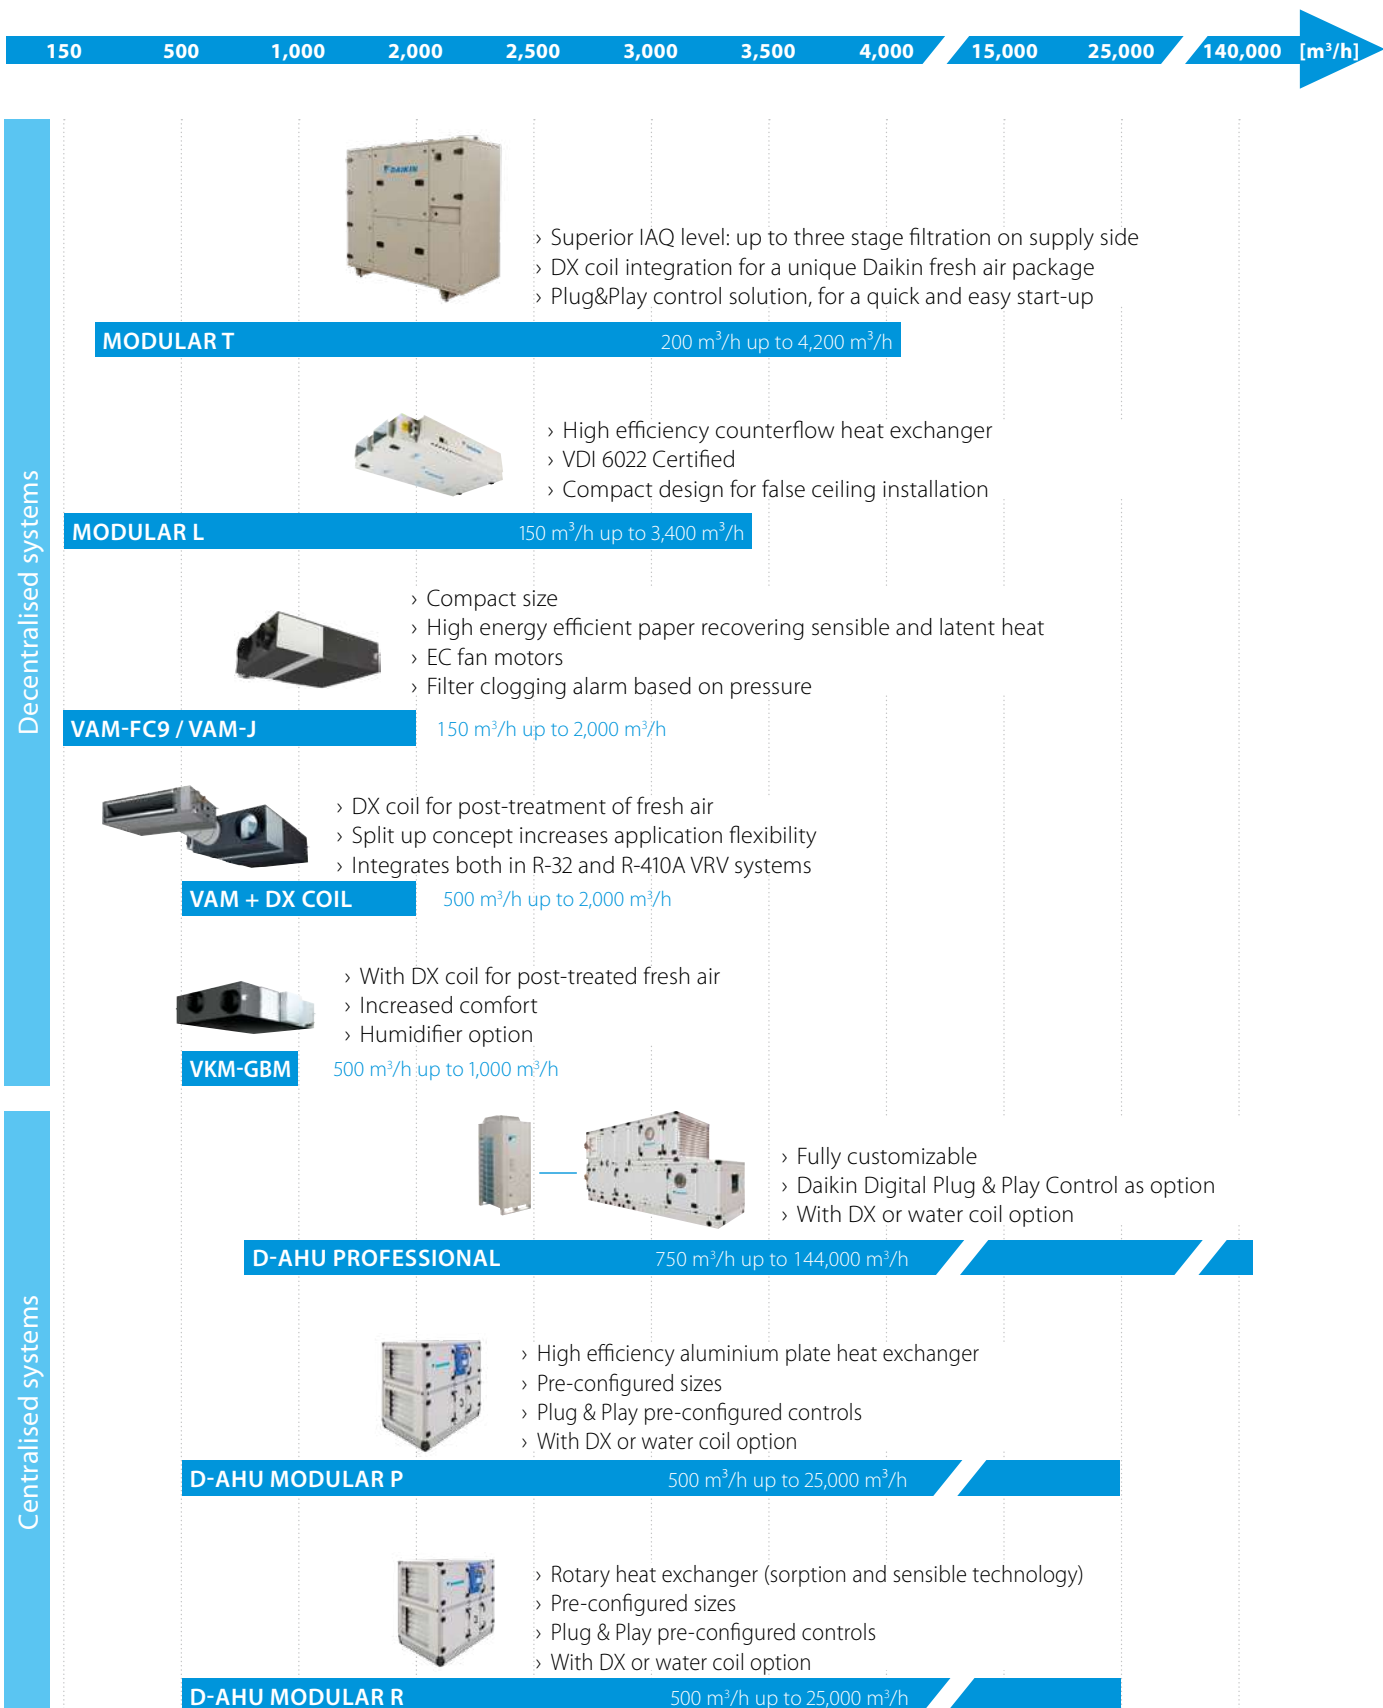

# 5 reasons why Daikin's ventilation range is unique in the market

## 1 Market leading controls & connectivity

- › Interlock of ventilation and air conditioning system
  - Control ERV/HRV and air conditioning from the same controller
  - Aligns the operation mode between the systems to save energy
- › Easy integration in the total solution
  - Online control and monitoring via the Daikin Cloud Service
  - Full portfolio integration in the intelligent Touch Manager, Daikin's cost-effective mini BMS
- › User-friendly controller with premium design
  - Intuitive touch button control

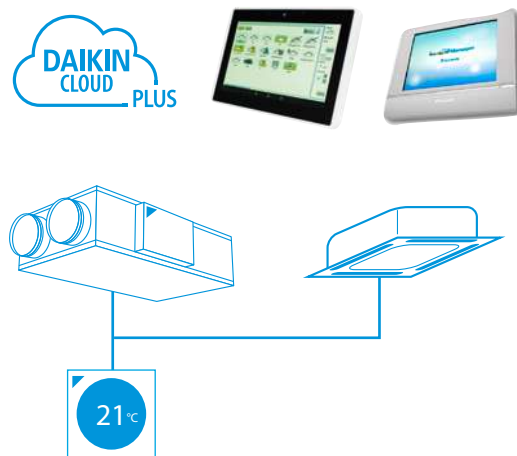

Madoka



reddot award 2018 winner

## 2 Unique installation benefits

- › Integrates seamlessly in the Daikin total solution, ensuring a single point of contact
- › Total fresh air solution with Daikin supplying the VAM/Modular L Smart, Modular T and the electrical heater
- › Daikin AHU and condensing unit connect Plug & Play thanks to same pipe diameters, factory mounted controls, expansion valves, etc.





### 3 High energy efficiency

- › Energy recovery of up to 92%, reducing running costs
- › Free nighttime cooling using fresh outside air
- › Inverter driven centrifugal fans
- › ErP compliant



### 4 Best comfort

- › Wide range of units to control fresh air and humidity
- › Wide range of optional filters to suit the application available up to ePM<sub>1</sub> 80% (F9)
- › Special paper heat exchanger recovers heat and moisture from extract air to warm up and humidify fresh air to comfortable levels (VAM, VKM)

### 5 Top reliability

- › Most extensive testing before new units leave the factory
- › Widest support network and after sales service
- › All spare parts available in Europe



## Did you know?

CO<sub>2</sub> levels and ventilation rates all have significant, independent impacts on cognitive function:

Please refer to our dedicate page on Indoor Air Quality for more information.



#### COGNITIVE FUNCTION SCORES ...



**+ 61%**  
IN GREEN BUILDING  
CONDITIONS



**+ 101%**  
IN ENHANCED  
GREEN BUILDING CONDITIONS

# Widest range of DX integrated ventilation on the market

Daikin offers a variety of solutions from small energy recovery ventilation to large-scale air handling units for the provision of fresh air ventilation to homes, or commercial premises.

## Ventilation solutions

Daikin offers state-of-the-art ventilation solutions that can easily be integrated into any project:

- › **Unique portfolio** within DX manufacturers
- › High-quality solutions complying with the **highest Daikin quality standards**
- › **Seamless integration** of all products to provide the best indoor climate
- › All Daikin products connected to a single controller for **complete control** of the HVAC system.

## Energy Recovery Ventilation

Our energy recovery units **recover sensible energy** (Modular L / Modular T) or **total (sensible + latent) energy** (VAM/EKVDX/VKM-GBM), substantially reducing the load on the air conditioning system up to 40%.

## Ventilation with DX connection - Control over fresh air temperature


Daikin offers a range of inverter condensing units to be used in combination with Daikin AHUs for ultimate control over the fresh air. There are 4 control possibilities when **combining AHU and Daikin outdoor units** hence offering all the required flexibility for any installation. Indoor units can be combined to the same outdoor unit to reduce the installation costs. For **false-ceiling installations** where space is a constraint, the VKM can fit perfectly to deliver fresh air at a comfortable temperature and it has an optional humidification element.



# Energy recovery ventilation

## Ventilation with heat recovery as standard

- › Thinnest High Efficiency Enthalpy Heat Exchanger in the market (J-series)
- › Energy saving ventilation using indoor heating, cooling and moisture recovery
- › Free cooling possible when outdoor temperature is below indoor temperature (eg. during nighttime)
- › Prevent energy losses from over-ventilation while improving indoor air quality with optional CO<sub>2</sub> sensor (J-series)
- › Possibility to change ESP via wired remote control allows optimisation of the supply air volume (J - series)
- › Can be used as stand alone or integrated in the Sky Air or VRV system
- › Wide range of units: air flow rate from 150 up to 2,000 m<sup>3</sup>/h
- › Shorter installation time thanks to easy adjustment of nominal air flow rate, so less need for dampers compared with traditional installation
- › No drain piping needed
- › Can operate in over- and under pressure
- › Total solution for fresh air with Daikin supply of both VAM / VKM and electrical heaters
- › VAM-J8 series are connectable to EKVDX DX coil for air processing
- › Possibility of CO<sub>2</sub> concentration when combining VAM-J8 with optional BRYMA CO<sub>2</sub> sensor and Madoka remote controller (with or without EKVDX)

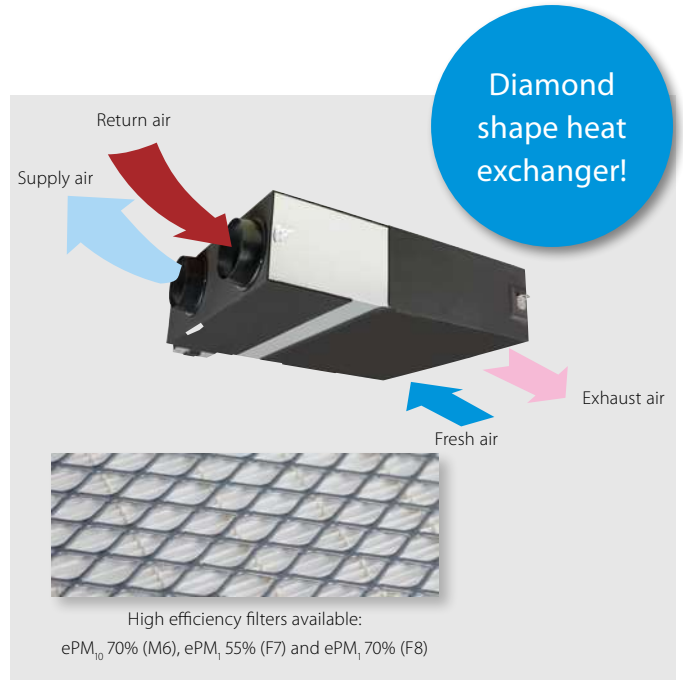

More details and final information can be found by scanning or clicking the QR codes.



VAM-FC9



VAM-J8

Ventilation		VAM/VAM	150FC9	250FC9	350J8	500J8	650J8	800J8	1000J8	1500J8	2000J8		
Power input - 50Hz	Heat exchange mode	Nom. Ultra high/High/Low	kW	0.132/0.111/0.058	0.161/0.079/0.064	0.097/0.070/0.039	0.164/0.113/0.054	0.247/0.173/0.081	0.303/0.212/0.103	0.416/0.307/0.137	0.548/0.384/0.191	0.833/0.614/0.273	
	Bypass mode	Nom. Ultra high/High/Low	kW	0.132/0.111/0.058	0.161/0.079/0.064	0.085/0.061/0.031	0.148/0.100/0.045	0.195/0.131/0.059	0.289/0.194/0.086	0.417/0.300/0.119	0.525/0.350/0.156	0.835/0.600/0.239	
Temperature exchange efficiency - 50Hz	Ultra high/High/Low		%	77.0(1)/72.0(2)/78.3(1)/72.3(2)/82.8(1)/73.2(2)	74.9(1)/69.5(2)/76.0(1)/70.0(2)/80.1(1)/72.0(2)	85.1/86.7/90.1	80.0/82.5/87.6	84.3/86.4/90.5	82.5/84.2/87.7	79.6/81.8/86.1	83.2/84.8/88.1	79.6/81.8/86.1	
	Cooling	Ultra high/High/Low	%	60.3(1)/61.9(1)/67.3(1)	60.3(1)/61.2(1)/64.5(1)	65.2/67.9/74.6	59.2/61.8/69.5	59.2/63.8/73.1	67.7/70.7/76.8	62.6/66.4/74.0	68.9/71.8/77.5	62.6/66.4/74.0	
Enthalpy exchange efficiency - 50Hz	Heating	Ultra high/High/Low	%	66.6(1)/67.9(1)/72.4(1)	66.6(1)/67.4(1)/70.7(1)	75.5/77.6/82.0	69.0/72.2/78.7	73.1/76.3/82.7	72.8/75.3/80.2	68.6/71.7/77.9	73.8/76.1/80.8	68.6/71.7/77.9	
	Operation mode			Heat exchange mode, bypass mode, fresh-up mode									
Heat exchange system				Air to air cross flow total heat (sensible + latent heat) exchange									
Heat exchange element				Specially processed non-flammable paper									
Dimensions	Unit	HeightxWidthxDepth	mm	285x776x525		301x1,113x886		368x1,354x920		368x1,354x1,172		731x1,354x1,172	
Weight	Unit		kg	24.0		46.5		61.5		79.0		157	
Casing	Material			Galvanised steel plate									
Fan	Air flow rate - 50Hz	Heat exchange mode	Ultra high/High/Low	m <sup>3</sup> /h	150/140/105	250/230/155	350(1)/300(1)/200(1)	500(1)/425(1)/275(1)	650(1)/550(1)/350(1)	800(1)/680(1)/440(1)	1,000(1)/850(1)/550(1)	1,500(1)/1,275(1)/825(1)	2,000(1)/1,700(1)/1,100(1)
		Bypass mode	Ultra high/High/Low	m <sup>3</sup> /h	150/140/105	250/230/155	350(1)/300(1)/200(1)	500(1)/425(1)/275(1)	650(1)/550(1)/350(1)	800(1)/680(1)/440(1)	1,000(1)/850(1)/550(1)	1,500(1)/1,275(1)/825(1)	2,000(1)/1,700(1)/1,100(1)
		External static pressure - 50Hz	Ultra high/High/Low	Pa	90/87/40	70/63/25	90(1)/70.0/50.0(1)						
Air filter	Type			Multidirectional fibrous fleeces				Multidirectional fibrous fleeces (G3)					
Sound pressure level - 50Hz	Heat exchange mode	Ultra high/High/Low	dBA	27.0/26.0/20.5	28.0/26.0/21.0	34.5(1)/32.0(1)/29.0(1)	37.5(1)/35.0(1)/30.5(1)	39.0(1)/36.0(1)/31.0(1)	39.0(1)/36.0(1)/30.5(1)	42.0(1)/38.5(1)/32.5(1)	42.0(1)/39.0(1)/33.5(1)	45.0(1)/41.5(1)/36.0(1)	
	Bypass mode	Ultra high/High/Low	dBA	27.0/26.5/20.5	28.0/27.0/21.0	34.5(1)/32.0(1)/28.0(1)	38.0(1)/35.0(1)/29.5(1)	38.0(1)/34.5(1)/30.5(1)	40.0(1)/36.5(1)/30.5(1)	42.5(1)/40.0(1)/32.5(1)	42.0(1)/39.0(1)/32.5(1)	45.0(1)/41.0(1)/35.0(1)	
Operation range	Around unit		°CDB	-				0°C~40°CDB, 80% RH or less					
Connection duct diameter			mm	100	150	200		250		2x250			
Power supply	Phase/Frequency/Voltage		Hz/V	1~; 50/60; 220-240/220									
Current	Maximum fuse amps (MFA)		A	15.0				16.0					
Specific energy consumption (SEC)	Cold climate		kWh/(m <sup>2</sup> .a)	-56.0(5)	-60.5(5)	-							
	Average climate		kWh/(m <sup>2</sup> .a)	-22.1(5)	-27.0(5)	-							
	Warm climate		kWh/(m <sup>2</sup> .a)	-0.100(5)	-5.30(5)	-							
SEC class				D / See note 5 B / See note 5		-							
Maximum flow rate at 100 Pa ESP	Flow rate		m <sup>3</sup> /h	130	207	-							
	Electric power input		W	129	160	-							
Sound power level (Lwa)			dB	40	43	51	54	58	61	62	65		
Annual electricity consumption			kWh/a	18.9(5)	13.6(5)	-							
Annual heating saved	Cold climate		kWh/a	41.0(5)	40.6(5)	-							
	Average climate		kWh/a	80.2(5)	79.4(5)	-							
	Warm climate		kWh/a	18.5(5)	18.4(5)	-							

(1)Measured according to JIS B 8628 | (2)Measured at reference flow rate according to EN13141-7 | (5) At reference flow rate in accordance with commission regulation (EU) No 1254/2014



# Electrical heater for VAM

- › Total solution for fresh air with Daikin supply of both VAM and electrical heaters
- › Increased comfort in low outdoor temperature thanks to the heated outdoor air
- › Integrated electrical heater concept (no additional accessories required)
- › Standard dual flow and temperature sensor
- › Flexible setting with adjustable setpoint
- › Increased safety with 2 cut-outs: manual & automatic



More details and final information can be found by scanning or clicking the QR codes.




GSIEKA

		GSIEKA	10009	15018	20024	25030	35530 <sup>(1)</sup>
Capacity	kW		0.9	1.8	2.4	3.0	3.0
Duct diameter	mm		100	150	200	250	355
Connectable VAM			VAM150FC9	VAM250FC9	VAM350,500J8	VAM650J8, VAM800J8, VAM1000J8	VAM1500J8, VAM2000J8


		GSIEKA10009	GSIEKA15018	GSIEKA20024	GSIEKA25030	GSIEKA35530	
Dimensions	Height	mm	171	221	271	321	426
	Depth	mm	100	150	200	250	355
	Width	mm	370	370	370	370	373
Minimum air velocity / airflow		m/s	1.5				
		m <sup>3</sup> /h	45	100	170	265	535
Power supply		1~230 VAC/50Hz					
Nominal current	A	4.1	8.2	10.9	13.1	13.1	
Heating power	kW	0.9	1.8	2.4	3.0	3.0	
Connection duct diameter	mm	100	150	200	250	355	
Operation range	Min.	°C	-40°C				
	Max.	°C	40°C				
	Rel. Humidity	%	90%				
Temperature sensor		10 kΩ at +25°C / TJ-K10K					
Temperature sensor range		- 30°C to 105°C					
Temperature set point range		- 10°C to 50°C					
LED indicators	LED 1	flashing every 5 seconds	heater is starting up				
		flashing every second	air flow detected, heating allowed				
		OFF	no power supply or no flow				
	LED 2	ON	problem with duct temperature sensor, set point potentiometer or PTC airflow sensor				
		OFF	heater is not operating				
		ON	heater is operating				
Ambient temperature adjacent to controller		0°C to +50°C					
Auto high temperature cut-out		50°C					
Manual reset high temperature cut-out		100°C					

# EKVDX-A

DX coil for post treatment of fresh air

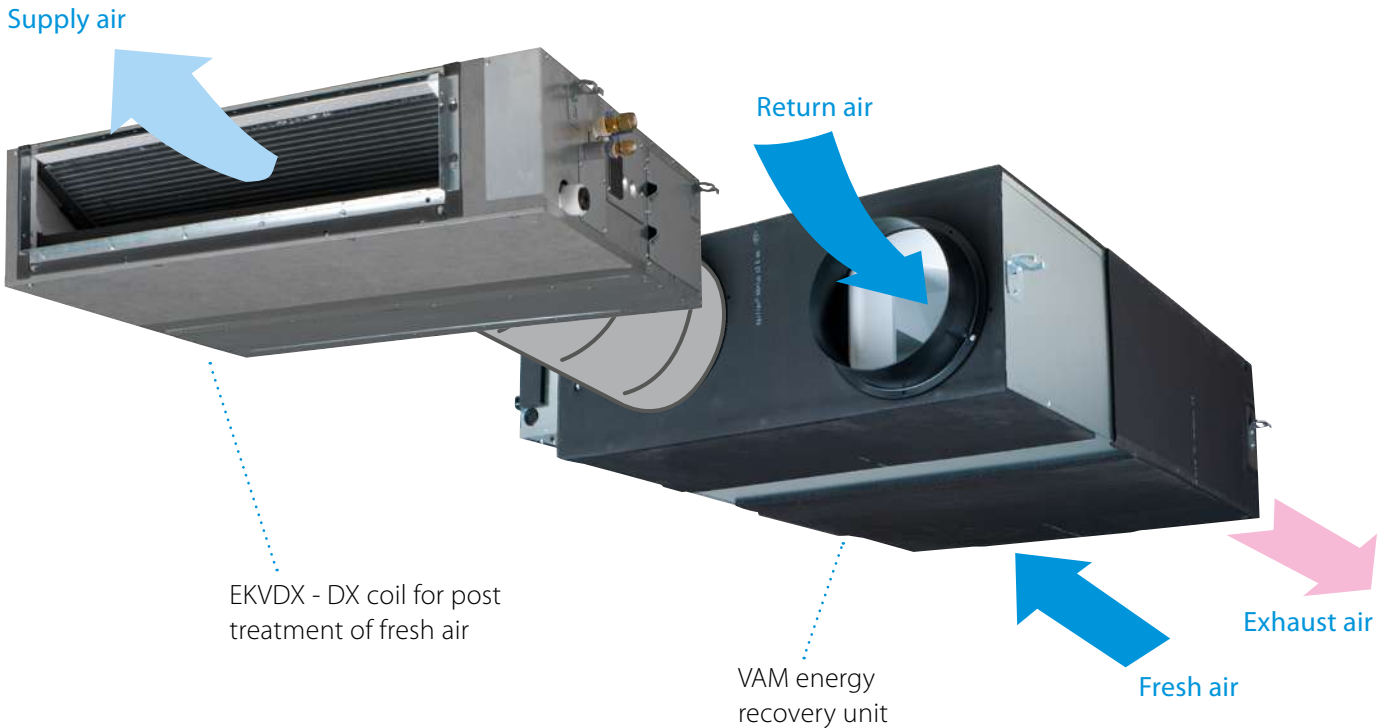

- › Creates a high quality indoor environment by pre conditioning of incoming fresh air
- › Maximum installation flexibility thanks to separate DX coil
  - Different installation possibilities to suit the application

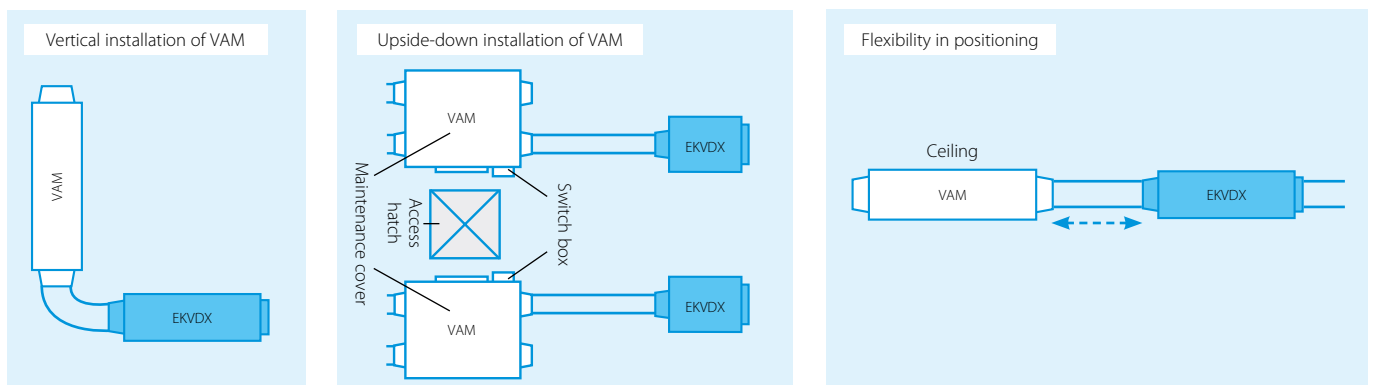

- › Fresh air flows from 500 up to 2,000 m<sup>3</sup>/h
- › High ESP up to 150 Pa
- › Can be integrated in both R-32/R-410A VRV systems
- › Replaces VKM-GB range, delivering increased capacity range and reduced sound levels

# DX coil for air processing

Post heating or cooling of fresh air to lower the load on the air conditioning system

- › Creates a high quality indoor environment by pre conditioning of incoming fresh air
- › Maximum installation flexibility thanks to separate DX coil
- › Wide range of units covering fresh air flows of 500 up to 2,000 m<sup>3</sup>/h
- › High ESP up to 150 Pa
- › Can be integrated in both R-32/R-410A VRV systems



More details and final information can be found by scanning or clicking the QR codes.



EKVDX-A

				EKVDX32A	EKVDX50A	EKVDX80A	EKVDX100A	
Power input - 50Hz	Cooling	Nom.	kW	0.035	0.035	0.035	0.035	
	Heating	Nom.	kW	0.035	0.035	0.035	0.035	
Casing	Material			Galvanised steel plate				
Insulation material				Opcell and anti-sweat material				
Dimensions	Unit	Height	mm	250				
		Width	mm	550	700	1,000	1,400	
	Depth	mm	809					
Weight	Unit		kg	19	23.4	30.1	37.7	
Operation range	Around unit		°CDB	10°C~40°CDB, 80% RH or less				
	On coil temperature	Cooling	Max.	°CDB	35			
		Heating	Min.	°CDB	11			
Piping connections	Liquid	OD	mm	6.35				
		Gas	OD	mm	12.7			
	Drain				VP20 (I.D. 20/O.D. 26), drain height 625 mm			
Refrigerant	Type				R410A/R32			
	GWP				2,087.5/675			
Heat exchange system				Direct expansion				
Power supply	Phase			single phase				
	Frequency		Hz	50/60				
Voltage			V	220-240/220				

Possible Combination VAMJ8 + EKVDX				EKVDX32A + VAM500J8	EKVDX50A + VAM650J8	EKVDX50A + VAM800J8	EKVDX80A + VAM1000J8	EKVDX100A + VAM1500J8	EKVDX100A + VAM2000J8	
Cooling capacity	Total (VAM+DX coil)	DX coil	At ultra high fan speed	kW	5.1	7.1	8.6	9.3	15.4	18.4
			At high fan speed	kW	3.4	4.8	5.5	5.7	9.5	11.2
	Heating capacity	Total (VAM+DX coil)	DX coil	At ultra high fan speed	kW	6.7	8.5	11	11.9	18.7
At high fan speed				kW	4.2	5.1	6.9	7	10.8	13
Fan		Air flow rate - 50Hz	Heat exchange mode	Ultra high	m <sup>3</sup> /h	500	650	800	1,000	1,500
	High			m <sup>3</sup> /h	425	550	680	850	1,275	1,700
	Bypass mode			m <sup>3</sup> /h	500	650	800	1,000	1,500	2,000
	External static pressure - 50Hz	Maximum	High	m <sup>3</sup> /h	425	550	680	850	1,275	1,700
			Pa	81.9	73.0	133.7	106.0	153.6	92.1	
			Pa	51.9	43.0	23.7	26.0	43.6	12.1	
Sound pressure level - 50Hz	Cooling	Ultra high	High	dBA	39.0	33.9	19.4	21.4	35.1	11.9
			High	dBA	32	34	35.5	40.5	38.5	43.5
			High	dBA	30.5	32	34	38	37	40
	Heating	Ultra high	High	dBA	32.5	34.5	36	40.5	39	44
			High	dBA	31.5	32	34	38.5	37	40.5
			High	dBA	31.5	32	34	38.5	37	40.5
Current	Maximum fuse amps (MFA)		A	6	6	6	6	16	16	

The heat reclaim ventilation unit and the EKVDX indoor unit MUST share the same electrical safety devices and power supply

# Energy recovery ventilation, humidification and air processing

Post heating or cooling of fresh air for lower load on the air conditioning system

- › Energy saving ventilation using indoor heating, cooling and moisture recovery
- › Creates a high quality indoor environment by pre conditioning of incoming fresh air
- › Humidification of the fresh air results in comfortable indoor humidity level, even during heating
- › Free cooling possible when outdoor temperature is below indoor temperature (eg. during nighttime)
- › Low energy consumption thanks to DC fan motor
- › Prevent energy losses from over-ventilation while improving indoor air quality with optional CO<sub>2</sub> sensor
- › Shorter installation time thanks to easy adjustment of nominal air flow rate, so less need for dampers compared with traditional installation
- › Specially developed heat exchange element with High Efficiency Paper (HEP)
- › Can operate in over- and under pressure




More details and final information can be found by scanning or clicking the QR codes.



VKM-GBM

Ventilation		VKM-GBM		50GBM	80GBM	100GBM	
Power input - 50Hz	Heat exchange mode	Nom.	Ultra high/High/Low	kW	0.270/0.230/0.170	0.330/0.280/0.192	0.410/0.365/0.230
	Bypass mode	Nom.	Ultra high/High/Low	kW	0.270/0.230/0.170	0.330/0.280/0.192	0.410/0.365/0.230
Fresh air conditioning load	Cooling			kW	4.71/1.91/3.5	7.46/2.96/5.6	9.12/3.52/7.0
	Heating			kW	5.58/2.38/3.5	8.79/3.79/5.6	10.69/4.39/7.0
Temperature exchange efficiency - 50Hz	Ultra high/High/Low			%	76/76/77.5	78/78/79	74/74/76.5
Enthalpy exchange efficiency - 50Hz	Cooling	Ultra high/High/Low		%	64/64/67	66/66/68	62/62/66
	Heating	Ultra high/High/Low		%	67/67/69	71/71/73	65/65/69
Operation mode	Heat exchange mode / Bypass mode / Fresh-up mode						
Heat exchange system	Air to air cross flow total heat (sensible + latent heat) exchange						
Heat exchange element	Specially processed non-flammable paper						
Humidifier	Natural evaporating type						
Dimensions	Unit	HeightxWidthxDepth	mm	387x1,764x832	387x1,764x1,214		
Weight	Unit		kg	100	119	123	
Casing	Galvanised steel plate						
Fan-Air flow rate - 50Hz	Heat exchange mode	Ultra high/High/Low		m <sup>3</sup> /h	500/500/440	750/750/640	950/950/820
	Bypass mode	Ultra high/High/Low		m <sup>3</sup> /h	500/500/440	750/750/640	950/950/820
Fan-External static pressure - 50Hz	Ultra high/High/Low			Pa	200/150/120	205/155/105	110/70/60
Air filter	Multidirectional fibrous fleeces						
Sound pressure level - 50Hz	Heat exchange mode	Ultra high/High/Low		dBA	38/36/34	40/37.5/35.5	40/38/35.5
	Bypass mode	Ultra high/High/Low		dBA	39/36/34.5	41/38/36	41/39/35.5
Operation range	Around unit			°CDB	0°C~40°CDB, 80% RH or less		
	Supply air			°CDB	-15°C~40°CDB, 80% RH or less		
	Return air			°CDB	0°C~40°CDB, 80% RH or less		
	On coil temperature	Cooling/Max./Heating/Min.			°CDB	-15/43	
Refrigerant	Control	Electronic expansion valve					
	Type	R-410A					
	GWP	2,087.5					
Connection duct diameter			mm	200	250		
Piping connections	Liquid	OD		mm	6.35		
	Gas	OD		mm	12.7		
	Water supply			mm	6.4		
	Drain				PT3/4 external thread		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240		
Current	Maximum fuse amps (MFA)			A	15		

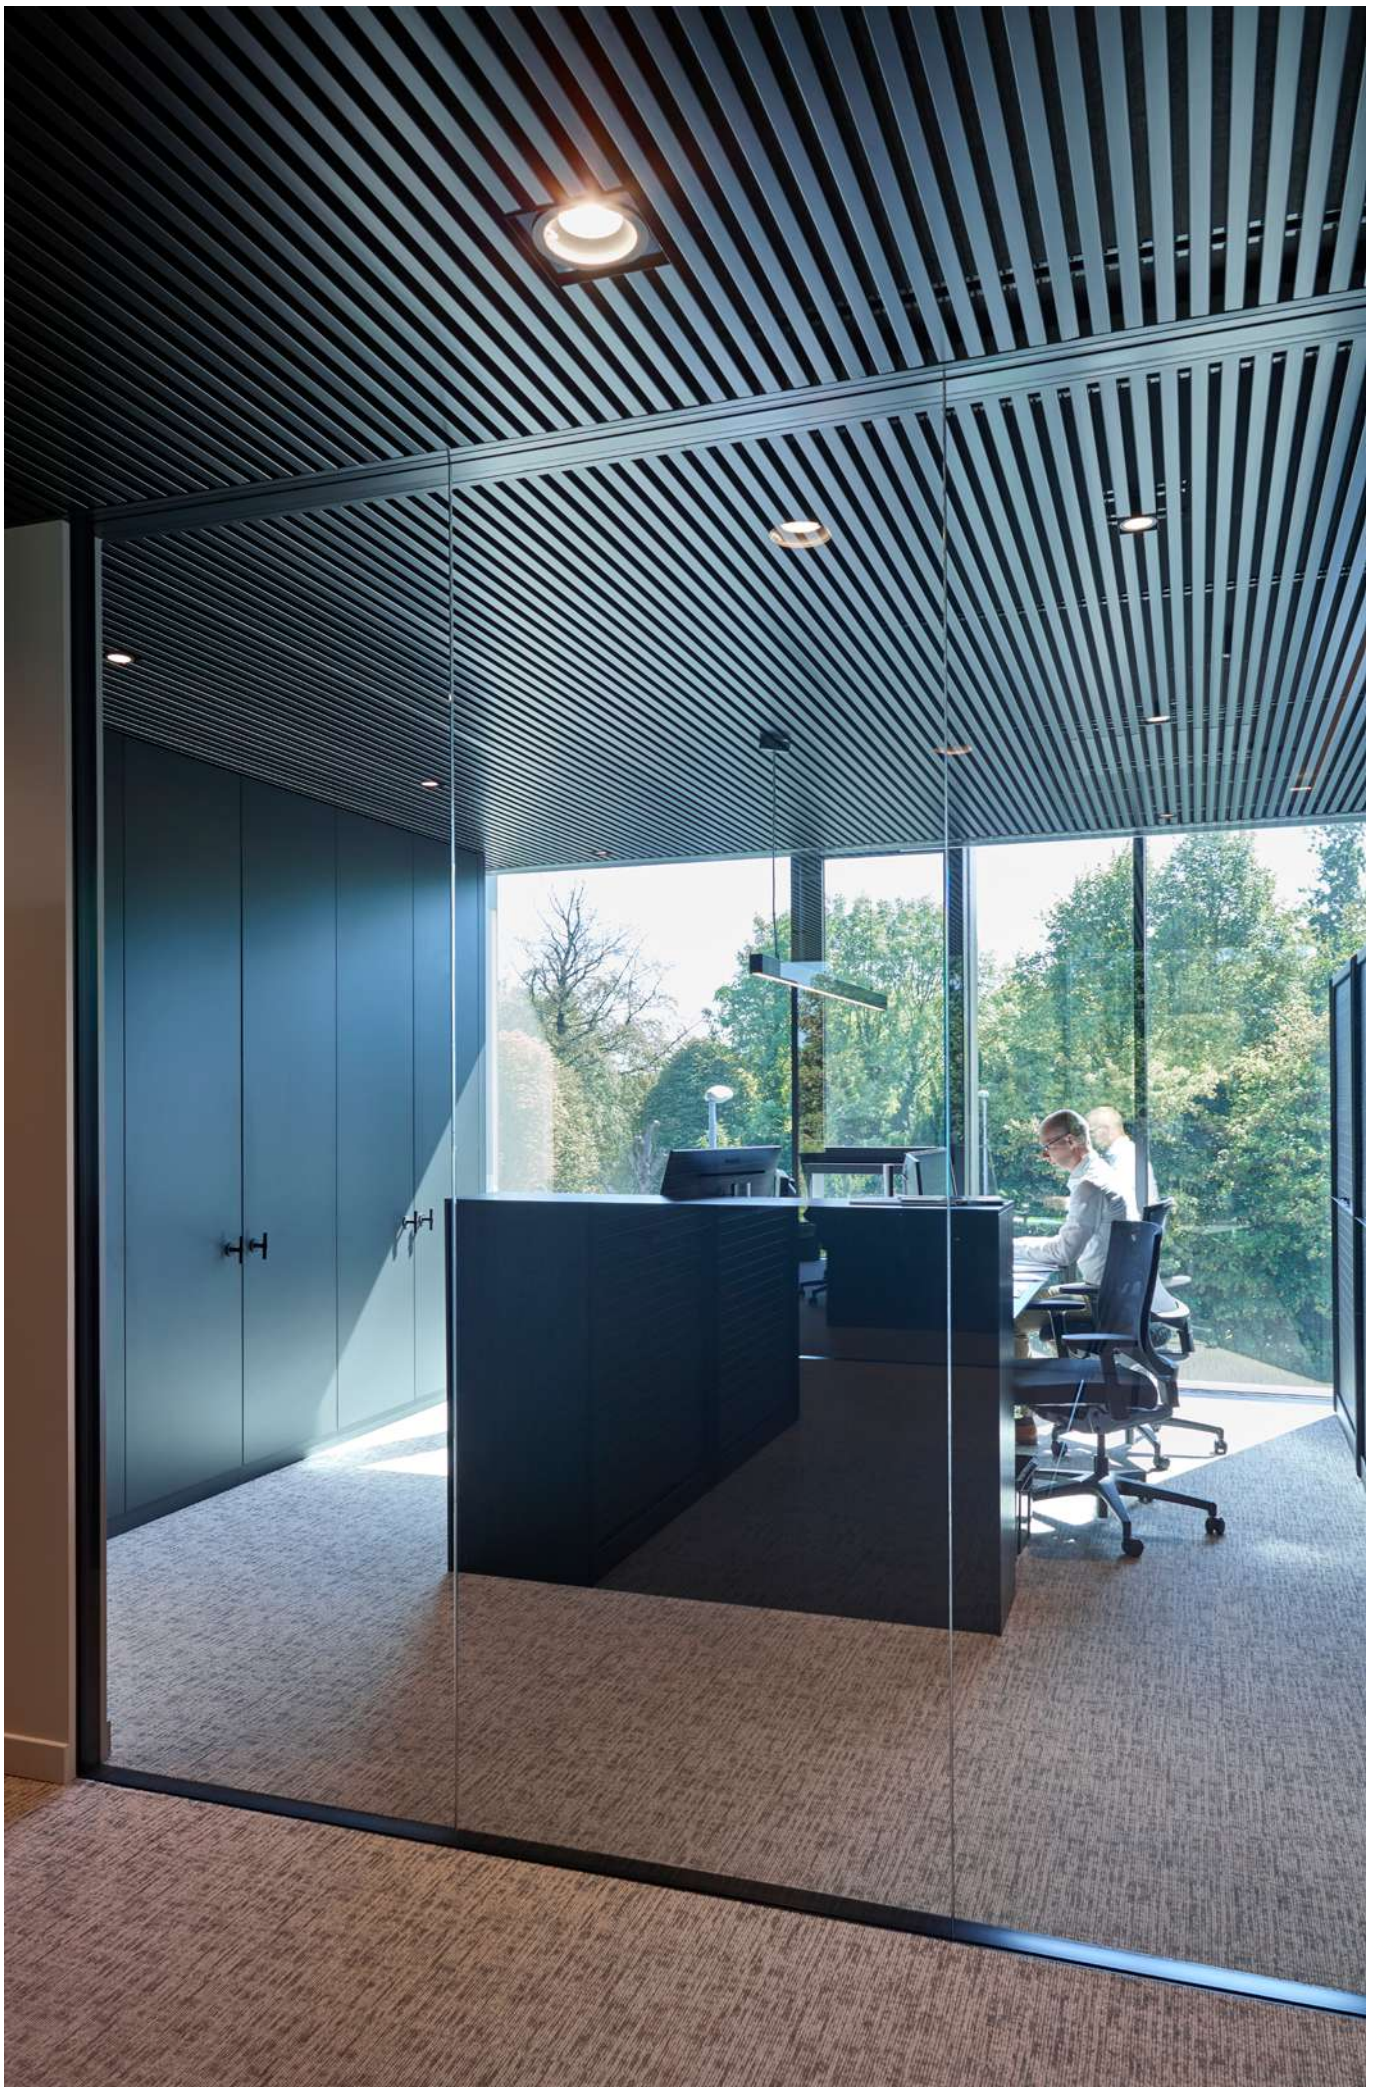

# Modular L Smart

Premium efficiency heat recovery unit

## Highlights

- › Connects Plug&Play into the Sky Air and VRV control network
- › Easy installation and commissioning
- › Internal pre-filter stage (up to ePM<sub>1</sub> 50% (F7) + ePM<sub>1</sub> 80% (F9)) making the unit reach highest indoor air quality requirements.
- › Wide air flow coverage from 150m<sup>3</sup>/h to 3,400m<sup>3</sup>/h
- › Exceeding ErP 2018 requirements
- › Best choice when compactness is needed (only 280 mm height up to 550 m<sup>3</sup>/h)
- › 50 mm double skin panel (120 kg/m<sup>3</sup>) for a maximum sound and thermal insulation

## EC centrifugal fan

- › Maximum ESP available 600 Pa (depending on model sizes and airflow)
- › Inverter driven with IE4 premium efficiency motor
- › High-efficient blade profiling
- › Reduced energy consumption
- › Optimized SFP (Specific Fan Power) for an efficient unit operation

## Heat exchanger

- › Premium quality counter flow plate heat exchanger
- › Up to 91% of the thermal energy recovered
- › High grade aluminum allowing optimum corrosion protection



Right drain connection (ALB-RBS)



Left drain connection (ALB-LBS)

For integration with Applied systems, please refer to the Modular L, in the AHU chapter



More details and final information can be found by scanning or clicking the QR codes.



ALB-LBS



ALB-RBS

## Technical details

D-AHU Modular L Smart			ALB02*BS	ALB03*BS	ALB04*BS	ALB05*BS	ALB06*BS	ALB07*BS
Airflow		m <sup>3</sup> /h	300	600	1,200	1,600	2,300	3,000
Heat exchanger thermal efficiency (1)		%	86		87			86
External static pressure	Nom.	Pa	100					
Current	Nom.	A	0.61	1.35	2.26	2.83	4.39	6.22
Power input	Nom.	kW	0.14	0.31	0.52	0.65	1.01	1.43
SFPv (2)		kW/m <sup>3</sup> /s	1.25	1.52	1.3	1.35	1.35	1.51
Electrical supply	Phase	ph	1					
	Frequency	Hz	50/60					
	Voltage	V	220/240 Vac					
Main unit dimensions	Width	mm	920	1,100	1,600		2,000	
	Height	mm	280	350	415		500	
	Length	mm	1,660	1,800	2,000			
Rectangular duct flange	Width	mm	250	400	500		700	
	Height	mm	150	200	300		400	
Weight unit		kg	125	180	270	280	355	360

(1) Winter design condition: Outdoor: -5°C, 90% Indoor: 22°C, 50% | (2) SFPv is a parameter that quantifies the fan efficiency (the lower it is the better will be). This reduces if airflow decreases.

## Electrical heater for Modular L Smart

- › Total solution for fresh air with Daikin supply of both Modular L Smart and electrical heaters
- › Increase comfort in low outdoor temperature thanks to the heated outdoor air
- › Integrated electrical heater concept (no additional accessories required)
- › Standard dual flow and temperature sensor
- › Heater only consumes what is required to pre-heat to the desired minimum fresh air temperature; thus saving energy



More details and final information can be found by scanning or clicking the QR codes.



ALD-HEFB

Electrical heater for Modular L Smart (ALD)	02HEFB	03HEFB	05HEFB	07HEFB
Capacity kW	1.5	3	7.5	15
Connectable Modular L Smart size	02	03	04, 05	06, 07
Supply voltage	230V,1ph		400V,3ph	
Output current (maximum) (A)	6.6	13.1	10.9	21.7
Temperature sensor	15k ohms at -20 °C 10k ohms at +10 °C	16k ohms at -20 °C 10k ohms at +10 °C	17k ohms at -20 °C 10k ohms at +10 °C	18k ohms at -20 °C 10k ohms at +10 °C
Temperature control range	- 20 °C to 10 °C			
Control fuse	Mini Circuit Breaker 6 A			
LED indicators	Yellow = Airflow fault Red = Heat ON			
Mounting holes	Depends on duct size			
Maximum ambient adjacent to terminal box	30°C (during operation)			
Auto high temperature cutout	75°C Pre-set			
Manual reset high temperature cutout	120°C Pre-set			
Width (mm)	470	620	720	920
Depth (mm)	370	370	370	370
Height (mm)	193	243	343	443

# Modular T Smart

## Top connected Air Handling Unit

### Highlights

- › Duct connections are located at the top, reducing the unit's footprint
- › Low power consumption and low SFP (Specific Fan Power) for a very efficient unit operation
- › Superior IAQ level: up to three stage filtration on supply side (more than the 90% of PM1 is removed from outdoor air)
- › Plug&Play control solution, for a quick and easy start-up
- › Very compact unit, starting from 550 mm width, for an air flow up to 1,100 m<sup>3</sup>/h
- › DX coil integration for a unique Daikin fresh air package available for connection to VRV or ERQ



ATB-S

### IAQ matters

An excellent IAQ improves people's performance and well-being, and decreases risk factors for various diseases. Modular T satisfies the ventilation and filtration needs of the indoor environment, guaranteeing an outstanding level of IAQ.

### The future of ventilation

The Modular T, with its unique features, represents the latest product developed by Daikin for fresh air treatment and not only. Thanks to its optimized design, it can be easily transported and installed into new projects or existing buildings.

More details and final information can be found by scanning or clicking the QR codes.



ATB

### Technical details

MODULAR T Pro & Smart		Size (1)	03	04	05	06	07
Airflow	m <sup>3</sup> /h		800	1,650	2,300	2,700	3,900
HE Thermal efficiency (2)	%		89.3	88.3	85.1	85.5	90.8
External static pressure	Pa				100		
Current	A		1.70	3.39	4.61	5.17	7.87
Power input	kW		0.39	0.78	1.06	1.19	1.81
SFPv (2)	kW/m <sup>3</sup> /s		1.47	1.5	1.49	1.41	1.5
Electrical supply	Phase (ph)		1				
	Frequency (Hz)		50/60				
	Voltage (V)		220/240 Vac				
Main unit Dimensions	Width (mm)		550		790		890
	Height (3) (mm)		1,600		1,900	1,850	2,050
	Length (mm)		1,580	1,650	2,170 (4)	2,620 (5)	2,950 (5)
Circular duct flange	Diameter (mm)		255	315	355	400	500
Unit sound power level	dB(A)		57	52		55	58
Unit sound pressure level (6)	dB(A)		50	45		48	51
Weight unit	Kg		200	250	400	500	620

(1) All size available in Smart or Pro version and right or left handing | (2) Outdoor condition: -5°C, 90% Indoor condition: 25°C, 50% | (3) Including feet and duct connections | (4) Size 05 is provided in two sections | (5) Size 06 and 07 are provided in three sections | (6) Simple source reference value at 1 meter, directivity factor Q=4 (quarter sphere) and non-reverberant field. Allowances on declared values: +/- 3dB




## Air flow range

Modular T is available in 5 sizes covering a wide range of applications such as hotels, offices, schools, gyms and light commercial buildings.

## Sectioning

To ensure an easy and quick installation Modular T size 05 will be provided in two sections, while size 06 and 07 in three sections to pass smoothly through standard doors<sup>1</sup>.

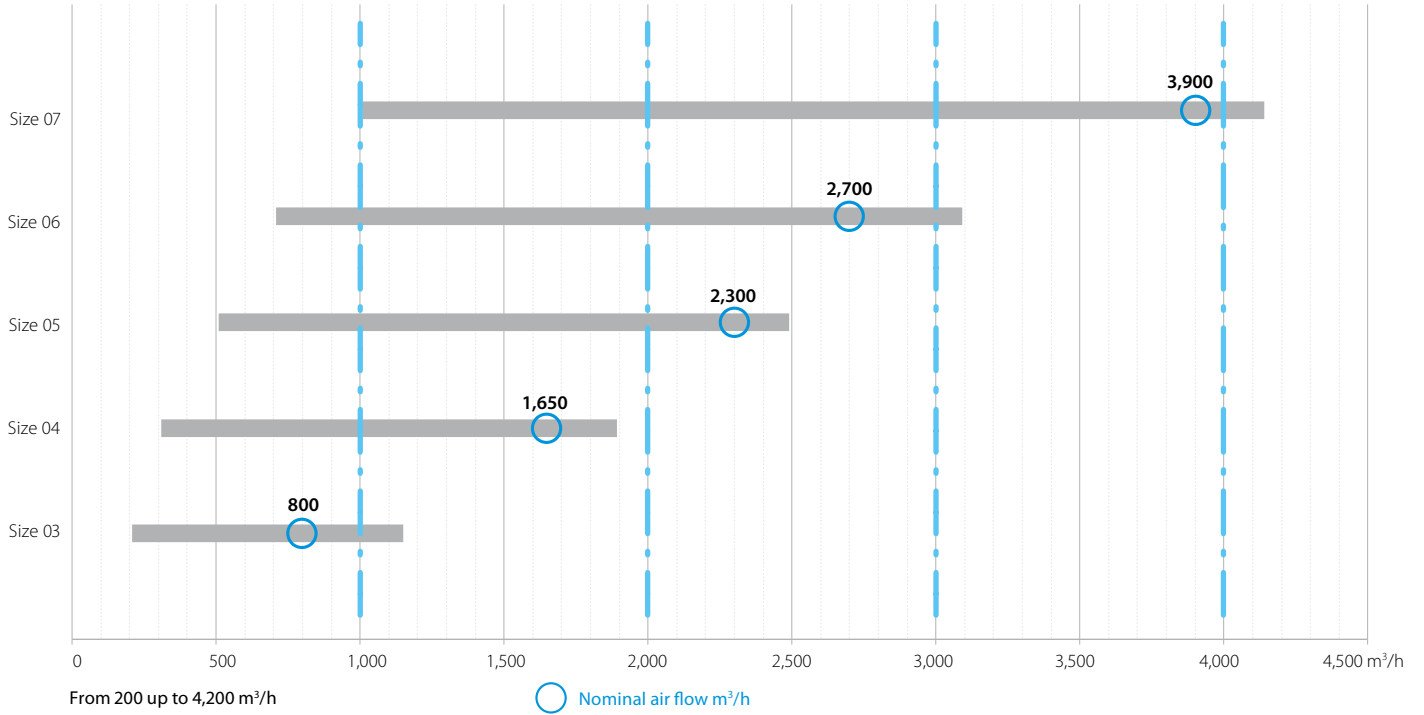

1. Please refer to technical data table at page 6 for more details



# Marketing tools



- › Watch the explanation of VAM range, its USPs from our Indoor Air Quality Seminar [www.youtube.com/daikineurope](http://www.youtube.com/daikineurope)
- › Watch the Modular L promotional video on [www.youtube.com/daikineurope](http://www.youtube.com/daikineurope)
- › Watch the Modular T promotional video: [www.youtube.com/daikineurope](http://www.youtube.com/daikineurope)
- › Download our brochure on Commercial Ventilation from [my.daikin.eu](http://my.daikin.eu)
- › Get access to our selection tool [bim.daikin.eu](http://bim.daikin.eu) to find your ventilation unit in a few click.
- › Download our app or refer to the selection tool above.



- › Consult the “Argue Card” document to support in promoting the Modular L range (*available on request*)

# BIM models

- › Get the VAM, Modular L and T BIM tools on [bim.daikin.eu](http://bim.daikin.eu)

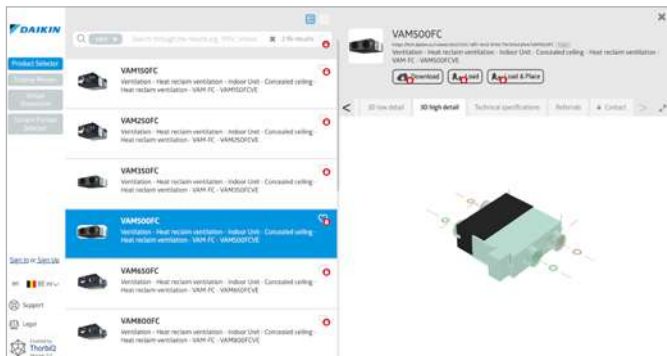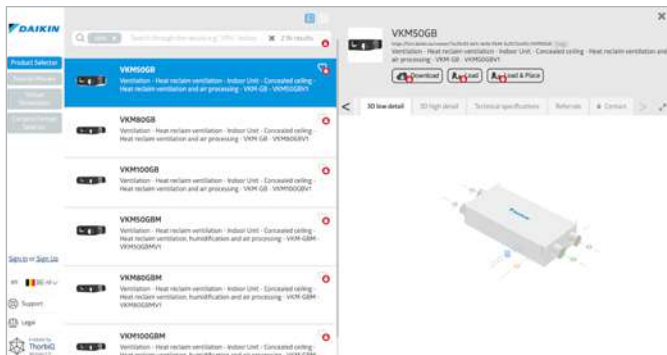

# Benefits for the installer

## Plug and play design

- › Pre-programmed and factory-tested controls for an easier and fast commissioning
- › Lightweight, low height and small footprint units
- › Easy access for servicing

# Benefits for the consultant

## Quick selection tool

- › In-house developed web software with improved user interface and preset parameters ensure that you can always find the optimum and most energy efficient product for your application
- › Interconnection with other product groups (e.g. automatic introduction of ventilation selection into a VRV Web Xpress selection)
- › Extremely flexible design

## BIM models

- › BIM models are available and can be downloaded with just a few clicks

# Benefits for the end user

## Best comfort

- › Wide range of units to control fresh air and humidity
- › Wide range of optional filters to suit the application available up to ePM1 80% (F9)
- › Special paper heat exchanger recovers heat and moisture from extract air to warm up and humidify fresh air to comfortable levels (VAM, VKM)

## Easy control and visualization

- › Wide and easy functionality with the use of Madoka remote controllers
- › Possibility to visualize the CO<sub>2</sub> concentration (with combination of VAM-J8 unit/BRYMA sensor/Madoka remote controller)

# Supporting tools, software and apps

[https://my.daikin.eu/denv/en\\_US/home/sales/ventilation-software.html](https://my.daikin.eu/denv/en_US/home/sales/ventilation-software.html)

Web based selection tools dedicated to the Daikin ventilation portfolio

## Ventilation Web Xpress

Selection tool for ventilation devices (VAM (+EKVDX) and VKM). The selection is based on given supply/extract airflows (including fresh up and given ESP of supply/extract ducting:

- › Easy calculation of fresh air per person or per area
- › Visualisation of psychrometric chart
- › Visualisation of selected configuration
- › Required field settings mentioned in the report






## ASTRA Web

- › Quick Modular L/T selection that will save you precious time, drastically reducing selection time through the ASTRA software interface.
- › Very competitive solution available within the Wizard thanks to pre-uploaded parameters.
- › High selection quality, thanks to the intelligence embedded within the software core.



## VRV Xpress integrates seamlessly with our ventilation selection software

- › The ventilation selection meant for a VRV project can be initiated directly from VRV Web Xpress.
- › The selected ventilation products -either on Ventilation Web Xpress or ASTRA- can be introduced into the VRV selection on VRV Web Xpress.
- › Integration of ventilation selection into 2D Floorplan.

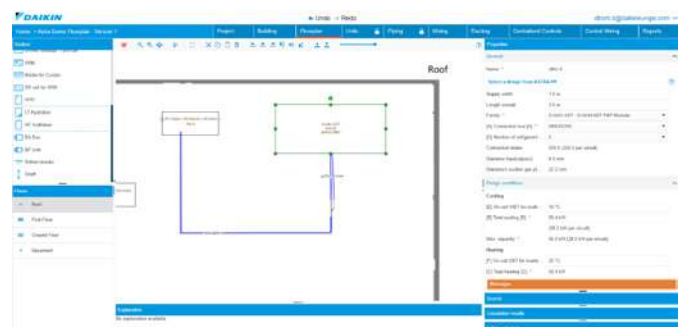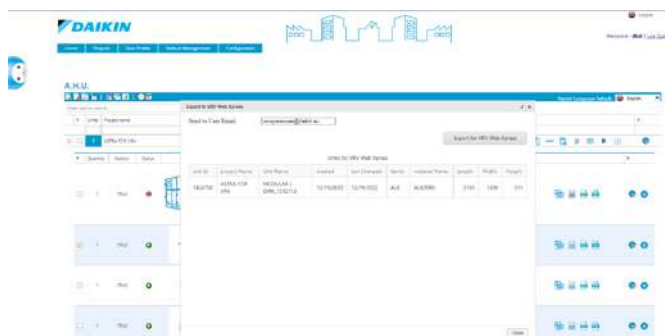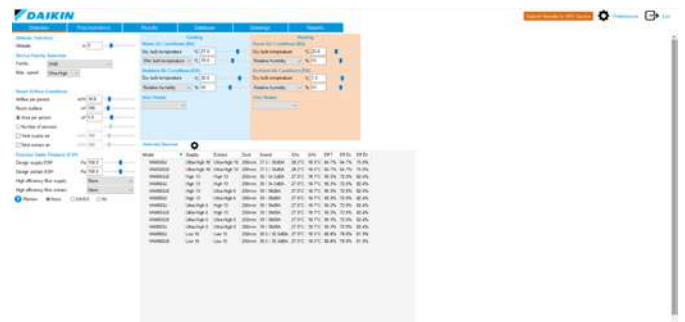

## Daikin air handling units



## Why choose Daikin air handling units?

- › Maximum energy efficiency and indoor air quality
- › Wide range of functions and options
- › **High quality** components
- › **Innovative** technology: Unique features and state of the art technology for short payback
- › Operation **efficiency** and **energy savings**
- › Outstanding **reliability** and **performance**
- › Various applications are possible including air conditioning applications, industry-type process cooling, and large-scale district heat source systems
- › Plug and play concept for easy installation and commissioning
- › Unique Daikin fresh air package available for connection of AHU to VRV or ERQ

## Certifications

- › Eurovent certified performances
- › Exceeding 2018 ErP – ECODESIGN requirements
- › Certified according to the Hygiene Directive VDI 6022 (Modular L and Professional ranges)
- › Certified according to the Hygiene Directive DIN 1946 (Professional range)
- › RLT certified performances



## The unique quality of Daikin AHU is accomplished by:

### Panels

- › The outer panel is Pre-painted with Corrosion Class RC5
- › The inner panel is made of Aluzinc with Corrosion Class RC4

### Gasket

- › Liquid gasket technology drastically reduces unit air leakage

### Frame

- › All anodized aluminium which has the highest corrosion resistance compared to natural aluminium
- › Unique Daikin thermal break (35 mm or 27 mm thermal break). Polyamide bars design to enhance thermal break unit performances
- › Distinctive Section to section thermal break profile to ensure thermal break design on the whole unit
- › Rounded profile for increased ease of cleaning

### IAQ

- › Flush internal surface and rounded corner flush surface to avoid the retention of dirt and to be easily cleanable
- › Wide filtration possibility to reduce pollution

### Plug & Play Controls

- › Pre-commissioned and Factory-tested control for quicker on site commissioning
- › Sole manufacturer to provide a complete AHU DX solution from a single manufacturer available for connection of AHU to VRV or ERQ (everything factory-mounted)



## D-AHU MODULAR R

Pre configured unit with side connection and rotary heat exchanger (sensible or sorption)



## D-AHU MODULAR P

Pre configured unit with side connection and aluminium counter flow plate heat exchanger



## D-AHU PROFESSIONAL

Fully customize solution to meet all projects demand

For more information on Modular R/P and Professional  
please refer to the Air Handling Unit section



# Why use DX outdoor units with Air Handling Units?



## High comfort levels

- › Rapid response of supply air temperature to changing loads, results in a steady indoor temperature
- › VRV offers the ultimate comfort thanks to continuous heating, also during defrost

## Low carbon footprint and operating costs

- › DX heat pumps are highly efficient inverter units using a lower GWP refrigerant
- › By integrating a VRV heat recovery system, excess heat from rooms in cooling can be reused to heat up incoming fresh air


## Easy design, all components integrated

- › A DX system is an all-in-one system, no boilers, tanks or pumps are needed reducing the total investment cost

## One-stop shop, Daikin's fresh air package

- › A plug & play package with a Daikin DX outdoor unit and Daikin Air Handling Unit
- › One point of contact for the design, installation and commissioning, streamlining the process

## Total solution operation example

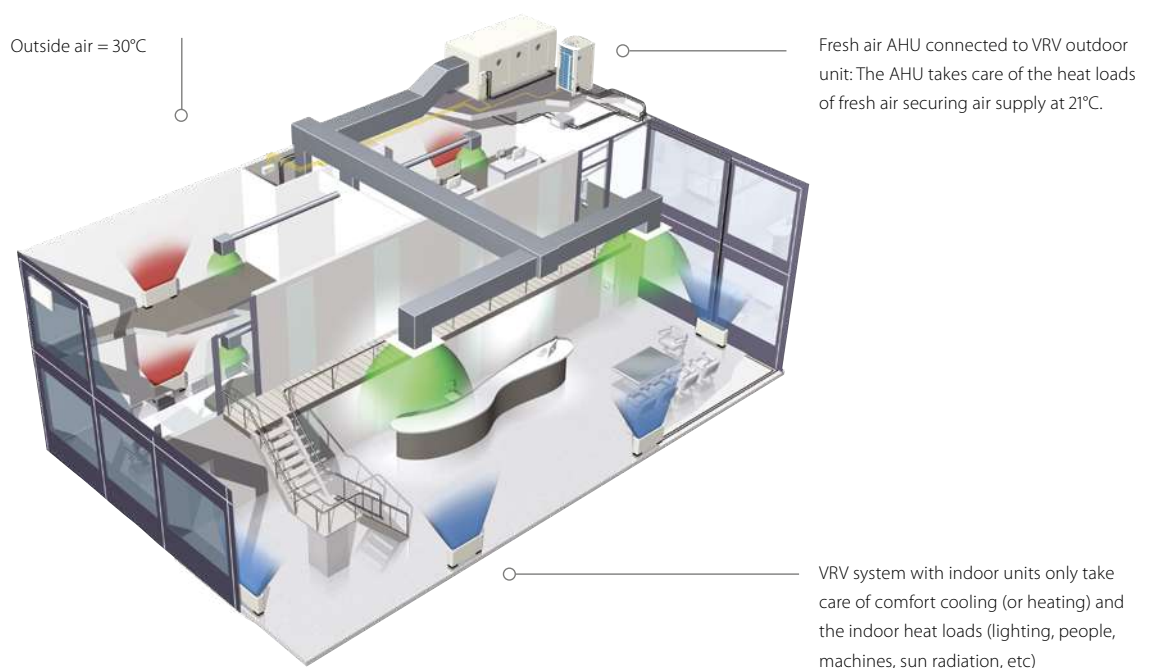


# Daikin Air Handling Unit kits for connection to DX outdoor units

**R-32**

## NEW Expansion valve kits

- 3 new capacities (300,350,400) offer a complete range of expansion valve kits from 5 to 69.3kW
- Improved flexibility thanks to combination ratio from 65% up to 110%
- Unified range connectable both to R-32 and R-410A systems
- Can be used in the most extreme outdoor conditions, down to -20°C
- Fully compliant to IEC60335-2-40, thanks to Shirudo Technology



## NEW Control box

- Complete offer of 5 control possibilities
  - Daikin integrated or third-party controller
  - Control of return air or fresh air supply temperature
- All control methods unified in one box
- Hinged door for easy servicing



**Expansion valve set (EKEXVA\*)**

- Controls the refrigerant flow in the AHU DX coil
- Fully brazed and wired in case of a Daikin AHU

**Control box (EKEACB)**

- Controls the expansion valve set and outdoor unit(s) capacity
- Mounted and wired in case of a Daikin AHU

## Specifications

### EKEA – Expansion valve kit

Ventilation				EKEXVA	50	63	80	100	120	140	200	250	300	350	400	450	500
Dimensions	Unit			mm													
				404x217x80.5													
Weight	Unit			kg													
				2.9													
Operation range	On coil temperature	Heating Min.	°CDB	10.0													
		Cooling Max.	°CDB	35.0													
Ambient installation conditions	Min.			°CDB													
				-20.0													
	Max			°CDB													
				52.0													
Sound pressure level	Cooling	Nom.	dBa	36.5	37.5	38.6	39.5	40.5	41.1	42.5	43.5	44.3	45.1	45.6	46.1	46.5	
		Nom.	dBa	24.8	25.8	26.8	27.8	28.8	29.4	30.8	31.8	32.5	33.3	33.8	34.3	34.8	
Refrigerant	Type / GWP		R-32 / 675 R-410A / 2,087.5														
Piping connections	Liquid	Type	mm	Braze connection (only liquid line connected)													
		OD	mm	6.35				9.52				12.7					

### EKEACB – Control box

				EKEACB		
Layout			Pair   Multi   Mix			
Dimensions	Unit	mm		300x400x150		
Weight	Unit	kg		5.1		
Ambient installation conditions	Min	°CDB		-20		
		Max	°CDB		52	
Power supply	Phase				1~	
	Frequency	Hz		50/60		
	Voltage	V		220-240/220		

Click more information on [EKEA](#) or [EKEXVA](#) outdoor units


# Air Handling Unit kits - Control possibilities

Every application is different.

Is there a constant load or not, how to control your temperature and which controls are available?

**With our complete offering of 5 control possibilities**, anything is possible.

Flow chart to select your control type

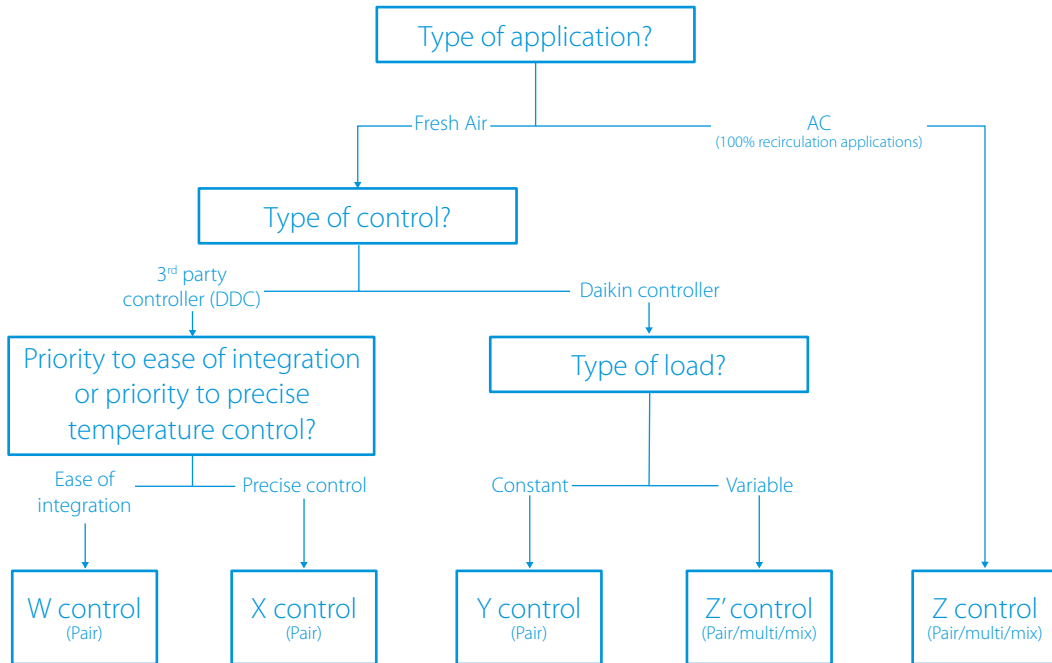


Control type benefits	Sensor Used	Controller
<b>W control – control of supply or return air temperature</b> <ul style="list-style-type: none"> <li>› <b>Responds to load variation</b> (capacity is changed as a function of measured temperature, but slower than X- control)</li> <li>› <b>Air temperature control</b></li> <li>› <b>Easy to integrate, as no additional programming</b> is needed for most standard AHU controllers</li> </ul>	<b>Td, Ts/f or Tr</b> (field supplied)	External controller (DDC) using a proportional 0~10 V signal for capacity control <b>(5 steps)</b>
<b>X control – control of supply or return air temperature</b> <ul style="list-style-type: none"> <li>› <b>Fastest response to load variation</b> (capacity is immediately changed as a function of measured temperature)</li> <li>› <b>Precise air temperature control</b></li> <li>› <b>Ideal for comfort sensitive applications.</b> This is also used by <b>default</b> in Daikin AHU controls</li> </ul>	<b>Td, Ts/f or Tr</b> (field supplied)	External controller (DDC) using a proportional 0~10 V signal for capacity control <b>(Stepless)</b>
<b>Y control – control of evaporating/condensing temperature</b> <ul style="list-style-type: none"> <li>› <b>Cost effective and simple solution</b>, no additional DDC controller required</li> <li>› <b>Fixed evaporating/condensing temperature</b>, no direct temperature control</li> <li>› <b>Ideal for applications with a constant cooling/heating load</b></li> </ul>	<b>R2T/R3T</b> (Daikin supplied)	<b>3rd party thermostat</b> (Daikin controller for field settings)





## Sensors used

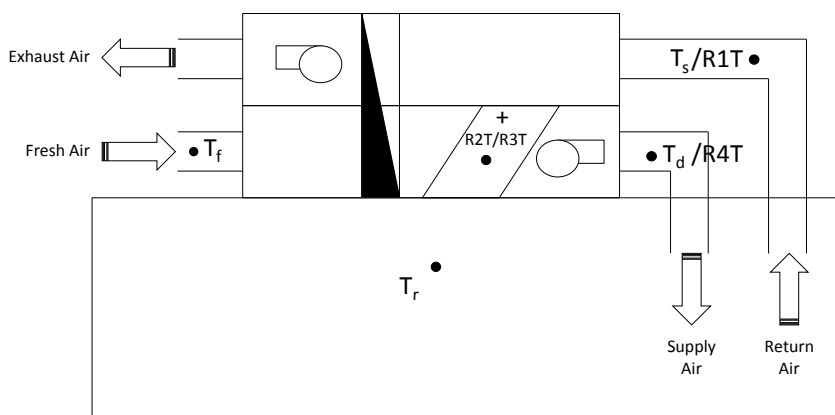

### Legend

- $T_d$  : discharge (supply) air temperature
- $T_s$  : suction (return) air temperature
- $T_f$  : fresh air temperature
- $T_r$  : room air temperature
- R2T/R3T: Refrigerant (liquid/gas line) temperature

Control type benefits	Sensor Used	Controller
<p><b>Z' control – control of supply air temperature</b></p> <ul style="list-style-type: none"> <li>› <b>Cost efficient and simple</b> solution, no additional DDC controller required</li> <li>› You can <b>combine VRV indoor units and AHUs</b> in one system or connect <b>several AHUs to 1 outdoor unit</b></li> <li>› <b>Ideal for pre-conditioning of fresh air</b> via <math>T_d</math> temperature control</li> <li>› Less accurate room temperature control compared to X/W/Z control</li> </ul>	<p><b>R4T</b> (Daikin supplied)</p>	<p>Daikin controller (set point can be set via field setting)</p>
<p><b>Z control – return air temperature control</b></p> <ul style="list-style-type: none"> <li>› <b>Cost efficient and simple solution</b>, no additional DDC controller required</li> <li>› You can <b>combine VRV indoor units and AHUs</b> in one system or connect <b>several AHUs to 1 outdoor unit</b></li> <li>› <b>Ideal for AHU's that operate at 100% recirculation</b> like indoor units or if no particular supply temperature required</li> <li>› <b>No supply temperature control</b></li> </ul>	<p><b>R1T</b> (Daikin supplied)</p>	<p>Daikin controller (set point can be set via remocon or via C1C2)</p>

# Air Handling Unit kits – Layout possibilities

With our wide capacity range and different control options, a variety of layout possibilities to match your application:

- > **Pair layout:** one or more outdoor units combined with 1 air handling unit
- > **Multi layout:** one outdoor unit combined with multiple air handling units
- > **Mix layout:** one outdoor unit combined with an air handling unit AND indoor units

## Pair layout


**One ERQ or VRV heat pump (system) connected to one AHU through one refrigerant circuit**

- > with W, X, Y, Z, Z' control
- > not allowed for VRV H/R




**One VRV heat pump (system) connected to the interlaced coil of one AHU through several refrigerant circuits**

- > with W, X, Y control
- > not allowed for VRV H/R and VRV-i

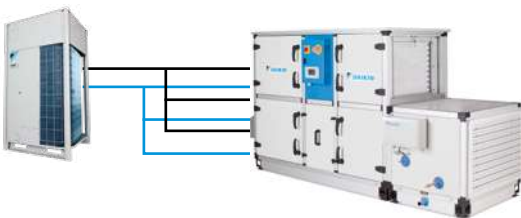

**Several ERQ or VRV heat pumps connected to the interlaced coil of one AHU through several refrigerant circuits**


- > with W, X, Y control
- > not allowed for VRV H/R and VRV-i

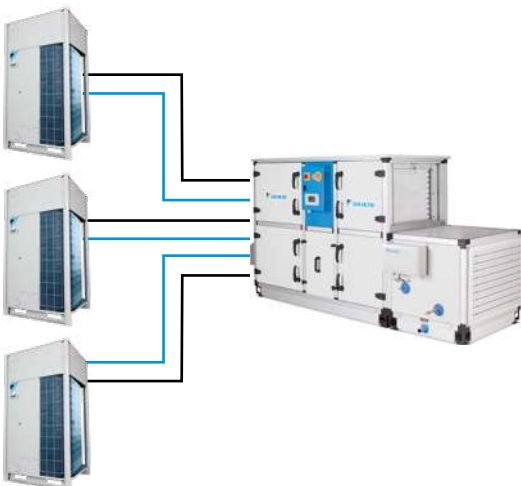

## Multi layout

**One VRV heat pump connected to several AHUs**


- > with Z, Z' control and field supplied controls on AHU side
- > not allowed for VRV H/R
- > no interlaced coil possible

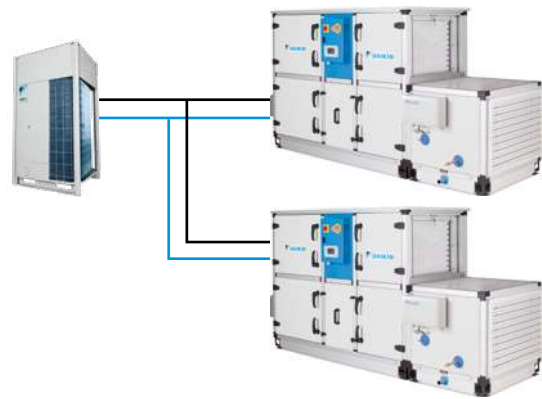

## Mix layout

**VRV indoor units and AHU(s) mixed in the same VRV heat pump or heat recovery system**


- > with Z, Z' control and field supplied controls on AHU side
- > no interlaced coil possible
- > hydrobox not possible

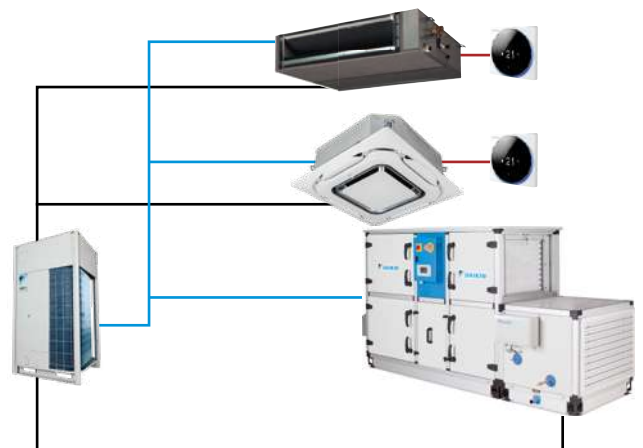

- Refrigerant piping
- F1-F2
- P1-P2



## Main components with detailed piping and wiring principle

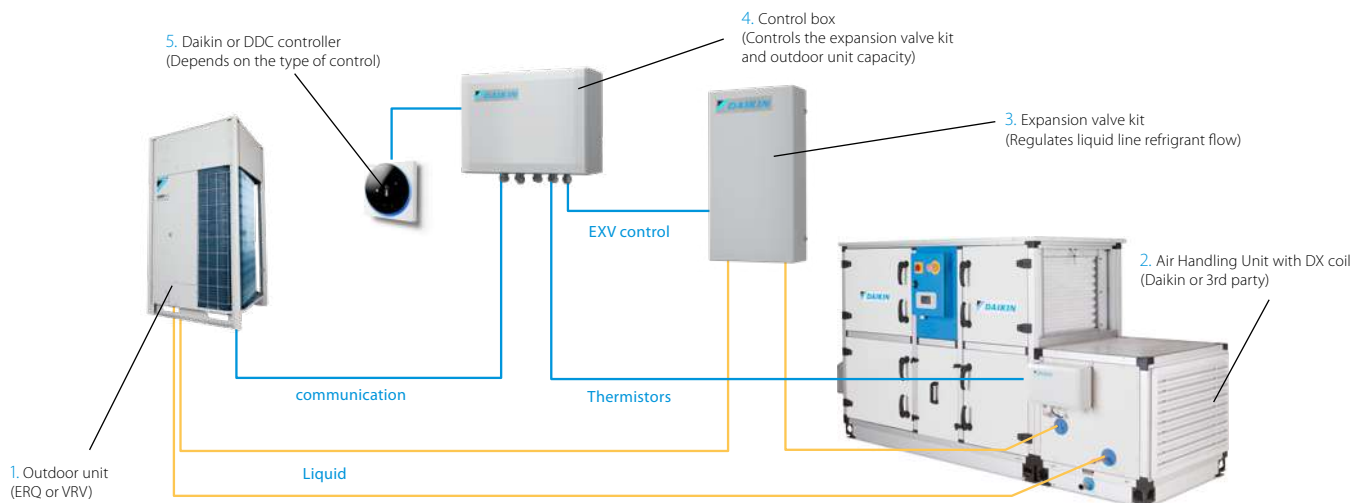

## Detailed combination table

Range	Outdoor Unit	Control box EKEACBVE	Expansion valve kits EKEXVA***												
			50	63	80	100	125	140	200	250	300	350	400	450	500
ERQ	ERQ100A7V1B	P	-	P	P	P	P	-	-	-	-	-	-	-	-
	ERQ125A7V1B	P	-	P	P	P	P	P	-	-	-	-	-	-	-
	ERQ140A7V1B	P	-	-	P	P	P	P	-	-	-	-	-	-	-
	ERQ125A7W1B	P	-	P	P	P	P	P	-	-	-	-	-	-	-
	ERQ200A7W1B	P	-	-	-	P	P	P	P	P	-	-	-	-	-
	ERQ250A7W1B	P	-	-	-	-	P	P	P	P	-	-	-	-	-
<b>VRV IV</b> & <b>VRV IV+</b>	H/P (RYYQ, RXYQ, RXYSQ, RXYTQ, RXYLQ, RXYSCQ, RWEYQ (H/P))	P/M	Pair and multi: 65% <sup>(1)</sup> < CR < 110% Mix: CR < 110% and 50% < IU CR < 110%												
	VRV-i (RKXYQ)	P <sup>(2)</sup> /M	Pair and multi: 65% <sup>(1)</sup> < CR < 110% Mix: CR < 110% and 50% < IU CR < 110%												
	H/R (REYQ, RWEYQ (H/R))	M <sup>(3)</sup>	Multi <sup>(3)</sup> : 65% <sup>(1)</sup> < CR < 110% Mix: CR < 110% and 50% < IU CR < 110%												
<b>VRV 5</b>	H/P (RXYS A, RXYA)	P/M	Pair and multi: 65% <sup>(1)</sup> < CR < 110% Mix: CR < 110% and 50% < IU CR < 110%												
	H/R REYA	M <sup>(3)</sup>	Multi <sup>(3)</sup> : 65% <sup>(1)</sup> < CR < 110% Mix: CR < 110% and 50% < IU CR < 110%												

P: Pair layout - One or more outdoor units connected to an (interlaced) coil of one AHU.

M: Mix or multi layout - Combination of (multiple) AHU(s) with (mix combination) or without (multi combination) VRV DX indoor(s). Only Z or Z' control possible (no interlaced coils).

(1): For 65% < CR < 75% please refer to the specifically required coil size

(2): Only Z or Z' control possible (no interlaced coils)

(3): Technically is possible to connect H/R in pair combination, but there's no benefit to do it



# Daikin Fresh Air package

## What is included?

- › A plug & play package with a Daikin DX outdoor unit and Daikin Air Handling Unit
- › Factory fitted and welded DX coil, expansion valve kit and control box
- › One point of contact



VRV or ERQ outdoor condensing unit



Daikin Air Handling Unit



Factory fitted and welded DX coil, expansion valve kit and control box

## Simplified business

- › Unique total solution approach of heating, cooling and ventilation
- › Off-the-shelf compatibility between Daikin outdoor unit and Daikin AHU
- › Plug&play control for outstanding reliability
- › **Peace-of-mind thanks to a single point of contact**

## Simple selection in 2-steps

### STEP 1



Select your design in ASTRA software

### STEP 2



Add the AHU design in Xpress (including capacity, dimensions, refrigerant connection location,...)

Share with Xpress

## Complete range of possibilities



750 m<sup>3</sup>/h up to 144,000 m<sup>3</sup>/h

D-AHU Professional

- › Infinite variable sizes
- › Tailored to the individual customer



500 m<sup>3</sup>/h up to 25,000 m<sup>3</sup>/h

D-AHU Modular R

- › Pre-configured sizes
- › Plug and play concept
- › EC Fan technology
- › Heat recovery wheel (sorption and sensible technology)
- › Compact design



500 m<sup>3</sup>/h up to 25,000 m<sup>3</sup>/h

D-AHU Modular P

- › Pre-configured sizes
- › Plug and play concept
- › EC Fan technology
- › High efficiency aluminium counter flow PHE
- › Compact design

# Integration with 3<sup>rd</sup> party Air Handling Units

Also for the integration with 3<sup>rd</sup> party AHU's Daikin provides expert support for the design and installation.

## Selection of the expansion valve kit – Fresh air application

- › Define the required heating/cooling load of your project
- › Define 3rd party AHU heat exchanger capacity
- › Use the Xpress selection software or the below table to select the correct expansion valve kit
- › The 3rd party AHU design should respect the allowed heat exchanger volume
- › Xpress selection software will select the correct outdoor unit at the design ambient temperatures.

### Cooling

EKEXVA Class	Allowed heat exchanger capacity (kW)			Allowed heat exchanger volume (dm <sup>3</sup> )		
	Minimum	Nominal	Maximum	Minimum		Maximum
				General Limits	(65%<CR<75%) Only for pair and multi layout	
50	5.0	5.6	6.2	0.95	1.09	1.65
63	6.3	7.1	7.8	1.02	1.18	2.08
80	7.9	9.0	9.9	1.42	1.64	2.64
100	10.0	11.2	12.3	1.51	1.74	3.30
125	12.4	14.0	15.4	1.98	2.29	4.12
140	15.5	16.0	17.6	2.54	2.94	4.62
200	17.7	22.4	24.6	3.02	3.49	6.60
250	24.7	28.0	30.8	3.97	4.58	8.25
<b>NEW</b> 300	30.9	33.5	36.9	4.53	5.25	9.9
<b>NEW</b> 350	37.0	40.0	44.0	5.48	6.32	11.55
400	44.1	45.0	49.5	6.04	6.97	13.2
<b>NEW</b> 450	49.6	50.4	55.4	6.99	8.07	14.5
500	55.5	56.0	61.6	7.55	8.72	16.5

Saturated evaporating temperature: +6°C  
Air temperature: +27°C DB / +19°C WB

### Heating

EKEXVA Class	Allowed heat exchanger capacity (kW)			Allowed heat exchanger volume (dm <sup>3</sup> )		
	Minimum	Nominal	Maximum	Minimum		Maximum
				General Limits	(65%<CR<75%) Only for pair and multi layout	
50	5.6	6.3	7.0	0.95	1.09	1.65
63	7.1	8.0	8.8	1.02	1.18	2.08
80	8.9	10.0	11.1	1.42	1.64	2.64
100	11.2	12.5	13.8	1.51	1.74	3.30
125	13.9	16.0	17.3	1.98	2.29	4.12
140	17.4	18.0	19.8	2.54	2.94	4.62
200	19.9	25.0	27.7	3.02	3.49	6.60
250	27.8	31.5	34.7	3.97	4.58	8.25
<b>NEW</b> 300	34.8	37.5	41.5	4.53	5.23	9.9
<b>NEW</b> 350	41.6	45.0	49.5	5.48	6.32	11.55
400	49.6	50.0	55.7	6.04	6.97	13.2
<b>NEW</b> 450	55.8	56.5	62.4	6.99	8.07	14.85
500	62.5	63.0	69.3	7.55	8.72	16.5

Saturated evaporating temperature: +46°C  
Air temperature: +20°C DB

## Selection of the expansion valve kit – Recirculation application

- › Define the required heating/cooling load of your project
- › Use the Xpress selection software or the below table to select the correct expansion valve, following the procedure used as for standard VRV indoor units
- › The 3rd party AHU design should respect the allowed heat exchanger volume
- › Xpress selection software will select the correct outdoor unit at the design ambient temperatures

### Cooling

EKEXVA Class	On-coil air temperature [°C]						
	14WB	16WB	18WB	19WB	20WB	22WB	24WB
	20DB	23DB	26DB	27DB	28DB	30DB	32DB
	kW	kW	kW	kW	kW	kW	kW
50	3.8	4.5	5.2	5.6	5.9	6.0	6.2
63	4.8	5.7	6.6	7.1	7.5	7.7	7.8
80	6.1	7.2	8.4	9.0	9.5	9.7	9.9
100	7.6	9.0	10.5	11.2	11.8	12.1	12.3
125	9.5	11.3	13.1	14.0	14.8	15.1	15.4
140	10.8	12.9	15.0	16.0	16.9	17.3	17.6
200	15.1	18.0	21.0	22.4	23.6	24.2	24.6
250	18.9	22.5	26.2	28.0	29.5	30.2	30.8
<b>NEW</b> 300	22.6	26.9	31.3	33.5	35.3	36.1	36.9
<b>NEW</b> 350	27.0	32.2	37.4	40.0	42.1	43.1	44.0
400	30.4	36.2	42.1	45.0	47.4	48.5	49.5
<b>NEW</b> 450	34.0	40.5	47.2	50.4	53.1	54.3	55.4
500	37.8	45.0	52.4	56.0	59.0	60.4	61.6

### Heating

EKEXVA Class	On-coil air temperature [°C]						
	10.0	16.0	18.0	20.0	21.0	22.0	24.0
	kW	kW	kW	kW	kW	kW	kW
50	6.6	6.6	6.6	6.3	6.1	5.9	5.5
63	8.4	8.4	8.4	8.0	7.7	7.5	7.0
80	10.5	10.5	10.5	10.0	9.7	9.4	8.7
100	13.1	13.1	13.1	12.5	12.1	11.7	10.9
125	16.8	16.8	16.8	16.0	15.5	15.0	13.9
140	18.9	18.9	18.9	18.0	17.4	16.8	15.7
200	26.2	26.2	26.2	25.0	24.2	23.4	21.8
250	33.1	33.1	33.1	31.5	30.5	29.5	27.5
<b>NEW</b> 300	39.4	39.4	39.4	37.5	36.3	35.1	32.7
<b>NEW</b> 350	47.2	47.2	47.2	45.0	43.6	42.1	39.2
400	52.4	52.4	52.4	50.0	48.4	46.8	43.6
<b>NEW</b> 450	59.2	59.2	59.2	56.5	54.7	52.9	49.3
500	66.0	66.0	66.0	63.0	61.0	59.0	54.9



# Astropure 2000, Air Purifier for Commercial Applications

## Plug & play, mobile recirculation unit with high efficiency filtration – for better indoor air quality in commercial spaces

- › For areas where additional, extra high, filtration performance is needed.
- › Airflow rate up to 2,000 m<sup>3</sup>/h
- › HEPA H14 filter in accordance with EN1822
- › Pre-filter options up to ISO Coarse 70%
- › Insulated double-wall construction provides whisper-quiet operation down to 35 dB(A)
- › Easy installation, operation, and maintenance in a totally self-contained system
- › For commercial areas up to 200m<sup>2</sup>



### Models

Model	BR00000554	BR00000749	BR00000676	BR00000751
Plug type	EU	UK	EU	UK
HEPA Filter (H14)		✓		✓
LCD Screen			✓	✓
Activ. Carbon (Gas phase) pre-filter			✓	

### Applications



Schools and Universities



Commercial Buildings



Healthcare



Hospitality



Shops and Shopping malls

## Providing high-efficiency 2-stage filtration

### Standard prefilter

All units are delivered with a prefilter, increasing filter life and protecting the installed HEPA filter

#### RedPleat - 4531002424

- › Delivered with BR00000554/749
- › ISO 16890: ISO coarse 70%
- › Available with Antimicrobial treated media (RedPleat ULTRA)



#### RedPleat Carb - 4139002424

- › Delivered with BR00000676/751
- › ISO 16890: ISO coarse 65%
- › Effectively removes offensive odors



### Main filter

The HEPA filter features eFRM filtration media which combines ultra-high efficiency and particulate loading to remove 99.99% of dust, pollen, mold, bacteria, viruses, and any airborne particle with a size of 0.3 microns or greater.

#### AstroCel III - 1493299990

- › H14 filtration efficiency according EN 1822
- › V-shaped filter configuration, combined with microglass media, delivers higher flow and the lowest possible pressure drop vs traditional box style HEPA filters
- › Compatible with Discrete Particle Counter (DPC) and photometric test methods as access and instrumentation allow



# Astropure 2000, Air Purifier for Commercial Applications

Plug & play, mobile recirculation unit with high efficiency filtration – for better indoor air quality in commercial spaces

- > Airflow rate up to 2,000 m<sup>3</sup>/h
- > HEPA H14 filter in accordance with EN1822
- > Optional touch sensitive LCD Display (BR00000676/751)
- > Insulated double-wall construction provides whisper-quiet operation
- > Activated carbon filter
- > Sliding tray design provides easy access and servicing of filters
- > Designed with internal variable fan speed (electronically commutated) to meet specific application requirements
- > Suitable for in-room use or sheltered outdoor installation
- > CE-compliance, VDI 6022 guided design



More details and final information can be found by scanning or clicking the QR codes.



BR00000554



BR00000676

Ventilation				BR00000554	BR00000749	BR00000676	BR00000751
Features	Plug type			EU	UK	EU	UK
	HEPA Filter (H14)			✓		✓	
	LCD Screen					✓	
	Activ. Carbon (Gas phase) pre-filter					✓	
Design air flow rate	m <sup>3</sup> /h		2,000				
Application			Floor standing type				
Casing	Colour			Painted galvanized steel finish			
Dimensions	Unit	HxWxD	mm	1,628x720x770			
Weight	Unit			150 (depending on version)			
Pre-filter	Dust collecting method			Prefilter RedPleat, ISO Coarse 70%		Prefilter RedPleat Carb, ISO Coarse 65% gas phase filter	
HEPA filter	Bacteria filtering method			Astrocel III HEPA H14			
Air purifying operation	Power input	High fan speed	kW	0.379			
Sound pressure level	Air purifying operation	High fan speed	dB(A)	55.9			
Fan Motor			Stepless adjustable				
Safety devices	Item			Safety switch (operation stops when the back door is open)			
Standard Accessories	Pre-filter			1			
	HEPA filter			1			
	Quick Start and Maintenance Guide			1			
	Installation and Operation Manual			1 (download)			
Power cord			m	3			
Power supply	Phase			1~			
	Frequency			50/60			
	Voltage			230			
Running current	Air purifying operation	High fan speed	A	1.73			

## Options - Ventilation

		Energy recovery ventilation - VAM								
		VAM 150FC9	VAM 250FC9	VAM 350J8	VAM 500J8	VAM 650J8	VAM 800J8	VAM 1000J8	VAM 1500J8	VAM 2000J8
Individual control systems	BRC301B61 VAM wired remote control	•	•	•	•	•	•	•	•	•
	Madoka BRC1H52W (White) / BRC1H52S (Silver) / BRC1H52K (Black) User-friendly wired remote controller with premium design	•	•	•	•	•	•	•	•	•
	BRC1E53A/B/C Wired remote control with full-text interface and back-light	•	•	•	•	•	•	•	•	•
	BRC1D52 Standard wired remote control with weekly timer	•	•	•	•	•	•	•	•	•
Centralised control systems	DCC601A51 intelligent Tablet Controller	•	•	•	•	•	•	•	•	•
	DCS601C51 intelligent Touch Controller	•	•	•	•	•	•	•	•	•
	DCS302C51 Central remote control	•	•	•	•	•	•	•	•	•
	DCS301B51 Unified ON/OFF control	•	•	•	•	•	•	•	•	•
	DCM601A51 intelligent Touch Manager	•	•	•	•	•	•	•	•	•
Building Management System & Standard protocol interface	DGE601A51 Edge adapter for connection to Daikin Cloud Plus	•	•	•	•	•	•	•	•	•
	DGE602A51 Edge lite adapter for connection to Daikin Cloud Plus	•	•	•	•	•	•	•	•	•
	EKMBDXB Modbus interface	•	•	•	•	•	•	•	•	•
	DMS502A51 BACnet Interface	•	•	•	•	•	•	•	•	•
	DMS504B51 LonWorks Interface	•	•	•	•	•	•	•	•	•
	Coarse 55% (G4)									
	ePM10 75% (M5)									
ePM10 70% (M6)			EKAFVJ50F6	EKAFVJ50F6	EKAFVJ65F6	EKAFVJ100F6	EKAFVJ100F6	EKAFVJ100F6 x2	EKAFVJ100F6 x2	
ePM1 50% (F7)										
ePM1 60% (F7)			EKAFVJ50F7	EKAFVJ50F7	EKAFVJ65F7	EKAFVJ100F7	EKAFVJ100F7	EKAFVJ100F7 x2	EKAFVJ100F7 x2	
ePM <sub>i</sub> 70% (F8)			EKAFVJ50F8	EKAFVJ50F8	EKAFVJ65F8	EKAFVJ100F8	EKAFVJ100F8	EKAFVJ100F8 x2	EKAFVJ100F8 x2	
ePM1 80% (F9)										
High efficiency filter										
Replacement air filter										
Mechanical accessories	Rail									
	Rectangular to round duct transition									
	Separate plenum								EKPLEN200 (5)	EKPLEN200 (5)
<b>CO<sub>2</sub> sensor</b>			BRYMA65	BRYMA65	BRYMA65	BRYMA100	BRYMA100	BRYMA200	BRYMA200	
<b>Electrical heater for pre treatment of fresh air</b>	GSIEKA10009	GSIEKA15018	GSIEKA20024	GSIEKA20024	GSIEKA25030	GSIEKA25030	GSIEKA25030	GSIEKA35530 (6)		
<b>DX coil for post treatment of fresh air</b>				EKVDX32A	EKVDX50A	EKVDX50A	EKVDX80A	EKVDX100A	EKVDX100A	
<b>Silencer (900mm depth)</b>										
Electrical accessories	Wiring adapter for external monitoring/ control (controls 1 entire system)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)
	Adapter PCB for humidifier									
	Adapter PCB for third party heater	BRP4A50A	BRP4A50A	BRP4A50A (4)	BRP4A50A (4)	BRP4A50A (3/4)	BRP4A50A (4)	BRP4A50A (4)	BRP4A50A (3/4)	BRP4A50A (3/4)
	External wired temperature sensor									
	Adapter PCB Mounting plate	EKMP25VAM	EKMP25VAM			EKMP65VAM			EKMPVAM	
	Installation box for adaptor PCB	KRP1BA101	KRP1BA101	KRP1BA101	KRP1BA101	KRP1BA101	KRP1BA101	KRP1BA101	KRP1BA101	KRP1BA101

### Notes

- (1) Do not connect the system to DIII-net devices LONWorks interface, BACnet interface, ...; (intelligent Touch Manager, EKMBDXA are allowed)
- (2) Installation box needed
- (3) Adapter PCB mounting plate needed, applicable model can be found in the table above






## Options - Ventilation

Accessories	Modular L Pro						Modular T Pro				
	ALB02LB ALB02RB	ALB03LB ALB03RB	ALB04LB ALB04RB	ALB05LB ALB05RB	ALB06LB ALB06RB	ALB07LB ALB07RB	ATB03RA ATB03LA	ATB04RA ATB04LA	ATB05RA ATB05LA	ATB06RA ATB06LA	ATB07RA ATB07LA
Iso Coarse 55% (G4) Filter	ALF02G4A	ALF03G4A	ALF05G4A		ALF07G4A		ATF03G4A	ATF04G4A	ATF05G4A	ATF06G4A	ATF07G4A
ePM10 75% (M5) Filter	ALF02M5A	ALF03M5A	ALF05M5A		ALF07M5A		ATF03M5A	ATF04M5A	ATF05M5A	ATF06M5A	ATF07M5A
ePM1 50% (F7) Filter	ALF02F7A	ALF03F7A	ALF05F7A		ALF07F7A		ATF03F7A	ATF04F7A	ATF05F7A	ATF06F7A	ATF07F7A
ePM1 80% (F9) Filter	ALF02F9A	ALF03F9A	ALF05F9A		ALF07F9A		ATF03F9A	ATF04F9A	ATF05F9A	ATF06F9A	ATF07F9A
Sound attenuator	ALS0290A	ALS0390A	ALS0590A		ALS0790A		ATS0360A	ATS0460A	ATS0560A	ATS0660A	ATS0760A
Rails for door	ALA02RLA	ALA03RLA	ALA05RLA		ALA07RLA						
Duct transition	ALA02RCA	ALA03RCA	ALA05RCA		ALA07RCA						
Mixing damper							ATA03MDA	ATA04MDA	ATA05MDA	ATA06MDA	ATA07MDA
External damper							ATA03EDA	ATA04EDA	ATA05EDA	ATA06EDA	ATA07EDA
Electric pre heater <sup>1</sup>	ALD02HEFA	ALD03HEFA	ALD05HEFA		ALD07HEFA		ATD03HEFAU	ATD04HEFAU	ATD05HEFAU	ATD06HEFAU	ATD07HEFAU
Electric post heater <sup>1</sup>	ALD02HESA	ALD03HESA	ALD05HESA		ALD07HESA		ATD03HESAU	ATD04HESAU	ATD05HESAU	ATD06HESAU	ATD07HESAU
DX coil <sup>2</sup>							ATD03UDSAR	ATD04UDSAR	ATD05UDSAR	ATD06UDSAR	ATD07UDSAR
							ATD03UDSAL	ATD04UDSAL	ATD05UDSAL	ATD06UDSAL	ATD07UDSAL
WATER coil <sup>2</sup>	ALD02CWSA	ALD03CWSA	ALD05CWSA		ALD07CWSA		ATD03UWSAR	ATD04UWSAR	ATD05UWSAR	ATD06UWSAR	ATD07UWSAR
							ATD03UWSAL	ATD04UWSAL	ATD05UWSAL	ATD06UWSAL	ATD07UWSAL
Water pre heating coil	ALD02HWUA	ALD03HWUA	ALD05HWUA		ALD07HWUA		ATD03HWFUA	ATD04HWFUA	ATD05HWFUA	ATD06HWFUA	ATD07HWFUA
Water post heating coil <sup>2</sup>	ALD02HWUA	ALD03HWUA	ALD05HWUA		ALD07HWUA		ATD03HWSAR	ATD04HWSAR	ATD05HWSAR	ATD06HWSAR	ATD07HWSAR
							ATD03HWSAL	ATD04HWSAL	ATD05HWSAL	ATD06HWSAL	ATD07HWSAL
Water valve 2 way cooling	ALV02CW2A	ALV03CW2A	ALV05CW2A		ALV07CW2A		ATV03CW2A	ATV04CW2A	ATV05CW2A	ATV06CW2A	ATV07CW2A
Water valve 2 way heating	ALV02HW2A	ALV03HW2A	ALV05HW2A		ALV07HW2A		ATV03HW2A	ATV04HW2A	ATV05HW2A	ATV06HW2A	ATV07HW2A
Water valve 3 way cooling	ALV02CW3A	ALV03CW3A	ALV05CW3A		ALV07CW3A		ATV03CW3A	ATV04CW3A	ATV05CW3A	ATV06CW3A	ATV07CW3A
Water valve 3 way heating	ALV02HW3A	ALV03HW3A	ALV05HW3A		ALV07HW3A		ATV03HW3A	ATV04HW3A	ATV05HW3A	ATV06HW3A	ATV07HW3A
Valve modulating actuator	ALE00AMVA						ATE00AMVA				
Damper modulating actuator							ATE00AMDA				
Digital PCB							ATE00DPUA				
Frost switch							ATE00FSUA				
CO <sub>2</sub> sensor							ALP00COA				
Humidity sensor							ALP00HUA				
Temperature probe							ALP00TEA				
Room Interface							ALC00822A (POL 822)				
Commissioning module							ALC00895A (POL 895)				
Modbus RTU module							ALC00902A (POL 902)				
Bacnet IP module							ALC00908A (POL 908)				
LonWorks Interface											
Intelligent Touch Manager											
Intelligent Tablet Controller											
Intelligent Touch Controller											
Central remote control											
Unified ON/OFF control											

### Notes

- (1) For modular T pro only, both electric heater can be used as pre and post heater
- (2) For modular T pro only, sixth digit on main unit material name has to be aligned with last digit of the coil material name  
 ATB0\*RA --> ATD00\*UDSAR  
 ATB0\*LA --> ATD00\*UDSAL  
 ATB0\*RA --> ATD00\*UWSAR  
 ATB0\*LA --> ATD00\*UWSAL  
 ATB0\*RA --> ATD00\*HWSAR  
 ATB0\*LA --> ATD00\*HWSAL
- (3) Please refer to the selection software for more details on accessories and their incompatibilities.



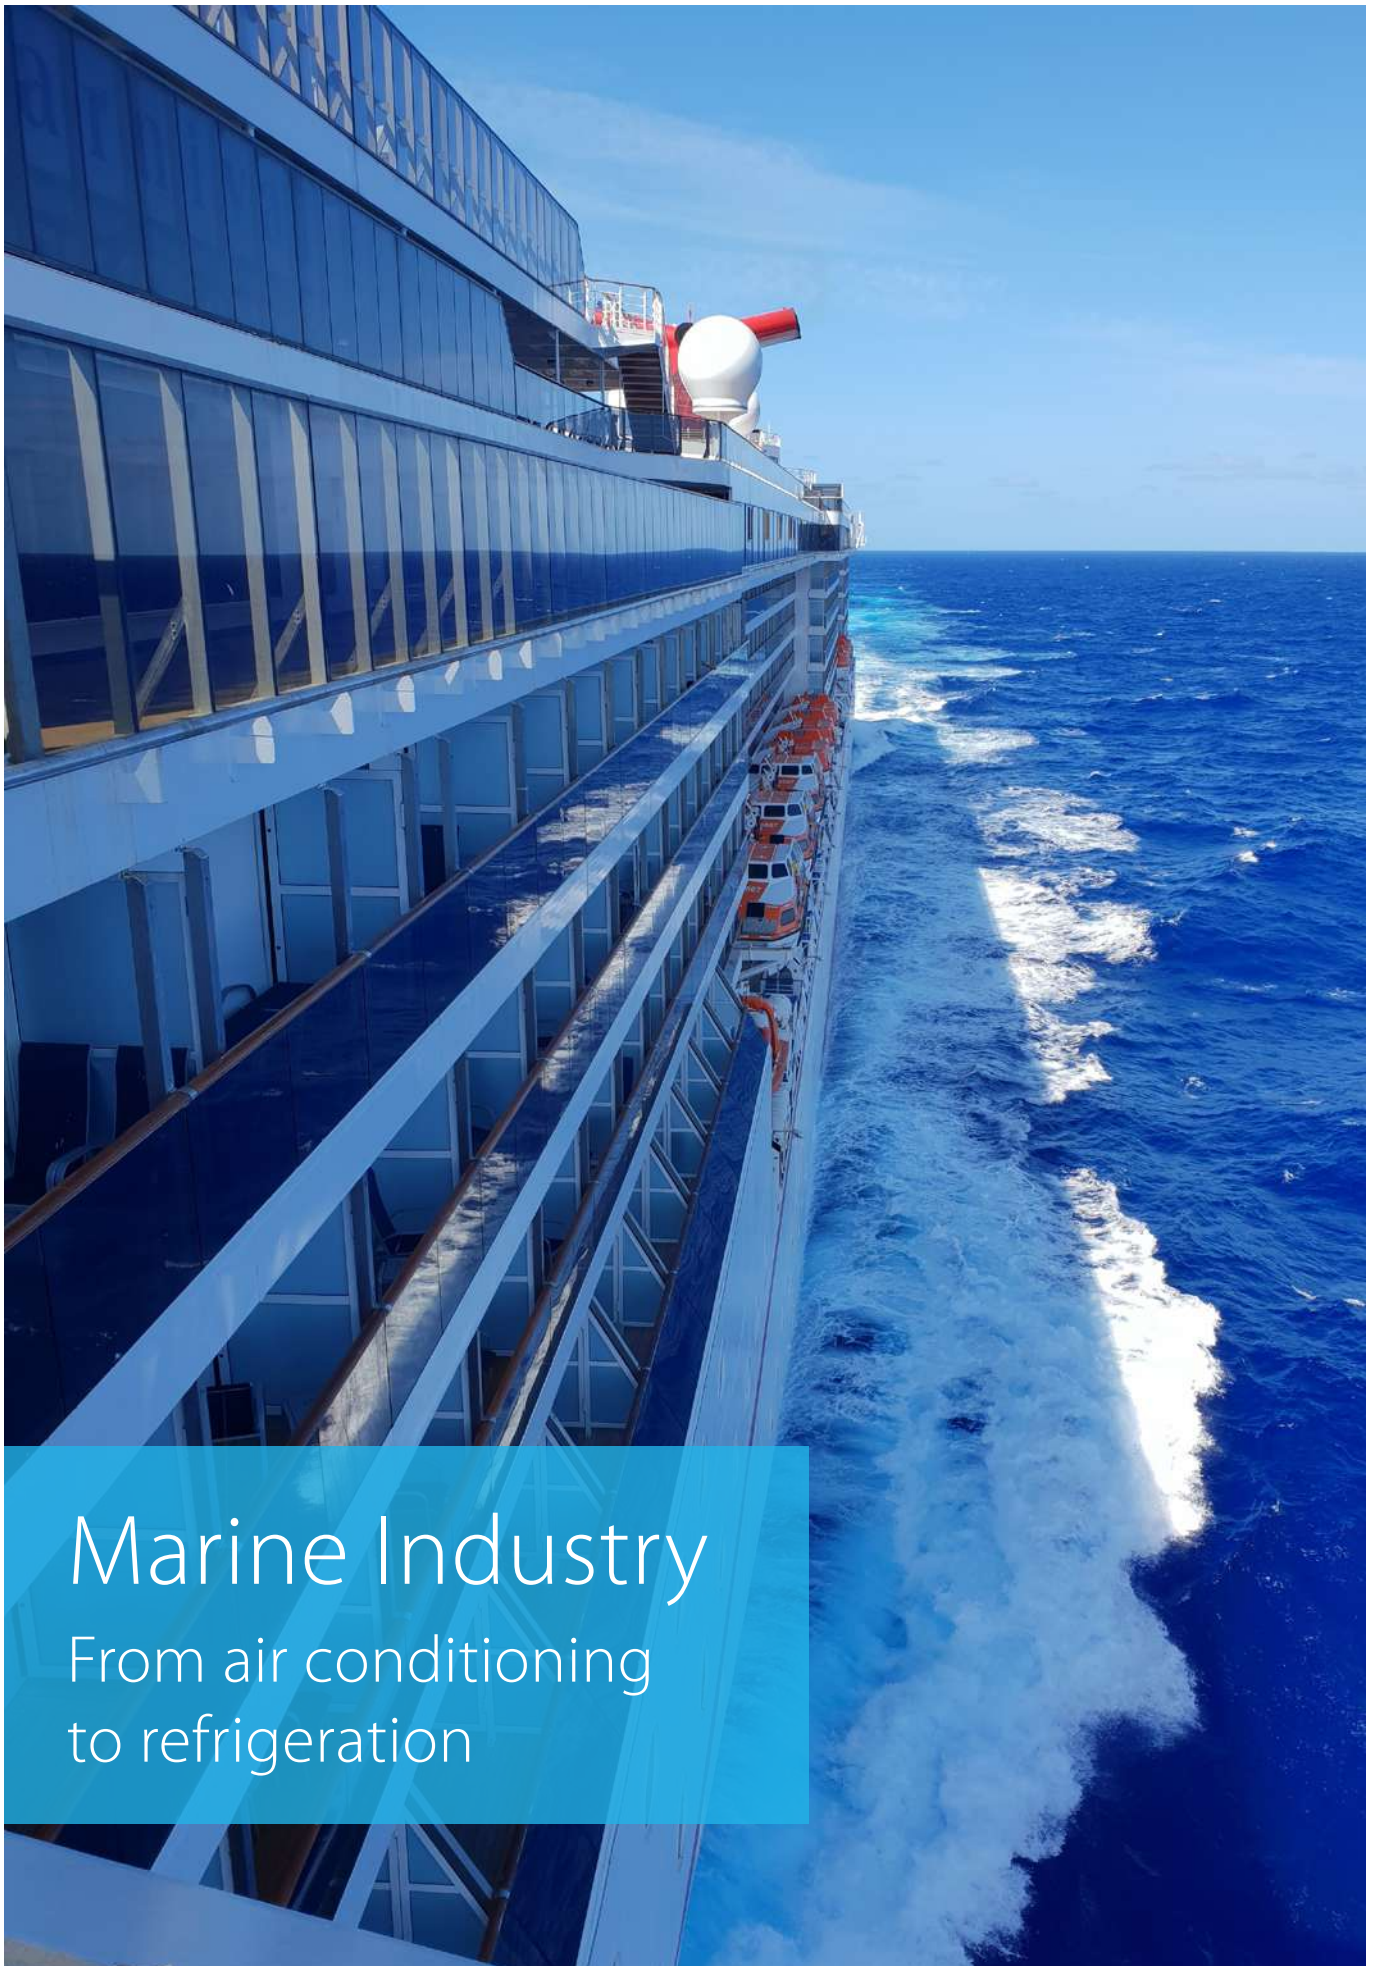


# Marine Industry

From air conditioning  
to refrigeration

The highest peak in marine technology

# Marine Industry

The Chiller Technology	604
The Standard Marine technology	606
The Air Handling and Fan Coil units	608
The DX range	610
The Controller	611

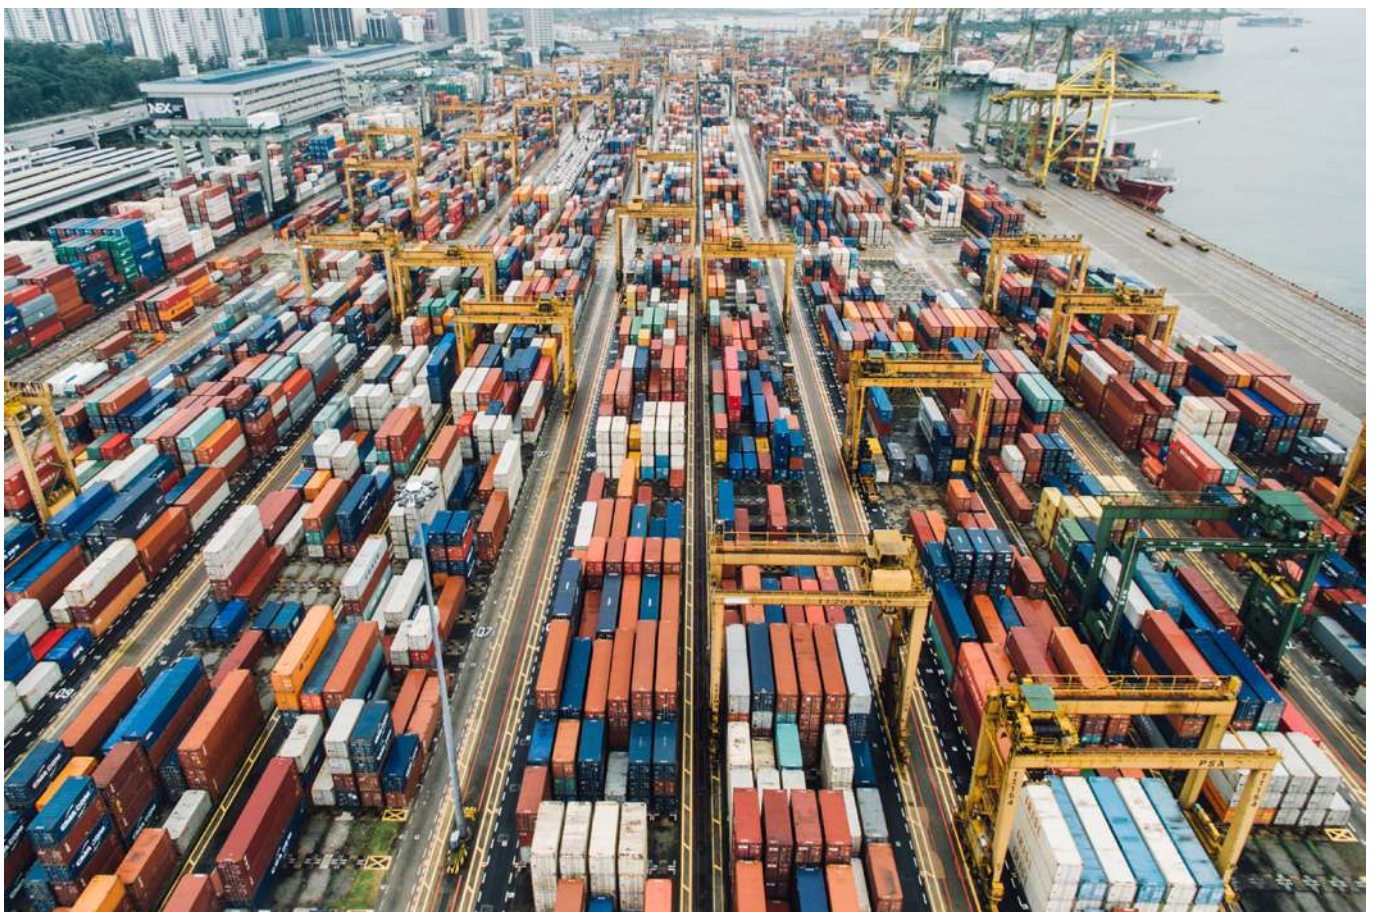

# The Chiller technology

Energy efficient &  
outstanding reliability

“Cooling and heating capacity”



## Available Features

- › Condenser Shell & tube type
- › Cu- or Cu-Ni 90/10 tubing
- › Compact, modular design
- › Anti-vibration features
- › Halogen free cabling & insulation
- › Inverter driven Compressors
- › Low GWP refrigerants
- › Operation as a heat pump
- › Stainless steel cable trays
- › Roll & Pitch resistant
- › Power supply 400/440/690V/6,600V & 50/60Hz
- › LRoS, ABS, BV, DNV/GL, classNK, RINA, Solas IMO certified



Hydro Cube



Air cooled chiller



J Type (screw)



Cooling capacity 10 kW to 9.000 kW



VZ Type (single screw)



VZ Type (dual screw)



DWSC Type (single centrifugal)



DWDC Type (dual centrifugal)



# The Standard Marine Technology

Reliable marine air conditioning

## Available Features

- › Electrical heater
- › 2 or 3 way sea-water-valves
- › Remote Control
- › Increase of external pressure
- › 690V execution
- › or other things on demand
- › LRoS, ABS, BV, DNV/GL, classNK, RINA,  
Solus IMO certified



Water Chilling Unit





Marine Compact



Deck Unit



Galley Unit



Refrigeration Condensing Unit

# The Air Handling and Fan Coil units

Performance You Demand.  
Quality You Expect.

## Available Features AHU

- › Electrical heater
- › Various stainless steel surfaces
- › Special coating (plastisol, precoated)
- › 3D drip pan
- › Coils Cu, CuNi, stainless titanium
- › Electro fin or heresite coating
- › Up to 65mm wall thickness
- › External pressure up to 2,500Pa
- › 400V / 440V / 690V – 50Hz / 60Hz
- › Fully prewired (optional)
- › With automation (optional)
- › Optimized component selection (low energy consumption)
- › Comprehensive tested to clients



The Ocean R



The Ocean P



## Available Features FCU

- › Special coating
- › Thermostat, build in or remote, wireless or hard-wired
- › Various IP classes
- › Anti vibration features
- › 60 Hz modifications
- › Roll & Pitch modification, drip pan height 35 mm & double outlet
- › ATEX certification
- › or on demand



ALB-RB\_LB



FWV01-02DT-DF



CQ35-50-60-71C



FWD04AT-AF



FWT-CT

# The DX Range

Flexible to fit your project



## Features available on demand

- › Special coating
- › Thermostat, build in or remote
- › Wireless or hard wired
- › Various IP classes
- › Anti vibration features
- › 60 Hz modifications
- › Roll & Pitch modification, drip pan height 35mm & double outlet
- › ATEX certification



# The Controller



## Available Features

- › Several protocol interfaces
- › Remote control
- › Visualization of energy consumption
- › Remote support and diagnostics
- › Predictive logic for VRV
- › Daikin Cloud Service



To connect intelligent Touch Manager to the Daikin Cloud Service, the IoT gateway (EU. SB.5000072) and AC/DC converter (999175A) is needed.





Web Access

Internet  
Extranet  
LAN  
3G  
HTTP interface



### Integration of third party equipment

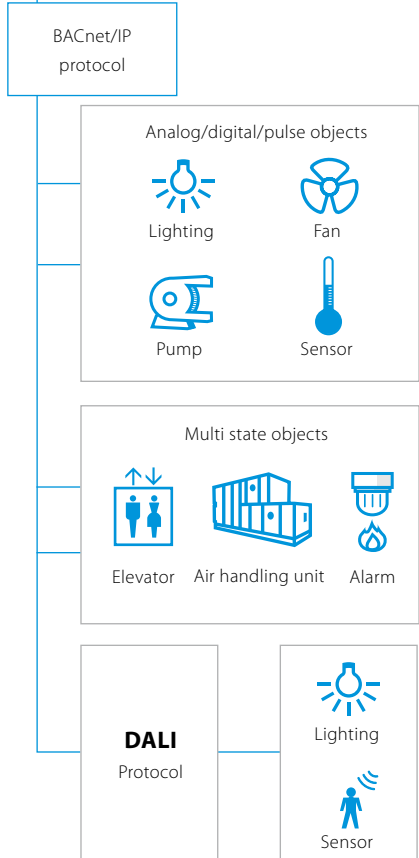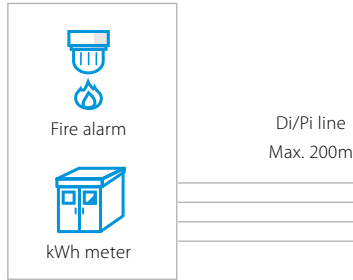

### Intelligent Manager

DCM601B51



WAGO interface

I/O module  
I/O module

### Full control of Daikin HVAC-R portfolio


DIII Plus adaptor  
DGE601A52

DIII Plus adaptor Slot DGE601A53  
Max. 6 Additional Slots can be connected



Max 64 indoor units

### Direct plug & play connection!

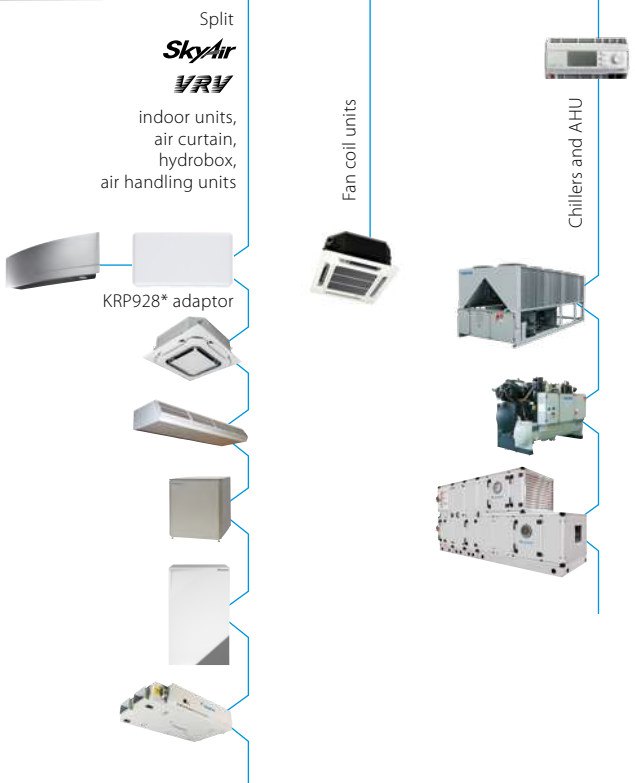



## Why choose Daikin?

Daikin is Europe's leading manufacturer and global n°1 of highly energy-efficient heating, cooling, ventilation and refrigeration solutions for residential, commercial and industrial applications.

## Why choose Daikin Marine equipment?

- › Wide and flexible marine portfolio
- › Worldwide experience in design and manufacturing
- › The highest efficiency for marine installations
- › Quality and reliability
- › Worldwide Service teams at disposal

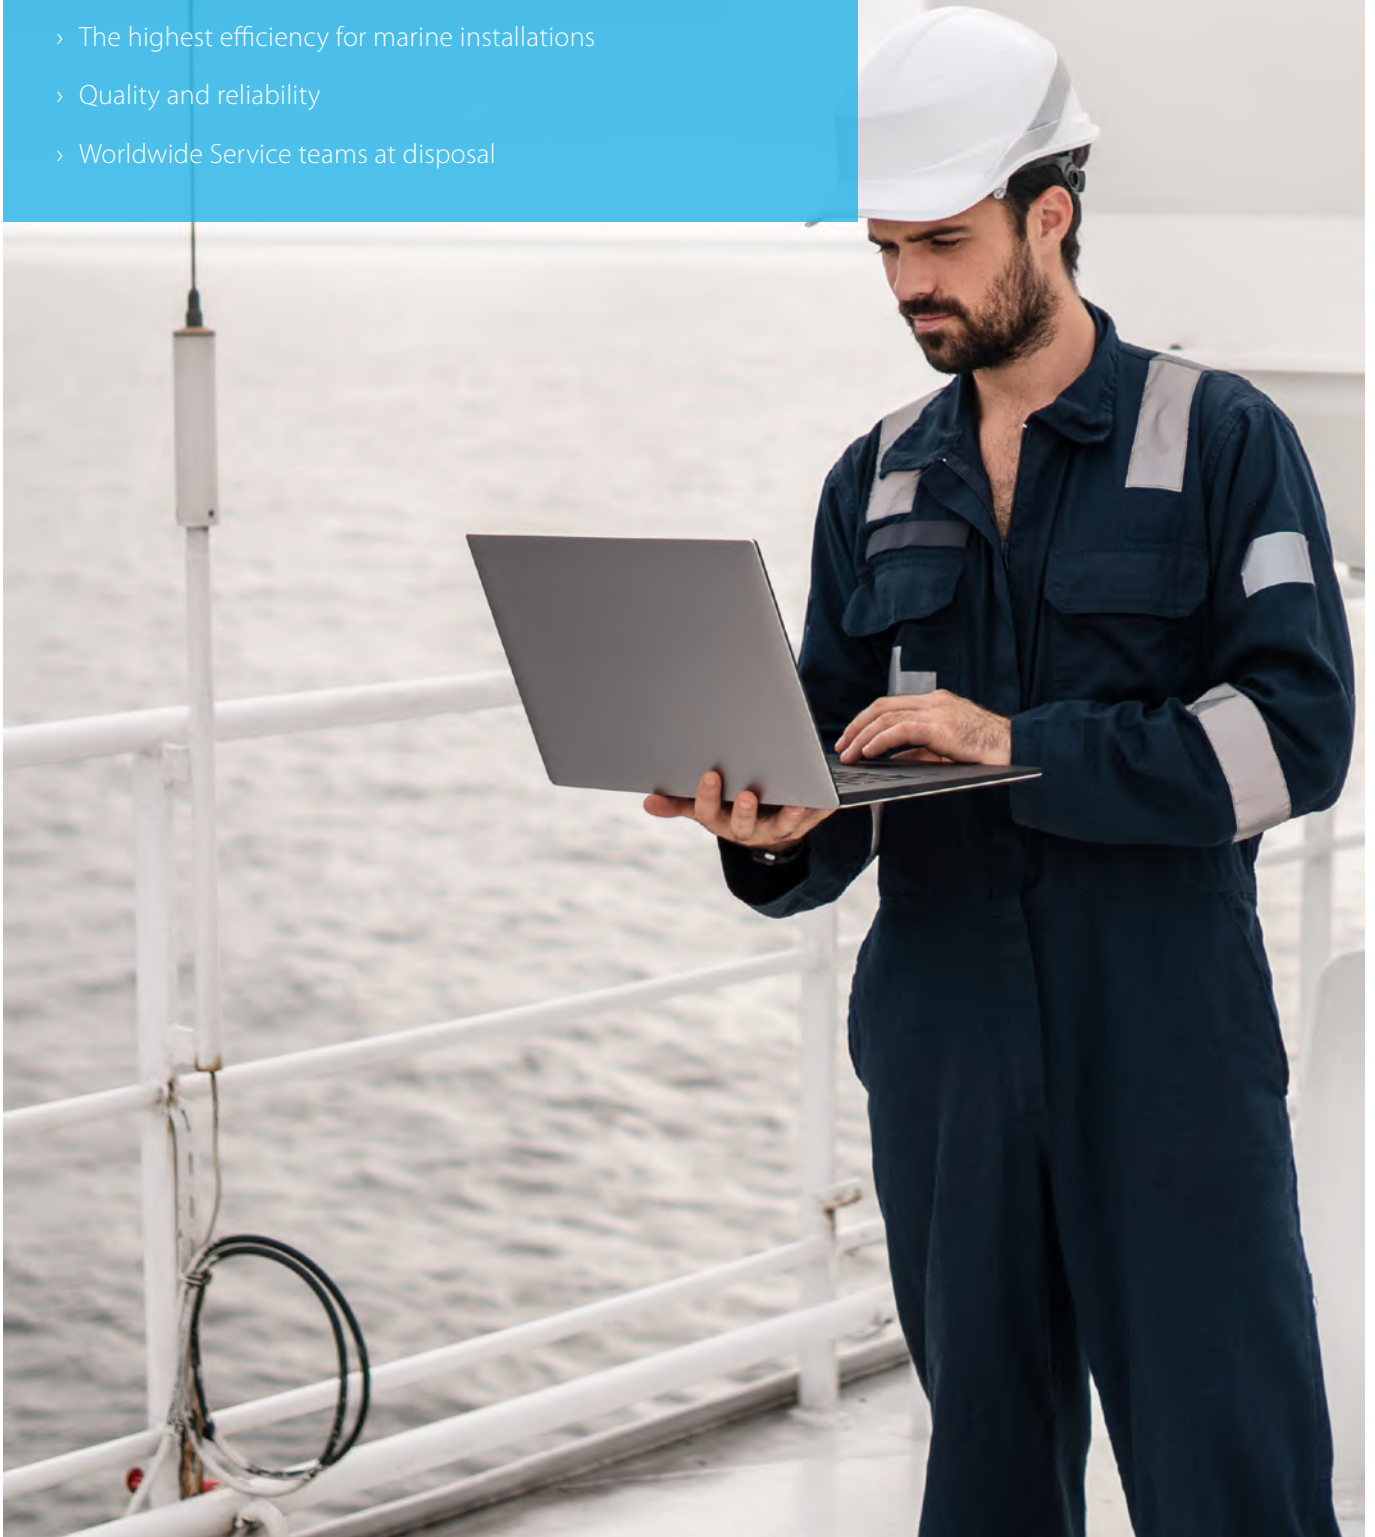



Daikin chillers offer the ultimate in reliability and flexibility — a reflection of the advanced technology inherent within them. Daikin chillers represent the sure and safe route to a comfortable environment and a process cooling solution that is clean and consistent.



# Chillers

Tools and platforms	617		
Daikin, the best partner for your green project	618		
Seasonal efficiency	619		
Chiller modernisation	620		
Reliability and efficiency	622		
Why choose Daikin chillers	626		
Products Overview - Air cooled chillers, condensing units and Multipurpose units	628		
Products Overview - Water cooled and condenserless chillers	630		
Air cooled chillers cooling only	633		
EWAA-DV3P	633		
EWAA-DW1P	634		
EWAA-DV3P-H	635		
EWAA-DW1P-H	636		
EWAT-CZ	637		
EWYT-CZ	640		
<b>NEW</b> EWAD-TZBSD	643		
<b>NEW</b> EWAD-TZSSD	644		
<b>NEW</b> EWAD-TZXSD	645		
<b>NEW</b> EWAD-TZXRD	646		
<b>NEW</b> EWAD-TZPSD	647		
<b>NEW</b> EWAD-TZPRD	648		
<b>NEW</b> EWAH-TZBSD	649		
<b>NEW</b> EWAH-TZSSD	650		
<b>NEW</b> EWAH-TZXSD	651		
<b>NEW</b> EWAH-TZXRD	652		
<b>NEW</b> EWAH-TZPSD	653		
<b>NEW</b> EWAH-TZPRD	654		
<b>NEW</b> EWAS-TZBSD	655		
<b>NEW</b> EWAS-TZSSD	656		
<b>NEW</b> EWAS-TZXSD	657		
<b>NEW</b> EWAS-TZXRD	658		
<b>NEW</b> EWAS-TZPSD	659		
<b>NEW</b> EWAS-TZPRD	660		
EWAT-B-SSB/SLB	662		
EWAT-B-SRB	663		
EWAT-B-XSB/XLB	664		
EWAT-B-XRB	665		
<b>NEW</b> EWAT-B-SSC	666		
<b>NEW</b> EWAT-B-SRC	667		
<b>NEW</b> EWAT-B-XSC	668		
		<b>NEW</b> EWAT-B-XRC	669
		<b>NEW</b> EWFT-B-SSC	670
		<b>NEW</b> EWFT-B-SRC	671
		<b>NEW</b> EWFT-B-XSC	672
		<b>NEW</b> EWFT-B-XRC	673
		Air cooled chillers Heat pump	674
		EWYA-DV3P	674
		EWYA-DW1P	676
		EWYA-DW1P-H	677
		EWYA-DV3P-H	678
		EWYT-B-SS/SL	682
		EWYT-B-SR	683
		EWYT-B-XS/XL	684
		EWYT-B-XR	685
		EWYT-CZ I / EWYT-CZ O	686
		EWYD-BZSS	688
		EWYD-BZSL	689
		Multipurpose unit	690
		EWYD-4ZXS2B	691
		EWYD-4ZXRB2	692
		Air cooled condensing unit	694
		ERAD-E-SS	694
		ERAD-E-SL	695
		Water cooled chillers	698
		EW(W)(H)(L)T~Q-A	696
		EWWQ-KC	698
		EWHQ-G-SS	700
		EWWQ-G-SS	701
		EWWQ-L-SS	702
		EWWD-J-SS	703
		EWWH-J-SS	704
		EWWJ-SS	705
		EWWD-VZ	708
		EWWH-VZ	712
		EWWJ-VZ	716
		Condenserless chillers	720
		EWLQ-KC	720
		EWLQ-G-SS	721
		EWLQ-L-SS	722
		EWLD-J-SS	723
		EWLH-J-SS	724
		EWLS-J-SS	725
		EWLD-I-SS	726
		Water cooled centrifugal chillers	728
		EWWD-DZ	728
		EWWH-DZ	730
		EWWJ-DZ	732
		DWSC C Series	734
		DWDC C Series	735
		Accessories	736



Forged under severe conditions around the world, Daikin chillers, fan coil units & air handling units provide high quality, operation efficiency and energy savings. Various applications are possible including air conditioning applications, industry-type process cooling and heating, and large-scale district cooling and heating.

## A partner of choice

Daikin is Europe's leading manufacturer and global n°1 of highly energy-efficient heating, cooling, ventilation and refrigeration solutions for residential, commercial and industrial applications. Daikin is a leader in using technologies that help preserve the environment, such as those that conserve energy and deliver high reliability to its customers. Daikin's flexible applied systems deliver high efficiency for commercial, institutional and industrial buildings.

## The comfort of reliability

Nobody is really looking for complexity in business. Because complexity often leads to mistakes, delays or losses. Unfortunately, the world we are all doing business in, is sometimes quite complex. When looking for further business development, we all expand our national and international operations. And that doesn't make things easy.

As a small scale business or multinational company, you deserve the best partners. Partners that can take away the headaches and make you feel comfortable again. With Daikin, you have found such a partner. Because Daikin would like things to be easy ... for you.

## Daikin quality

Daikin's much envied quality quite simply stems from the close attention paid to design, production and testing as well as aftersales support. To this end, every component is carefully selected and rigorously tested to verify its contribution to product quality and reliability.


## Staff who understands you

Daikin and its staff of devoted engineers, consultants and analysts are ready to assist you on a daily basis in setting up nationwide or international agreements, providing advice on equipment selection and monitoring regulations. Our goal is to help you carry out your plans with confidence, using custom-designed systems that meet your needs (for comfort, performance levels, support and service).

## Daikin Applied Development Center

Opened in May 2009, the Daikin Applied Development Center is the world's most advanced facility for heating, ventilation and air conditioning (HVAC) research and development. The purpose of the center is to develop and test advanced chiller, compressor and other HVAC technologies to reduce energy consumption and, ultimately the carbon footprint of the buildings where they will be used.

Find out more about the Daikin Applied Europe in the video below:



  
www.youtube.com/  
DaikinEurope



## Witness Testing Chiller testing facilities Daikin Applied Europe

We are industry leaders in air cooled and water cooled chiller technologies. Our performance in each condition can be shared through witness tests. During witness testing even the toughest design conditions can be simulated. Customers and consultants can appreciate product performance before its delivery, ensuring "peace of mind" chiller integration in the whole project. We have specific competencies and state of the art testing facilities to pursue these goals.

Find out more about our testing facilities in the video below:



  
www.youtube.com/  
DaikinEurope



# Tools and platforms

Have a question, looking for specific software applications, need detailed product information or looking for any other marketing tools? This overview gives you an idea of what we can offer.

## Selection software

Daikin Europe offers you a variety of building modelling, selection, simulation and quotation software tools to support your sales.

### Web-based chiller selection software

A user-friendly interface allows users to quickly create new projects, open and change existing projects or simply do a quick selection.

Technical selection reports can be printed or downloaded in several formats.

To make life easier, the tool is accessible everywhere, via any device. No matter where you are, projects can be consulted.

Create now a new account on:

› <http://tools.daikinapplied.eu/>



## Online support

### Business portal

Experience our new extranet that thinks with you


- › Find information in seconds via a powerful search
- › Customize the options so you see only info relevant for you
- › Access via mobile or desktop via **my.daikin.eu**

### Daikin on Site

A new remote monitoring and control for chillers and air handling units has been developed by Daikin to give peace of mind to the end-customer.

Using this new tool results in optimum use and costs over the system's entire lifetime:

- › enhanced control and measuring
- › monitors the system
- › reduces risks at the earliest possible moment
- › keeps the system running as it was intended to

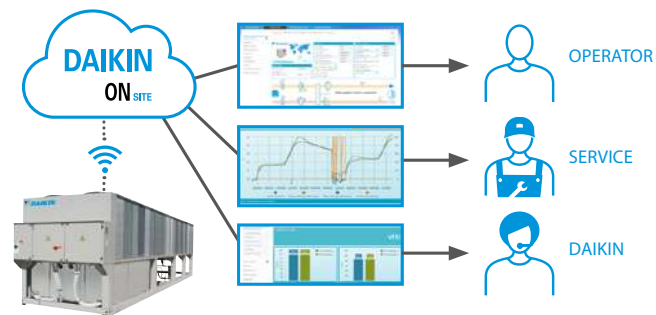

### ASTRA Web

- › Quick AHU selection that will save you precious time, drastically reducing selection time through the new software interface.
- › Very competitive solution available within the Wizard thanks to pre-uploaded parameters.
- › High selection quality, thanks to the intelligence embedded within the software core.

**BREEAM<sup>®</sup>**

# Daikin, the best partner for your green project

From 2015 onwards the majority of new building projects in Europe are expected to be green.

93% percent of developers & investors consider green certification important

BREEAM and LEED green building programmes are the two most important sustainable building certificates in Europe, covering more than 75% of the total sustainable-building certificate market.

## Property developers are setting high standards

- › Aiming for a BREEAM Excellent or LEED Gold target is no longer rare
- › The real challenge? Achieving these targets while staying within budget

## HVAC-R systems play an important role

- › Within the total green assessment & investment cost
- › They require the alignment of many different parties

BREEAM is a registered trademark of BRE (the Building Research Establishment Ltd. Community Trade Mark E5778551). The BREEAM marks, logos and symbols are the Copyright of BRE and are reproduced by permission.

It is essential to choose an HVAC-R partner with the knowledge and portfolio to achieve your BREEAM or LEED objectives, and other green needs.

Daikin has successfully participated in many green and sustainable projects. Helping builders achieve BREEAM Excellent, LEED Gold, NZEB and similar certificates has become one of our specialities.



**We have a team of BREEAM accredited professionals (APs) at your service!**

- › Over 17 APs across Europe
- › Assisting you to achieve your BREEAM certificate



**You get maximum support in scoring BREEAM credits & LEED points:**

- › Daikin Total HVAC-R Solutions
- › High seasonal efficiency technologies
- › Smart energy management with intelligent network
- › Boost your end score with innovative products & technologies

## Maximise your BREEAM and LEED green building programme score with Daikin solutions

### › **Manage up to 70% of your energy consumption with the Daikin Total Solution**

### › **Top seasonal efficiency**

Both BREEAM and LEED green building programmes put the strongest focus on energy efficiency. This is exactly why it's so important to choose Daikin.

### › **Smart air conditioning management with Intelligent Network**

To drastically reduce your energy consumption and CO<sub>2</sub> emissions it's not enough to simply make your equipment more efficient.


# Seasonal efficiency,

## Smart use of energy

### Challenging 20-20-20 environmental targets

The European Commission has set challenging targets for improving energy efficiency in the EU. These so-called 20-20-20 targets aim at a 20% reduction in CO<sub>2</sub> emissions, 20% share of renewable energy and a 20% reduction in the use of primary energy, all by the year 2020. To realise these objectives, Europe issued the Eco-Design Directive [2009/125/EC]. This sets minimum efficiency requirements for energy related products.

#### European action plan 20-20-20

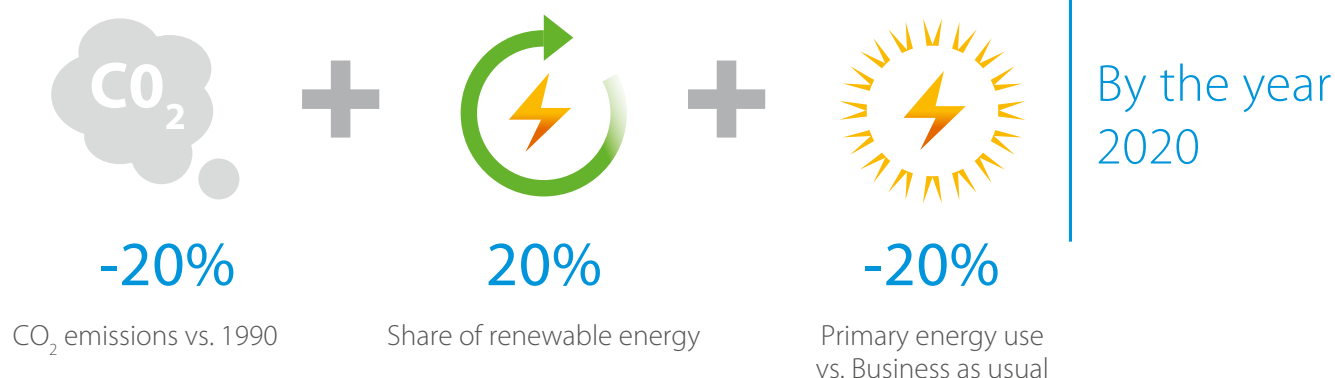

### Applied systems: products in scope

Since 26 September 2015, heat generators for space heating (LOT 1) also need to comply to these 20-20-20 targets. For the applied systems market it means that all heat pumps below 400 kW need to comply to minimum efficiency requirements. Heat pumps below 70 kW must be marked with a product energy label.

### Our service

Daikin helps its partners to meet their obligations regarding the Ecodesign Directive and energy labelling. Labels, product and technical fiches for each individual product are available as downloads at any time from the Energy Label Generator at [https://www.daikin.eu/en\\_us/about/daikin-innovations/seasonal-efficiency.html](https://www.daikin.eu/en_us/about/daikin-innovations/seasonal-efficiency.html).

# Chiller modernisation

## Be smart – replace components, not systems

### Our concept

Even if the R-22 chiller has been maintained well and is still in good condition, R-22 is no longer allowed to be used. That's why Daikin offers chiller modernisation packages. Not only is the chiller made compliant with the latest legislation, the technology upgrade also revives your system, increasing reliability and efficiency.

#### Main benefits

- › Convert R-22 to be compliant with legislation
- › Limit capital
- › Save money for future equipment thanks to the chiller's longer lifetime, increased reliability, and improved maintenance efficiency
- › Enhance energy efficiency up to +20% ESEER by manufacturer pre-engineered upgrade

#### Benefits for budget and risk management

- › No chiller removal
- › No water pipe work
- › No electrical modifications
- › Low logistic expenses (transport, crantage, permissions ...)
- › Quick delivery
- › Government-sponsored subsidies may be available




Controller box upgrade



## Fact: R-22 has been banned in Europe\*

If your equipment is more than 15 years old, it probably still uses R-22 refrigerant. Since 31 December 2014 repairs to R-22 systems are prohibited, possibly resulting in unexpected downtime. Keep your business running at all times with Daikin replacement technology.

- 
- Soft starter
  - Inverter



Compressor upgrade



\* EU directive: Regulation (EC) No.2037/2000


# Day-to-day reliability and efficiency

## Inhouse development and manufacturing of compressors

Unlike many other air conditioning manufacturers, Daikin manufactures its own compressors. This is important because the compressor is the very heart of the air conditioning system, increasing the pressure and temperature of the refrigerant vapour, effectively concentrating the heat as it passes around the system. Daikin has always been at the forefront of developing compressor technology and now offers a comprehensive range of swing, scroll, screw and centrifugal compressors. As a result, inverter compressor control is applied throughout our product range, delivering enhanced comfort and system efficiency.



### Swing compressor

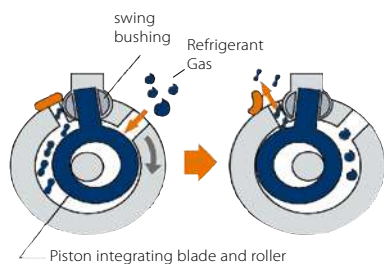

The mini chiller series EWAQ005-007ADVP & EWYQ005-007ADVP are equipped with a swing inverter compressor. This innovative design by Daikin has fewer moving parts allowing a smoother, more reliable operation with low vibration and low noise levels. The high-efficiency motor reduces energy consumption, resulting in energy cost savings.



### Scroll compressor for controlled capacity


Being compact, the Daikin scroll compressor is used with R-407C and R-410A to provide constant reliability and high efficiency throughout its service life. Designed for small and medium capacities, the scroll compressors are used with air cooled and water cooled chillers.

#### Characteristics:


- › Compact, simple yet robust design
- › Absence of valves and oscillating connecting mechanisms providing maximum reliability
- › Constant compression guaranteeing low energy consumption
- › Increased compression efficiency thanks to the absence of volumetric re-expansion
- › Low sound level
- › Low starting current



### Innovative frictionless centrifugal compressor

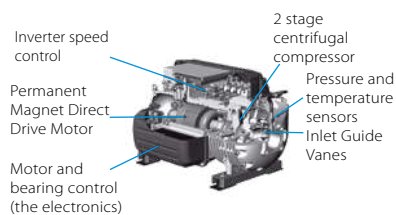

The innovative frictionless centrifugal compressor has an integrated VFD, as well as magnetic bearings, and delivers high levels of unit efficiency and reliability. The compressor's only moving part - the rotor shaft and impellers - are powered by the permanent magnetic direct-drive motor and kept levitated by a digitally controlled magnetic bearing system. This reduction in moving parts significantly increases unit reliability and reduces maintenance costs. As the condensing temperature and/or cooling load reduces, the speed of rotation reduces and movable inlet guide vanes, activated by the step motor, redirect gas flow into the first stage impeller once the compressor has reached its minimum speed. This delivers increased efficiency and cost savings during part-load operations.

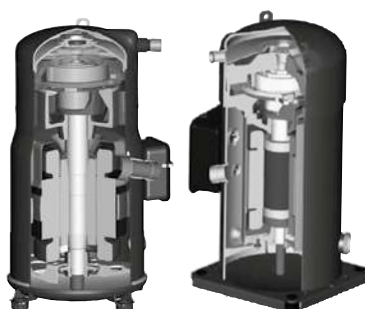




Whatever the requirements of the customer - large systems requiring constant capacity or small systems for flexibility - Daikin always provides a reliable and efficient solution.



### The single-screw stepless compressor for high capacity

At the heart of the larger Daikin chillers is a semi hermetic single screw compressor, designed, tested and manufactured in Daikin's own factories, in order to meet the highest capacity, performance and maintenance specifications. This compressor has been especially developed for operation with R-410A or R-134a refrigerants, guaranteeing unequalled reliability and many years of efficient operation. The bearing life is 100,000hrs with inspection and maintenance intervals every 40,000hrs.

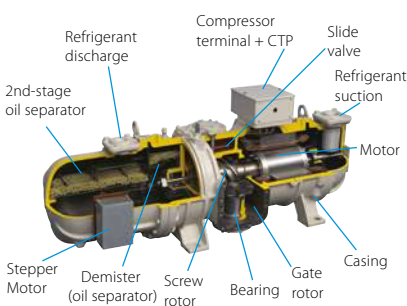

#### Characteristics:

- › Optimal performance through stepless capacity control chilled water temperatures. The unit capacity is infinitely variable from 30 - 100% on single circuit units and 15 -100 % on dual circuit units.
- › Compact, simple yet robust construction.
- › Using a main single screw and two gate rotors, axial and radial forces are balanced, thanks to the symmetrical compression guaranteeing low bearing loads.
- › Gate rotors made of polymer material result in closer tolerances with the main screw and reduced friction greatly improves compressor efficiency and lifetime.
- › No oil pump necessary - lubrication based on the differential pressure principle.
- › Easy access to both compressor and safety devices.
- › Star-Delta starter with low starting current as standard.




### Screw compressor with integrated inverter


#### Characteristics:

- › Compressor and inverter fully designed by Daikin
- › Inverter integral to the compressor body
- › Inverter refrigerant cooled
- › VVR = Variable Volume Ration for optimized efficiency
- › Enlarged discharge port and suction side for reduced refrigerant pressure drop
- › New optimized compressor motors

#### Main benefits:

- › Better ESEER & EER values
- › 30% more compact than single-screw compressor
- › Rapid payback time
- › Silent operations
- › Optimal comfort levels

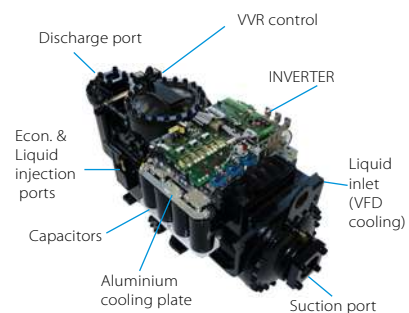

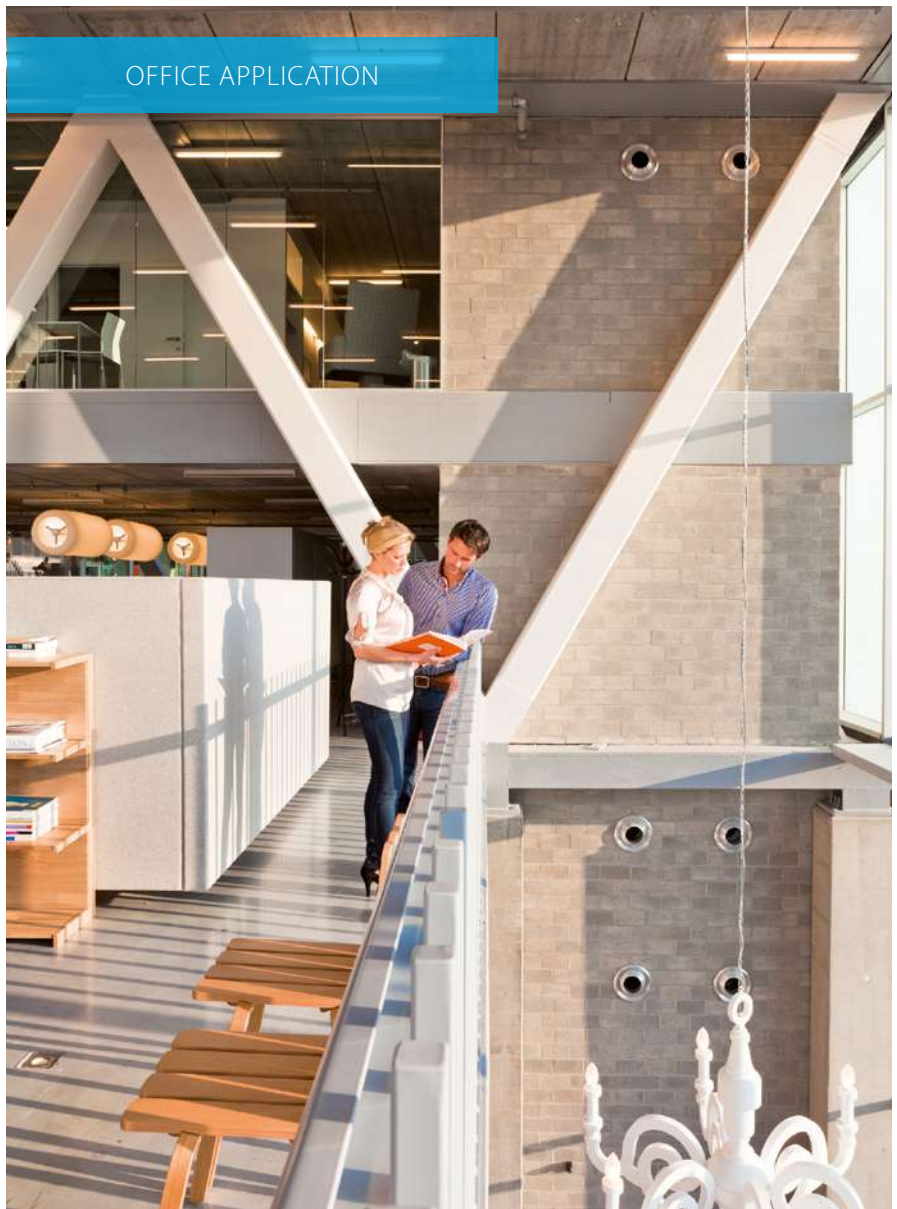

OFFICE APPLICATION



AIR COOLED CHILLER INSTALLATION



AIR COOLED CHILLER INSTALLATION




INDUSTRIAL APPLICATION

HOTEL  
APPLICATION



DATA CENTER  
APPLICATION

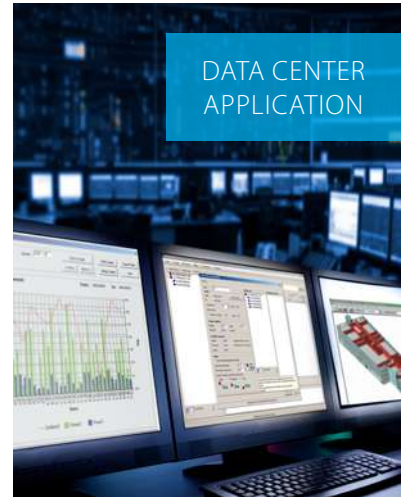

PROCESS COOLING  
APPLICATION





## Daikin chillers

### Why choose Daikin chillers?

Daikin chillers are the perfect bridge between project requirements and customer satisfaction. From the smallest chillers to the very largest, our quality control and attention detail is absolute. Our systems have the **most advanced technologies**, deliver **the highest energy efficiencies** and **lowest running costs**, and are the gold standard for reliability and performance.

#### The widest and most flexible chiller portfolio

- › From the smallest mini chiller for residential use to the largest chiller for district cooling
- › Tailor made solutions based on the most advanced technologies
- › Wide range of options and accessories

#### Worldwide experience in chiller design and manufacturing

- › World's most advanced facilities for air conditioning research and development: the Applied Development Center in Minneapolis, Minnesota
- › Inhouse development and manufacturing of chiller main components (compressors, fans, condenser coils, software, etc...)
- › Chillers produced in European factories, in Milan and Ostend

#### The highest efficiency for every installation

- › Inverter technology over the whole capacity range
- › The lowest total cost of ownership and fast payback time

#### Quality and reliability

- › Daikin's integrated zero defect policy ensures quality of components and finished products
- › Each Daikin chiller is factory run-tested and subjected to quality audit before shipment

### Benefits for installers

- › Plug & play solutions
- › Maximum serviceability
- › Ideal solutions for retrofit projects

### Benefits for consultants

- › Energy efficient solutions without compromising on reliability and performance
- › Latest technology embedded in all our products

### Benefits for end users

- › Remarkable savings on running costs
- › Easy to customise the chiller to your application, environment and need thanks to more than 150 different options.


# Web-based chiller selection software

A user-friendly interface allows users to quickly create new projects, open and change existing projects or simply do a quick selection.

Technical selection reports can be printed or downloaded in several formats.

To make life easier, the tool is accessible everywhere, via any device. No matter where you are, projects can be consulted.

Create now a new account on:  
<http://tools.daikinapplied.eu/>

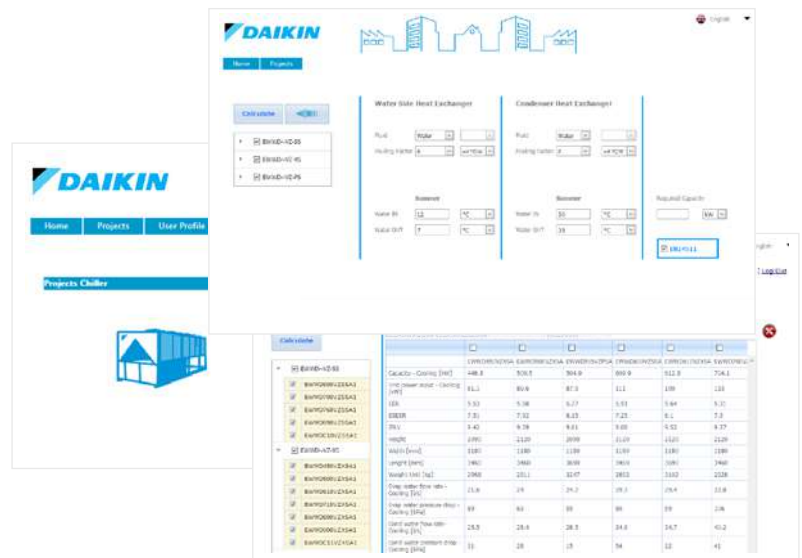

401 Chiller and air side equipment  
Product portfolio



416 Modular L  
Product profile



445 EWYD-4Z Multipurpose  
Product profile



404 EWAD-TZ B  
Product profile



418 Chiller series  
Product profile

## Supporting tools

### Business portal

- › Experience our extranet that thinks with you at [my.daikin.eu](http://my.daikin.eu)
- › Find information in seconds via a powerful search
- › Customise the options so you see only info relevant for you
- › Access via mobile device or desktop





























### Website

- › [www.daikin.eu/en\\_us/product-group/chillers.html](http://www.daikin.eu/en_us/product-group/chillers.html)
- › Explore our product range
- › Find our solutions for applications
- › Get more commercial details on our flagship products

### Literature

- › Download or consult our literature for our professional network and end-customers


# Products overview

	Refrigerant type *	Refrigerant circuits	Inverter 	Free cooling 	Compressor			Water heat exchanger		Efficiency version				Sound version		
					Swing 	Scroll 	Screw 	Plate** 	Single pass shell and tube 	Blue	Silver	Gold	Platinum	Standard	Low	Reduced
<b>Cooling only</b>																
	R-32	1	●		●			●	BPHE		●			●		
	R-32	1	●		●			●	BPHE		●			●		
	R-32	1-2	●			●		●	BPHE		●			●		
 <b>NEW</b>	R-32	1-2				●		●			●	●		●	●	●
 <b>NEW</b>	R32	1-2				●		●			●	●		●		●
 <b>NEW</b>	R32	1-2		●		●		●			●	●		●		●
 <b>NEW</b>	R32	1-2	●				●	●	●	●	●	●	●	●		●
 <b>NEW</b>	R1234ze(E)	1-2	●	●			●	●	●	●	●	●	●	●		
 <b>NEW</b>	R1234ze(E)	1-2	●				●	●	●	●	●	●	●	●		●
 <b>NEW</b>	R513A	1-2	●	●			●	●	●	●	●	●	●	●		
 <b>NEW</b>	R513A	1-2	●				●	●	●	●	●	●	●	●		●
 <b>NEW</b>	R134a	1-2	●	●			●	●	●	●	●	●	●	●		
<b>Heat pump</b>																
	R-32	1	●		●			●	BPHE		●			●		
	R-32	1	●		●			●	BPHE		●			●		
	R-32	1-2	●			●		●	BPHE		●			●		
 <b>NEW</b>	R-32	1-2				●		●	BPHE		●	●		●	●	●
 <b>NEW</b> 	R-32	1-2	●			●		●	BPHE		●			●		
	R-134a	2-3	●				●		●		●			●	●	
<b>Condensing unit</b>																
	R-134a	1					●				●			●	●	
<b>Multipurpose unit</b>																
	R-134a	2	●				●		●		●			●	●	●







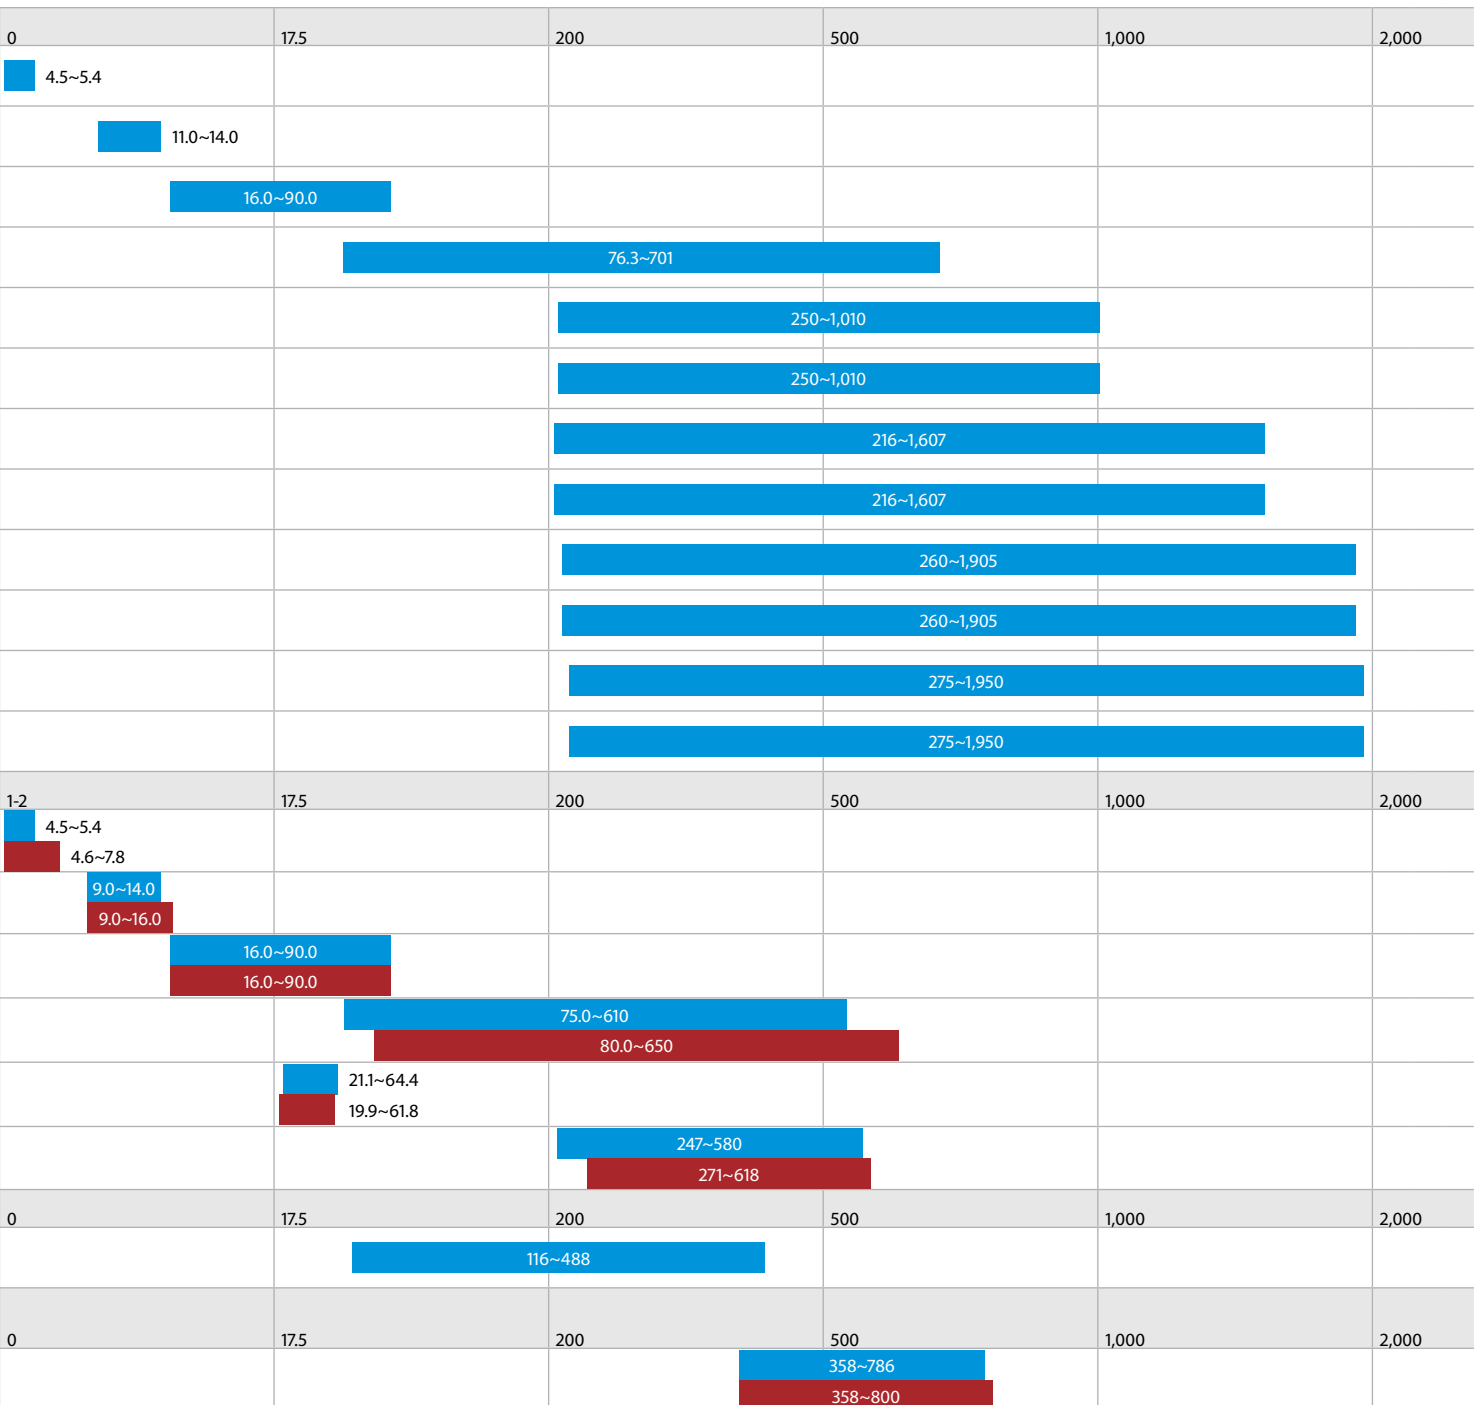



















\* (GWP): R-410A (2,087.5), R-134a (1,430) - \*\* BPHE: Brazed plate heat exchanger

# Air cooled chillers, condensing units and Multipurpose units

Cooling capacity (kW)  
Heating capacity (kW)




# Products overview


	Refrigerant Type *	Refrigerant circuits	Inverter 	Compressor			Water heat exchanger			Efficiency version			Sound version	
				Scroll 	Screw 	Centrifugal 	Plate **	Single pass shell and tube	Shell and tube	Standard	High	Premium	Standard	
<b>Water cooled chillers (Cooling only and Heat Pump)</b>														
EWVQ-KCW1N		R-410a	1-2		●			●			●			●
EWVQ~G-		R-410A	1		●			●			●			●
EWVQ~G-		R-410A	1		●			●			●			●
EWVQ~L-		R-410A	2		●			●			●			●
EWVQ~J-		R-134a	1			●		●			●			●
EWVQ~J-		R1234ze	1			●		●			●			●
EWVQ~J-		R-513A	1			●		●			●			●
EWVQ~VZ		R-134a	1-2	●		●				Flooded	●	●	●	●
EWVQ~VZ		R-1234ze(E)	1-2	●		●				Flooded	●	●	●	●
EWVQ~VZ		R-513A	1-2	●		●				Flooded	●	●	●	●
<b>Condenserless chillers</b>														
EWLQ-KCW1N		R-410A	1-2		●			●			●			●
EWLQ~G-		R-410A	1		●			●			●			●
EWLQ~L-		R-410A	2		●			●			●			●
EWLQ~J-		R-134a	1			●		●			●			●
EWLQ~I-		R-134a	1-2-3			●		●			●			●
EWLQ~J-		R1234ze	1			●		●			●			●
EWLQ~J-		R-513A	1			●		●			●			●
<b>Water cooled centrifugal chillers</b>														
EWVQ~DZ		R-134a	1			●				●		●		●
EWVQ~DZ		R-1234ze(E)	1			●				●		●		●
DWDC B		R-134a and R513A	1	optional		●				●	Flooded		●	●
DWSCC / DWDC		R-134a, R-513A and R-1234ze	1	optional		●				●	Flooded		●	●
6,000 RT CENTRIFUGAL		R-134a	2 per chiller			●		●	Flooded			●		●

\* (GWP): R-410A (2,087.5), R-134a (1,430), R-407C (1,773.9) - \*\* BPHE: Brazed plate heat exchanger



Cooling capacity (kW)  
Heating capacity (kW)

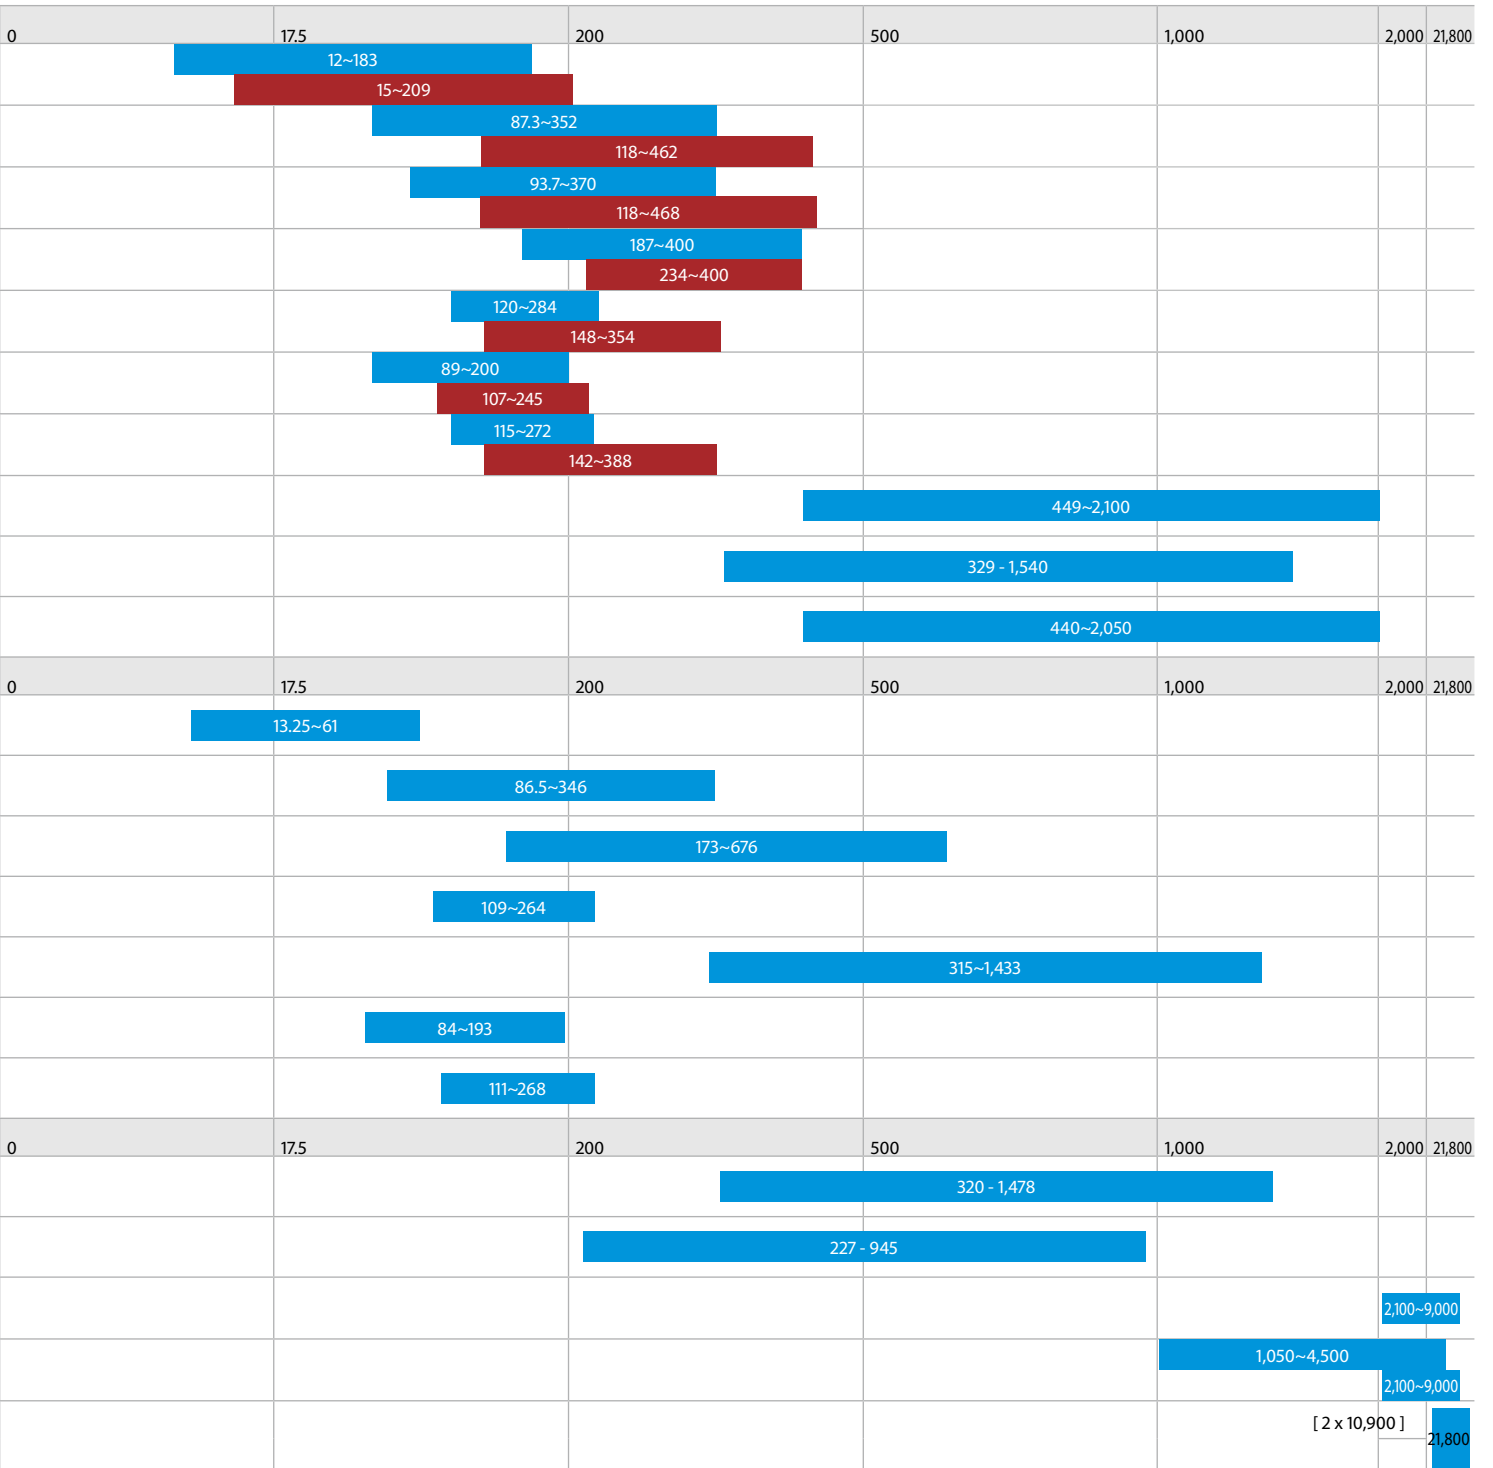

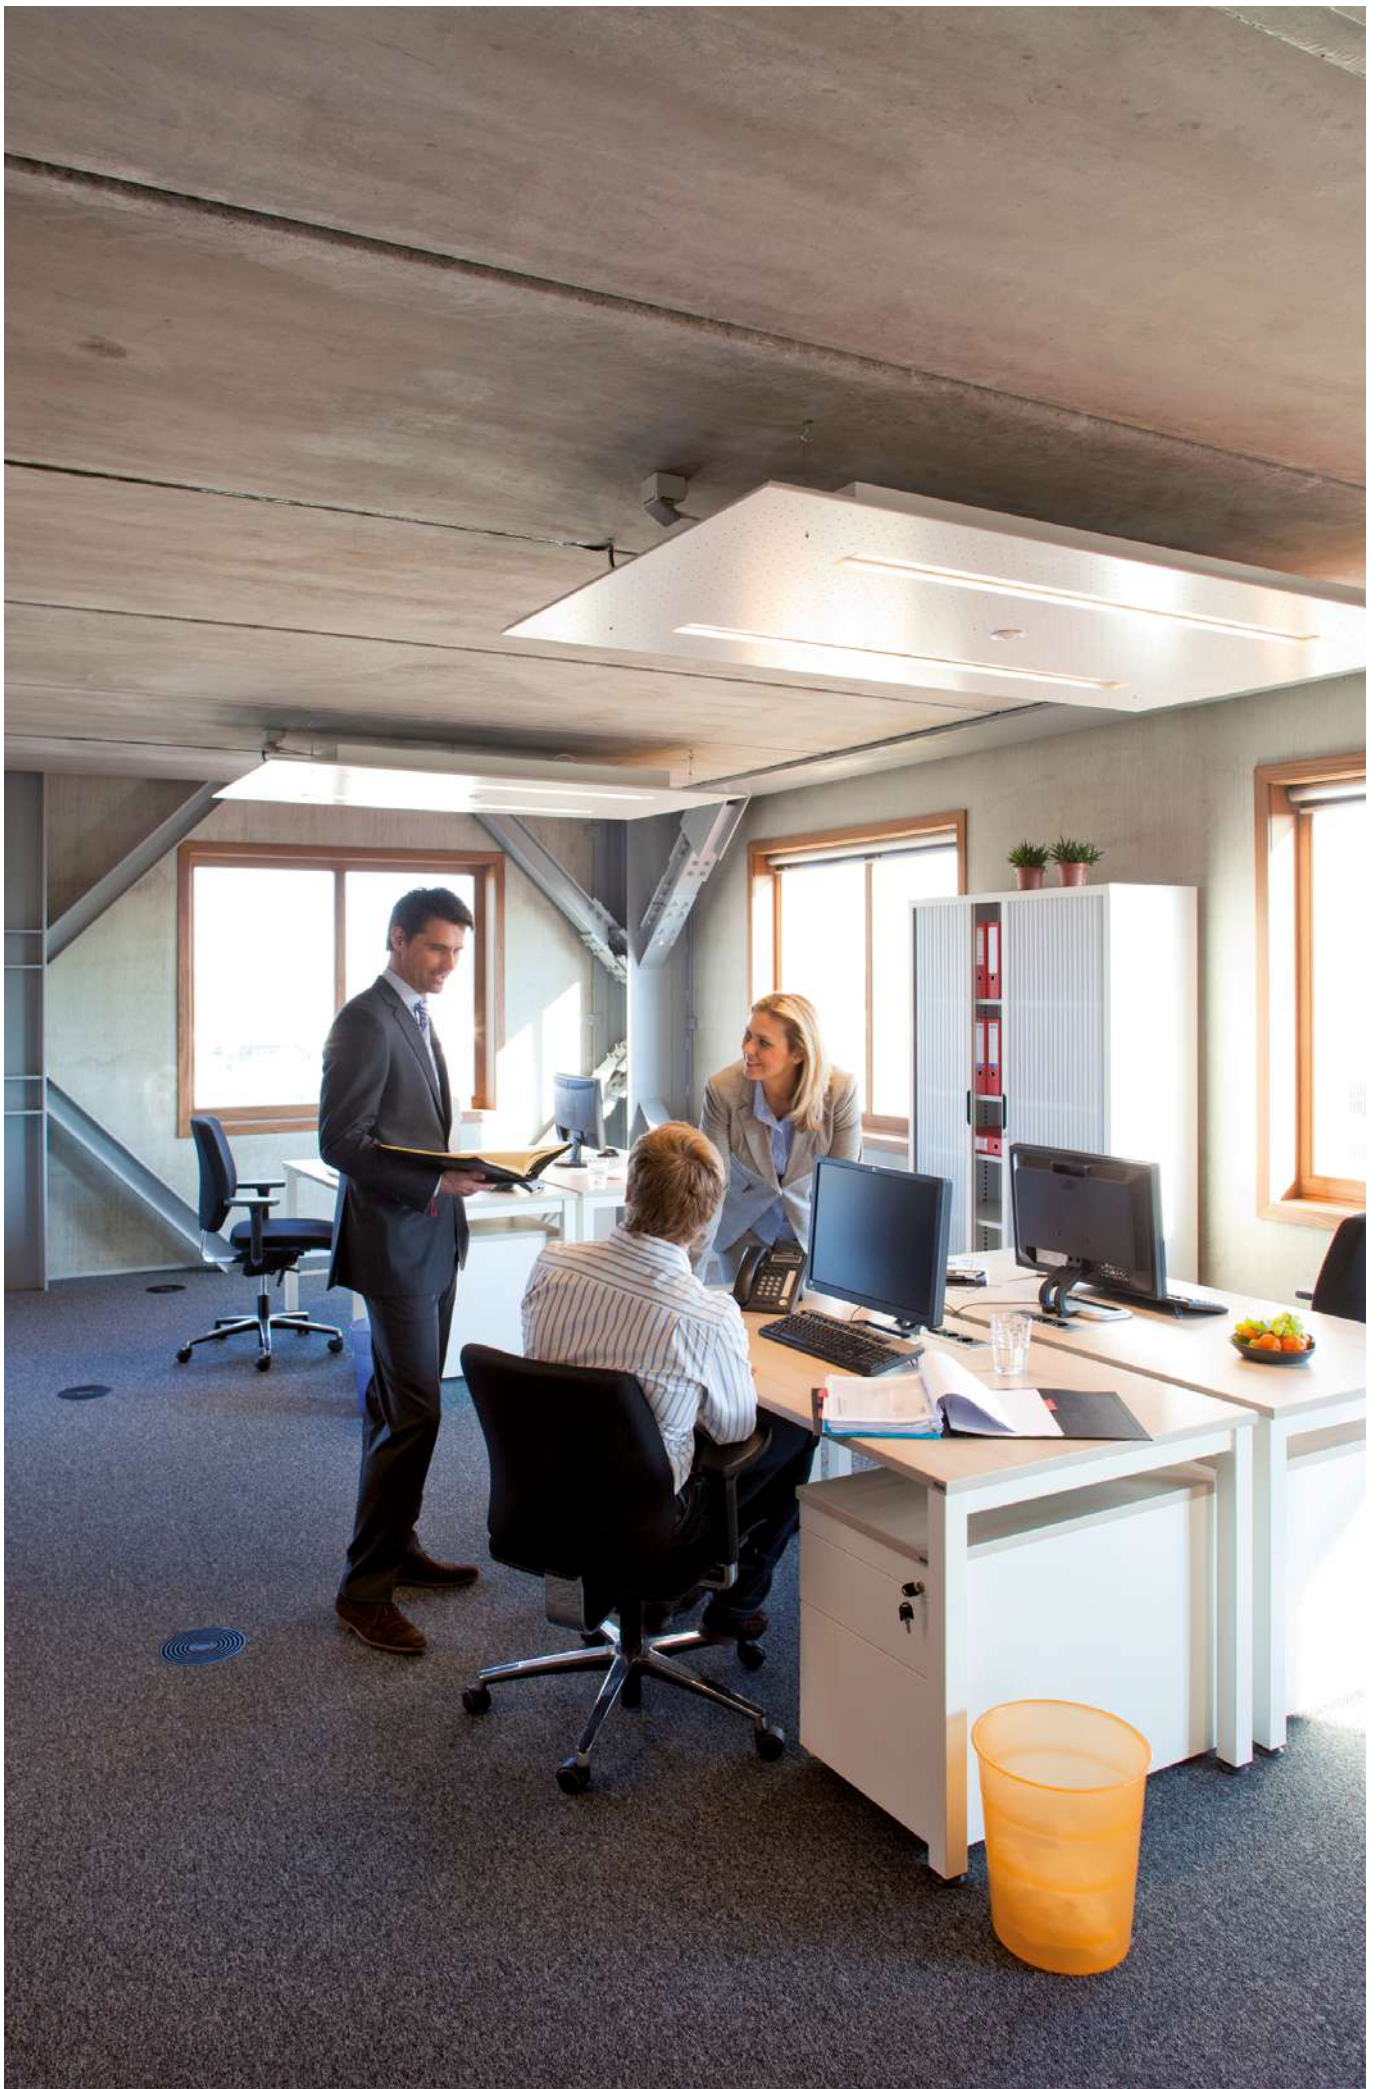

# Air cooled mini inverter chiller

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



EW(A-Y)A004-008DV3P\_R

More details and final information can be found by scanning or clicking the QR codes.



EWAA-DV3P

Cooling Only				EWAA-D	004DV3P	006DV3P	008DV3P	011DV3P	014DV3P	016DV3P
Space cooling	A Condition Pdc 35°C		kW	-			11.6	12.8	14.0	
	ηs,c		%	-			229	226	221	
SEER				-			5.79(6)	5.71(6)	5.59(6)	
Cooling capacity	Nom.		kW	4.86(1)/4.52(2)	5.83(1)/5.09(2)	6.18(1)/5.44(2)	11.6(4)/11.5(5)	12.8(4)/12.7(5)	14.0(4)/15.3(5)	
Power input	Cooling	Nom.	kW	0.820(1)/1.36(2)	1.08(1)/1.55(2)	1.19(1)/1.73(2)	3.56(4)/2.17(5)	4.06(4)/2.51(5)	4.58(4)/3.24(5)	
	Heating	Nom.	kW	0.840(1)/1.26(2)	1.24(1)/1.69(2)	1.63(1)/2.23(2)	-			
Capacity control	Method			Variable (inverter)						
EER				5.91(1)/3.32(2)	5.40(1)/3.28(2)	5.19(1)/3.14(2)	3.26(4)/5.31(5)	3.16(4)/5.04(5)	3.06(4)/4.74(5)	
Dimensions	Unit	Height	mm	770			870			
		Width	mm	1,250			1,380			
		Depth	mm	362			460			
Weight	Unit		kg	88.0			147			
Water heat exchanger	Type			Plate heat exchanger						
	Water volume		l	1			2			
Air heat exchanger	Type			-			High efficiency fin and tube type with integral subcooler			
Compressor	Type			Hermetically sealed swing compressor			Hermetically sealed swing inverter compressor			
	Quantity			-			1			
Fan	Type			Propeller fan						
	Quantity			-			1			
	Air flow rate	Cooling Nom.	m <sup>3</sup> /min	-			70	85		
Sound power level	Cooling	Nom.	dBa	61.0(1)	62.0(1)		67.0	69.0		
Sound pressure level	Cooling	Nom.	dBa	48.0(1)	49.0(1)	50.0(1)	47.7	50.8	51.0	
Operation range	Air side	Cooling	Min.~Max.	°CDB 10(3)~43			10~43			
Refrigerant	Type/GWP			R-32/675.0						
	Charge		kg	1.35			-			
	Control			-			Electronic expansion valve			
	Circuits	Quantity		-			1			
Refrigerant charge	Per circuit		kg	-			3.80			
Unit	Running	Max current	A	-			30.8			
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /230 +/-10%			1~/50 /230			

(1) Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2) Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3) For more details, see operation range drawing | (4) Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (5) Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (6) According to EN14825 | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | Depends on operation mode, refer to installation manual.

# Air cooled mini inverter chiller

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



EWAA-EWYA-D\_R

More details and final information can be found by scanning or clicking the QR codes.



EWAA-DW1P

Cooling Only					EWAA	011DW1P	014DW1P	016DW1P
Space cooling	A Condition Pdc 35°C			kW	11.6		12.8	14.0
	ηs,c			%	229		226	221
SEER					5.79(3)		5.71(3)	5.59(3)
Cooling capacity	Nom.			kW	11.6(1)/11.5(2)		12.8(1)/12.7(2)	14.0(1)/15.3(2)
Power input	Cooling	Nom.		kW	3.56(1)/2.17(2)		4.06(1)/2.51(2)	4.58(1)/3.24(2)
Capacity control	Method				Variable (inverter)			
EER					3.26(1)/5.31(2)		3.16(1)/5.04(2)	3.06(1)/4.74(2)
Dimensions	Unit	Height		mm	870			
		Width		mm	1,380			
		Depth		mm	460			
Weight	Unit			kg	147			
Water heat exchanger	Type				Plate heat exchanger			
	Water volume				l	2		
Air heat exchanger	Type				High efficiency fin and tube type with integral subcooler			
Compressor	Type				Hermetically sealed swing inverter compressor			
	Quantity				1			
Fan	Type				Propeller fan			
	Quantity				1			
Air flow rate	Air flow rate	Cooling	Nom.	m³/min	70		85	
	Sound power level	Cooling	Nom.	dB(A)	67.0		69.0	
Sound pressure level	Cooling	Nom.		dB(A)	47.7		50.8	51.0
Operation range	Air side	Cooling	Min.~Max.	°CDB	10~43			
	Water side	Cooling	Min.~Max.	°CDB	5~22			
Refrigerant	Type/GWP				R-32/675.0			
	Control				Electronic expansion valve			
	Circuits	Quantity				1		
Refrigerant charge	Per circuit			kg	3.80			
				TCO2Eq	2.6			
Unit	Running current	Max		A	14.0			
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50 /400			

(1) Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2) Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (3) According to EN14825 | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

# Air cooled mini inverter chiller

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



EW(A-Y)A004-008DV3P-H\_R

More details and final information can be found by scanning or clicking the QR codes.



EWAA-DV3P-H

Cooling Only				EWAA-D	004DV3P-H	006DV3P-H	008DV3P-H	011DV3P-H	014DV3P-H	016DV3P-H
Space cooling	A Condition Pdc 35°C		kW		-			11.6	12.8	14.0
	ηs,c		%		-			229	226	221
SEER					-			5.79(6)	5.71(6)	5.59(6)
Cooling capacity	Nom.		kW	4.86(1)/4.52(2)	5.83(1)/5.09(2)	6.18(1)/5.44(2)	11.6(4)/11.5(5)	12.8(4)/12.7(5)	14.0(4)/15.3(5)	
Power input	Cooling	Nom.	kW	0.820(1)/1.36(2)	1.08(1)/1.55(2)	1.19(1)/1.73(2)	3.56(4)/2.17(5)	4.06(4)/2.51(5)	4.58(4)/3.24(5)	
	Heating	Nom.	kW	0.840(1)/1.26(2)	1.24(1)/1.69(2)	1.63(1)/2.23(2)	-			
Capacity control	Method			Variable (inverter)						
EER				5.91(1)/3.32(2)	5.40(1)/3.28(2)	5.19(1)/3.14(2)	3.26(4)/5.31(5)	3.16(4)/5.04(5)	3.06(4)/4.74(5)	
Dimensions	Unit	Height	mm	770			870			
		Width	mm	1,250			1,380			
		Depth	mm	362			460			
Weight	Unit	kg	88.0			147				
Water heat exchanger	Type		Plate heat exchanger							
	Water volume		l	1			2			
Air heat exchanger	Type		-				High efficiency fin and tube type with integral subcooler			
Compressor	Type		Hermetically sealed swing compressor				Hermetically sealed swing inverter compressor			
	Quantity		1							
Fan	Type		Propeller fan							
	Quantity		1							
	Air flow rate	Cooling Nom.	m <sup>3</sup> /min	-			70	85		
Sound power level	Cooling	Nom.	dB(A)	61.0(1)	62.0(1)		67.0	69.0		
Sound pressure level	Cooling	Nom.	dB(A)	48.0(1)	49.0(1)	50.0(1)	47.7	50.8	51.0	
Operation range	Air side	Cooling	Min.~Max.	°CDB 10(3)~43			10~43			
Refrigerant	Type/GWP		R-32/675.0							
	Charge		kg	1.35			-			
	Control		-							
	Circuits		Quantity	1						
Refrigerant charge	Per circuit		kg	-			3.80			
Unit	Running	Max current	A	-			30.8			
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /230 +/-10%			1~/50 /230			

(1) Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2) Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3) For more details, see operation range drawing | (4) Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (5) Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (6) According to EN14825 | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | Depends on operation mode, refer to installation manual.

# Air cooled mini inverter chiller

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWAA-DWIP-H

Cooling Only					EWAA	011DW1P-H-	014DW1P-H-	016DW1P-H-
Space cooling	A Condition Pdc 35°C			kW	11.6		12.8	14.0
	ηs,c			%	229		226	221
SEER					5.79(3)		5.71(3)	5.59(3)
Cooling capacity	Nom.			kW	11.6(1)/11.5(2)		12.8(1)/12.7(2)	14.0(1)/15.3(2)
Power input	Cooling	Nom.		kW	3.56(1)/2.17(2)		4.06(1)/2.51(2)	4.58(1)/3.24(2)
Capacity control	Method				Variable (inverter)			
EER					3.26 (1)/5.31 (2)		3.16 (1)/5.04 (2)	3.06 (1)/4.74 (2)
Dimensions	Unit	Height		mm	870			
		Width		mm	1,380			
		Depth		mm	460			
Weight	Unit			kg	147			
Water heat exchanger	Type				Plate heat exchanger			
	Water volume				l	2		
Air heat exchanger	Type				High efficiency fin and tube type with integral subcooler			
Compressor	Type				Hermetically sealed swing inverter compressor			
	Quantity				1			
Fan	Type				Propeller fan			
	Quantity				1			
	Air flow rate	Cooling	Nom.	m³/min	70		85	
Sound power level	Cooling	Nom.		dB(A)	67.0		69.0	
Sound pressure level	Cooling	Nom.		dB(A)	47.7		50.8	51.0
Operation range	Air side	Cooling	Min.~Max.	°CDB	10~43			
	Water side	Cooling	Min.~Max.	°CDB	5~22			
Refrigerant	Type/GWP				R-32/675.0			
	Control				Electronic expansion valve			
	Circuits	Quantity				1		
Refrigerant charge	Per circuit			kg	3.80			
				TCO2Eq	2.6			
Unit	Running	Max		A	14.0			
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50 /400			

(1) Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2) Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (3) According to EN14825 | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

# Air cooled scroll inverter chiller

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



More details and final information can be found by scanning or clicking the QR codes.



EWAT-CZN

Cooling Only				EWAT	016CZN-A1	021CZN-A1	025CZN-A1	032CZN-A1	040CZN-A1	040CZN-A2	050CZN-A2	064CZN-A2	090CZN-A2		
Space cooling	A Condition Pdc 35°C			kW	15.9	20.9	25.6	32.4	39.6	41.4	50.8	64.0	88.3		
	ηs,c			%	197		200	205	201	213	210	205	198		
SEER					5.00		5.06	5.21	5.09	5.41	5.33	5.21	5.03		
Cooling capacity	Nom.			kW	15.9	20.9	25.6	32.4	39.6	41.4	50.8	64.0	88.3		
Power input	Cooling Nom.			kW	5.50	6.60	8.50	10.3	13.4	13.2	17.0	21.8	31.0		
Capacity control	Method			Inverter controlled											
	Minimum capacity			%	18	14	12	19	15	14	12	15	14		
EER					2.90	3.16	3.00	3.13	2.95	3.12	2.98	2.93	2.84		
IPLV					5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61		
Dimensions	Unit	Height		mm	1,878										
		Width		mm	1,152				1,752			2,306		2,906	3,506
		Depth		mm	802					814					
Weight	Unit			kg	222	245		340	339	480		574	672		
	Operation weight			kg	223	247		343	342	486		580	680		
Water heat exchanger	Type			Braze plate heat exchanger											
	Water volume			l	1	2				5			8		
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2		
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum											
	Compressor	Type			Scroll compressor										
Fan	Quantity			1					2						
	Type			Axial											
	Quantity			1				2			3	4			
	Speed			rpm	800	900	700	900	700	900	800	900			
Sound power level	Cooling	Nom.	dBA	76.0	78.0	79.0	80.0			81.0	83.0	85.0			
Sound pressure level	Cooling	Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0				
Refrigerant	Type/GWP			R-32/675											
	Charge			kg	3.00	5.50	7.00	8.00	12.0		13.0	16.0			
	Circuits Quantity			1					2						
Piping connections Evaporator water inlet/outlet (OD)				1"1/4					2"						

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

# Air cooled scroll inverter chiller

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



EWAT-CZ\_R

More details and final information can be found by scanning or clicking the QR codes.



EWAT-CZP

Cooling Only				EWAT	016CZP-A1	021CZP-A1	025CZP-A1	032CZP-A1	040CZP-A1	040CZP-A2	050CZP-A2	064CZP-A2	090CZP-A2		
Space cooling	A Condition Pdc 35°C			kW	16.0	21.0	25.7	32.6	39.8	41.6	51.0	64.3	88.6		
	ηs,c			%	209	213		225	211	228	216	211	204		
SEER					5.30	5.41		5.70	5.36	5.76	5.48	5.34	5.18		
Cooling capacity	Nom.			kW	16.1	21.1	25.9	32.7	39.9	41.7	51.1	64.4	88.8		
Power input	Cooling Nom.			kW	5.45	6.56	8.48	10.3	13.3	13.2	16.9	21.9	31.1		
Capacity control	Method			Inverter controlled											
	Minimum capacity			%	18	14	12	19	15	14	12	15	14		
EER					2.96	3.22	3.05	3.18	3.00	3.17	3.03	2.95	2.85		
IPLV					5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61		
Dimensions	Unit	Height		mm	1,878										
		Width		mm	1,152				1,752			2,306		2,906	3,506
		Depth		mm	802								814		
Weight	Unit			kg	256	278		383	382		531	630	727		
	Operation weight			kg	257	280		386	385		537	636	735		
Water heat exchanger	Type			Braze plate heat exchanger											
	Water volume			l	1	2				5			8		
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2		
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum											
	Compressor			Scroll compressor											
Fan	Quantity			1					2						
	Type			Axial											
	Quantity			1				2			3	4			
	Speed			rpm	800	900	700	900	700	900	800	900			
Sound power level	Cooling	Nom.	dBA	76.0	78.0	79.0	80.0			81.0	-				
Sound pressure level	Cooling	Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	-					
Refrigerant	Type/GWP			R-32/675											
	Charge			kg	3.00	5.50	7.00	8.00	12.0			13.0	16.0		
	Circuits Quantity			1					2						
Piping connections Evaporator water inlet/outlet (OD)				1"1/4					2"						

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing





# Air cooled scroll inverter chiller

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



EWAT-CZ\_R

More details and final information can be found by scanning or clicking the QR codes.



EWAT-CZH

Cooling Only				EWAT	016CZH-A1	021CZH-A1	025CZH-A1	032CZH-A1	040CZH-A1	040CZH-A2	050CZH-A2	064CZH-A2	090CZH-A2	
Space cooling	A Condition Pdc 35°C			kW	16.1	21.1	25.8	32.7	39.9	41.7	51.1	64.3	88.7	
	ηs,c			%	205	210	211	224	210	227	213	208	202	
Cooling capacity	Nom.			kW	16.2	21.2	25.9	32.8	40.1	41.8	51.3	64.5	88.9	
Power input	Cooling	Nom.		kW	5.60	6.70	8.70	10.4	13.5	13.3	17.0	22.0	31.2	
Capacity control	Method			Inverter controlled										
	Minimum capacity			%	18	14	12	19	15	14	12	15	14	
EER					2.89	3.15	2.98	3.14	2.97	3.15	3.02	2.93	2.85	
IPLV					5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61	
Dimensions	Unit	Height	mm	1,878										
		Width	mm	1,152				1,752			2,306		2,906	3,506
		Depth	mm	802								814		
Weight	Unit			kg	256	278	383	382	531	630	727			
	Operation weight			kg	257	280	386	385	537	636	735			
Water heat exchanger	Type			Braze plate heat exchanger										
	Water volume			l	1	2				5			8	
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.20	
	Water pressure drop	Cooling	Nom.	kPa	20	11	16	19	28	10	14	22	20	
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum										
Compressor	Type			Scroll compressor										
	Quantity				1					2				
Fan	Type			Axial										
	Quantity				1			2			3	4		
	Speed			rpm	800	900	700	900	700	900	800	900		
Sound power level	Cooling	Nom.	dBA	76.0	78.0	79.0	80.0		81.0	83.0	85.0			
Sound pressure level	Cooling	Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0			
Refrigerant	Type/GWP			R-32/675										
	Charge			kg	3.00	5.50	7.00	8.00	12.0	13.0	16.0			
	Circuits Quantity				1					2				
Piping connections	Evaporator water inlet/outlet (OD)				1"1/4					2"				

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing



# Air cooled scroll inverter heat pump

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request
- › Dedicated controller extension (EKRSCIOH) for Heating applications



EWYT-CZ\_R

More details and final information can be found by scanning or clicking the QR codes.



EWYT-CZN

Heating & Cooling				EWYT	016CZN-A1	021CZN-A1	025CZN-A1	032CZN-A1	040CZN-A1	040CZN-A2	050CZN-A2	064CZN-A2	090CZN-A2
Space cooling	A Condition 35°C	Pdc	kW	15.9	20.9	25.6	32.4	39.6	41.4	50.8	64.0	88.3	
	ηs,c		%	197		200	205	201	213	210	205	198	
SEER				5.00	5.06	5.21	5.09	5.41	5.33	5.21	5.03		
Space heating	Average climate water outlet 35°C	General	SCOP Seasonal space heating eff. class	3.89	4.00	4.07	4.06	4.07	4.02	4.00	3.98	4.00	
				A++									
Cooling capacity	Nom.		kW	15.9	20.9	25.6	32.4	39.6	41.4	50.8	64.0	88.3	
Heating capacity	Nom.		kW	15.9	20.2	24.8	32.4	39.4	40.3	49.8	61.9	85.8	
Power input	Cooling	Nom.	kW	5.50	6.60	8.50	10.3	13.4	13.2	17.0	21.8	31.0	
	Heating	Nom.	kW	4.70	5.80	7.50	9.40	11.8	11.9	15.4	19.1	27.2	
Capacity control	Method			Inverter controlled									
	Minimum capacity		%	18	14	12	19	15	14	12	15	14	
EER				2.90	3.16	3.00	3.13	2.95	3.12	2.98	2.93	2.84	
COP				3.41	3.46	3.33	3.45	3.33	3.38	3.24	3.23	3.16	
IPLV				5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61	
Dimensions	Unit	Height	mm	1,878									
		Width	mm	1,152			1,752			2,306		2,906	3,506
		Depth	mm	802						814			
Weight	Unit		kg	227		252	350	349		494	588	693	
	Operation weight		kg	228		254	353	352		500	594	701	
Water heat exchanger	Type			Braze plate heat exchanger									
	Water volume		l	1	2			5			8		
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2
		Heating	Nom.	l/s	0.8	1.0	1.2	1.5	1.9		2.4	3.0	4.1
Water pressure drop	Cooling	Nom.	kPa	20	11	16	19	28	10	14	22	20	
	Heating	Nom.	kPa	19.6	10.6	15.4	19.1	27.1	9.4	13.8	20.4	19.1	
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum									
Compressor	Type			Scroll compressor									
	Quantity			1					2				
Fan	Type			Axial									
	Quantity			1			2			3	4		
	Speed		rpm	800	900	700	900	700	900	800	900		
Sound power level	Cooling	Nom.	dBA	76.0	78.0	79.0	80.0		81.0	83.0	85.0		
Sound pressure level	Cooling	Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0		
Refrigerant	Type/GWP			R-32/675									
	Charge		kg	3.00	5.50	7.00	8.00	12.0		13.0	16.0		
	Circuits	Quantity		1					2				
Piping connections	Evaporator water inlet/outlet (OD)			1"1/4					2"				

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

# Air cooled scroll inverter heat pump

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request
- › Dedicated controller extension (EKRSCIOH) for Heating applications



EWYT-CZ\_R

More details and final information can be found by scanning or clicking the QR codes.



EWYT-CZP

Heating & Cooling				EWYT	016CZP-A1	021CZP-A1	025CZP-A1	032CZP-A1	040CZP-A1	040CZP-A2	050CZP-A2	064CZP-A2	090CZP-A2
Space cooling	A Condition	Pd <sub>c</sub>	kW	16.0	21.0	25.7	32.6	39.8	41.6	51.0	64.3	88.6	
	35°C												
	η <sub>s,c</sub>		%	209	213	225	211	228	216	211	204		
SEER				5.30	5.41	5.70	5.36	5.76	5.48	5.34	5.18		
Space heating	Average climate water outlet 35°C	General	SCOP	4.03	4.19	4.18	4.19	4.12	4.01	4.04			
				Seasonal space heating eff. class	A++								
Cooling capacity	Nom.		kW	16.1	21.1	25.9	32.7	39.9	41.7	51.1	64.4	88.8	
Heating capacity	Nom.		kW	15.6	19.9	24.6	32.1	39.0	40.0	49.5	61.4	85.3	
Power input	Cooling	Nom.	kW	5.45	6.56	8.48	10.3	13.3	13.2	16.9	21.9	31.1	
	Heating	Nom.	kW	4.63	5.81	7.42	9.32	11.7	11.8	15.3	19.2	27.3	
Capacity control	Method			Inverter controlled									
	Minimum capacity		%	18	14	12	19	15	14	12	15	14	
EER				2.96	3.22	3.05	3.18	3.00	3.17	3.03	2.95	2.85	
COP				3.37	3.43	3.31	3.44	3.33	3.38	3.23	3.20	3.13	
IPLV				5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61	
Dimensions	Unit	Height	mm	1,878									
		Width	mm	1,152			1,752			2,306		2,906	3,506
		Depth	mm	802				814					
Weight	Unit		kg	261	286	393	392	546	644	749			
		Operation weight	kg	262	288	396	395	551	650	757			
Water heat exchanger	Type			Braze plate heat exchanger									
	Water volume		l	1	2			5			8		
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2
		Heating	Nom.	l/s	0.8	1.0	1.2	1.5	1.9		2.4	3.0	4.1
	Water pressure drop	Cooling	Nom.	kPa	20	11	16	19	28	10	14	22	20
Heating		Nom.	kPa	19.6	10.6	15.4	19.1	27.1	9.4	13.8	20.4	19.1	
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum									
Compressor	Type			Scroll compressor									
	Quantity			1					2				
Fan	Type			Axial									
	Quantity			1			2			3	4		
	Speed		rpm	800	900	700	900	700	900	800	900		
Sound power level	Cooling	Nom.	dBA	76.0	78.0	79.0	80.0		81.0	83.0	85.0		
Sound pressure level	Cooling	Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0		
Refrigerant	Type/GWP			R-32/675									
	Charge		kg	3.00	5.50	7.00	8.00	12.0	13.0	16.0			
	Circuits	Quantity		1					2				
Piping connections	Evaporator water inlet/outlet (OD)			1"1/4					2"				

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing



# Air cooled scroll inverter heat pump

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request
- › Dedicated controller extension (EKRSCIOH) for Heating applications



EWYT-CZ\_R

More details and final information can be found by scanning or clicking the QR codes.



EWYT-CZH

Heating & Cooling				EWYT	016CZH-A1	021CZH-A1	025CZH-A1	032CZH-A1	040CZH-A1	040CZH-A2	050CZH-A2	064CZH-A2	090CZH-A2
Space cooling	A Condition	Pdc	kW	16.1	21.1	25.8	32.7	39.9	41.7	51.1	64.3	88.7	
	35°C												
	ηs,c		%	205	210	211	224	210	227	213	208	202	
SEER				5.20	5.32	5.34	5.67	5.34	5.76	5.40	5.27	5.12	
Space heating	Average climate water outlet 35°C	General	SCOP	3.88	4.06	4.08	4.11	4.13	4.14	4.09	3.94	4.00	
				Seasonal space heating eff. class A++									
Cooling capacity	Nom.		kW	16.2	21.2	25.9	32.8	40.1	41.8	51.3	64.5	88.9	
Heating capacity	Nom.		kW	15.5	19.8	24.5	32.0	38.9	39.9	49.4	61.3	85.2	
Power input	Cooling	Nom.	kW	5.60	6.70	8.70	10.4	13.5	13.3	17.0	22.0	31.2	
	Heating	Nom.	kW	4.80	6.00	7.60	9.50	11.9	12.0	15.4	19.3	27.4	
Capacity control	Method			Inverter controlled									
	Minimum capacity			%	18	14	12	19	15	14	12	15	14
EER				2.89	3.15	2.98	3.14	2.97	3.15	3.02	2.93	2.85	
COP				3.24	3.31	3.22	3.37	3.28	3.33	3.20	3.17	3.12	
IPLV				5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61	
Dimensions	Unit	Height	mm	1,878									
		Width	mm	1,152			1,752			2,306		2,906	3,506
		Depth	mm	802				814					
Weight	Unit		kg	261	286	393	392	546	644	749			
	Operation weight		kg	262	288	396	395	551	650	757			
Water heat exchanger	Type			Braze plate heat exchanger									
	Water volume			l	1	2			5		8		
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2
		Heating	Nom.	l/s	0.8	1.0	1.2	1.5	1.9		2.4	3.0	4.1
	Water pressure drop	Cooling	Nom.	kPa	20	11	16	19	28	10	14	22	20
Heating		Nom.	kPa	19.6	10.6	15.4	19.1	27.1	9.4	13.8	20.4	19.1	
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum									
Compressor	Type			Scroll compressor									
	Quantity			1				2					
Fan	Type			Axial									
	Quantity			1			2			3		4	
	Speed			rpm	800	900	700	900	700	900	800	900	
Sound power level	Cooling	Nom.	dBA	76.0	78.0	79.0	80.0		81.0	83.0	85.0		
Sound pressure level	Cooling	Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0		
Refrigerant	Type/GWP			R-32/675									
	Charge			kg	3.00	5.50	7.00	8.00	12.0	13.0	16.0		
	Circuits			Quantity	1				2				
Piping connections Evaporator water inlet/outlet (OD)				1"1/4				2"					

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

# Inverter screw cooling only with BLU efficiency. Standard sound.

- › Environmentally conscious HFC134a – the most thermodynamically efficient refrigerant for air cooled applications
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,950 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZBSD



MicroTech 4



EWAD\_H\_S-TZ-D

		EWAD-TZBSD		275	320	345	400	470	510	525	545	570	580	625	630	670	755	
SEER				4.517	4.637	4.636	4.829	4.809	4.561	4.73	4.55	4.552	4.711	4.65	4.556	4.564	4.917	
Cooling capacity	Nom.	kW		274.8	316.9	346	418.5	467	512.6	520.7	543.7	573.2	574.7	622.2	630.9	674	753.1	
Power input	Cooling	Nom.	kW	91.31	100.1	115.5	136.4	159.9	171	167.6	188.4	206	198.2	230.6	216.2	242.8	231.7	
Capacity control	Method			Stepless														
	Minimum capacity	%		22	19	17	22	23	11	22	10	19	17	10	13			
EER				3	3.2	3	3.1	2.9	3	3.1	2.9	2.8	2.9	2.7	2.9	2.8	3.3	
IPLV				4.4	4.6		4.8		4.4	4.7	4.4		4.7		4.5	4.9		
Dimensions	Unit	Height	mm	2,553														
		Width	mm	2,238														
		Depth	mm	2,560	3,640				4,720				5,800				6,880	
Weight	Unit		kg	2,602	3,084		3,486		4,212	4,032	4,212		4,032		4,695		5,670	
		Operation weight	kg	2,677	3,169		3,583.7		3,593.7	4,552	4,160.1	4,557	4,562	4,170.1	4,175.1	5,035	5,045	6,055
Air heat exchanger	Type			Microchannel														
Compressor	Type			Screw compressor														
	Quantity			1				2		1		2		1		2		
Fan	Type			Direct propeller														
	Quantity			4	6				8				10				12	
	Air flow rate	Cooling	Nom.	I/s	25,490	38,240				50,980	50,990	50,980		50,990		63,730		76,480
Sound power level	Cooling	Nom.	dBA	97	98	100	97		99	98	99	100	98	101	102	99		
Sound pressure level	Cooling	Nom.	dBA	78				80	78	77	79	77	79	80	78	80	82	78
Operation range	Air side	Cooling	Min.~Max.	°CDB	5~46													
Refrigerant	Type/GWP			R-134a/1,430														
	Charge		kg	35	45		55	65	70		75	80		85		95	105	
	Circuits	Quantity		1				2	1	2		1		2				
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm				139.7mm		168.3mm	139.7mm	168.3mm		139.7mm		168.3mm		
Unit	Starting current	Max	A	0														
	Running current	Cooling	Nom.	A	179.1	196.2	217.6	248.4	283.5	336.9	298.8	367.3	392.4	344.2	392.3	412.1	450	434.7
		Max	A	220	262	284	346	362	411	400	440	471	457	464	512	556	600	
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400														

		EWAD-TZBSD		830	915	C10	H10	H11	C12	C13	C14	C15	H16	H17	H18	H19	
SEER				4.879	4.901	4.855	4.797	4.936	4.942	4.906	4.849	4.858	5.044	4.995	4.997	4.979	
Cooling capacity	Nom.	kW		825.6	916.8	997.9	1,092	1,168	1,238	1,332	1,405	1,534	1,665	1,760	1,876	1,954	
Power input	Cooling	Nom.	kW	267.5	298.4	347.8	369.7	387.5	409.9	447	494.1	531.7	546.3	608.6	659.1	730.3	
Capacity control	Method			Stepless													
	Minimum capacity	%		11	13	11	10				13	12	11	10			
EER				3.1		2.9	3			2.8	2.9	3	2.9	2.8	2.7		
IPLV				4.8	4.9	4.8	4.9		4.8	4.7		5.3		5.2			
Dimensions	Unit	Height	mm	2,553													
		Width	mm	2,238													
		Depth	mm	6,880				7,960	9,040	10,120	11,200		12,280		13,360		
Weight	Unit		kg	5,670	6,142		6,816	7,297	7,779	8,260	8,581	9,920	10,323		10,805		
		Operation weight	kg	6,065	6,748	6,763	7,523	8,014	8,506	9,002	9,333	11,146	11,564	11,579	12,076	12,086	
Air heat exchanger	Type			Microchannel													
Compressor	Type			Screw compressor													
	Quantity			2													
Fan	Type			Direct propeller													
	Quantity			12				14	16	18	20		22		24		
	Air flow rate	Cooling	Nom.	I/s	76,480				89,230	101,980	114,720		127,460		140,210		152,960
Sound power level	Cooling	Nom.	dBA	100	99	100	101		102	104	105	106	104	105	106	107	
Sound pressure level	Cooling	Nom.	dBA	79	78	79				80	81	82	83	81	82	83	84
Operation range	Air side	Cooling	Min.~Max.	°CDB	5~46												
Refrigerant	Type/GWP			R-134a/1,430													
	Charge		kg	115	125	140	150	160	170	185	195	215	230	245	260	270	
	Circuits	Quantity		2													
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm				219.1mm				273mm					
Unit	Starting current	Max	A	0													
	Running current	Cooling	Nom.	A	488.5	536.5	610.2	645.8	674.8	710.6	767.8	837.3	899.1	919.5	1,011	1,088	1,193
		Max	A	668	751	817	884	930	948	1,120	1,200	1,227	1,340	1,475	1,608		
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400													

# Inverter screw with SILVER efficiency. Standard sound.

- › Environmentally conscious HFC134a – the most thermodynamically efficient refrigerant for air cooled applications
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,950 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZSSD



MicroTech 4



EWAD\_H\_S-TZ-D

				EWAD-TZSSD														
				285	325	380	430	495	520	535	555	585	595	645	650	705	760	
SEER				5.551	5.737	5.636	5.741	5.434	5.281	5.659	5.237	5.099	5.556	5.291	5.535	5.2	5.547	
Cooling capacity	Nom.			kW	283.6	327.3	360.3	426.8	490.9	522.4	530.6	555.8	586.7	590	646.3	642.1	706.1	760.3
Power input	Cooling	Nom.		kW	84.44	98.36	112.8	131	151.7	162.1	161	177.6	194.1	188.4	202.9	218.2	235.4	225.2
Capacity control	Method			Stepless														
	Minimum capacity			%	22	19	17	22	23	11	22	10	19	10	17	10	13	
EER					3.4	3.3	3.2	3.3	3.2	3.3	3.1	3	3.1	3.2	2.9	3	3.4	
IPLV					5.7	5.8	5.7	6	5.8	5.4	6	5.3	5.2	5.8	5.4	5.6	5.3	6
Dimensions	Unit	Height		mm	2,553													
		Width		mm	2,238													
		Depth		mm	3,640	4,720				5,800				6,880	5,800	6,880	7,960	
Weight	Unit			kg	3,084	3,604		3,968	4,032	4,693	4,513	4,693		4,513	5,177	4,513	5,177	6,151
	Operation weight			kg	3,164	3,697	3,702	4,070.7	4,155.1	5,033	4,646.1	5,038	5,043	4,651.1	5,522	4,661.1	5,527	6,536
Air heat exchanger	Type			Microchannel														
Compressor	Type			Screw compressor														
	Quantity			1 2 1 2 1 2 1 2 1 2														
Fan	Type			Direct propeller														
	Quantity			6	8				10				12	10	12	14		
	Air flow rate	Cooling	Nom.	I/s	38,240	50,990				63,730				76,480	63,730	76,480	89,230	
Sound power level	Cooling	Nom.		dBA	98	100	98	97	99	98	99	101	98	101	103	99		
Sound pressure level	Cooling	Nom.		dBA	78	80	77	79	77	79	80	78	80	82	78			
Operation range	Air side	Cooling	Min.~Max.	°CDB	5~46				-20~46	5~46	-20~46	5~46	-20~46	5~46	-20~46			
Refrigerant	Type/GWP			R-134a/1,430														
	Charge			kg	40	45	50	60	65	70	75	80		90	95	105		
	Circuits	Quantity			1				2	1	2		1	2	1	2		
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm				139.7mm	168.3mm	139.7mm	168.3mm	139.7mm	168.3mm	139.7mm	168.3mm			
Unit	Starting current	Max			A													
	Running current	Cooling	Nom.	A	174.3	202.4	227.4	249.9	281.8	332.1	300.1	359.1	387.7	340.8	407	384.9	451.6	442.9
	current	Max			A	231	272	294	357	372	421	411	450	481	467	523	474	566
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50 /400													

				EWAD-TZSSD														
				835	960	C10	H10	H11	H12	H13	H14	H15	H16	H17	H18	H19		
SEER				5.714	5.615	5.536	5.55	5.562	5.714	5.673	5.529	5.707	5.633	5.608	5.527	5.445		
Cooling capacity	Nom.			kW	837.7	960.2	1,017	1,064	1,168	1,281	1,372	1,482	1,562	1,665	1,787	1,876	1,954	
Power input	Cooling	Nom.		kW	258.7	301.2	332.2	351.6	384.5	412.6	451.9	500.2	485.4	542.2	589.4	654.5	725.7	
Capacity control	Method			Stepless														
	Minimum capacity			%	11	12	11		10				14	13	12	11	10	
EER					3.2		3.1	3	3.1	3	3.2	3.1	3	2.9	2.7			
IPLV					5.8	5.7	5.6		5.7	5.6	6.1	6	5.9	5.8	5.7			
Dimensions	Unit	Height		mm	2,553													
		Width		mm	2,238													
		Depth		mm	7,960				9,040	11,200	12,280				13,360			
Weight	Unit			kg	6,151	6,623		6,816	7,297	8,260	8,742	9,920	10,323		10,805			
	Operation weight			kg	6,546	7,239	7,244	7,518	8,014	8,992	9,489	11,136	11,549	11,564	12,066	12,076	12,086	
Air heat exchanger	Type			Microchannel														
Compressor	Type			Screw compressor														
	Quantity			2														
Fan	Type			Direct propeller														
	Quantity			14	16				20	22				24				
	Air flow rate	Cooling	Nom.	I/s	89,230				101,908	127,460	140,210				152,960			
Sound power level	Cooling	Nom.		dBA	100				101	102	104	105	103	104	105	106	107	
Sound pressure level	Cooling	Nom.		dBA	79	78	79		80	81	82	80	81	82	83	84		
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20~46													
Refrigerant	Type/GWP			R-134a/1,430														
	Charge			kg	115	135	140	145	160	175	190	205	215	230	250	260	270	
	Circuits	Quantity			2													
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm	219.1mm				273mm									
Unit	Starting current	Max			A													
	Running current	Cooling	Nom.	A	489.7	555	601.4	630.5	683.6	733.8	796.2	871.1	848	931.7	1,005	1,101	1,206	
	current	Max			A	679	706	761	789	884	948	1,156	1,124	1,227	1,351	1,475	1,608	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50 /400													

# Inverter screw with GOLD efficiency. Standard sound.

- › Environmentally conscious HFC134a – the most thermodynamically efficient refrigerant for air cooled applications
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,950 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZXSD



MicroTech 4



EWAD\_H\_S-TZ-D

				EWAD-TZXSD																
				295	345	380	440	515	525	565	565	610	635	670	705	725	760			
SEER				5.605	6.007	5.961	6.165	6.019	6.002	6.251	5.937	5.999	6.146	5.891	5.552	5.94	5.308			
Cooling capacity	Nom.	kW		294.4	344.4	378	434.8	507.9	524.3	560.5	565.9	610.7	629	668.1	701	724	757.3			
Power input	Cooling	Nom. kW		89.4	102.5	116.8	120.6	150	146.6	162	163.3	177	190.8	201.3	207.2	219.5	233.1			
Capacity control	Method	Stepless																		
	Minimum capacity	%		22	19	17	28	23	13	22	12	11	19	10	30	10	28			
EER				3.3	3.4	3.2	3.6	3.4	3.6	3.5			3.3		3.4	3.3	3.2			
IPLV				6	6.3	6.1	6.6	6.5	6.3	6.7	6.1	6.2	6.5	6.1	5.7	6.2	5.6			
Dimensions	Unit	Height	mm	2,553																
		Width	mm	2,238																
		Depth	mm	3,640	4,720	5,800			6,880			7,960	6,880	7,960	6,880	7,960	6,880			
Weight	Unit	kg		3,255	3,775		4,569		5,348	5,136	5,348	5,829	5,136	5,829	5,805	5,946	5,805			
		Operation weight		3,335	3,868	3,873	4,687.1	4,697.1	5,673	5,287.3	5,683	6,169	5,297.3	6,174	5,976.3	6,344	5,986.3			
Air heat exchanger	Type	Microchannel																		
Compressor	Type	Screw compressor																		
	Quantity	1 2 1 2 1 2 1 2 1 2 1																		
Fan	Type	Direct propeller																		
	Quantity	6 8 10 12 14 12 14 12 14 12																		
	Air flow rate	Cooling	Nom.	I/s	33,930	45,240		56,540		67,860	68,280	67,860	79,170	68,280	79,170	68,280	79,170			
Sound power level	Cooling	Nom.		dBA	97	98	103	96	97	100			101	105	101	99	102			
Sound pressure level	Cooling	Nom.		dBA	80	82	83	75	76	79	76	80	81	77	83	78	84			
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~46															
Refrigerant	Type/GWP	R-134a/1,430																		
	Charge	kg		40	45	50	60	70		75	80	85		90	95	100	105			
	Circuits	Quantity		1			2		1	2		1	2	1	2	1				
Piping connections	Evaporator water inlet/outlet (OD)	88.9mm 139.7mm 168.3mm 139.7mm 168.3mm 139.7mm 168.3mm 139.7mm 168.3mm 139.7mm																		
Unit	Starting current	Max		A	0															
	Running current	Cooling	Nom.	A	188.5	216.8	235.8	247.6	291.7	319.1	316.3	348.1	378.7	359.4	420.8	383.5	443	421.6		
	Max	A		224	261	289	314	342	389	404	429	457	452	498	520	535	568			
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400																

				EWAD-TZXSD																
				805	880	950	C10	H10	H11	C12	H12	H13	H14	H15	H16	H17				
SEER				6.088	6.355	6.192	6.365	6.186	6.313	6.217	6.126	6.14	5.896	5.807	5.723	5.629				
Cooling capacity	Nom.	kW		802.3	877.7	949.4	993.6	1,062	1,129	1,194	1,286	1,359	1,454	1,567	1,671	1,770				
Power input	Cooling	Nom. kW		233.2	250.8	282.1	292.3	325.1	336.7	370.1	402.4	425.5	419.5	472.2	528.4	590.4				
Capacity control	Method	Stepless																		
	Minimum capacity	%		10	14	13	12	11			10		15	14	13	12				
EER				3.4	3.5	3.4		3.3	3.4	3.2			3.5	3.3	3.2	3				
IPLV				6.4	6.6	6.4	6.5	6.4	6.5	6.4	6.3	6.1	6.3	6.2	6					
Dimensions	Unit	Height	mm	2,553																
		Width	mm	2,238																
		Depth	mm	9,040			10,120			11,200			12,280			13,360				
Weight	Unit	kg		6,904	7,160		7,642		8,316			9,655			10,805					
		Operation weight		7,495	7,761	7,771	8,258	8,268	9,028	9,038	9,053	10,856	12,016	12,031	12,046	12,061				
Air heat exchanger	Type	Microchannel																		
Compressor	Type	Screw compressor																		
	Quantity	2																		
Fan	Type	Direct propeller																		
	Quantity	16 18 20 22 24																		
	Air flow rate	Cooling	Nom.	I/s	90,480			101,780			113,080		124,390			135,700				
Sound power level	Cooling	Nom.		dBA	105	98	100	101	102	103	105	108	106	102	103	104	105			
Sound pressure level	Cooling	Nom.		dBA	84	76	77		78			79		80	81					
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~46															
Refrigerant	Type/GWP	R-134a/1,430																		
	Charge	kg		110	120	130	135	145	155	165	180	190	200	215	230	245				
	Circuits	Quantity		2								273mm								
Piping connections	Evaporator water inlet/outlet (OD)	219.1mm																		
Unit	Starting current	Max		A	0															
	Running current	Cooling	Nom.	A	470.4	496.7	543.6	565	613.9	637.5	687	737.2	777.9	774.1	852	934.8	1,026			
	Max	A		573	626	683	720	782	744	803	851	899	997	1,103	1,217	1,330				
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400																

# Inverter screw with GOLD efficiency. Reduced sound.

- › Environmentally conscious HFC134a – the most thermodynamically efficient refrigerant for air cooled applications
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,950 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZXRD



MicroTech 4



EWAD\_H\_S-TZ-D

				EWAD-TZXRD														
				295	345	380	440	515	525	565	565	610	635	670	705	725	760	
SEER				5.507	5.938	5.866	6.042	5.901	6.037	6.159	5.944	6.029	6.039	5.922	5.418	5.964	5.358	
Cooling capacity	Nom.	kW		290.7	340.9	373.4	431	502.3	518.8	555.4	559.5	604.2	622.3	660.4	691.7	714.9	745.6	
Power input	Cooling	Nom. kW		89.12	101.1	116.3	118.5	149.8	144.1	160.2	161.7	174.5	190.5	200.1	209.3	219.2	236.6	
Capacity control	Method			Stepless														
	Minimum capacity	%		22	19	17	28	23	13	22	12	11	19	10	30	10	28	
EER				3.3	3.4	3.2	3.6	3.4	3.6	3.5			3.3			3.2		
IPLV				6.1	6.3	6.2	6.5		6.3	6.7	6.2		6.6	6.1	5.8	6.2	5.8	
Dimensions	Unit	Height	mm	2,553														
		Width	mm	2,238														
		Depth	mm	3,640	4,720		5,800		6,880		7,960	6,880	7,960	6,880	7,960	6,880		
Weight	Unit	kg		3,375	3,895		4,689		5,468	5,256	5,468	5,949	5,256	5,949	5,925	6,066	5,925	
		Operation weight		3,455	3,988	3,993	4,807.1	4,817.1	5,793	5,407.3	5,803	6,289	5,417.3	6,294	6,096.3	6,464	6,106.3	
Air heat exchanger	Type			Microchannel														
Compressor	Type			Screw compressor														
	Quantity			1			2		1	2		1		2	1	2	1	
Fan	Type			Direct propeller														
	Quantity			6	8		10		12		14	12	14	12	14	12	14	
	Air flow rate	Cooling	Nom.	I/s	28,330	37,770		47,210		56,660		66,100	56,660	66,100	56,660	66,100	56,660	
Sound power level	Cooling	Nom.		dBA	87	88	92	88		90		91	93	91	90	92	90	
Sound pressure level	Cooling	Nom.		dBA	68			71	67	68	69			72	69	68	70	69
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~46													
Refrigerant	Type/GWP			R-134a/1,430														
	Charge	kg		40	45	50	60	70		75	80	85		90	95	100	105	
	Circuits	Quantity		1			2		1	2		1		2	1	2	1	
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm			139.7mm		168.3mm	139.7mm	168.3mm		139.7mm	168.3mm	139.7mm	168.3mm	139.7mm	
Unit	Starting current	Max		0														
	Running current	Cooling	Nom.	A	193.6	221.9	241.5	252.5	299.5	326	323.5	356.7	387.5	368.6	431.6	396.2	454.1	436.4
	current	Max		A	224	261	289	314	342	389	404	429	457	452	498	520	535	568
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400														

				EWAD-TZXRD															
				805	880	950	C10	H10	H11	C12	H12	H13	H14	H15	H16	H17			
SEER				6.169	6.363	6.179	6.354	6.217	6.34	6.191	6.12	6.181	5.883	5.764	5.704	5.537			
Cooling capacity	Nom.	kW		792.9	867.7	937.7	982.6	1,049	1,117	1,179	1,268	1,341	1,434	1,543	1,641	1,729			
Power input	Cooling	Nom. kW		231.9	250.8	283.9	292.8	327.6	338	373.2	408	430.2	424.5	480.3	539.4	603.9			
Capacity control	Method			Stepless															
	Minimum capacity	%		10	14	13	12	11			10		15	14	13	12			
EER				3.4	3.5	3.3	3.4	3.2	3.3	3.2		3.1	3.4	3.2	3	2.9			
IPLV				6.4	6.6	6.4	6.6	6.4	6.6	6.4		6.1	5.9	6.2	5.8				
Dimensions	Unit	Height	mm	2,553															
		Width	mm	2,238															
		Depth	mm	9,040			10,120			11,200			12,280			13,360			
Weight	Unit	kg		7,024	7,280		7,762		8,436		9,775		10,925						
		Operation weight		7,615	7,881	7,891	8,378	8,388	9,148	9,158	9,173	10,976	12,136	12,151	12,166	12,181			
Air heat exchanger	Type			Microchannel															
Compressor	Type			Screw compressor															
	Quantity			2															
Fan	Type			Direct propeller															
	Quantity			16			18			20			22		24				
	Air flow rate	Cooling	Nom.	I/s	75,540			84,980			94,420			103,870		113,320			
Sound power level	Cooling	Nom.		dBA	94	90	91	92		93	94	96	95	93		94			
Sound pressure level	Cooling	Nom.		dBA	72	68	69		70		72	74	72	69	70		71		
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~46														
Refrigerant	Type/GWP			R-134a/1,430															
	Charge	kg		110	120	130	135	145	155	165	180	190	200	215	230	245			
	Circuits	Quantity		2															
Piping connections	Evaporator water inlet/outlet (OD)			219.1mm						273mm									
Unit	Starting current	Max		0															
	Running current	Cooling	Nom.	A	481.4	509.6	559.3	580.3	632.1	655.3	707.6	761.7	802.5	800.7	883.2	970.5	1,066		
	current	Max		A	573	626	683	720	782	744	803	851	899	997	1,103	1,217	1,330		
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400															



# Inverter screw with PLATINUM efficiency. Standard sound.

- › Environmentally conscious HFC134a – the most thermodynamically efficient refrigerant for air cooled applications
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,950 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZPSD



MicroTech 4



EWAD\_H\_S-TZ-D

				EWAD-TZPSD											
				285	330	370	405	450	490	530	575	615	675	735	
SEER				6.29	6.465	6.389	6.687	6.64	6.567	6.391	6.301	6.28	6.161	6.216	
Cooling capacity	Nom.	kW		285.8	330.4	367.9	401.5	447	486.1	529.6	571.8	617.7	676.1	733.5	
Power input	Cooling	Nom. kW		77.75	92.02	106	105.2	117.3	130.3	143.1	158.6	171.1	194	210.7	
Capacity control	Method			Stepless											
	Minimum capacity			%	23	20	18	30	28	25	13	12	11	10	
EER				3.7	3.6	3.5	3.8		3.7		3.6		3.5		
IPLV				6.7		6.6	7.3	7.6	7.5	6.7	6.6	6.5	6.4	6.5	
Dimensions	Unit	Height	mm	2,553											
		Width	mm	2,238											
		Depth	mm	4,720	5,800		6,880		7,960		9,040				
Weight	Unit	kg		3,775	4,256	5,050	5,136	5,829	6,311	6,427					
	Operation weight			kg	3,863	4,349	4,354	5,163.1	5,272.3	5,277.3	6,159	6,164	6,651	6,661	6,825
Air heat exchanger	Type			Microchannel											
Compressor	Type			Screw compressor											
	Quantity			1											
Fan	Type			Direct propeller											
	Quantity			8	10	12	14	16							
	Air flow rate	Cooling	Nom. I/s	45,240	56,540	67,850	79,170	90,480							
Sound power level	Cooling	Nom. dBA		97	98	100	95	96	98	100	101	101	102	102	
Sound pressure level	Cooling	Nom. dBA		78	81	82	74	75	79	80	81	83	83	83	
Operation range	Air side	Cooling	Min.~Max. °CDB	-20 ~46											
Refrigerant	Type/GWP			R-134a/1,430											
	Charge			kg	40	45	50	55	60	65	75	80	85	95	100
	Circuits			1											
	Quantity			2											
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm			139.7mm			168.3mm					
Unit	Starting current			0											
	Running	Cooling	Nom. A	174	204	229	233	249	269	318	345	374	414	442	
	current	Max	A	220	258	285	293	352	404	399	429	468	508	535	
Power supply	Phase/Frequency/Voltage			Hz/V 3~/50 /400											

				EWAD-TZPSD											
				810	890	960	C10	H10	H11	C12	H12	H13	H14	H15	
SEER				6.48	6.725	6.602	6.648	6.483	6.529	6.398	6.263	6.31	5.978	5.928	
Cooling capacity	Nom.	kW		809.8	885.5	958.4	1,003	1,072	1,137	1,203	1,298	1,372	1,455	1,568	
Power input	Cooling	Nom. kW		226.1	242.4	271.7	281.9	312.5	325.9	357.4	387.4	409.1	409.5	462.1	
Capacity control	Method			Stepless											
	Minimum capacity			%	10	14	13	12	11		10		15	14	
EER				3.6	3.7	3.5	3.6	3.4	3.5		3.4		3.6	3.4	
IPLV				6.8	7	6.8	6.5	6.7	6.9	6.7	6.6	6.2	6.5		
Dimensions	Unit	Height	mm	2,553											
		Width	mm	2,238											
		Depth	mm	10,120		11,200		12,280		13,360					
Weight	Unit	kg		7,385	7,642	8,123	8,798	9,655	10,136	10,805					
	Operation weight			kg	7,976	8,243	8,253	8,744	8,754	9,515	9,520	10,846	11,337	12,021	12,036
Air heat exchanger	Type			Microchannel											
Compressor	Type			Screw compressor											
	Quantity			2											
Fan	Type			Direct propeller											
	Quantity			18	20	22	24								
	Air flow rate	Cooling	Nom. I/s	101,780	113,080	140,200	152,940								
Sound power level	Cooling	Nom. dBA		105	99	100	101	102	103	105	108	106	102	103	
Sound pressure level	Cooling	Nom. dBA		84	76		77		78		79	80	80	80	
Operation range	Air side	Cooling	Min.~Max. °CDB	-20 ~46											
Refrigerant	Type/GWP			R-134a/1,430											
	Charge			kg	110	120	130	140	150	160	165	180	190	205	220
	Circuits			2											
	Quantity			2											
Piping connections	Evaporator water inlet/outlet (OD)			219.1mm			273mm								
Unit	Starting current			0											
	Running	Cooling	Nom. A	466	490	534	555	601	627	674	721	759	837	837	
	current	Max	A	573	616	672	709	761	796	845	893	951	1,039	1,135	
Power supply	Phase/Frequency/Voltage			Hz/V 3~/50 /400											

# Inverter screw with PLATINUM efficiency. Reduced sound.

- › Environmentally conscious HFC134a – the most thermodynamically efficient refrigerant for air cooled applications
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,950 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZPRD



MicroTech 4



EWAD\_H\_S-TZ-D

				EWAD-TZPRD													
				285	330	370	405	450	490	530	575	615	675	735			
SEER				6.232	6.448	6.358	6.622	6.542	6.467	6.421	6.322	6.325	6.183	6.254			
Cooling capacity	Nom.	kW		283.7	328.4	365	398.8	443.9	482.4	524.8	566.5	612.5	669.9	726			
Power input	Cooling	Nom. kW		75.13	88.51	103.1	101	113.6	127.2	139	155.2	166.8	190.7	208.2			
Capacity control	Method	Stepless															
	Minimum capacity	%		23	20	18	30	28	25	13	12	11	10				
EER				3.8	3.7	3.5	4	3.9	3.8		3.7		3.5				
IPLV				6.7	6.8	6.6	7.2	7.5	7.4	6.7	6.6	6.5	6.4	6.5			
Dimensions	Unit	Height	mm	2,553													
		Width	mm	2,238													
		Depth	mm	4,720	5,800		6,880			7,960			9,040				
Weight	Unit	kg		3,895	4,376		5,170	5,256		5,949		6,431		6,547			
	Operation weight	kg		3,983	4,469	4,474	5,283.1	5,392.3	5,397.3	6,279	6,284	6,771	6,781	6,945			
Air heat exchanger	Type	Microchannel															
Compressor	Type	Screw compressor															
	Quantity	1						2									
Fan	Type	Direct propeller															
	Quantity	8		10		12			14			16					
	Air flow rate	Cooling	Nom.	I/s	37,770		47,210			56,660			66,100			75,540	
Sound power level	Cooling	Nom.		dB(A)	88	89	90	88		89		91		92			
Sound pressure level	Cooling	Nom.		dB(A)	68		69	67		68		69		70			
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~46												
Refrigerant	Type/GWP	R-134a/1,430															
	Charge	kg		40	45	50	55	60	65	75	80	85	95	100			
	Circuits	Quantity		1						2							
Piping connections	Evaporator water inlet/outlet (OD)	88.9mm				139.7mm				168.3mm							
Unit	Starting current	Max		A	0												
	Running current	Cooling	Nom.	A	176.6	207.4	232.7	236.3	253.2	273.8	324.3	352.5	381.3	422.7	448		
	current	Max		A	220	258	285	293	352	404	399	429	468	508	535		
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400													

				EWAD-TZPRD													
				810	890	960	C10	H10	H11	C12	H12	H13	H14	H15			
SEER				6.51	6.771	6.598	6.661	6.515	6.683	6.555	6.433	6.432	6.055	5.932			
Cooling capacity	Nom.	kW		801.7	876.7	948.2	993	1,061	1,126	1,190	1,282	1,356	1,435	1,544			
Power input	Cooling	Nom. kW		222.8	240.2	271.1	280	312.2	324.7	357.7	389.9	410.4	413.9	469.4			
Capacity control	Method	Stepless															
	Minimum capacity	%		10	14	13	12	11			10		15	14			
EER				3.6		3.5		3.4	3.5	3.3		3.5		3.3			
IPLV				6.8	7.1	6.9	6.7	7	6.7	6.6	6.3	6.1					
Dimensions	Unit	Height	mm	2,553													
		Width	mm	2,238													
		Depth	mm	10,120			11,200			12,280			13,360				
Weight	Unit	kg		7,505	7,762		8,243		8,918		9,775	10,256	10,925				
	Operation weight	kg		8,096	8,363	8,373	8,864	8,874	9,635	9,640	10,966	11,457	12,141	12,156			
Air heat exchanger	Type	Microchannel															
Compressor	Type	Screw compressor															
	Quantity	2															
Fan	Type	Direct propeller															
	Quantity	18			20			22			24						
	Air flow rate	Cooling	Nom.	I/s	84,980		94,420			103,870			113,320				
Sound power level	Cooling	Nom.		dB(A)	94	90	91	92		93	95	96	95	93			
Sound pressure level	Cooling	Nom.		dB(A)	72	68	69		70	72	74	72	69	70			
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~46												
Refrigerant	Type/GWP	R-134a/1,430															
	Charge	kg		110	120	130	140	150	160	165	180	190	205	220			
	Circuits	Quantity		2						2							
Piping connections	Evaporator water inlet/outlet (OD)	219.1mm				273mm											
Unit	Starting current	Max		A	0												
	Running current	Cooling	Nom.	A	475.1	501.2	547.7	568.5	616.6	643	692.2	742.3	780.3	784.9	867		
	current	Max		A	573	616	672	709	761	796	845	893	951	1,039	1,135		
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400													

# Inverter screw cooling only with BLU efficiency. Standard sound.

- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZBSD



MicroTech 4



EWAH\_H\_S-TZ-D

				EWAH-TZBSD														
				235	255	300	350	400	400	420	425	455	485	505	545	545	590	
SEER				4.491	4.373	4.355	4.666	4.428	4.588	4.601	4.571	4.593	4.603	4.565	4.557	4.595	4.568	
Cooling capacity	Nom.	kW		235.4	255.6	301.6	359.8	398.5		417.2	425.2	448.8	487.5	500	537.5		576.1	
Power input	Cooling	Nom. kW		79.49	92.42	118.2	117.9	140.7		151.4	135.6	176.2	162	204.3	202.2		201.2	
Capacity control	Method	Stepless																
	Minimum capacity	%		19	17	14	23	12	20	19	11	17	10	15		10		
EER				2.961	2.766	2.552	3.052	2.832		2.755	3.137	2.547	3.009	2.447	2.658		2.864	
IPLV				4.484	4.419	4.369	4.683	4.411	4.584	4.558	4.407	4.537	4.451	4.523	4.492	4.462	4.402	
Dimensions	Unit	Height	mm	2,553														
		Width	mm	2,238														
		Depth	mm	2,560			3,640	4,720	3,640		4,720	3,640	4,720	3,640	4,720	3,640	4,720	5,800
Weight	Unit	kg		2,559		2,589	3,486	3,751	3,486		3,751	3,486	3,941	3,871	4,353	3,971	4,422	
		Operation weight		2,589		2,629	3,536	3,806	3,541		3,811	3,546	4,006	3,941	4,428	4,046	4,502	
Air heat exchanger	Type	Microchannel																
Compressor	Type	Screw compressor																
	Quantity			1		2		1		2		1		2		1		
Fan	Type	Direct propeller																
	Quantity			4		6		8		6		8		6		8		10
	Air flow rate	Cooling	Nom.	I/s	25,490	25,493		38,240	50,987	38,240		50,987	38,240	50,987	38,240	50,990	50,987	63,733
Sound power level	Cooling	Nom.		dB(A)	97.5	99.8	101.2	96.7	97.5	97.6	97.7	100.4	100.3	100.6	101.9	103	102.8	103.9
Sound pressure level	Cooling	Nom.		dB(A)	78.41	80.65	82.11	76.96	77.19	77.88	78	80.12	80.61	80.29	82.2	82.7	82.53	83.21
Operation range	Air side	Cooling	Min.~Max.	°CDB	5~46													
Refrigerant	Type/GWP	R-1234(ze)/7																
	Charge	kg		30		35	40	50	55			60		65	70	75		80
	Circuits	Quantity		1		2		1		2		1		2		1		2
Piping connections	Evaporator water inlet/outlet (OD)	88.9mm			139.7mm			168.3mm			139.7mm			168.3mm				
Unit	Starting current	Max		0														
	Running current	Cooling	Nom.	A	159	181	219	221	255		271	274	308	321	351		391	
		current	Max	A	204	227	268	291	334		355	358	396	406	435	463	452	494
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400														

				EWAH-TZBSD																								
				635	745	785	845	900	985	C11	H11	C13	H13	H14	C15	H15												
SEER				4.612	4.792	4.758	4.774	4.766	4.72	4.71	4.65	5.062	5.043	5.041	4.983	4.984												
Cooling capacity	Nom.	kW		633.2	742.7	786.2	842.9	899	983.8	1,104	1,177	1,315	1,386	1,474	1,535	1,586												
Power input	Cooling	Nom. kW		226.9	238.6	261.4	287.6	302.2	350.9	391.1	436	423.5	471	508.7	563.3	580.5												
Capacity control	Method	Stepless																										
	Minimum capacity	%		10		12		11		10			12		11		10											
EER				2.791	3.113	3.007	2.931	2.974	2.804	2.823	2.699	3.105	2.943	2.898	2.725	2.732												
IPLV				4.452	4.741	4.716	4.722	4.692	4.624	4.623	4.543	5.285	5.263	5.232	5.165	5.15												
Dimensions	Unit	Height	mm	2,553																								
		Width	mm	2,238																								
		Depth	mm	5,800		6,880		7,960			9,040		10,120		11,200		12,280											
Weight	Unit	kg		4,452		5,370		5,614		6,096		6,185		7,352		8,279		9,242										
		Operation weight		4,537		5,470		5,480		5,729		6,221		6,320		7,507		7,517		8,459		8,469		8,965		8,975		9,462
Air heat exchanger	Type	Microchannel																										
Compressor	Type	Screw compressor																										
	Quantity	2																										
Fan	Type	Direct propeller																										
	Quantity			10		12		14		16		18		20		22												
	Air flow rate	Cooling	Nom.	I/s	63,733		76,480		89,233		101,980		114,720		127,467		140,213											
Sound power level	Cooling	Nom.		dB(A)	104.6	99.7	100.3	100.6	101.5	103.2	105.1	106.9	104.3	105.2	106.1	107	107.5											
Sound pressure level	Cooling	Nom.		dB(A)	83.83	78.53	79.14	79.46	79.93	81.67	83.17	84.97	82.09	82.94	83.56	84.45	84.63											
Operation range	Air side	Cooling	Min.~Max.	°CDB	5~46																							
Refrigerant	Type/GWP	R-1234(ze)/7																										
	Charge	kg		85		100	110	115	125	135	155	165	180	190	205	215	220											
	Circuits	Quantity		2																								
Piping connections	Evaporator water inlet/outlet (OD)	168.3mm			219.1mm			273mm																				
Unit	Starting current	Max		0																								
	Running current	Cooling	Nom.	A	425	445	480	519	544	617	682	748	733	804	862	943	971											
		current	Max	A	536	581	624	667	719	801	889	927	1,015	1,106	1,383	1,330	1,400											
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400																								

# Inverter screw with SILVER efficiency. Standard sound.

- > HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- > New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- > New single screw compressor geometry allowing performance optimization
- > Refrigerant cooled inverter mounted on compressor all across the range
- > Premium energy efficiency both at full and part load conditions
- > Best capacity with smallest footprint
- > Microchannel coils
- > Unique fully integrated active harmonic filtration solution
- > Performance monitoring
- > MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZSSD



MicroTech 4



EWAH\_H\_S-TZ-D

				EWAH-TZSSD																					
				240	265	295	370	400	415	450	470	490	535	540	595	630	690								
SEER				5.606	5.489	5.354	5.624	5.379	5.498	5.506	5.211	5.512	5.252	5.592	5.291	5.221	5.538								
Cooling capacity	Nom.	kW		242.1	264.9	296.5	366.7	402.3	408.8	447.1	468.8	485.8	508.7	533.5	592.4	626.5	696.4								
Power input	Cooling	Nom. kW		75.33	86.23	98.15	112.9	121.5	133.5	144.5	149.2	166.9	162.3	183.6	188.6	206.3	214.1								
Capacity control	Method	Stepless																							
	Minimum capacity	%		19	17	15	23	12	20	19	10	17	10	15	10		13								
EER				3.214	3.072	3.021	3.248	3.312	3.062	3.094	3.143	2.911	3.134	2.906	3.141	3.037	3.252								
IPLV				5.624	5.53	5.387	5.92	5.48	5.755	5.738	5.317	5.593	5.351	5.607	5.392	5.316	5.64								
Dimensions	Unit	Height	mm	2,553																					
		Width	mm	2,238																					
		Depth	mm	3,640			4,720	5,800	4,720	5,800	4,720	5,800	6,880												
Weight	Unit	kg		3,041	3,071	3,968	4,233	3,968	4,032	4,233	4,032	4,422	4,834	4,934		5,370									
		Operation weight		3,076	3,111	4,018	4,288	4,023	4,092	4,298	4,097	4,492	4,909	5,014	5,019	5,465									
Air heat exchanger	Type	Microchannel																							
Compressor	Type	Screw compressor																							
	Quantity			1		2		1		2		1		2		1									
Fan	Type	Direct propeller																							
	Quantity			6		8		10		8		10		8		10									
	Air flow rate	Cooling	Nom.	I/s		38,240		50,990		63,733		50,990		63,733		50,990		76,480							
Sound power level	Cooling	Nom.	dBA		97.9	100	102.3	97.1	97.8	98	98.1	100.7	100.5	101.3	102.2	104.3	105.1	99							
Sound pressure level	Cooling	Nom.	dBA		78.18	80.27	82.57	76.87	77.09	77.71	77.82	79.96	80.28	80.56	81.47	83.15	83.92	77.8							
Operation range	Air side	Cooling	Min.~Max.		°CDB		-20 ~46																		
Refrigerant	Type/GWP	R-1234(ze)/7																							
	Charge	kg		35		40		50		55		60		65		70		75		80		85		95	
	Circuits	Quantity		1		2		1		2		1		2		1		2		1		2			
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm				139.7mm				168.3mm				139.7mm				168.3mm					
Unit	Starting current	Max		A																					
	Running current	Cooling	Nom.	A		158.4	177.6	198.4	226.8	259.9	254	271.3	309	304.8	332.2	334.3	381.9	412.4	425.7						
		current	Max	A		214	237	259	302	345	344	365	405	406	428	455	495	526	538						
Power supply	Phase/Frequency/Voltage			Hz/V																					
				3~/50 /400																					

				EWAH-TZSSD																		
				740	795	855	910	980	C10	C11	C12	H12	H13	C14	C15	H15						
SEER				5.452	5.539	5.505	5.532		5.53	5.489	5.339	5.735	5.652	5.723	5.774	5.686						
Cooling capacity	Nom.	kW		741.3	795.3	854.3	909.5	983.4	1,043	1,113	1,211	1,331	1,406	1,492	1,542	1,606						
Power input	Cooling	Nom. kW		236.7	254.1	278.9	294	322.6	341.1	365.2	416.6	409.9	455.3	495.6	512.4	566.3						
Capacity control	Method	Stepless																				
	Minimum capacity	%		11			10			12			11			10						
EER				3.132	3.13	3.063	3.094	3.048	3.058	3.046	2.906	3.248	3.088	3.01	3.009	2.836						
IPLV				5.523	5.564	5.539	5.56	5.516	5.505	5.452	5.254	6.207	5.994	6.078	6.09	5.956						
Dimensions	Unit	Height	mm	2,553																		
		Width	mm	2,238																		
		Depth	mm	6,880	7,960			9,040	10,120	11,200					12,280		13,360					
Weight	Unit	kg		5,370	5,852	6,096	6,577	7,059	7,629	8,315		8,760			9,242		9,723					
		Operation weight		5,470	5,962	6,216	6,702	7,194	7,774	8,470	8,485	8,945	8,955	9,447	9,938	9,948						
Air heat exchanger	Type	Microchannel																				
Compressor	Type	Screw compressor																				
	Quantity	2																				
Fan	Type	Direct propeller																				
	Quantity			12		14		16		18		20				22		24				
	Air flow rate	Cooling	Nom.	I/s		76,480		89,233		101,908		114,714		127,460				140,206		152,952		
Sound power level	Cooling	Nom.	dBA		99.7	100.5	100.8	101.6	103	104.1	104.8	107	104.4	105.2	106.2	107.1	107.5					
Sound pressure level	Cooling	Nom.	dBA		78.52	78.95	79.25	79.73	80.8	81.53	82.27	84.42	81.86	82.7	83.33	83.98	84.4					
Operation range	Air side	Cooling	Min.~Max.		°CDB		-20 ~46															
Refrigerant	Type/GWP	R-1234(ze)/7																				
	Charge	kg		100	110	120	125	135	145	155	170	185	195	205	215	225						
	Circuits	Quantity		2																		
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm				219.1mm				273mm										
Unit	Starting current	Max		A																		
	Running current	Cooling	Nom.	A		456.1	483.2	520.7	547.3	594.5	627.5	665.5	741.8	732.3	799.8	862.2	893.4	973.3				
		current	Max	A		581	634	677	729	802	852	891	948	1,025	1,117	1,393	1,351	1,410				
Power supply	Phase/Frequency/Voltage			Hz/V																		
				3~/50 /400																		

# Inverter screw with GOLD efficiency. Standard sound.

- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZXSD



MicroTech 4



EWAD\_H\_S-TZ-D

				EWAH-TZXSD													
				220	230	275	300	350	400	465	470	515	540	545	600		
SEER				5.528	5.478	5.899	5.78	6.259	6.127	5.999	6.336	6.198	5.64	6.108	6.04		
Cooling capacity	Nom.	kW		219.8	323.4	275.1	299.3	348.7	397.5	471.7	466	504.2	534.5	543.9	602.4		
Power input	Cooling	Nom. kW		67.79	74.71	82.02	92.55	99.59	122.1	135.2	139.9	159.8	152.6	155.1	178.4		
Capacity control	Method	Stepless															
	Minimum capacity	%		22	20	18	16	25	22	10	19	17	30	10			
EER				3.243	3.111	3.354	3.234	3.501	3.256	3.488	3.331	3.156	3.503	3.508	3.376		
IPLV				6.035	5.988	6.156	6.085	6.684	6.588	6.223	6.632	6.422	5.95	6.381	6.28		
Dimensions	Unit	Height	mm	2,553													
		Width	mm	2,238													
		Depth	mm	2,560	3,640			4,720		6,880		5,800			6,880		
Weight	Unit	kg		2,731	3,242			4,023		4,886		4,569			5,323	5,105	5,157
		Operation weight		2,761	3,277	3,282	4,068	4,078	4,951	4,634	4,639	5,398	5,180	5,242			
Air heat exchanger	Type	Microchannel															
Compressor	Type	Screw compressor															
	Quantity	1												2	1		2
Fan	Type	Direct propeller															
	Quantity	4			6			8		12		10			12		
	Air flow rate	Cooling	Nom.	I/s	22,620	33,930			45,240		67,860		56,540			67,860	
Sound power level	Cooling	Nom.	dB(A)	97.3	97.5	100.2	100.8	97.3	99.8	100.6	104.5	101.7	98.8	100.9	105.5		
Sound pressure level	Cooling	Nom.	dB(A)	78.13	78.36	80.42	81.11	77.01	79.55	79.43	83.77	80.97	78.1	79.75	84.34		
Operation range	Air side	Cooling	Min.~Max.	°CDB -20 ~46													
Refrigerant	Type/GWP	R-1234(ze)/7															
	Charge	kg		30	35	40	45	55	65		70	75		85			
	Circuits	Quantity	1			2		1			2						
Piping connections	Evaporator water inlet/outlet (OD)	88.9mm			139.7mm					168.3mm							
Unit	Starting current	Max		A 0													
	Running current	Cooling	Nom.	A	145.1	157.4	175.8	194.2	211.3	243.1	299	276.8	306.6	296.2	334.4	375.7	
		Max	A	172	183	214	236	269	310	364	357	394	414	406	448		
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400													

				EWAH-TZXSD													
				620	645	700	750	790	840	900	975	H10	H11	H12	H13		
SEER				5.558	6.211	6.102	6.362	6.407	6.296	6.195	6.234	6.183	5.865	5.933	5.988		
Cooling capacity	Nom.	kW		617	641.9	697.1	752.7	788.8	841.2	897.2	972.1	1,082	1,184	1,275	1,383		
Power input	Cooling	Nom. kW		191	186	209.1	219	225.9	249.4	273.7	299.9	326.1	346.2	380	415.3		
Capacity control	Method	Stepless															
	Minimum capacity	%		25	14	13	12		11		10		14	13	12		
EER				3.231	3.452	3.334	3.437	3.491	3.373	3.278	3.242	3.318	3.42	3.355	3.33		
IPLV				5.741	6.446	6.347	6.608	6.64	6.479	6.36	6.383	6.42	6.367	6.514	6.481		
Dimensions	Unit	Height	mm	2,553													
		Width	mm	2,238													
		Depth	mm	5,800	6,880		7,960	9,040			10,120	11,200		12,280	13,360		
Weight	Unit	kg		5,323	5,414		6,151	6,633		6,722	7,203	8,091	8,760	9,242	9,723		
		Operation weight		5,408	5,504	5,509	6,256	6,743	6,748	6,847	7,338	8,241	8,925	9,417	9,913		
Air heat exchanger	Type	Microchannel															
Compressor	Type	Screw compressor															
	Quantity	1												2			
Fan	Type	Direct propeller															
	Quantity	10			12			14		16		18	20		22	24	
	Air flow rate	Cooling	Nom.	I/s	56,540	67,860			79,170		90,480		101,772	113,080		124,388	135,696
Sound power level	Cooling	Nom.	dB(A)	100.5	98.1	100.1	100.9	101.5	102.8	105.1	106.8	104.7	102.7	103.6	104.5		
Sound pressure level	Cooling	Nom.	dB(A)	79.81	76.91	78.9	79.3	79.61	80.92	83.2	84.61	82.17	80.14	80.78	81.43		
Operation range	Air side	Cooling	Min.~Max.	°CDB -20 ~46													
Refrigerant	Type/GWP	R-1234(ze)/7															
	Charge	kg		85	90	95	105	110	115	125	135	150	165	175	190		
	Circuits	Quantity	1			2											
Piping connections	Evaporator water inlet/outlet (OD)	139.7mm			168.3mm			219.1mm					273mm				
Unit	Starting current	Max		A 0													
	Running current	Cooling	Nom.	A	353.5	388.6	428.2	445.5	457.9	493.4	530.6	575.7	623.9	651.9	708.1	768.7	
		Max	A	491	472	517	527	579	618	655	702	787	902	992	1,090		
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400													

# Inverter screw with GOLD efficiency. Reduced sound.

- > HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- > New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- > New single screw compressor geometry allowing performance optimization
- > Refrigerant cooled inverter mounted on compressor all across the range
- > Premium energy efficiency both at full and part load conditions
- > Best capacity with smallest footprint
- > Microchannel coils
- > Unique fully integrated active harmonic filtration solution
- > Performance monitoring
- > MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZXR



MicroTech 4



EWAD\_H\_S-TZ-D

				EWAH-TZXR												
				220	230	275	300	350	400	465	470	515	540	545	600	
SEER				5.404	5.363	5.942	5.775	6.188	6.026	6.02	6.284	6.103	5.588	6.133	6.042	
Cooling capacity	Nom.	kW		216.3	228.3	271.7	295.3	345.2	393.5	467.2	461.6	497.8	528	537.6	594.3	
Power input	Cooling	Nom. kW		68.5	75.92	81.59	92.45	98.6	122.2	132.7	139.1	159.9	153.8	153.6	178.3	
Capacity control	Method			Stepless												
	Minimum capacity			%	22	20	18	16	25	22	10	19	17	30	10	
EER				3.157	3.007	3.33	3.194	3.501	3.219	3.52	3.319	3.112	3.434	3.494	3.334	
IPLV				6.058	6.007	6.144	6.065	6.641	6.619	6.273	6.667	6.49	5.796	6.414	6.301	
Dimensions	Unit	Height	mm	2,553												
		Width	mm	2,238												
		Depth	mm	2,680	3,760			4,840		7,000		5,920		7,000		
Weight	Unit	kg		2,851	3,362			4,143		5,006		4,689		5,443	5,225	5,277
	Operation weight			kg	2,761	3,277	3,282	4,068	4,078	4,951	4,634	4,639	5,398	5,180	5,242	
Air heat exchanger	Type			Microchannel												
Compressor	Type			Screw compressor												
	Quantity			1												
Fan	Type			Direct propeller												
	Quantity			4	6			8		12		10		12		
	Air flow rate	Cooling	Nom.	I/s	18,890	28,330			37,770		56,660		47,213		56,660	
Sound power level	Cooling	Nom.		dB(A)	86.7	86.9	89.3	89.9	87.9	89.4	90.5	93.3	91.1	89.2	90.8	94.2
Sound pressure level	Cooling	Nom.		dB(A)	67.62	67.78	69.6	70.14	67.59	69.17	69.38	72.53	70.32	68.42	69.59	73.07
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~46											
Refrigerant	Type/GWP			R-1234(ze)/7												
	Charge			kg	30	35	40	45	55	65		70	75		85	
	Circuits	Quantity			1			2		1		2				
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm				139.7mm				168.3mm				
Unit	Starting current			Max	A											
	Running	Cooling	Nom.	Max	A	150.2	163.3	180.6	199.6	216.9	249.8	305.9	283.6	314.9	306.1	343.5
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50 /400											

				EWAH-TZXR														
				620	645	700	750	790	840	900	975	H10	H11	H12	H13			
SEER				5.467	6.207	6.095	6.392	6.417	6.318	6.216	6.252	6.226	5.875	5.942	5.987			
Cooling capacity	Nom.	kW		607.1	632.8	687.3	743.4	780.8	831.9	886	959.8	1,066	1,167	1,257	1,363			
Power input	Cooling	Nom. kW		194.4	186.7	211.1	220	225.2	250.2	276	301.6	327.9	351.2	384.5	419.4			
Capacity control	Method			Stepless														
	Minimum capacity			%	25	14	13	12		11		10		14	13	12		
EER				3.123	3.389	3.255	3.379	3.467	3.325	3.21	3.182	3.251	3.323	3.268	3.251			
IPLV				5.64	6.46	6.317	6.633	6.648	6.52	6.407	6.445	6.447	6.498	6.388	6.435			
Dimensions	Unit	Height	mm	2,553														
		Width	mm	2,238														
		Depth	mm	5,920	7,000			8,080		9,160		10,240		11,320		12,400	13,480	
Weight	Unit	kg		5,443	5,534			6,271		6,753		6,842		7,323	8,211	8,880	9,362	9,843
	Operation weight			kg	5,408	5,504	5,509	6,256	6,743	6,748	6,847	7,338	8,241	8,925	9,417	9,913		
Air heat exchanger	Type			Microchannel														
Compressor	Type			Screw compressor														
	Quantity			1														
Fan	Type			Direct propeller														
	Quantity			10	12			14		16		18		20		22		24
	Air flow rate	Cooling	Nom.	I/s	47,213	56,660			66,098		75,540		84,983		94,425		103,868	113,320
Sound power level	Cooling	Nom.		dB(A)	90.2	89.1	90.2	91	91.6	92.4	94.1	95.6	94.1	92.7	93.4	94.2		
Sound pressure level	Cooling	Nom.		dB(A)	69.5	67.94	69.04	69.4	69.68	70.53	72.22	73.4	71.53	70.14	70.59	71.07		
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~46													
Refrigerant	Type/GWP			R-1234(ze)/7														
	Charge			kg	85	90	95	105	110	115	125	135	150	165	175	190		
	Circuits	Quantity			1			2		2		2		2				
Piping connections	Evaporator water inlet/outlet (OD)			139.7mm	168.3mm			219.1mm				273mm						
Unit	Starting current			Max	A													
	Running	Cooling	Nom.	Max	A	366.7	401.1	433.8	454.5	470	507.6	547.1	592.9	642.8	675.5	732.6	793.9	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50 /400													

# Inverter screw with PLATINUM efficiency. Standard sound.

- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZPSD



MicroTech 4



EWAH\_H\_S-TZ-D

		EWAH-TZPSD		225	265	295	340	395	420	490	500	540	545	615	
SEER				6.234	6.353	6.334	6.977	6.709	6.849	6.786	6.44	6.576	6.09	6.865	
Cooling capacity	Nom.	kW		227.3	266.6	293.6	336.7	392	421.5	848.9	502.6	538.7	541.2	612.4	
Power input	Cooling	Nom.	kW	61.76	71.25	81.63	84.16	105.1	113.2	133.4	132.3	141.6	143.6	156.8	
Capacity control	Method			Stepless											
	Minimum capacity	%		22	19	17	28	23	22	19	10		30	15	
EER				3.6	3.618	3.499	3.853	3.651	3.612	3.561	3.737	3.721	3.736	3.843	
IPLV				6.688	6.689	6.595	7.437	7.042	7.251	7.093	6.797	6.932	6.385	7.155	
Dimensions	Unit	Height	mm	2,553											
		Width	mm	2,238											
		Depth	mm	3,640	4,720	5,800	6,880	7,960	6,880	7,960	6,880	7,960			
Weight	Unit		kg	3,212	3,724	4,569	5,050	5,136	5,157	5,639	5,805	6,151			
		Operation weight	kg	3,242	3,759	3,764	4,614	4,624	5,110	5,201	5,227	5,714	5,880	6,236	
Air heat exchanger	Type			Microchannel											
Compressor	Type			Screw compressor											
	Quantity			1											
Fan	Type			Direct propeller											
	Quantity			6	8	10	12	14	12	14					
	Air flow rate	Cooling	Nom.	I/s	33,930	45,240	56,540	67,848	79,170	67,848	79,170				
Sound power level	Cooling	Nom.	dB(A)	97.5	98.1	102.6	95.7	98.7	100.1	104.6	100.6	100.9	99	96.6	
Sound pressure level	Cooling	Nom.	dB(A)	77.74	77.83	82.3	75	77.94	78.89	83.39	79.43	79.35	77.82	75.06	
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~46										
Refrigerant	Type/GWP			R-1234(ze)/7											
	Charge		kg	30	35	40	45	55	60	65	70	75	85		
	Circuits	Quantity		1											
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm											
Unit	Starting current	Max	A	0											
	Running current	Cooling	Nom.	A	142.3	166.7	184.7	196.1	230.8	248	278	298.6	322.3	290.8	347.4
		Max	A	183	214	235	258	301	330	367	375	406	425	432	
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50 /400												

		EWAH-TZPSD		645	700	770	845	900	960	C10	H10	H11	C12	
SEER				6.816	6.672	6.656	6.712	6.595	6.596	6.52	6.564	6.262	6.327	
Cooling capacity	Nom.	kW		640.9	697.3	768.3	847.6	901.3	958.2	1,006	1,068	1,163	1,216	
Power input	Cooling	Nom.	kW	167.4	190.8	209.2	230.4	254.6	268.9	289.6	305.9	315.5	327.6	
Capacity control	Method			Stepless										
	Minimum capacity	%		14	13	12	11	10				14		
EER				3.782	3.642	3.648	3.528	3.54	3.462	3.469	3.7	3.712		
IPLV				7.157	6.992	6.965	7.134	6.932	6.912	6.746	6.815	6.562	7.068	
Dimensions	Unit	Height	mm	2,553										
		Width	mm	2,238										
		Depth	mm	7,960	9,040	10,120	11,200	12,280	13,360					
Weight	Unit		kg	6,151	6,722	7,256	7,381	8,050	8,573	9,242	9,723			
		Operation weight	kg	6,241	6,246	6,827	7,371	7,381	8,180	8,190	8,723	9,402	9,893	
Air heat exchanger	Type			Microchannel										
Compressor	Type			Screw compressor										
	Quantity			2										
Fan	Type			Direct propeller										
	Quantity			14	16	18	20	22	24					
	Air flow rate	Cooling	Nom.	I/s	79,170	90,480	101,780	113,089	140,200	152,945				
Sound power level	Cooling	Nom.	dB(A)	97.5	99.3	101	102.3	104.2	106.5	106.9	105.5	102.4	102.8	
Sound pressure level	Cooling	Nom.	dB(A)	75.95	77.76	79.04	80.05	81.92	83.96	84.32	82.67	79.52	79.71	
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~46									
Refrigerant	Type/GWP			R-1234(ze)/7										
	Charge		kg	90	95	105	115	125	130	140	150	160	170	
	Circuits	Quantity		2										
Piping connections	Evaporator water inlet/outlet (OD)			219.1mm										
Unit	Starting current	Max	A	0										
	Running current	Cooling	Nom.	A	365	403.1	437.5	473.2	507.8	539.6	569.4	603	612	638.1
		Max	A	458	505	558	609	647	694	731	779	875	923	
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50 /400											

# Inverter screw with PLATINUM efficiency. Reduced sound.

- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZPRD



MicroTech 4



EWARD\_H\_S-TZ-D

				EWAH-TZPRD											
				225	265	295	340	395	420	490	500	540	545	615	
SEER				6.176	6.335	6.289	7.018	6.627	6.824	6.728	6.458	6.426	6.091	6.484	
Cooling capacity	Nom.	kW		225.2	264.6	291.2	333.9	389.2	419.1	481.2	497.4	533.5	536.5	604.9	
Power input	Cooling	Nom. kW		61.76	71.25	81.63	84.16	105.1	113.2	133.4	132.3	141.6	143.6	156.8	
Capacity control	Method			Stepless											
	Minimum capacity			%	22	19	17	28	23	19	10		30	15	
EER				3.647	3.713	3.567	3.967	3.705	3.703	3.606	3.76	3.768	3.736	3.858	
IPLV				6.699	6.688	6.583	7.472	7.129	7.273	7.127	6.826	6.955	6.407	7.285	
Dimensions	Unit	Height	mm	2,553											
		Width	mm	2,238											
		Depth	mm	3,760	4,840		5,920		7,000			8,080	7,000	8,080	
Weight	Unit	kg		3,332	3,844		4,689		5,170	5,256	5,277	5,759	5,925	6,271	
	Operation weight			kg	3,242	3,759	3,764	4,614	4,624	5,110	5,201	5,227	5,714	5,880	6,236
Air heat exchanger	Type			Microchannel											
Compressor	Type			Screw compressor											
	Quantity			1											
Fan	Type			Direct propeller											
	Quantity			6	8		10		12			14	12	14	
	Air flow rate	Cooling	Nom. I/s	28,330	37,770		47,213		56,660			66,098	56,660	66,098	
Sound power level	Cooling	Nom. dBA		87.5	88.3	91.5	87.6	89.1	90.2	93.4	90.5	91	89.6	88.9	
Sound pressure level	Cooling	Nom. dBA		67.73	68.06	71.23	66.88	68.33	69.04	72.28	69.38	69.43	68.42	67.29	
Operation range	Air side	Cooling	Min.~Max. °CDB	-20 ~46											
Refrigerant	Type/GWP			R-1234(ze)/7											
	Charge			kg	30	35	40	45	55	60	65	70	75	85	
	Circuits		Quantity	1											
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm			139.7mm			168.3mm		139.7mm	219.1mm		
Unit	Starting current			Max A	0										
	Running current	Cooling	Nom. A	145.5	169.8	188.1	199.8	235.9	252.3	283.4	305.9	329.8	298.5	355.9	
		Max A		A	183	214	235	258	301	330	367	375	406	425	432
Power supply	Phase/Frequency/Voltage			Hz/V 3~/50 /400											

				EWAH-TZPRD											
				645	700	770	845	900	960	C10	H10	H11	C12		
SEER				6.833	6.649	6.674	6.722	6.613	6.665	6.53	6.577	6.262	6.255		
Cooling capacity	Nom.	kW		633.1	689	760.6	839.9	892.3	949.1	994.9	1,056	1,150	1,204		
Power input	Cooling	Nom. kW		167.4	190.8	209.2	230.4	254.6	268.9	289.6	305.9	315.5	327.6		
Capacity control	Method			Stepless											
	Minimum capacity			%	14	13	12	11	10			14			
EER				3.783	3.612	3.636	3.646	3.504	3.53	3.435	3.452	3.644	3.675		
IPLV				7.162	7.001	6.458	7.118	6.974	6.918	6.794	6.863	6.451	6.947		
Dimensions	Unit	Height	mm	2,553											
		Width	mm	2,238											
		Depth	mm	8,080	9,160		10,240		11,320			12,400		13,480	
Weight	Unit	kg		6,271	6,842		7,376		8,170			8,693	9,362	9,843	
	Operation weight			kg	6,241	6,246	6,827	7,371	7,381	8,180	8,190	8,723	9,402	9,893	
Air heat exchanger	Type			Microchannel											
Compressor	Type			Screw compressor											
	Quantity			2											
Fan	Type			Direct propeller											
	Quantity			14	16		18		20			22		24	
	Air flow rate	Cooling	Nom. I/s	66,098	75,540		84,983		94,425			103,868		113,320	
Sound power level	Cooling	Nom. dBA		89.2	90.1	91.2	92.3	93.5	95.4	95.7	94.8	92.6	93.1		
Sound pressure level	Cooling	Nom. dBA		67.65	68.52	69.33	70.02	71.3	72.9	73.2	71.92	69.81	69.96		
Operation range	Air side	Cooling	Min.~Max. °CDB	-20 ~46											
Refrigerant	Type/GWP			R-1234(ze)/7											
	Charge			kg	90	95	105	115	125	130	140	150	160	170	
	Circuits		Quantity	2											
Piping connections	Evaporator water inlet/outlet (OD)			219.1mm						273mm					
Unit	Starting current			Max A	0										
	Running current	Cooling	Nom. A	374.4	414.8	449.1	484.8	521.2	552.9	584.1	617.4	631.3	656.9		
		Max A		A	458	505	558	609	647	694	731	779	875	923	
Power supply	Phase/Frequency/Voltage			Hz/V 3~/50 /400											



# Inverter screw cooling only with BLU efficiency. Standard sound.

- › Refrigerant R-513A
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,850 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAS-TZBSD



MicroTech 4



EWAD\_H\_S-TZ-D

EWAS-TZBSD				275	320	345	400	470	525	580	625	755	830	915	
SEER				4.3	4.4		4.6			4.7	4.6		4.7		
Cooling capacity	Nom.	kW		258.8	310.6	338.2	405.8	451.2	505.5	554.9	597.4	734	800.1	884.2	
Power input	Cooling	kW		97.8	106.4	122.7	145.2	170.8	178.3	210.4	244.8	246.3	284.8	319.3	
Capacity control	Method	Stepless													
	Minimum capacity	%		22	19	17	22	23	22	19	17	13	11	13	
EER				2.646	2.919	2.756	2.795	2.642	2.835	2.637	2.44	2.98	2.809	2.769	
IPLV				4.3	4.5	4.4	4.7	4.6		4.5		4.8	4.7		
Dimensions	Unit	Height	mm	2,553											
		Width	mm	2,238											
		Depth	mm	2,560	3,640				4,720			6,880			
Weight	Unit	kg		2,602	3,084		3,486		4,032		5,670		6,142		
	Operation weight	kg		2,677	3,169		3,583.7		4,160.1		4,175.1		6,065		
Air heat exchanger	Type	Microchannel													
Compressor	Type	Screw compressor													
	Quantity	1											2		
Fan	Type	Direct propeller													
	Quantity	4		6				8			12				
	Air flow rate	Cooling	Nom.	I/s	25,490	38,235				50,990			76,470		
Sound power level	Cooling	Nom.	dBA	97.4	97.9	100	97.3	96.7	97.7	98.1	100.5	99	100	99	
Sound pressure level	Cooling	Nom.	dBA	78.3	78.2	80.3	77.6	77	77.4	77.8	80.3	77.8	78.8	77.8	
Operation range	Air side	Cooling	Min.~Max.	°CDB	5~42										
Refrigerant	Type/GWP	R-513A/630													
	Charge	kg		35	45		55	65	70	80	85	105	115	125	
	Circuits	Quantity	1											2	
Piping connections	Evaporator water inlet/outlet (OD)	88.9mm				139.7mm				168.3mm		219.1mm			
Unit	Starting current	Max	A	0											
	Running current	Cooling	Nom.	A	190.1	207.1	228.7	262	300.2	315.2	362.8	413.9	457.4	515.3	568.4
	current	Max	A	220	262	284	346	362	400	457	464	600	668		
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400											

EWAS-TZBSD				C10	H10	H11	C12	C13	C14	C15	H16	H17	H18	H19	
SEER				4.7				4.6			4.9	4.8	4.7	4.8	
Cooling capacity	Nom.	kW		953.9	1,050	1,127	1,197	1,293	1,359.6	1,483.5	1,606	1,688	1,799.6	1,868	
Power input	Cooling	kW		371.96	393.3	411.8	434.6	472.69	519.9	558.77	581.2	647.2	699.02	775.2	
Capacity control	Method	Stepless													
	Minimum capacity	%		11	10				13			12	11	10	
EER				2.565	2.67	2.737	2.754	2.735	2.615	2.655	2.763	2.608	2.574	2.41	
IPLV				4.7	4.8		4.7	4.6			5.2		5.1		
Dimensions	Unit	Height	mm	2,553											
		Width	mm	2,238											
		Depth	mm	6,880	7,960	9,040	10,120	11,200			12,280		13,360		
Weight	Unit	kg		6,142	6,816	7,297	7,779	8,260	8,581	9,920	10,323		10,805		
	Operation weight	kg		6,763	7,523	8,014	8,506	9,002	9,333	11,146	11,564	11,579	12,076	12,086	
Air heat exchanger	Type	Microchannel													
Compressor	Type	Screw compressor													
	Quantity	2													
Fan	Type	Direct propeller													
	Quantity	12		14	16	18	20			22		24			
	Air flow rate	Cooling	Nom.	I/s	76,470	89,233	101,980	114,705	127,450			140,195		152,940	
Sound power level	Cooling	Nom.	dBA	100	100.7	101	101.8	103.7	104.8	106.2	104.1	104.9	105.8	106.6	
Sound pressure level	Cooling	Nom.	dBA	78.8	79.1		79.6	81.2	82.3	83.4	81.2	82	82.7	83.5	
Operation range	Air side	Cooling	Min.~Max.	°CDB	5~42										
Refrigerant	Type/GWP	R-513A/630													
	Charge	kg		140	150	160	170	185	195	215	230	245	260	270	
	Circuits	Quantity	2												
Piping connections	Evaporator water inlet/outlet (OD)	219.1mm				273mm									
Unit	Starting current	Max	A	0											
	Running current	Cooling	Nom.	A	647.2	681.9	711.6	748.1	807.1	876.6	940.2	972.2	1,069	1,148	1,261
	current	Max	A	751	817	884	930	948	1,120	1,200	1,227	1,340	1,475	1,608	
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400											

# Inverter screw with SILVER efficiency. Standard sound.

- › Refrigerant R-513A
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,850 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAS-TZSSD



MicroTech 4



EWAD\_H\_S-TZ-D

				EWAS-TZSSD														
				285	325	380	430	495	520	535	555	585	595	645	650	705	760	
SEER				5.2	5.4	5.5	5.2	5.1	4.9	5.3	5	4.9	5.2	5	5.2	4.9	5	
Cooling capacity	Nom.	kW		284.9	329.3	374.3	426.2	487.5	522	529.7	553.9	583.2	585.6	645.1	635.1	702.3	758.2	
Power input	Cooling	Nom. kW		89.25	103.6	120.5	138.8	161.5	172.1	170.5	188.8	206.6	200.1	214.8	231	249.4	239.4	
Capacity control	Method	Stepless																
	Minimum capacity	%		22	19	17	22	23	11	22	10	19	10	17	10	13		
EER				3.192	3.179	3.106	3.071	3.019	3.033	3.107	2.934	2.823	2.927	3.003	2.749	2.816	3.167	
IPLV				5.5	5.6	5.7	5.8	5.6	5.2	5.7	5.1	5.6	5.2	5.5	5.1	5.7		
Dimensions	Unit	Height	mm	2,553														
		Width	mm	2,238														
		Depth	mm	3,640	4,720				5,800				6,880	5,800	6,880	7,960		
Weight	Unit	kg		3,084	3,604		3,968	4,032	4,693	4,513	4,693		4,513	5,177	4,513	5,177	6,151	
		Operation weight		3,164	3,697	3,702	4,070.7	4,155.1	5,033	4,646.1	5,038	5,043	4,651.1	5,522	4,661.1	5,527	6,536	
Air heat exchanger	Type	Microchannel																
Compressor	Type	Screw compressor																
	Quantity	1 2 1 2 1 2 1 2																
Fan	Type	Direct propeller																
	Quantity	6			8				10				12	10	12	14		
	Air flow rate	Cooling	Nom.	I/s	38,240	50,990				63,733				76,480	63,733	76,480	89,233	
Sound power level	Cooling	Nom.	dB(A)	97.8	98.3	100.2	97.7	97.1	99.3	98	99.5	100.7	98.4	100.9	100.7	103	99.2	
Sound pressure level	Cooling	Nom.	dB(A)	78			80	77.4	76.9	78.6	77.3	78.7	79.9	77.7	79.8	80	81.9	77.7
Operation range	Air side	Cooling	Min.~Max.	°CDB -20 ~42														
Refrigerant	Type/GWP	R-513A/630																
	Charge	kg		40	45	50	60	65	70	75		80		90		95	105	
	Circuits	Quantity	1			2		1	2		1	2	1	2				
Piping connections	Evaporator water inlet/outlet (OD)	88.9mm 139.7mm 168.3mm 139.7mm 168.3mm 139.7mm 168.3mm 139.7mm 168.3mm																
Unit	Starting current	Max		A 0														
	Running	Cooling	Nom.	A	182.7	211.5	234.4	261.8	296.6	349.9	314.5	378.9	409.6	358.4	427.8	404.3	472.9	461.3
		current	Max	A	231	272	294	357	372	421	411	450	481	467	523	474	566	610
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400														

				EWAS-TZSSD														
				835	960	C10	H10	H11	H12	H13	H14	H15	H16	H17	H18	H19		
SEER				5.2	5.3	5.2		5.3	5.4		5.2	5.5	5.4		5.3	5.1		
Cooling capacity	Nom.	kW		832.7	948.8	1,001	1,043	1,149	1,268	1,359	1,465	1,542	1,638	1,756	1,837			
Power input	Cooling	Nom. kW		274.7	321.4	354.4	375	408.9	436.8	477.3	526.1	516.5	577.2	627.5	695.5			
Capacity control	Method	Stepless																
	Minimum capacity	%		11	12	11			10			14	13	12	11	10		
EER				3.031	2.952	2.824	2.781	2.81	2.903	2.847	2.785	2.985	2.838	2.798	2.641			
IPLV				5.6	5.5	5.4	5.5	5.4	5.5		5.4	6.1	5.9	5.8	5.7	5.5		
Dimensions	Unit	Height	mm	2,553														
		Width	mm	2,238														
		Depth	mm	7,960				9,040	11,200	12,280				13,360				
Weight	Unit	kg		6,151	6,623		6,816	7,297	8,260	8,742	9,920	10,323		10,805				
		Operation weight		6,546	7,239	7,244	7,518	8,014	8,992	9,489	11,136	11,549	11,564	12,066	12,076	12,086		
Air heat exchanger	Type	Microchannel																
Compressor	Type	Screw compressor																
	Quantity	2																
Fan	Type	Direct propeller																
	Quantity	14			16		20		22				24					
	Air flow rate	Cooling	Nom.	I/s	89,233			101,908	127,467	140,213				152,960				
Sound power level	Cooling	Nom.	dB(A)	100.2	99.6	100.2	100.5	101	102.5	104.2	105.3	103.3	104.1	104.9	105.8	106.6		
Sound pressure level	Cooling	Nom.	dB(A)	78.7	78	78.7	78.9	79.1	79.9	81.3	82.5	80.5	81.2	81.8	82.7	83.5		
Operation range	Air side	Cooling	Min.~Max.	°CDB -20 ~42														
Refrigerant	Type/GWP	R-513A/630																
	Charge	kg		115	135	140	145	160	175	190	205	215	230	250	260	270		
	Circuits	Quantity	2															
Piping connections	Evaporator water inlet/outlet (OD)	168.3mm 219.1mm 273mm																
Unit	Starting current	Max		A 0														
	Running	Cooling	Nom.	A	514.3	585.7	635	666.1	720.5	770.5	834.6	910.1	894.9	984.4	1,062	1,163		
		current	Max	A	679	706	761	789	884	948	1,187	1,156	1,124	1,227	1,351	1,475	1,608	
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400														

# Inverter screw with GOLD efficiency. Standard sound.

- › Refrigerant R-513A
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,850 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAS-TZXSD



MicroTech 4



EWAD\_H\_S-TZ-D

				EWAS-TZXSD															
				295	345	380	440	515	525	565	565	610	635	670	705	725	760		
SEER				5.2	5.4	5.5	5.2	5.1	5	5.3	4.9	5	5.2	4.9	5.2	5	4.9		
Cooling capacity	Nom.	kW		293.5	344.9	377.1	435.9	506.6	524.4	560.5		610.4	626.7	665.8	696.1	719.7	749.1		
Power input	Cooling	kW		94.89	108.5	124.1	127.6	159.3	155	171.5		187.8	202.4	214.2	220.6	233.6	248.3		
Capacity control	Method	Stepless																	
	Minimum capacity	%		22	19	17	28	23	13	22	12	11	19	10	30	10	28		
EER				3.093	3.179	3.039	3.416	3.18	3.383	3.268		3.25	3.096	3.108	3.155	3.081	3.017		
IPLV				5.8	6.1	5.9	6.3	6.1	6	6.5	5.9	6	6.2	5.8	5.6	5.9	5.5		
Dimensions	Unit	Height	mm	2,553															
		Width	mm	2,238															
		Depth	mm	3,640	4,720		5,800		6,880			7,960	6,880	7,960	6,880	7,960	6,880		
Weight	Unit	kg		3,255	3,775		4,569		5,348	5,136	5,348	5,829	5,136	5,829	5,805	5,946	5,805		
		Operation weight		3,335	3,868	3,873	4,687.1	4,697.1	5,673	5,287.3	5,683	6,169	5,297.3	6,174	5,976.3	6,344	5,986.3		
Air heat exchanger	Type	Microchannel																	
Compressor	Type	Screw compressor																	
	Quantity	1 2 1 2 1 2 1 2 1 2 1																	
Fan	Type	Direct propeller																	
	Quantity	6 8 10 12 14 12 14 12 14 12																	
	Air flow rate	Cooling	Nom.	I/s	33,930	45,240		56,540		67,860	68,280	67,860	79,170	68,280	79,170	68,280	79,170		
Sound power level	Cooling	Nom.	dB(A)	97.5	98.1	102.6	95.7	97.5	100.1	100.3	100.6	104.6	100.9	99	102.3	99.8	99.8		
Sound pressure level	Cooling	Nom.	dB(A)	79.9	81.8	82.8	74.6	75.8	78.9	76.2	80.2	81.2	76.6	83.3	77.8	83.8	78.6		
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~42														
Refrigerant	Type/GWP	R-513A/630																	
	Charge	kg		40	45	50	60	70	75	80	85		90	95	100	105			
	Circuits	Quantity	1 2 1 2 1 2 1 2 1																
Piping connections	Evaporator water inlet/outlet (OD)	88.9mm 139.7mm 168.3mm 139.7mm 168.3mm 139.7mm 168.3mm 139.7mm 168.3mm 139.7mm																	
Unit	Starting current	Max	A	0															
	Running current	Cooling	Nom.	A	198.1	227.3	247	258.3	305.8	334.1	331		397.7	377.1	443.2	403.7	464.7	444.5	
	current	Max	A	224	261	289	314	342	389	404	429	457	452	498	520	535	568		
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400															

				EWAS-TZXSD															
				805	880	950	C10	H10	H11	C12	H12	H13	H14	H15	H16	H17			
SEER				5.2	5.3	5.2		5.3	5.4	5.2		5.5	5.4		5.3	5.1			
Cooling capacity	Nom.	kW		794.9	873.2	941.6	988.1	1,052	1,122	1,183	1,267.2	1,344	1,442	1,551	1,645	1,734			
Power input	Cooling	kW		246.2	266.2	300.2	310.7	346.2	357.9	393.7	426.7	452.1	446.3	503.1	562.8	628.6			
Capacity control	Method	Stepless																	
	Minimum capacity	%		10	14	13	12	11			10		15	14	13	12			
EER				3.229	3.28	3.137	3.18	3.039	3.135	3.005	2.97	2.973	3.231	3.083	2.923	2.759			
IPLV				6	6.4	6.2	6.3	6.1	6.3	6.1	6		6.1	6.2	6.1	5.9			
Dimensions	Unit	Height	mm	2,553															
		Width	mm	2,238															
		Depth	mm	9,040			10,120			11,200			12,280			13,360			
Weight	Unit	kg		6,904	7,160		7,642		8,316			9,655			10,805				
		Operation weight		7,495	7,761	7,771	8,258	8,268	9,028	9,038	9,053	10,856	12,016	12,031	12,046	12,061			
Air heat exchanger	Type	Microchannel																	
Compressor	Type	Screw compressor																	
	Quantity	2																	
Fan	Type	Direct propeller																	
	Quantity	16 18 20 22 24																	
	Air flow rate	Cooling	Nom.	I/s	90,480		101,772		113,080			124,388		135,696					
Sound power level	Cooling	Nom.	dB(A)	104.6	98.4	100.3	101	102.3	102.9	105.2	107.5	106.1	102	102.8	103.7	104.5			
Sound pressure level	Cooling	Nom.	dB(A)	83.9	76.1	76.5	76.8	77.5	77.6	77.9	78	79.1	78.9	79.7	80.5	81.4			
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~42														
Refrigerant	Type/GWP	R-513A/630																	
	Charge	kg		110	120	130	135	145	155	165	180	190	200	215	230	245			
	Circuits	Quantity	2																
Piping connections	Evaporator water inlet/outlet (OD)	219.1mm 273mm																	
Unit	Starting current	Max	A	0															
	Running current	Cooling	Nom.	A	466.5	520.3	571.1	592.9	645.8	669.5	722.6	744.2	817.8	814.6	898.5	986.3	1,083		
	current	Max	A	573	626	683	720	782	744	803	851	899	997	1,103	1,217	1,330			
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400															

# Inverter screw with GOLD efficiency. Reduced sound.

- › Refrigerant R-513A
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,850 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAS-TZXRD



MicroTech 4



EWAD\_H\_S-TZ-D

		EWAS-TZXRD																
		295	345	380	440	515	525	565	565	610	635	670	705	725	760			
Capacity control	Method	Stepless																
	Minimum capacity	%	22	19	17	28	23	13	22	12	11	19	10	30	10	28		
Dimensions	Unit	Height	2,553															
		Width	2,238															
	Depth	mm	3,640	4,720	5,800		6,880		7,960	6,880	7,960	6,880	7,960	6,880	7,960	6,880		
Weight	Unit	kg	3,375	3,895		4,689		5,468	5,256	5,468	5,949	5,256	5,949	5,925	6,066	5,925		
	Operation weight	kg	3,455	3,988	3,993	4,807.1	4,817.1	5,793	5,407.3	5,803	6,289	5,417.3	6,294	6,096.3	6,464	6,106.3		
Air heat exchanger	Type	Microchannel																
Compressor	Type	Screw compressor																
	Quantity	1 2 1 2 1 2 1 2 1 2 1																
Fan	Type	Direct propeller																
	Quantity	6	8		10		12		14	12	14	12	14	12	14			
	Air flow rate	Cooling	Nom.	l/s	28,330	37,770		47,213		56,660		66,098	56,660	66,098	56,660	66,098	56,660	
Sound power level	Cooling	Nom.	dBA	87.5	88.3	91.5	87.6	88.4	90.2	90.3	90.8	93.4	91	89.6	91.9	90.1		
Sound pressure level	Cooling	Nom.	dBA	67.7	68.1	71.2	66.9	67.7	69		69.2	72.3	69.4	68.4	70.3	68.9		
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~42													
Refrigerant	Type/GWP	R-134a/630																
	Charge	kg	40	45	50	60	70	75	80	85	90	95	100	105				
	Circuits	Quantity	1 2 1 2 1 2 1 2 1 2 1															
Piping connections	Evaporator water inlet/outlet (OD)	88.9mm 139.7mm 168.3mm 139.7mm 168.3mm 139.7mm 168.3mm 139.7mm 168.3mm 139.7mm																
Unit	Starting current	Max	A 0															
	Running current	Max	A	224	261	289	314	342	389	404	429	457	452	498	520	535	568	
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50 /400															

		EWAS-TZXRD																
		805	880	950	C10	H10	H11	C12	H12	H13	H14	H15	H16	H17				
Capacity control	Method	Stepless																
	Minimum capacity	%	10	14	13	12	11	10			15	14	13	12				
Dimensions	Unit	Height	2,553															
		Width	2,238															
	Depth	mm	9,040		10,120		11,200		12,280		13,360							
Weight	Unit	kg	7,024	7,280		7,762		8,436		9,775		10,925						
	Operation weight	kg	7,615	7,881	7,891	8,378	8,388	9,148	9,158	9,173	10,976	12,136	12,151	12,166	12,181			
Air heat exchanger	Type	Microchannel																
Compressor	Type	Screw compressor																
	Quantity	2																
Fan	Type	Direct propeller																
	Quantity	16		18		20		22		24								
	Air flow rate	Cooling	Nom.	l/s	75,540		84,983		94,425		103,868		113,320					
Sound power level	Cooling	Nom.	dBA	93.7	89.9	90.9	91.5	92.3	92.8	94.4	96.3	95.2	92.6	93.1	93.6	94.2		
Sound pressure level	Cooling	Nom.	dBA	71.8	68	69	69.3	70	70.3	71.9	73.7	72.4	69.5	70	70.5	71.1		
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~42													
Refrigerant	Type/GWP	R-134a/630																
	Charge	kg	110	120	130	135	145	155	165	180	190	200	215	230	245			
	Circuits	Quantity	2															
Piping connections	Evaporator water inlet/outlet (OD)	219.1mm						273mm										
Unit	Starting current	Max	A 0															
	Running current	Max	A	573	626	683	720	782	744	803	851	899	997	1,103	1,217	1,330		
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50 /400															

# Inverter screw with PLATINUM efficiency. Standard sound.

- › Refrigerant R-513A
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,850 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAS-TZPSD



MicroTech 4



EWAD\_H\_S-TZ-D

EWAS-TZPSD				285	330	370	405	450	490	530	575	615	675	735	
SEER				5.9	6	5.9	6.3	6.2		6	5.9		5.8		
Cooling capacity	Nom.			kW	287.6	333.2	370.2	405.1	450.1	488.4	531.7	573.6	620.2	677.1	732.9
Power input	Cooling	Nom.		kW	81.89	96.83	111.6	110.6	123.5	137.5	150.8	167.7	180.9	205.7	223.4
Capacity control	Method			Stepless											
	Minimum capacity			%	23	20	18	30	28	25	13	12	11	10	
EER					3.512	3.441	3.317	3.663	3.645	3.552	3.526	3.42	3.428	3.292	3.281
IPLV					6.5		6.4	7	7.3	7.2	6.4		6.3	6.1	6.2
Dimensions	Unit	Height		mm	2,553										
		Width		mm	2,238										
		Depth		mm	4,720	5,800		6,880			7,960		9,040		
Weight	Unit			kg	3,775	4,256		5,050	5,136		5,829		6,311		6,427
	Operation weight			kg	3,863	4,349	4,354	5,163.1	5,272.3	5,277.3	6,159	6,164	6,651	6,661	6,825
Air heat exchanger	Type			Microchannel											
Compressor	Type			Screw compressor											
	Quantity			1											
Fan	Type			Direct propeller											
	Quantity			8	10		12			14		16			
	Air flow rate	Cooling	Nom.	I/s	45,240	56,540		67,848			79,170		90,480		
Sound power level	Cooling	Nom.		dB(A)	97.5	98.1	100.4	94.7	96	97.7	100.2	100.4	100.7	101	102.3
Sound pressure level	Cooling	Nom.		dB(A)	78.2	81	81.9	74.2	74.5	74.9	78.6	79.9	80.9	83	83.4
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~42										
Refrigerant	Type/GWP			R-513A/630											
	Charge			kg	40	45	50	55	60	65	75	80	85	95	100
	Circuits	Quantity		1											
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm											
	Unit			139.7mm											
	Starting current			0											
	Running	Cooling	Nom.	A	181.1	212.7	238.2	242	258.8	280	332	361.5	391.2	434	459.1
	current	Max		A	220	258	285	293	352	404	399	429	468	508	535
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50 /400										

EWAS-TZPSD				810	890	960	C10	H10	H11	C12	H12	H13	H14	H15	
SEER				6.1	6.3	6.1	6.2	6.1		6	6.1	6	5.9	5.7	
Cooling capacity	Nom.			kW	810	884.2	954	1,001	1,067	1,110	1,197	1,288	1,363	1,443	1,552
Power input	Cooling	Nom.		kW	238.8	256.7	288.7	298.9	331.9	343.6	434.6	410.7	433.6	435.6	492.1
Capacity control	Method			Stepless											
	Minimum capacity			%	10	14	13	12	11		10		15	14	
EER					3.392	3.444	3.304	3.349	3.215	3.231	2.754	3.136	3.143	3.313	3.154
IPLV					6.5	6.8	6.6		6.3	6.5	6.4	6.3	6.4	6.3	6.4
Dimensions	Unit	Height		mm	2,553										
		Width		mm	2,238										
		Depth		mm	10,120		11,200			12,280		13,360			
Weight	Unit			kg	7,385	7,642		8,123		8,798		9,655	10,136	10,805	
	Operation weight			kg	7,976	8,243	8,253	8,744	8,754	9,515	9,520	10,846	11,337	12,021	12,036
Air heat exchanger	Type			Microchannel											
Compressor	Type			Screw compressor											
	Quantity			2											
Fan	Type			Direct propeller											
	Quantity			18	20		22			24					
	Air flow rate	Cooling	Nom.	I/s	101,772		113,080			140,200			152,945		
Sound power level	Flowing	Nom.		dB(A)	104.6	98.6	100.4	101.1	102.4	103	105.2	107.5	106.2	102	102.8
Sound pressure level	Cooling	Nom.		dB(A)	83.6	75.9	76.3	76.6	77.3	77.4	77.7	77.9	78.9		79.7
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~42										
Refrigerant	Type/GWP			R-513A/630											
	Charge			kg	110	120	130	140	150	160	165	180	190	205	220
	Circuits	Quantity		2											
Piping connections	Evaporator water inlet/outlet (OD)			219.1mm											
	Unit			273mm											
	Starting current			0											
	Running	Cooling	Nom.	A	485.2	511.9	559.9	581.2	630.4	653.8	748.1	756.2	796.3	798.5	882
	current	Max		A	573	616	672	709	761	796	845	893	951	1,039	1,135
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50 /400										

# Inverter screw with PLATINUM efficiency. Reduced sound.

- › Refrigerant R-513A
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,850 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAS-TZPRD




MicroTech 4



EWAD\_H\_S-TZ-D

				EWAS-TZPRD											
				285	330	370	405	450	490	530	575	615	675	735	
Capacity control	Method	Stepless													
	Minimum capacity	%	23	20	18	30	28	25	13	12	11	10			
Dimensions	Unit	Height	2,553												
		Width	2,238												
		Depth	mm	4,720	5,800		6,880			7,960		9,040			
Weight	Unit		kg	3,895	4,376		5,170	5,256		5,949		6,431		6,547	
		Operation weight	kg	3,983	4,469	4,474	5,283.1	5,392.3	5,397.3	6,279	6,284	6,771	6,781	6,945	
Air heat exchanger	Type	Microchannel													
Compressor	Type	Screw compressor													
	Quantity	1						2							
Fan	Type	Direct propeller													
	Quantity		8	10		12			14		16				
	Air flow rate	Cooling	Nom.	l/s	37,770	47,213		56,660			66,098		75,540		
Sound power level	Cooling	Nom.	dBA	88	88.7	90.1	87.8	88.2	88.9	90.6	90.7	91.1	91.3	92.1	
Sound pressure level	Cooling	Nom.	dBA	67.7	68	69.4	66.6	67	67.8	69	69.1	69.2	69.4	70.2	
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~42										
Refrigerant	Type/GWP	R-134a/630													
	Charge		kg	40	45	50	55	60	65	75	80	85	95	100	
	Circuits	Quantity		1						2					
Piping connections	Evaporator water inlet/outlet (OD)	88.9mm				139.7mm				168.3mm					
Unit	Starting current	Max	A	0											
	Running current	Max	A	220	258	285	293	352	404	399	429	468	508	535	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400											

				EWAS-TZPRD											
				810	890	960	C10	H10	H11	C12	H12	H13	H14	H15	
Capacity control	Method	Stepless													
	Minimum capacity	%	10	14	13	12	11			10			15	14	
Dimensions	Unit	Height	2,553												
		Width	2,238												
		Depth	mm	10,120			11,200			12,280			13,360		
Weight	Unit		kg	7,505	7,762		8,243		8,918		9,775	10,256	10,925		
		Operation weight	kg	8,096	8,363	8,373	8,864	8,874	9,635	9,640	10,966	11,457	12,141	12,156	
Air heat exchanger	Type	Microchannel													
Compressor	Type	Screw compressor													
	Quantity	2													
Fan	Type	Direct propeller													
	Quantity		18			20			22			24			
	Air flow rate	Cooling	Nom.	l/s	84,983			94,425			103,868			113,320	
Sound power level	Cooling	Nom.	dBA	93.9	90.3	91.2	91.8	92.5	93	94.5	96.4	95.4	92.6	93.1	
Sound pressure level	Cooling	Nom.	dBA	71.6	68.1	68.9	69.2	69.9	70.2	71.7	73.5	72.2	69.5	70	
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~42										
Refrigerant	Type/GWP	R-134a/630													
	Charge		kg	110	120	130	140	150	160	165	180	190	205	220	
	Circuits	Quantity		2											
Piping connections	Evaporator water inlet/outlet (OD)	219.1mm						273mm							
Unit	Starting current	Max	A	0											
	Running current	Max	A	573	616	672	709	761	796	845	893	951	1,039	1,135	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400											

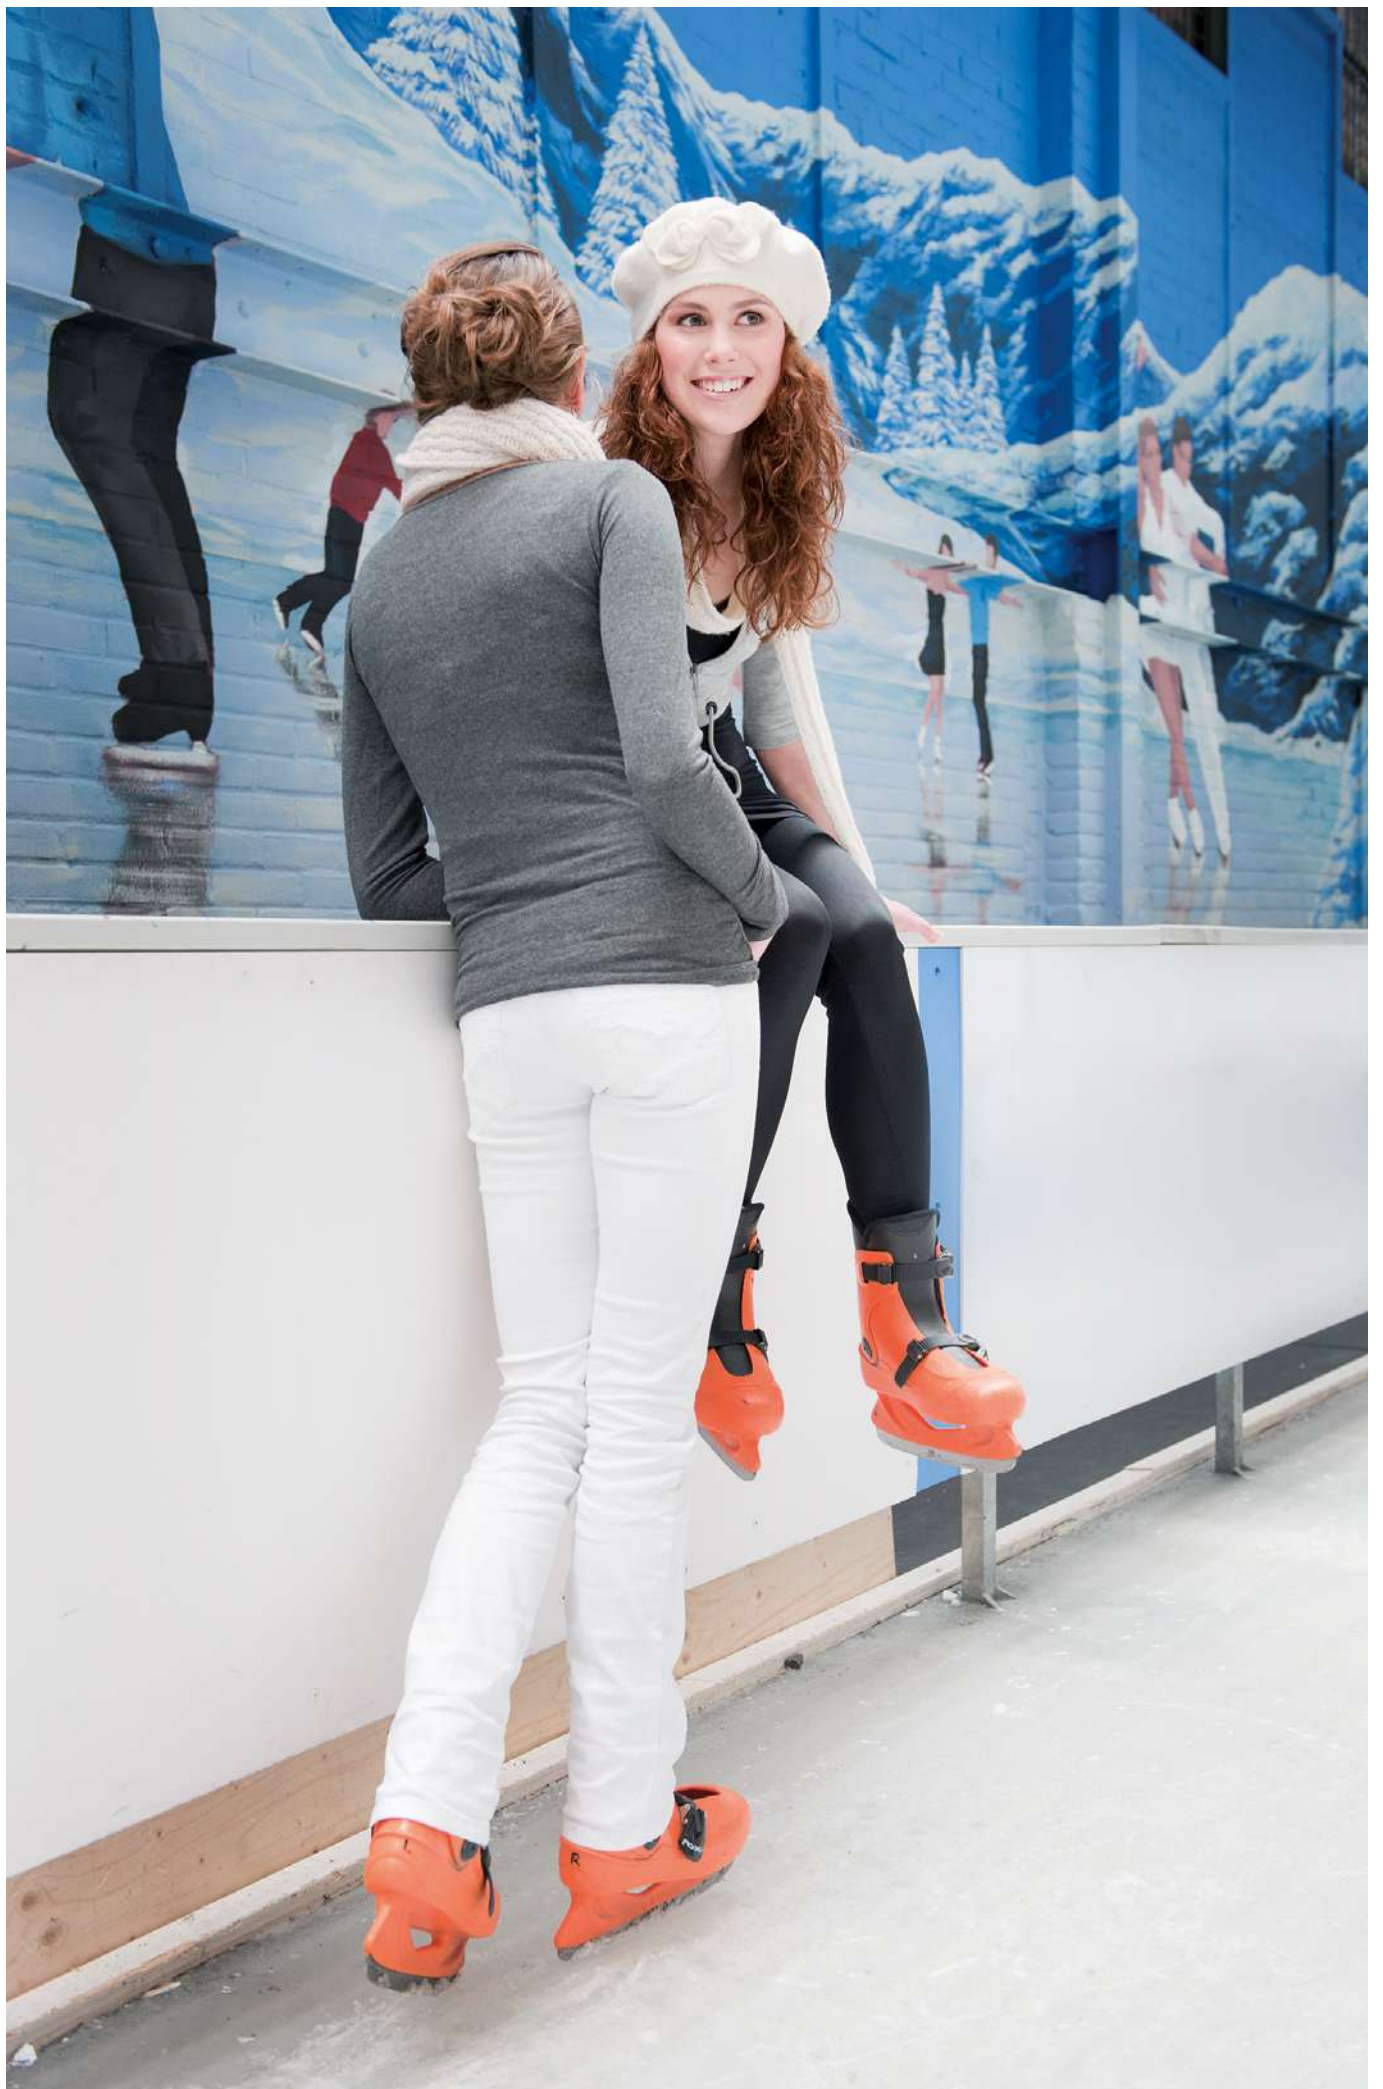

# Air cooled scroll chiller, standard efficiency, standard/low sound

- › First R-32 air cooled chiller with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller with superior control logic and easy interface
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-SSB



EWAT-B-SLB

Cooling Only			EWAT-B-SSB/SLB		085	115	135	155	175	195	205	215	
Space cooling	A Condition 35°C Pdc		kW	80.92	108.97	131.42	158.15	174.93	191.39	210.53	217.08		
	ηs,c		%	161	173	161		176.2	170.6	173	161		
	ηs,c + VFDFAN		%										
SEER				4.1	4.4	4.1		4.48	4.34	4.4	4.1		
SEER + VFDFAN													
Cooling capacity	Nom.		kW	81	109	131	158	175	191	211	217		
Power input	Cooling	Nom.	kW	31.8	38.5	49.8	61.9	67.8	69.5	80	85.8		
Capacity control	Method			Step									
	Minimum capacity		%	50	38	50	25	38	21	19	50		
EER				2.55	2.83	2.64	2.55	2.58	2.75	2.63	2.53		
IPLV				4.65	4.92	4.46	4.68	4.78	4.84	4.86	4.7		
EER + VFDFAN													
IPLV + VFDFAN													
Dimensions	Unit	Height	mm	1,801			1,822		1,801		1,822		
		Width	mm	1,204									
		Length	mm	2,120	2,660		3,570		3,180		4,170		3,780
Weight (SSB)	Unit		kg	681	767	811	1,007	984	1,166	1,158	1,184		
	Operation weight		kg	686	773	820	1,014	996	1,177	1,169	1,200		
Weight (SLB)	Unit		kg	691	777	821	1,028	994	1,187	1,179	1,194		
	Operation weight		kg	696	783	830	1,035	1,006	1,198	1,190	1,210		
Water heat exchanger	Type			Braze plate									
	Water volume		l	5	6	9	7	12	11		16		
	Water flow rate	Cooling	Nom.	l/s	3.9	5.2	6.3	7.6	8.4	9.1	10.1	10.4	
	Water pressure drop	Cooling	Nom.	kPa	27.3	34.4	26.5	64.2	41.7	45.9	54.4	41.4	
Air heat exchanger	Type			Microchannel									
Compressor	Type			Scroll compressor									
	Quantity			2			4		2		4		2
Fan	Type			Direct propeller									
	Quantity			4		6		8		10			
	Air flow rate	Nom.	l/s	6,022	9,036		13,354		12,023		16,710		15,057
	Speed		rpm	1,360									
Sound power level (SSB)	Cooling	Nom.	dB(A)	84.8	88.2	89.7	87.8	91.8	89.9	90.9	93.2		
Sound power level (SLB)	Cooling	Nom.	dB(A)	83.7	86.2	87	86.7	88.8	88.1	88.7	90		
Sound pressure level (SSB)	Cooling	Nom.	dB(A)	67.4	70.5	72	69.5	73.8	71.3	72.3	74.8		
Sound pressure level (SLB)	Cooling	Nom.	dB(A)	66.3	68.5	69.3	68.4	70.7	69.5	70.1	71.6		
Refrigerant	Type/GWP			R-32/675									
	Charge (SSB)		kg	7.1	8.4		12.4	10.7	14.1	14.4	12.7		
	Charge (SLB)		kg	7.1	8.2	8.4	12.4	10.7	14	13.4	12.7		
	Circuits	Quantity		1			2	1	2		1		
Piping connections	Evaporator water inlet/outlet (OD)			76.1			88.9	76.1	88.9		76.1		
Unit	Starting current	Max	A	213	313	324	284	462	384	395	498		
	Running current	Cooling	Nom.	A	59	69	83	108	113	117	131	142	
		Max	A	73	86	96	143	132	156	167	168		
Power supply	Phase/Frequency		Hz	3~/50									



# Air cooled scroll chiller, standard efficiency, reduced sound

- › First R-32 air cooled chiller with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller with superior control logic and easy interface
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-SRB

Cooling Only		EWAT-B-SRB		085	115	135	155	175	195	205	215	
Space cooling	A Condition 35°C Pdc		kW	76.49	105	123.88	150.13	164.87	181.31	200.51	203.5	
	ηs,c		%	161	173	161	166.2	162.2	167.8	161		
SEER				4.1	4.4	4.1	4.23	4.13	4.27	4.1		
Cooling capacity	Nom.		kW	76	105	124	150	165	181	201	204	
Power input	Cooling	Nom.	kW	33.7	40.3	53	65.9	73	73.2	84.6	91.9	
Capacity control	Method			Step								
	Minimum capacity		%	50	38	50	25	38	21	19	50	
EER				2.27	2.61	2.34	2.28	2.26	2.48	2.37	2.21	
IPLV				4.67	4.97	4.5	4.63	4.74	4.64	4.91	4.66	
Dimensions	Unit	Height	mm	1,801			1,822	1,801	1,822			
		Width	mm	1,204								
		Length	mm	2,120	2,660		3,570	3,180	4,170		3,780	
Weight	Unit		kg	691	777	821	1,028	994	1,187	1,179	1,194	
	Operation weight		kg	696	783	830	1,035	1,006	1,198	1,190	1,210	
Water heat exchanger	Type			Braze plate								
	Water volume		l	5	6	9	7	12	11		16	
	Water flow rate	Cooling	Nom.	l/s	3.7	5	5.9	7.2	7.9	8.7	9.6	9.7
	Water pressure drop	Cooling	Nom.	kPa	24.6	32.2	23.8	58.5	37.5	41.6	49.9	36.8
Air heat exchanger	Type			Microchannel								
Compressor	Type			Scroll compressor								
	Quantity			2		4	2	4		2		
Fan	Type			Direct propeller								
	Quantity			4	6		8		10			
	Air flow rate	Nom.	l/s	4,929	7,396		11,352	9,838	14,202		12,325	
	Speed		rpm	1,200								
Sound power level	Cooling	Nom.	dBA	78.6	82.5	84.1	81.6	86.3	83.9	85.2	87.8	
Sound pressure level	Cooling	Nom.	dBA	61.2	64.7	66.4	63.3	68.3	65.3	66.6	69.4	
Refrigerant	Type/GWP			R-32/675								
	Charge		kg	71	8.4		13	10.7	13.9	14.4	12.3	
	Circuits	Quantity		1		2	1	2		1		
Piping connections	Evaporator water inlet/outlet (OD)			76.1		88.9	76.1	88.9		76.1		
Unit	Starting current	Max	A	213	313	324	284	462	384	395	498	
	Running current	Cooling	Nom.	A	62	71	87	115	119	123	139	151
		Max	A	73	86	96	143	132	156	167	168	
Power supply	Phase/Frequency		Hz	3~/50								

# Air cooled scroll chiller, high efficiency, standard/low sound

- › First R-32 air cooled chiller with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller with superior control logic and easy interface
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-XSB



EWAT-B-XLB

Cooling Only				EWAT-B-XSB/XLB		085	115	145	180	185
Space cooling	A Condition 35°C Pdc		kW	87.9	113.89	143.48	179.01	182.67		
	ηs,c		%	167	183	175	-	175.8		
	ηs,c + VFDFAN		%	-	-	-	181.8	-		
SEER				4.25	4.65	4.45	4.38	4.47		
SEER + VFDFAN				-	-	-	4.62	-		
Cooling capacity	Nom.		kW	88	114	143	179	183		
Power input	Cooling	Nom.	kW	28.8	36.6	44.4	57	63.6		
Capacity control	Method						Step			
	Minimum capacity		%	50	38		25	38		
EER				3.05	3.12	3.23	3.14	2.87		
IPLV				4.83	5	4.82	4.65	4.74		
EER + VFDFAN				-	-	-	3.13	-		
IPLV + VFDFAN				-	-	-	5.11	-		
Dimensions	Unit	Height	mm	1,801		1,822	2,540	1,822		
		Width	mm			1,204	2,236	1,204		
		Length	mm	2,660	3,180	3,780	2,326	3,780		
Weight (XSB)	Unit		kg	737	830	949	1,633	1,066		
	Operation weight		kg	742	836	958	1,644	1,078		
Weight (XLB)	Unit		kg	747	840	959	1,736	1,076		
	Operation weight		kg	752	846	968	1,747	1,088		
Water heat exchanger	Type			Braze plate						
	Water volume		l	5	6	9	11	12		
	Water flow rate	Cooling	Nom.	l/s	4.2	5.4	6.9	8.6	8.7	
	Water pressure drop	Cooling	Nom.	kPa	31.6	37.3	31	40.7	45.1	
Air heat exchanger	Type			Microchannel						
Compressor	Type			Scroll compressor						
	Quantity			2			4	2		
Fan	Type			Direct propeller						
	Quantity			6	8	10	4	10		
	Air flow rate	Nom.	l/s	9,036	12,023	15,057	20,306	15,057		
	Speed		rpm		1,360		900	1,360		
Sound power level (XSB)	Cooling	Nom.	dBA	86	88.8	90.5	91.2	92.1		
Sound power level (XLB)	Cooling	Nom.	dBA	85.2	87.1	88.5	90.6	89.3		
Sound pressure level (XSB)	Cooling	Nom.	dBA	68.3	70.8	72.2	72.3	73.7		
Sound pressure level (XLB)	Cooling	Nom.	dBA	67.5	69.1	70.1	71.6	70.9		
Refrigerant	Type/GWP			R-32/675						
	Charge (XSB)		kg	8.6	9.7	10.7	19.4	11.2		
	Charge (XLB)		kg	8.6	9.4	11.2	18.8	11.2		
	Circuits	Quantity		1			2	1		
Piping connections	Evaporator water inlet/outlet (OD)			76.1			88.9	76.1		
Unit	Starting current	Max	A	215	315	328	290	464		
	Running current	Cooling	Nom.	A	56	67	78	110	108	
		Max	A	75	87	100	149	134		
Power supply	Phase/Frequency		Hz	3~/50						

# Air cooled scroll chiller, high efficiency, reduced sound

- › First R-32 air cooled chiller with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller with superior control logic and easy interface
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-XRB

Cooling Only				EWAT-B-XRB	085	115	145	180	185	
Space cooling	A Condition 35°C Pdc ηs,c		kW	81.86	108.59	135.62	168.03	166.16		
			%	213.28	179.4	166.6	177	164.6		
SEER			4.13	4.56	4.24	4.5	4.19			
Cooling capacity	Nom.		kW	82	109	136	168	166		
Power input	Cooling	Nom.	kW	30.8	38.9	46.9	59.1	70.5		
Capacity control	Method			Step						
		Minimum capacity	%	50	38	50	25	38		
EER			2.66	2.79	2.89	2.84	2.36			
IPLV			4.74	5.1	4.76	5.04	4.72			
Dimensions	Unit	Height	mm	1,801		1,822	2,540	1,822		
		Width	mm			1,204	2,236	1,204		
		Length	mm	2,660	3,180	3,780	2,326	3,780		
Weight	Unit		kg	747	840	959	1,736	1,076		
		Operation weight	kg	752	846	968	1,747	1,088		
Water heat exchanger	Type			Braze plate						
		Water volume	l	5	6	9	11	12		
		Water flow rate	Cooling Nom.	l/s	3.9	5.2	6.5	8	7.9	
		Water pressure drop	Cooling Nom.	kPa	27.8	34.2	28	36.3	38	
Air heat exchanger	Type		Microchannel							
Compressor	Type			Scroll compressor						
		Quantity		2			4	2		
Fan	Type			Direct propeller						
		Quantity		6	8	10	4	10		
		Air flow rate	Nom.	l/s	6,673	8,896	11,122	15,054	11,122	
	Speed	rpm		1,108		700	1,108			
Sound power level	Cooling	Nom.	dB(A)	77.9	81.9	84	84.2	86		
Sound pressure level	Cooling	Nom.	dB(A)	60.2	63.9	65.6	65.3	67.7		
Refrigerant	Type/GWP			R-32/675						
		Charge	kg	8.4	9.1	10.3	12	11.8		
		Circuits	Quantity		1			2	1	
Piping connections	Evaporator water inlet/outlet (OD)			76.1			88.9	76.1		
Unit	Starting current	Max	A	215	315	328	290	464		
		Running current	Cooling	Nom.	A	59	71	83	113	118
			Max	A	75	87	100	149	134	
Power supply	Phase/Frequency		Hz	3~/50						

# Air cooled scroll compressor chiller

## Gold efficiency

## Standard sound

- › R32 refrigerant;
- › Nominal capacity up to 1,000 kW;
- › Scroll compressors;
- › Top class efficiency both at full and part load conditions;
- › Best capacity with smallest footprint;
- › Microchannel coils;
- › Performance monitoring;
- › New Daikin MicroTech 4 controller.

More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-SSC



Cooling Only				EWAT	310B-SSC1	320B-SSC2	350B-SSC1	380B-SSC2	430B-SSC2	480B-SSC2	570B-SSC2	620B-SSC2	670B-SSC2	730B-SSC2	
Space cooling	A Condition 35°C Pdc			kW	305.92	317.98	345.59	381.40	426.61	477.56	567.34	622.34	668.92	734.97	
	ηs,c			%	184.6	177.7	181.2	183.0	184.9	183.0	190.4	188.9	188.1	190.4	
SEER					4.689	4.517	4.604	4.649	4.698	4.649	4.834	4.797	4.778	4.834	
Cooling capacity	Nom.			kW	305.92	317.98	345.59	381.40	426.61	477.56	567.34	622.34	668.92	734.97	
Power input	Cooling	Nom.		kW	106.6	115.0	130.0	125.2	148.6	176.0	185.5	213.1	237.0	248.6	
Capacity control	Method			Step											
	Minimum capacity			%	22	21	19	18	16	14	22	20	18	17	
EER					2.869	2.764	2.658	3.046	2.871	2.714	3.058	2.921	2.823	2.957	
IPLV					4.948	4.794	4.948	4.849	4.907	4.940	5.062	5.073	5.088	5.120	
Dimensions	Unit	Height	mm	2,535											
		Width	mm	2,238											
		Depth	mm	2,510		3,590			4,670		5,750				
Weight	Unit			kg	2,080	2,120	2,200	2,620	2,800	2,920	3,500	3,670	3,780	4,310	
	Operation weight				kg	2,099	2,146	2,228	2,646	2,837	2,960	3,555	3,747	3,856	4,385
Air heat exchanger	Type			Microchannel											
Compressor	Type			Scroll compressor											
	Quantity				3	4	3	4	5	6					
Fan	Type			Direct propeller											
	Quantity				4				6		8			10	
Air flow rate	Cooling	Nom.		l/s	25,490	25,500	25,490	38,240			50,980			63,730	
	Sound power level	Cooling	Nom.	dBA	94.0	93.8	94.5	95.1	95.6	95.9	96.7	97.0	97.3	97.9	
Sound pressure level	Cooling	Nom.		dBA	74.9	74.7	75.5	75.4	75.9	76.2	76.5	76.7	77.0	77.2	
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20~52										
Refrigerant	Type/GWP			R-32/675											
	Charge			kg	22.0	25.0	30.0	31.0	35.0	39.0	45.0	50.0	53.0	59.0	
	Circuits	Quantity			1	2	1	2							
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm											
Unit	Starting current	Max		A	693	697	735	750	792	838	891	936	979	1,032	
	Running current	Cooling	Nom.	A	186	200	224	222	260	304	329	374	413	438	
	Max			A	245	249	287	302	344	390	443	488	531	584	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400										

Cooling Only				EWAT	790B-SSC2	860B-SSC2	960B-SSC2	
Space cooling	A Condition 35°C Pdc			kW	791.18	857.22	961.63	
	ηs,c			%	190.8	192.6	189.0	
SEER					4.844	4.889	4.801	
Cooling capacity	Nom.			kW	791.18	857.22	961.63	
Power input	Cooling	Nom.		kW	273.9	285.5	335.1	
Capacity control	Method			Step				
	Minimum capacity			%	15	14	25	
EER					2.889	3.002	2.870	
IPLV					5.092	5.122	5.079	
Dimensions	Unit	Height	mm	2,535				
		Width	mm	2,238				
		Depth	mm	5,850		6,930		
Weight	Unit			kg	4,670	5,120	5,310	
	Operation weight				kg	4,743	5,196	5,412
Air heat exchanger	Type			Microchannel				
Compressor	Type			Scroll compressor				
	Quantity				7			8
Fan	Type			Direct propeller				
	Quantity				10		12	
Air flow rate	Cooling	Nom.		l/s	63,730		76,480	
Sound power level	Cooling	Nom.		dBA	98.1		99.0	
Sound pressure level	Cooling	Nom.		dBA	77.4		77.8	
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20~52			
Refrigerant	Type/GWP			R-32/675				
	Charge			kg	63.0		77.0	
	Circuits	Quantity			2			
Piping connections	Evaporator water inlet/outlet (OD)			139.7mm				
Unit	Starting current	Max		A	1,079		1,220	
	Running current	Cooling	Nom.	A	479		585	
	Max			A	631		772	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400			

# Air cooled scroll compressor chiller

## Gold efficiency

## Standard sound

- › R32 refrigerant;
- › Nominal capacity up to 1,000 kW;
- › Scroll compressors;
- › Top class efficiency both at full and part load conditions;
- › Best capacity with smallest footprint;
- › Microchannel coils;
- › Performance monitoring;
- › New Daikin MicroTech 4 controller.



More details and final information can be found by scanning or clicking the QR codes.

EWAT-B-SRC

Cooling Only		EWAT	310B-SRC1	320B-SRC2	350B-SRC1	380B-SRC2	430B-SRC2	480B-SRC2	570B-SRC2	620B-SRC2	670B-SRC2	730B-SRC2		
Space cooling	A Condition 35°C Pdc	kW	297.62	308.38	334.14	373.60	415.25	463.29	553.35	605.02	647.77	714.95		
	ηs,c	%	197.5	185.0	189.2	192.8	193.5	193.1	202.0	200.3	197.9	205.2		
SEER			5.013	4.700	4.806	4.895	4.913	4.902	5.124	5.083	5.022	5.206		
Cooling capacity	Nom.	kW	297.62	308.38	334.14	373.60	415.25	463.29	553.35	605.02	647.77	714.95		
Power input	Cooling	kW	108.0	117.1	133.5	124.4	149.9	179.2	186.4	216.0	242.2	251.4		
Capacity control	Method		Step											
	Minimum capacity	%	22	21	19	18	16	14	22	20	18	17		
EER			2.757	2.634	2.502	3.003	2.771	2.586	2.969	2.801	2.674	2.844		
IPLV			5.485	4.999	5.319	5.324	5.339	5.382	5.557		5.525	5.650		
Dimensions	Unit		2,535											
	Height	mm	2,238											
	Width	mm	2,514			3,594			4,674			5,754		
Weight	Unit	kg	2,164	2,206	2,288	2,705	2,920	3,063	3,634	3,828	3,937	4,467		
	Operation weight	kg	2,187	2,234	2,316	2,733	2,959	3,099	3,694	3,905	4,014	4,544		
Air heat exchanger	Type		Microchannel											
Compressor	Type		Scroll compressor											
	Quantity		3			4			5			6		
Fan	Type		Direct propeller											
	Quantity		4			6			8			10		
Air flow rate	Cooling	Nom.	21,470	21,460	21,470	32,200			42,940			53,670		
Sound power level	Cooling	Nom.	87.9	87.8	88.1	89.5	89.6	89.7	90.8	90.9	91.0	91.9		
Sound pressure level	Cooling	Nom.	68.8		69.0	69.8	69.9	70.0	70.6	70.7	70.8	71.2		
Operation range	Air side	Cooling	Min.~Max.	-20 ~52										
Refrigerant	Type/GWP		R-32/675											
	Charge	kg	22	25	30	31	35	39	45	50	53	59		
	Circuits	Quantity	1	2	1	2			2					
Piping connections	Evaporator water inlet/outlet (OD)		88.9mm						139.7mm					
Unit	Starting current	Max	A	693	697	735	750	792	838	891	936	979	1,032	
	Running current	Cooling	Nom.	A	195	210	236	232	272	319	344	392	434	459
		Max	A	245	249	287	302	344	390	443	488	531	584	
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50 /400											

Cooling Only		EWAT	790B-SRC2	860B-SRC2	960B-SRC2	
Space cooling	A Condition 35°C Pdc	kW	768.57	835.75	933.57	
	ηs,c	%	206.3	208.4	201.8	
SEER			5.232	5.284	5.121	
Cooling capacity	Nom.	kW	768.57	835.75	933.57	
Power input	Cooling	kW	278.3	287.5	341.0	
Capacity control	Method		Step			
	Minimum capacity	%	15	14	25	
EER			2.762	2.907	2.738	
IPLV			5.484	5.630	5.550	
Dimensions	Unit		2,535			
	Height	mm	2,238			
	Width	mm	6,928			
Weight	Unit	kg	5,848	5,298	5,512	
	Operation weight	kg	4,922	5,375	5,611	
Air heat exchanger	Type		Microchannel			
Compressor	Type		Scroll compressor			
	Quantity		7			
Fan	Type		Direct propeller			
	Quantity		12			
Air flow rate	Cooling	Nom.	53,670	64,400		
Sound power level	Cooling	Nom.	91.9	92.6	92.7	
Sound pressure level	Cooling	Nom.	71.2	71.5	71.6	
Operation range	Air side	Cooling	Min.~Max.	-20 ~52		
Refrigerant	Type/GWP		R-32/675			
	Charge	kg	63	68	77	
	Circuits	Quantity	2			
Piping connections	Evaporator water inlet/outlet (OD)		139.7mm			
Unit	Starting current	Max	A	1,078	1,219	
	Running current	Cooling	Nom.	A	503	615
		Max	A	630	683	771
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50 /400			

# Air cooled scroll compressor chiller

## Gold efficiency

## Standard sound

- › R32 refrigerant;
- › Nominal capacity up to 1,000 kW;
- › Scroll compressors;
- › Top class efficiency both at full and part load conditions;
- › Best capacity with smallest footprint;
- › Microchannel coils;
- › Performance monitoring;
- › New Daikin MicroTech 4 controller.

More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-XSC



Cooling Only		EWAT	10B-XSC2	250B-XSC1	320B-XSC1	370B-XSC1	390B-XSC2	450B-XSC2	510B-XSC2	540B-XSC2	590B-XSC2	630B-XSC2
Space cooling	A Condition 35°C Pdc	kW	1,009.36	252.39	324.44	371.33	387.85	448.05	512.31	539.39	586.74	631.42
	ηs,c	%	193.4	181.8	188.6	187.4	184.9	187.4	189.4	192.5	192.4	192.6
SEER			4.910	4.620	4.789	4.759	4.697	4.760	4.810	4.887	4.884	4.890
Cooling capacity	Nom.	kW	1,009.00	252.39	324.44	371.33	387.85	448.05	512.31	539.39	586.74	631.42
Power input	Cooling	kW	315.7	79.1	100.0	118.8	125.6	140.5	158.0	160.2	178.6	197.1
	Nom.											
Capacity control	Method		Step									
	Minimum capacity	%	25	50	22	19	18	16	25	14	22	20
EER			3.197	3.189	3.245	3.126	3.088	3.189	3.242	3.368	3.285	3.203
IPLV			5.126	4.907	5.002	5.051	4.895	4.977	5.068	5.091	5.117	5.109
Dimensions	Unit		2,535									
	Height	mm	2,238									
	Width	mm										
Weight	Unit		9,088	2,514		3,594		4,674		5,754		4,024
	Operation weight	kg	6,251	1,963	2,466	2,585	2,657	3,169	3,359	3,804	3,916	4,024
		kg	6,350	1,986	2,489	2,610	2,693	3,205	3,419	3,864	3,979	4,084
Air heat exchanger	Type		Microchannel									
Compressor	Type		Scroll compressor									
	Quantity		8	2	3		4		5			
Fan	Type		Direct propeller									
	Quantity		16	4		6		8		10		
Sound power level	Air flow rate	Cooling	101,980	25,490		38,240		50,980		63,730		
	Nom.											
Sound pressure level	Cooling	dB	99.5	93.5	94.8	95.3	95.1	96.1	96.5	96.9	97.2	97.5
	Nom.	dB	77.6	74.4	75.1	75.6	75.4	75.9	76.3	76.2	76.5	76.8
Operation range	Air side	Cooling	-20 ~52									
Refrigerant	Type/GWP		R-32/675									
	Charge	kg	75.0	44.0	50.0	55.0	30.5	35.0	39.5	42.0	45.0	49.0
Piping connections	Circuits	Quantity	2		1				2			
	Evaporator water inlet/outlet (OD)		139.7mm			88.9mm			139.7mm			
Unit	Starting current	Max	A	1,240	647	703	746	750	803	845	858	901
	Running current	Cooling	Nom.	A	567	142	181	212	223	252	284	292
	Max	A	792	199	255	298	302	355	397	410	453	496
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50 /400									

Cooling Only		EWAT	720B-XSC2	760B-XSC2	830B-XSC2	880B-XSC2	
Space cooling	A Condition 35°C Pdc	kW	716.56	762.50	834.45	880.39	
	ηs,c	%	193.9	194.2	193.8	193.5	
SEER			4.923	4.930	4.920	4.913	
Cooling capacity	Nom.	kW	716.56	762.50	834.45	880.39	
Power input	Cooling	kW	218.1	236.9	257.3	276.1	
	Nom.						
Capacity control	Method		Step				
	Minimum capacity	%	18	17	15	14	
EER			3.285	3.219	3.243	3.189	
IPLV			5.141	5.165	5.130	5.146	
Dimensions	Unit		2,535				
	Height	mm	2,238				
	Width	mm					
Weight	Unit		6,834		8,008		
	Operation weight	kg	4,565	4,673	5,442	5,551	
		kg	4,642	4,750	5,519	5,628	
Air heat exchanger	Type		Microchannel				
Compressor	Type		Scroll compressor				
	Quantity		6		7		
Fan	Type		Direct propeller				
	Quantity		12		14		
Sound power level	Air flow rate	Cooling	76,480		89,230		
	Nom.						
Sound pressure level	Cooling	dB	98.0	98.3	98.7	98.9	
	Nom.	dB	76.9	77.1	77.2	77.4	
Operation range	Air side	Cooling	-20 ~52				
Refrigerant	Type/GWP		R-32/675				
	Charge	kg	55.0	57.5	62.5	67.0	
Piping connections	Circuits	Quantity	2				
	Evaporator water inlet/outlet (OD)		139.7mm				
Unit	Starting current	Max	A	999	1,042	1,142	
	Running current	Cooling	Nom.	A	394	425	464
	Max	A	551	594	694	694	
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50 /400				

# Air cooled scroll compressor chiller

## Gold efficiency

## Standard sound

- > R32 refrigerant;
- > Nominal capacity up to 1,000 kW;
- > Scroll compressors;
- > Top class efficiency both at full and part load conditions;
- > Best capacity with smallest footprint;
- > Microchannel coils;
- > Performance monitoring;
- > New Daikin MicroTech 4 controller.

More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-XRC



Cooling Only				EWAT	10B-XRC2	250B-XRC1	320B-XRC1	370B-XRC1	390B-XRC2	450B-XRC2	510B-XRC2	540B-XRC2	590B-XRC2	630B-XRC2
Space cooling	A Condition 35°C Pdc			kW	965.50	241.40	313.20	355.68	370.32	431.43	489.48	520.68	563.54	603.94
	ηs,c			%	206.2	195.6	204.4	202.6	196.2	203.3	201.3	208.2	207.8	206.5
SEER					5.229	4.965	5.186	5.140	4.979	5.158	5.108	5.279	5.270	5.237
Cooling capacity	Nom.			kW	965.50	241.40	313.20	355.68	370.32	431.43	489.48	520.68	563.54	603.94
Power input	Cooling	Nom.		kW	323.5	81.1	99.9	121.4	129.1	141.4	162.1	159.6	180.7	202.0
Capacity control	Method			Step										
	Minimum capacity			%	25	50	22	19	18	16	25	14	22	20
EER					2.985	2.977	3.135	2.929	2.869	3.052	3.019	3.262	3.119	2.990
IPLV					5.576	5.340	5.525	5.487	5.317	5.446	5.528	5.630	5.620	5.601
Dimensions	Unit	Height	mm	2,535										
		Width	mm	2,238										
		Depth	mm	9,090	2,510	53,600	3,590			4,670		5,750		
Weight	Unit	Operation weight		kg	6,450	2,020	2,550	2,670	2,740	3,290	3,480	3,940	4,060	4,160
				kg	6,549	2,045	2,577	2,698	2,780	3,324	3,538	4,003	4,115	4,223
Air heat exchanger	Type			Microchannel										
	Compressor			Scroll compressor										
Fan	Type			Direct propeller										
	Quantity			8 2 3 6 4 8 10										
Air flow rate	Cooling	Nom.	I/s	75,600	18,900	28,350			37,800		47,250			
				90.0	84.0	85.4	85.7	85.6	86.8	87.0	87.6	87.8	87.9	
Sound pressure level	Cooling	Nom.		dB(A)	68.1	64.9	65.7	66.0	65.9	66.5	66.7	66.9	67.1	67.2
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~52									
Refrigerant	Type/GWP			R-32/675										
	Charge			kg	75.0	44.0	50.0	55.0	30.5		39.5	42.0	45.0	49.0
	Circuits	Quantity		2	1					2				
Piping connections	Evaporator water inlet/outlet (OD)			139.7mm	88.9mm						139.7mm			
Unit	Starting current	Max	A	1,240	647	703	746	750	803	845	858	901	944	
				Running current	Cooling	Nom.	A	570	143	178	213	225	249	286
	Max	A	792	199	255	298	302	355	397	410	453	496		
			Power supply			Phase/Frequency/Voltage	Hz/V 3~/50 /400							

Cooling Only				EWAT	720B-XRC2	760B-XRC2	830B-XRC2	880B-XRC2
Space cooling	A Condition 35°C Pdc			kW	687.57	728.98	800.94	842.34
	ηs,c			%	208.6	207.0	210.0	208.8
SEER					5.291	5.249	5.324	5.294
Cooling capacity	Nom.			kW	687.57	729.00	800.94	842.34
Power input	Cooling	Nom.		kW	221.3	242.8	261.1	
Capacity control	Method			Step				
	Minimum capacity			%	18	17	15	14
EER					3.107	3.003	3.067	2.979
IPLV					5.649	5.605	5.613	5.605
Dimensions	Unit	Height	mm	2,535				
		Width	mm	2,238				
		Depth	mm	6,830		8,010		5,730
Weight	Unit	Operation weight		kg	4,720	4,830	5,620	5,730
				kg	4,801	4,909	5,697	5,806
Air heat exchanger	Type			Microchannel				
	Compressor			Scroll compressor				
Fan	Type			Direct propeller				
	Quantity			6 7 12 14				
Air flow rate	Cooling	Nom.	I/s	56,700	66,150			
				88.6	88.7	89.3	89.4	
Sound pressure level	Cooling	Nom.		dB(A)	67.5	67.6	67.7	67.8
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~52			
Refrigerant	Type/GWP			R-32/675				
	Charge			kg	55.0	57.5	62.5	67.0
	Circuits	Quantity		2				
Piping connections	Evaporator water inlet/outlet (OD)			139.7mm				
Unit	Starting current	Max	A	999	1,042		1,142	
				Running current	Cooling	Nom.	A	393
	Max	A	551	594		694		
			Power supply			Phase/Frequency/Voltage	Hz/V 3~/50 /400	

# Air cooled scroll compressor chiller with integrated free cooling Gold efficiency Standard sound

- › R32 refrigerant;
- › Nominal capacity up to 1,000 kW;
- › Scroll compressors;
- › Top class efficiency both at full and part load conditions;
- › Best capacity with smallest footprint;
- › Microchannel coils;
- › Glycol free option;
- › New Daikin MicroTech 4 controller.



More details and final information can be found by scanning or clicking the QR codes.



EWFT-B-SSC

Cooling Only				EWFT	310B-SSC1	320B-SSC2	350B-SSC1	380B-SSC2	430B-SSC2	480B-SSC2	570B-SSC2	620B-SSC2	670B-SSC2	730B-SSC2
SEER				4.833	4.546	4.641	4.688	4.73	4.742	4.921	4.879	4.815	5.014	
Cooling capacity	Nom.		kW	395.2	351.7	439.1	499.3	493.6	553.8	738.6	803.5	749.6	843.7	
	Power input	Cooling Nom.	kW	121.6	95.91	151.7	138.4	131.3	164.2	211	245.1	211.9	220.9	
Capacity control	Method			Step										
	Minimum capacity		%	39	21	33	18	16	14	22	20	18	17	
EER				3.25	3.667	2.894	3.608	3.76	3.373	3.501	3.278	3.538	3.819	
IPLV				5.259	4.869	5.080	5.078	5.086	5.122	5.284	5.275	5.241	5.392	
Dimensions	Unit	Height	mm	2,535										
		Width	mm	2,238										
		Depth	mm	2,514		3,594			4,674			5,754		
Weight	Unit	Operation weight	kg	2,245	2,288	2,373	2,852	3,012	3,155	3,774	3,953	4,056	4,667	
		Operation weight	kg	2,388	2,436	2,521	3,023	3,198	3,341	4,044	4,223	4,343	5,054	
Air heat exchanger	Type			Microchannel										
	Compressor	Type		Scroll compressor										
Fan	Type			Direct propeller										
	Quantity			3	4	3	4	5	5	6	6	6	6	
Sound power level	Cooling Nom.	Air flow rate	l/s	22,510		33,765			45,020			56,275		
		Sound pressure level	dB(A)	94	93.8	94.5	95.1	95.6	95.9	96.7	97	97.3	97.9	
Operation range	Air side Cooling	Min.~Max.	°CDB	-20 ~46										
		Refrigerant	Type/GWP	R-32/675.0										
Piping connections	Evaporator water inlet/outlet (OD)	Charge	kg	22.0	25.0	30.0	31.0	35.0	39.0	45.0	50.0	53	59.0	
		Circuits	Quantity	1	2	1	88.9			2			139.7	
Unit	Starting current	Max	A	693	697	735	750	792	838	891	936	979	1,032	
		Running	Cooling Nom.	A	216.2	174.1	264.3	252.3	240.2	294.4	378.9	435	380.3	403.2
		current	Max	A	245	249	287	302	344	390	443	488	531	584
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400										

Cooling Only				EWFT	790B-SSC2			860B-SSC2			960B-SSC2		
SEER					5.049			5.076			4.93		
Cooling capacity	Nom.		kW		1,018			1,112			1,235		
	Power input	Cooling Nom.	kW		316.1			325.1			387.5		
Capacity control	Method			Step									
	Minimum capacity		%	15			14			25			
EER				3.222			3.422			3.188			
IPLV				5.307			5.381			5.312			
Dimensions	Unit	Height	mm	2,535									
		Width	mm	2,238									
		Depth	mm	5,848			5,546			6,928			
Weight	Unit	Operation weight	kg	5,035			5,975			6,311			
		Operation weight	kg	5,422			5,975			6,311			
Air heat exchanger	Type			Microchannel									
	Compressor	Type		Scroll compressor									
Fan	Type			Direct propeller									
	Quantity			10			12			8			
Sound power level	Cooling Nom.	Air flow rate	l/s	56,275			67,530			77,530			
		Sound pressure level	dB(A)	98.1			98.6			99			
Operation range	Air side Cooling	Min.~Max.	°CDB	77.4									
		Refrigerant	Type/GWP	R-32/675.0									
Piping connections	Evaporator water inlet/outlet (OD)	Charge	kg	63.0			68.0			77.0			
		Circuits	Quantity	2			2			2			
Unit	Starting current	Max	A	139.7			139.7			139.7			
		Running	Cooling Nom.	A	1,079			1,132			1,220		
		current	Max	A	559			581.8			683.6		
Power supply	Phase/Frequency/Voltage		Hz/V	631			684			772			
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400									

Performances according to Chiller Configurator 1.4 software | Cooling: entering evaporator water temp. 26°C; leaving evaporator water temp. 18°C; ambient air temp. 35°C; ethylene glycol fluid 25%; full load operation.



# Air cooled scroll compressor chiller with integrated free cooling Gold efficiency Standard sound

- › R32 refrigerant;
- › Nominal capacity up to 1,000 kW;
- › Scroll compressors;
- › Top class efficiency both at full and part load conditions;
- › Best capacity with smallest footprint;
- › Microchannel coils;
- › Glycol free option;
- › New Daikin MicroTech 4 controller.



More details and final information can be found by scanning or clicking the QR codes.



EWFT-B-SRC

Cooling Only				EWFT	310B-SRC1	320B-SRC2	350B-SRC1	380B-SRC2	430B-SRC2	480B-SRC2	570B-SRC2	620B-SRC2	670B-SRC2	730B-SRC2
SEER				4.778	4.329	4.602	4.713	4.715	4.662	4.899	4.823	4.782	4.972	
Cooling capacity	Nom.		kW	395.2	408.4	439.1	480.6	544.2	598.2	725	762.6	851.4	947.6	
	Power input	Cooling	Nom.	kW	121.6	131.1	151.7	143.7	167.5	204.3	214.2	259.3	277.4	283.4
Capacity control	Method			Step										
	Minimum capacity		%	39	21	33	18	16	14	22	20	18	17	
EER				3.25	3.115	2.894	3.344	3.249	2.928	3.385	2.941	3.069	3.344	
IPLV				5.281	4.858	5.084	5.074	5.096	5.148	5.329	5.347	5.309	5.414	
Dimensions	Unit	Height	mm	2,535										
		Width	mm	2,238										
		Depth	mm	2,514		3,594			4,674			5,754		
Weight	Unit		kg	2,336	2,379	2,464	2,942	3,134	3,298	3,917	4,116	4,219	4,830	
	Operation weight		kg	2,479	2,527	2,612	3,113	3,320	3,484	4,187	4,386	4,506	5,217	
Air heat exchanger	Type			Microchannel										
	Compressor	Type		Scroll compressor										
Fan	Quantity			3	4	3	4	4	5	5	6	6	6	
	Type			Direct propeller										
Air flow rate	Cooling	Nom.	l/s	4		6			8			10		
	Nom.		l/s	22,510		33,765			45,020			56,275		
Sound power level	Cooling	Nom.	dBA	87.9	87.8	88.1	89.5	89.6	89.7	90.8	90.9	91	91.9	
Sound pressure level	Cooling	Nom.	dBA	68.8		69.0	69.8	69.9	70.0	70.6	70.7	70.8	71.2	
Operation range	Air side	Cooling	Min.~Max.	-20 ~46										
Refrigerant	Type/GWP			R-32/675										
	Charge		kg	22.0	25.0	30.0	31.0	35.0	39.0	45.0	50.0	53.0	59.0	
Piping connections	Evaporator water inlet/outlet (OD)			1			2			2			139.7	
	Unit	Starting current	Max	A	693	697	735	750	792	838	891	936	979	1,032
Unit	Running current	Cooling	Nom.	A	229.6	243.8	277.7	266.8	312.2	372.3	401.2	464.7	509.7	529.5
	current	Max		A	245	249	287	302	344	390	443	488	531	584
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400										

Cooling Only				EWFT	790B-SRC2	860B-SRC2	960B-SRC2
SEER				4.984		5.057	4.883
Cooling capacity	Nom.		kW	970.4		1,093	1,170
	Power input	Cooling	Nom.	kW	335.4	329.9	409.7
Capacity control	Method			Step			
	Minimum capacity		%	15		14	25
EER				2.893		3.312	2.856
IPLV				5.271		5.399	5.300
Dimensions	Unit	Height	mm	2,535			
		Width	mm	2,238			
		Depth	mm	5,848		6,928	
Weight	Unit		kg	5,220		5,730	6,065
	Operation weight		kg	5,607		6,159	6,516
Air heat exchanger	Type			Microchannel			
	Compressor	Type		Scroll compressor			
Fan	Quantity			7			8
	Type			Direct propeller			
Air flow rate	Cooling	Nom.	l/s	10		12	
	Nom.		l/s	56,275		67,530	
Sound power level	Cooling	Nom.	dBA	91.9		92.6	92.7
Sound pressure level	Cooling	Nom.	dBA	71.2		71.5	71.6
Operation range	Air side	Cooling	Min.~Max.	-20 ~46			
Refrigerant	Type/GWP			R-32/675			
	Charge		kg	63.0		68.0	77.0
Piping connections	Evaporator water inlet/outlet (OD)			1		2	
	Unit	Starting current	Max	A	1,078	1,131	1,219
Unit	Running current	Cooling	Nom.	A	597.9	615.2	727.8
	current	Max		A	630	683	771
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400			

Performances according to Chiller Configurator 1.4 software | Cooling: entering evaporator water temp. 26°C; leaving evaporator water temp. 18°C; ambient air temp. 35°C; ethylene glycol fluid 25%; full load operation.

# Air cooled scroll compressor chiller with integrated free cooling Gold efficiency Standard sound

- › R32 refrigerant;
- › Nominal capacity up to 1,000 kW;
- › Scroll compressors;
- › Top class efficiency both at full and part load conditions;
- › Best capacity with smallest footprint;
- › Microchannel coils;
- › Glycol free option;
- › New Daikin MicroTech 4 controller.



More details and final information can be found by scanning or clicking the QR codes.



EWFT-B-XSC

Cooling Only				EWFT	10B-XSC2	250B-XSC1	320B-XSC1	370B-XSC1	390B-XSC2	450B-XSC2	510B-XSC2	540B-XSC2	590B-XSC2	630B-XSC2	
SEER				5.189	4.723	5.186	5.011	4.74	4.957	4.911	5.213	5.141	5.131		
Cooling capacity	Nom.		kW	1,326	331.9	429.6	487.6	508.5	591.6	673.7	716.2	774.8	829.5		
Power input	Cooling	Nom.	kW	351.7	87.99	108.4	131	139.3	152.6	176.8	175.2	197.5	219.9		
Capacity control	Method			Step											
	Minimum capacity		%	25	50	39	33	18	16	25	14	22	20		
EER				3.77	3.772	3.963	3.722	3.65	3.877	3.81	4.088	3.923	3.772		
IPLV				5.514	5.185	5.518	5.366	5.122	5.326	5.322	5.623	5.546	5.509		
Dimensions	Unit	Height	mm	2,535											
		Width	mm	2,238											
		Depth	mm	9,088	2,514	3,594			4,674			5,754			
Weight	Unit		kg	6,792	2,129	2,678	2,800	2,885	3,420	3,634	4,150	4,266	4,377		
		Operation weight	kg	7,331	2,272	2,851	2,975	3,064	3,658	3,904	4,520	4,636	4,747		
Air heat exchanger	Type			Microchannel											
Compressor	Type			Scroll compressor											
	Quantity			8	2	3			4			5			
Fan	Type			Direct propeller											
	Quantity			16	4	6			8			10			
	Air flow rate	Cooling	Nom.	l/s	90,040	22,510	33,765			45,020			56,275		
Sound power level	Cooling	Nom.	dBA	99.5	93.5	94.8	95.3	95.1	96.1	96.5	96.9	97.2	97.5		
Sound pressure level	Cooling	Nom.	dBA	77.6	74.4	75.1	75.6	75.4	75.9	76.3	76.2	76.5	76.8		
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~46										
Refrigerant	Type/GWP			R-32/675											
	Charge		kg	90.0	26.0	30.0	33.0	37.0	42.0	47.0	50.0	54.0	58.0		
	Circuits	Quantity		2	1			2			2				
Piping connections	Evaporator water inlet/outlet (OD)			139.7	88.9			139.7			139.7				
Unit	Starting current	Max	A	1,240	647	703	746	750	803	845	858	901	944		
	Running current	Cooling	Nom.	A	642.5	160.7	202.1	239.6	253.6	282.7	327.1	364.3	401.6		
	current	Max	A	792	199	255	298	302	355	397	410	453	496		
	Power supply	Phase/Frequency/Voltage	Hz/V	3~/50 /400											

Cooling Only				EWFT	720B-XSC2	760B-XSC2	830B-XSC2	880B-XSC2
SEER				5.219	5.193	5.193	5.251	5.243
Cooling capacity	Nom.		kW	945.8	1,002	1,002	1,100	1,156
Power input	Cooling	Nom.	kW	241.8	264.5	264.5	284.6	307.3
Capacity control	Method			Step				
	Minimum capacity		%	18	17	17	15	14
EER				3.912	3.789	3.789	3.865	3.763
IPLV				5.570	5.518	5.518	5.553	5.519
Dimensions	Unit	Height	mm	2,535				
		Width	mm	2,238				
		Depth	mm	6,834	8,008			8,008
Weight	Unit		kg	4,975	5,086	5,086	5,879	5,991
		Operation weight	kg	5,404	5,515	5,515	6,352	6,464
Air heat exchanger	Type			Microchannel				
Compressor	Type			Scroll compressor				
	Quantity			6	7			7
Fan	Type			Direct propeller				
	Quantity			12	14			14
	Air flow rate	Cooling	Nom.	l/s	67,530	78,785		
Sound power level	Cooling	Nom.	dBA	98	98.3	98.3	98.7	98.9
Sound pressure level	Cooling	Nom.	dBA	76.9	77.1	77.1	77.2	77.4
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~46			
Refrigerant	Type/GWP			R-32/675				
	Charge		kg	66.0	69.0	69.0	75.0	80.0
	Circuits	Quantity		2				
Piping connections	Evaporator water inlet/outlet (OD)			139.7				
Unit	Starting current	Max	A	999	1,042	1,042	1,142	1,142
	Running current	Cooling	Nom.	A	445.1	482.9	523.9	561.6
	current	Max	A	551	594	594	694	694
	Power supply	Phase/Frequency/Voltage	Hz/V	3~/50 /400				

Performances according to Chiller Configurator 1.4 software | Cooling: entering evaporator water temp. 26°C; leaving evaporator water temp. 18°C; ambient air temp. 35°C; ethylene glycol fluid 25%; full load operation.

# Air cooled scroll compressor chiller with integrated free cooling Gold efficiency Standard sound

- › R32 refrigerant;
- › Nominal capacity up to 1,000 kW;
- › Scroll compressors;
- › Top class efficiency both at full and part load conditions;
- › Best capacity with smallest footprint;
- › Microchannel coils;
- › Glycol free option;
- › New Daikin MicroTech 4 controller.



More details and final information can be found by scanning or clicking the QR codes.



EWFT-B-XRC

Cooling Only				EWFT	10B-XRC2	250B-XRC1	320B-XRC1	370B-XRC1	390B-XRC2	450B-XRC2	510B-XRC2	540B-XRC2	590B-XRC2	630B-XRC2	
SEER					5.14	4.7	5.144	5.025	4.70	5.002	4.833	5.214	5.167	5.064	
Cooling capacity	Nom.				1,224	306.4	403.9	451.4	484.7	553.5	620.5	673.3	721.2	765.7	
	Power input	Cooling	Nom.		383.2	95.79	114.4	142.5	146.9	162.7	192.9	184.1	211.7	239.6	
Capacity control	Method				Step										
	Minimum capacity			%	25	50	39	33	18	16	25	14	22	20	
EER					3.195	3.198	3.531	3.168	3.3	3.402	3.217	3.657	3.407	3.196	
IPLV					5.568	5.118	5.587	5.431	5.094	5.373	5.305	5.650	5.567	5.515	
Dimensions	Unit	Height		mm	2,535										
		Width		mm	2,238										
		Depth		mm	9,088	2,514		3,594			4,674		5,754		
Weight	Unit			kg	6,997	2,189	2,768	2,891	2,975	3,543	3,757	4,293	4,409	4,520	
		Operation weight		kg	7,536	2,332	2,941	3,066	3,154	3,781	4,027	4,663	4,779	4,890	
Air heat exchanger	Type				Microchannel										
	Compressor	Type			Scroll compressor										
Fan	Quantity				8	2		3		4			5		
		Type			Direct propeller										
Air flow rate	Cooling	Nom.		l/s	90,040	22,510		33,765		45,020		56,275			
			Sound power level	Cooling	Nom.	dBA	90	84	85.4	85.7	85.6	86.8	87	87.6	87.8
Sound pressure level	Cooling	Nom.		dBA	68.1	64.9	65.7	66.0	65.9	66.5	66.7	66.9	67.1	67.2	
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~46										
Refrigerant	Type				R-32										
	Charge			kg	90.0	26.0	30.0	33.0	37.0	42.0	47.0	50.0	54.0	58.0	
	Circuits	Quantity			2		1				2				
Piping connections	Evaporator water inlet/outlet (OD)				139.7		88.9					139.7			
Unit	Starting current	Max		A	1,240	647	703	746	750	803	845	858	901	944	
		Running	Cooling	Nom.	A	712.9	178.3	220.3	265.6	285.1	309.9	358.4	356	400.7	445.7
		current	Max	A	792	199	255	298	302	355	397	410	453	496	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50 /400										

Cooling Only				EWFT	720B-XRC2	760B-XRC2	830B-XRC2	880B-XRC2	
SEER					5.159	5.121	5.293	5.181	
Cooling capacity	Nom.				878.7	924.2	1,023	1,068	
	Power input	Cooling	Nom.		260.1	288.3	306.6	334.8	
Capacity control	Method				Step				
	Minimum capacity			%	18	17	15	14	
EER					3.378	3.206	3.335	3.19	
IPLV					5.620	5.549	5.598	5.563	
Dimensions	Unit	Height		mm	2,535				
		Width		mm	2,238				
		Depth		mm		6,834		8,008	
Weight	Unit			kg	5,139	5,250	6,062	6,174	
		Operation weight		kg	5,568	5,679	6,535	6,647	
Air heat exchanger	Type				Microchannel				
	Compressor	Type			Scroll compressor				
Fan	Quantity				6		7		
		Type			Direct propeller				
Air flow rate	Cooling	Nom.		l/s		12		14	
			Sound power level	Cooling	Nom.	dBA	88.6	88.7	89.3
Sound pressure level	Cooling	Nom.		dBA	67.5	67.6	67.7	67.8	
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~46				
Refrigerant	Type				R-32				
	Charge			kg	66.0	69.0	75.0	80.0	
	Circuits	Quantity				2			
Piping connections	Evaporator water inlet/outlet (OD)					139.7			
Unit	Starting current	Max		A	999	1,042		1,142	
		Running	Cooling	Nom.	A	490.5	536.1	577.5	623.1
		current	Max	A	551	594		694	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50 /400				

Performances according to Chiller Configurator 1.4 software | Cooling: entering evaporator water temp. 26°C; leaving evaporator water temp. 18°C; ambient air temp. 35°C; ethylene glycol fluid 25%; full load operation.

# Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.

EWYA-DV3P

Heating & Cooling					EWYA-D	004DV3P	006DV3P	008DV3P
Space cooling	A Condition Pdc				kW		-	
	35°C				%		-	
SEER							-	
Space heating	Average climate water outlet 35°C	General	SCOP			4.54	4.52	4.61
			Seasonal space heating eff. class			A+++		
Cooling capacity	Nom.			kW	4.86(1)/4.52(2)	5.83(1)/5.09(2)	6.18(1)/5.44(2)	
Heating capacity	Nom.				kW	4.30(1)/4.60(2)	6.00(1)/5.90(2)	7.50(1)/7.80(2)
Power input	Cooling	Nom.			kW	0.820(1)/1.36(2)	1.08(1)/1.55(2)	1.19(1)/1.73(2)
	Heating	Nom.			kW	0.840(1)/1.26(2)	1.24(1)/1.69(2)	1.63(1)/2.23(2)
Capacity control	Method					Variable (inverter)		
EER						5.91(1)/3.32(2)	5.40(1)/3.28(2)	5.19(1)/3.14(2)
COP						5.10(1)/3.65(2)	4.85(1)/3.50(2)	4.60(1)/3.50(2)
Dimensions	Unit	Height			mm	770		
		Width			mm	1,250		
		Depth			mm	362		
Weight	Unit				kg	88.0		
Water heat exchanger	Type			Plate heat exchanger				
	Water volume			l	1			
Air heat exchanger	Type				-			
Compressor	Type			Hermetically sealed swing compressor				
	Quantity			1				
Fan	Type			Propeller fan				
	Quantity			1				
Air flow rate	Cooling	Nom.			m <sup>3</sup> /min	-		
		Heating	Nom.			m <sup>3</sup> /min	-	
Sound power level	Cooling	Nom.			dBA	61.0(1)	62.0(1)	
	Heating	Nom.			dBA	58.0(1)	60.0(1)	62.0(1)
Sound pressure level	Cooling	Nom.			dBA	48.0(1)	49.0(1)	50.0(1)
	Heating	Nom.			dBA	44.0(1)	47.0(1)	49.0(1)
Operation range	Air side	Cooling	Min.~Max.			°CDB		
		Heating	Min.~Max.			°CDB		
Refrigerant	Type/GWP			R-32/675.0				
	Charge			kg	1.35			
	Control			-				
	Circuits	Quantity			-			
Refrigerant charge	Per circuit				kg	-		
Unit	Running current	Max			A	-		
Power supply	Phase/Frequency/Voltage				Hz/V	1~/50 /230 +/-10%		

(1)Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2)Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3)For more details, see operation range drawing | (4)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (5)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (6)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (7)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | (8)According to EN14825 | Depends on operation mode, refer to installation manual.

# Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



EWAA-EWYA-D\_R

More details and final information can be found by scanning or clicking the QR codes.

EWYA-DV3P

Heating & Cooling				EWYA-D	009DV3P	011DV3P	014DV3P	016DV3P
Space cooling	A Condition Pdc 35°C		kW	9.35	11.6	12.8	14.0	
	ηs,c		%	222	229	226	221	
SEER				5.62(8)	5.79(8)	5.71(8)	5.59(8)	
Space heating	Average climate water outlet 35°C	General	SCOP Seasonal space heating eff. class	4.82	4.73	4.70	4.69	
				A+++				
Cooling capacity	Nom.		kW	9.35(4)/9.10(5)	11.6(4)/11.5(5)	12.8(4)/12.7(5)	14.0(4)/15.3(5)	
Heating capacity	Nom.		kW	9.37(6)/9.00(7)	10.6(6)/9.82(7)	12.0(6)/12.5(7)	16.0(6)/16.0(7)	
Power input	Cooling	Nom.	kW	2.79(4)/1.71(5)	3.56(4)/2.17(5)	4.06(4)/2.51(5)	4.58(4)/3.24(5)	
	Heating	Nom.	kW	1.91(6)/2.43(7)	2.18(6)/2.68(7)	2.46(6)/3.42(7)	3.53(6)/4.56(7)	
Capacity control	Method			Variable (inverter)				
EER				3.35(4)/5.34(5)	3.26(4)/5.31(5)	3.16(4)/5.04(5)	3.06(4)/4.74(5)	
COP				4.91(6)/3.71(7)	4.83(6)/3.66(7)	4.87(6)/3.64(7)	4.53(6)/3.51(7)	
Dimensions	Unit	Height	mm	870				
		Width	mm	1,380				
		Depth	mm	460				
Weight	Unit			147				
Water heat exchanger	Type			Plate heat exchanger				
	Water volume			2				
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler				
Compressor	Type			Hermetically sealed swing inverter compressor				
	Quantity			1				
Fan	Type			Propeller fan				
	Quantity			1				
Air flow rate	Cooling	Nom.	m³/min	63	70	85		
		Heating	Nom.	m³/min	48.0	55.8	70.4	85.0
Sound power level	Cooling	Nom.	dBA	65.5	67.0	69.0		
		Heating	Nom.	dBA				
Sound pressure level	Cooling	Nom.	dBA	44.0	47.7	50.8	51.0	
		Heating	Nom.	dBA				
Operation range	Air side	Cooling	Min.~Max.	°CDB 10~43				
		Heating	Min.~Max.	°CDB -25~25				
Refrigerant	Type/GWP			R-32/675.0				
	Charge			-				
	Control			Electronic expansion valve				
	Circuits	Quantity			1			
Refrigerant charge	Per circuit			kg 3.80				
Unit	Running current	Max	A	30.8				
Power supply	Phase/Frequency/Voltage			Hz/V 1~/50 /230				

(1)Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2)Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3)For more details, see operation range drawing | (4)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (5)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (6)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (7)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | (8)According to EN14825 | Depends on operation mode, refer to installation manual.

# Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWYA-DW1P

Heating & Cooling				EWYA-D	009DW1P	011DW1P	014DW1P	016DW1P
Space cooling	A Condition Pdc		kW	9.35	11.6	12.8	14.0	
	35°C			222	229	226	221	
	ηs,c		%	5.62(5)	5.79(5)	5.71(5)	5.59(5)	
SEER				4.82	4.73	4.70	4.69	
Space heating	Average climate water outlet 35°C	General	SCOP	A+++				
								Seasonal space heating eff. class
Cooling capacity	Nom.	kW	9.35(1)/9.10(2)	11.6(1)/11.5(2)	12.8(1)/12.7(2)	14.0(1)/15.3(2)		
	Heating capacity		Nom.	kW	9.37(3)/9.00(4)	10.6(3)/9.82(4)	12.0(3)/12.5(4)	16.0(3)/16.0(4)
Power input	Cooling	Nom.	kW	2.79(1)/1.71(2)	3.56(1)/2.17(2)	4.06(1)/2.51(2)	4.58(1)/3.24(2)	
	Heating			Nom.	kW	1.91(3)/2.43(4)	2.18(3)/2.68(4)	2.46(3)/3.42(4)
Capacity control	Method		Variable (inverter)					
EER				3.35(1)/5.34(2)	3.26(1)/5.31(2)	3.16(1)/5.04(2)	3.06(1)/4.74(2)	
COP				4.91(3)/3.71(4)	4.83(3)/3.66(4)	4.87(3)/3.64(4)	4.53(3)/3.51(4)	
Dimensions	Unit	Height	mm	870				
		Width	mm	1,380				
		Depth	mm	460				
Weight	Unit	kg		147				
Water heat exchanger	Type	Plate heat exchanger						
	Water volume	l		2				
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler						
Compressor	Type	Hermetically sealed swing inverter compressor						
	Quantity	1						
Fan	Type	Propeller fan						
	Quantity	1						
Air flow rate	Cooling	Nom.	m <sup>3</sup> /min	63	70	85		
		Heating	Nom.	m <sup>3</sup> /min	48.0	55.8	70.4	85.0
Sound power level	Cooling	Nom.	dBA	65.5	67.0	69.0		
Sound pressure level	Cooling	Nom.	dBA	44.0	47.7	50.8	51.0	
Operation range	Air side	Cooling	Min.~Max.	°CDB 10 ~43				
		Heating	Min.~Max.	°CDB -25 ~25				
	Water side	Cooling	Min.~Max.	°CDB 5 ~22				
		Heating	Min.~Max.	°CDB 9 (6)~60 (6)				
Refrigerant	Type/GWP	R-32/675.0						
	Control	Electronic expansion valve						
	Circuits	Quantity	1					
Refrigerant charge	Per circuit		kg	3.80				
			TCO2Eq	2.6				
Unit	Running current	Max current	A	14.0				
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400				

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (3)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (4)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | (5)According to EN14825 | (6)For more details, see operation range drawing | Depends on operation mode, refer to installation manual.

# Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWYA-DW1P-H-

Heating & Cooling				EWYA-D	009DW1P-H-	011DW1P-H-	014DW1P-H-	016DW1P-H-
Space cooling	A Condition Pdc		kW	9.35	11.6	12.8	14.0	
	35°C		%	222	229	226	221	
SEER				5.62(5)	5.79(5)	5.71(5)	5.59(5)	
Space heating	Average climate water outlet 35°C	General	SCOP	4.82	4.73	4.70	4.69	
			Seasonal space heating eff. class	A+++				
Cooling capacity	Nom.		kW	9.35(1)/9.10(2)	11.6(1)/11.5(2)	12.8(1)/12.7(2)	14.0(1)/15.3(2)	
Heating capacity	Nom.		kW	9.37(3)/9.00(4)	10.6(3)/9.82(4)	12.0(3)/12.5(4)	16.0(3)/16.0(4)	
Power input	Cooling	Nom.	kW	2.79(1)/1.71(2)	3.56(1)/2.17(2)	4.06(1)/2.51(2)	4.58(1)/3.24(2)	
	Heating	Nom.	kW	1.91(3)/2.43(4)	2.18(3)/2.68(4)	2.46(3)/3.42(4)	3.53(3)/4.56(4)	
Capacity control	Method			Variable (inverter)				
EER				3.35(1)/5.34(2)	3.26(1)/5.31(2)	3.16(1)/5.04(2)	3.06(1)/4.74(2)	
COP				4.91(3)/3.71(4)	4.83(3)/3.66(4)	4.87(3)/3.64(4)	4.53(3)/3.51(4)	
Dimensions	Unit	Height	mm	870				
		Width	mm	1,380				
		Depth	mm	460				
Weight	Unit		kg	147				
Water heat exchanger	Type				Plate heat exchanger			
	Water volume				2			
Air heat exchanger	Type				High efficiency fin and tube type with integral subcooler			
Compressor	Type				Hermetically sealed swing inverter compressor			
	Quantity				1			
Fan	Type				Propeller fan			
	Quantity				1			
Air flow rate	Cooling	Nom.	m <sup>3</sup> /min	63	70	85		
		Heating	Nom.	m <sup>3</sup> /min	48.0	55.8	70.4	85.0
Sound power level	Cooling	Nom.	dBA	65.5	67.0	69.0		
Sound pressure level	Cooling	Nom.	dBA	44.0	47.7	50.8	51.0	
Operation range	Air side	Cooling	Min.~Max.	°CDB 10 ~43				
		Heating	Min.~Max.	°CDB -25 ~25				
	Water side	Cooling	Min.~Max.	°CDB 5 ~22				
		Heating	Min.~Max.	°CDB 9 (6)~60 (6)				
Refrigerant	Type/GWP				R-32/675.0			
	Control				Electronic expansion valve			
	Circuits	Quantity				1		
Refrigerant charge	Per circuit		kg	3.80				
			TCO <sub>2</sub> Eq	2.6				
Unit	Running current	Max current	A	14.0				
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400				

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (3)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (4)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | (5)According to EN14825 | (6)For more details, see operation range drawing | Depends on operation mode, refer to installation manual.

# Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



EW(A-Y)A004-008DV3P-H\_R

More details and final information can be found by scanning or clicking the QR codes.



EWYA-DV3P-H-

Heating & Cooling				EWYA-D	004DV3P-H	006DV3P-H	008DV3P-H	009DV3P-H-	011DV3P-H-	014DV3P-H-	016DV3P-H-
Space cooling	A Condition Pdc		kW		-			9.35	11.6	12.8	14.0
	35°C										
	ηs,c		%		-			222	229	226	221
SEER					-			5.62(8)	5.79(8)	5.71(8)	5.59(8)
Space heating	Average climate water outlet 35°C	General	SCOP	Seasonal space heating eff. class	4.54	4.52	4.61	4.82	4.73	4.70	4.69
					A+++						
Cooling capacity	Nom.		kW	4.86(1)/4.52(2)	5.83(1)/5.09(2)	6.18(1)/5.44(2)	9.35(4)/9.10(5)	11.6(4)/11.5(5)	12.8(4)/12.7(5)	14.0(4)/15.3(5)	
Heating capacity	Nom.		kW	4.30(1)/4.60(2)	6.00(1)/5.90(2)	7.50(1)/7.80(2)	9.37(6)/9.00(7)	10.6(6)/9.82(7)	12.0(6)/12.5(7)	16.0(6)/16.0(7)	
Power input	Cooling	Nom.	kW	0.820(1)/1.36(2)	1.08(1)/1.55(2)	1.19(1)/1.73(2)	2.79(4)/1.71(5)	3.56(4)/2.17(5)	4.06(4)/2.51(5)	4.58(4)/3.24(5)	
	Heating	Nom.	kW	0.840(1)/1.26(2)	1.24(1)/1.69(2)	1.63(1)/2.23(2)	1.91(6)/2.43(7)	2.18(6)/2.68(7)	2.46(6)/3.42(7)	3.53(6)/4.56(7)	
Capacity control	Method			Variable (inverter)							
EER				5.91(1)/3.32(2)	5.40(1)/3.28(2)	5.19(1)/3.14(2)	3.35(4)/5.34(5)	3.26(4)/5.31(5)	3.16(4)/5.04(5)	3.06(4)/4.74(5)	
COP				5.10(1)/3.65(2)	4.85(1)/3.50(2)	4.60(1)/3.50(2)	4.91(6)/3.71(7)	4.83(6)/3.66(7)	4.87(6)/3.64(7)	4.53(6)/3.51(7)	
Dimensions	Unit	Height	mm	770			870				
		Width	mm	1,250			1,380				
		Depth	mm	362			460				
Weight	Unit	kg	88.0			147					
Water heat exchanger	Type	Plate heat exchanger									
	Water volume	l	1			2					
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler									
Compressor	Type	Hermetically sealed swing compressor									
	Quantity	1									
Fan	Type	Propeller fan									
	Quantity	1									
Air flow rate	Cooling	Nom.	m <sup>3</sup> /min	-			63	70	85		
		Heating	Nom.	m <sup>3</sup> /min	-			48.0	55.8	70.4	85.0
Sound power level	Cooling	Nom.	dBA	61.0(1)	62.0(1)		65.5	67.0	69.0		
	Heating	Nom.	dBA	58.0(1)	60.0(1)	62.0(1)	-				
Sound pressure level	Cooling	Nom.	dBA	48.0(1)	49.0(1)	50.0(1)	44.0	47.7	50.8	51.0	
	Heating	Nom.	dBA	44.0(1)	47.0(1)	49.0(1)	-				
Operation range	Air side	Cooling	Min.~Max.	°CDB			10(3)~43		-25~25		
		Heating	Min.~Max.	°CDB			-25~25		10~43		
Refrigerant	Type/GWP	R-32/675.0									
	Charge	kg	1.35			-					
	Control	Electronic expansion valve									
	Circuits	Quantity	1								
Refrigerant charge	Per circuit	kg	-			3.80					
Unit	Running Max current	A	-			30.8					
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50 /230 +/-10%			1~/50 /230					

(1)Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2)Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3)For more details, see operation range drawing | (4)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (5)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (6)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (7)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | (8)According to EN14825 | Depends on operation mode, refer to installation manual.





Infinitely flexible  
choice in heat pumps



# EWYT-B

## Multi scroll heat pumps with R-32 refrigerant

- ✓ Top class efficiency, SEER up to 4.92 and SCOP up to 4.06
- ✓ Low environmental impact thanks to R-32 refrigerant
- ✓ Dedicated Scroll Compressors for hot water production up 60°C
- ✓ The Global Warming Potential (GWP) of R-32 refrigerant is 675, which is only one third compared to commonly used refrigerant R-410
- ✓ The low GWP R-32 refrigerant falls into category class A2L in ISO817 and it can be safely used in many applications including chilled water systems
- ✓ As a single component refrigerant, R-32 is also easier to recycle and reuse another environmental plus in its favour
- ✓ Wide capacity range: 80 – 650 kW
- ✓ Optimized Copper -Aluminium Coils improving performances and de-frosting operation
- ✓ Silver and Gold efficiency versions
- ✓ 3 sound configurations
- ✓ 2 different layouts: Parallel Coil and Double V Coil
- ✓ One or Two independent refrigerant circuits
- ✓ Full compatibility with Daikin on Site
- ✓ Extensive option lists
- ✓ Fan speed modulation option (VFD)

## Connectivity

### Daikin on Site

Fully compatible with Daikin on Site cloud based platform that allows a number of advanced functionalities including:

- › Remote monitoring
- › System optimization
- › Preventive maintenance
- › Remote access with one click via LAN or 4G LTE router

### Connection to Intelligent Chiller Manager

Daikin can offer the Intelligent Chiller Manager option, allowing energy optimisation of the system and, when necessary, full customization of the control solutions to the specific installation's needs even in case of more complex installation.

- › High number of units
- › Cooling and Heating mode
- › Peripheral controls

 Intelligent Chiller Manager

# Layouts & Range overview

## Parallel coils



Silver Efficiency	75-193 kW 82-213 kW	1 circuit
Gold Efficiency	80-206 kW 86-218 kW	
Silver Efficiency	189-230 kW 209-256 kW	2 circuits
Gold Efficiency	206-250 kW 215-261 kW	

## Double-V coils



Silver Efficiency	270-570 kW 300-627 kW	2 circuits
Gold Efficiency	294-630 kW 306-650 kW	

## Extensive option lists Including new options:

### Partial heat recovery

Introduction of condensation control allowing to maintain heat recovery capacity at lower ambient temperatures with unit operating at full capacity

### Buffer tank

Unit mounted buffer tank available all across the range for plug and play solution.

### VFD pumps and variable flow control

- > Variable pump speed control via external 0-10 volt signal
- > "Thermostat on" and "thermostat off" pump speed management
- > Variable primary flow control


### Master/Slave supplied as standard

Master/Slave functionality allowing to manage up to 4 units on the same system without the need of external control devices.

### Fan Silent Mode

The parallel coil units and units with VFD option are standardly equipped with Fan Silent Mode, which reduces fan velocity and therefore unit sound emission on scheduled time bands, enhancing comfort during night operation.

### Pumping energy

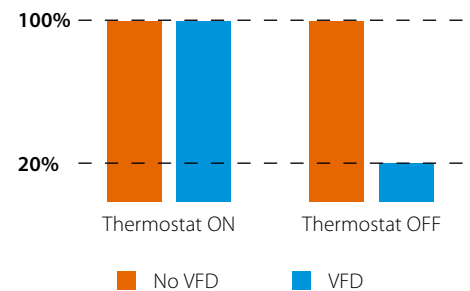



# Air cooled multi-scroll heat pump, standard efficiency, reduced sound

- › First R-32 air cooled heat pump with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



EWYT-B-SR

Heating & Cooling				EWYT-B-SR																																			
				085	105	135	175	205	215	235	255	300	340	390	430	490	540	590	630																				
SEER				3.82	3.93	3.87	3.96	3.92	3.82	3.83	3.84	4.18	4.37	4.21	4.19	4.49	4.46	4.52																					
Space heating	Average climate water outlet 35°C	General	SCOP	3.35	3.40	3.37	3.42	3.44	3.43	3.32	3.33	3.42	3.49	3.57	3.65	3.60	3.67	3.66																					
			Seasonal space heating eff. class	A+																																			
Cooling capacity	Nom.			kW	74	96	119	150	186	189	209	226	265	311	344	368	424	470	519	557																			
Heating capacity	Nom.			kW	80.91	105.24	131.02	167.11	207.27	209.99	233.05	251.28	295.81	335.24	384.62	426.79	477.49	528.73	581.03	615.34																			
Power input	Cooling	Nom.		kW	28.7	37.4	45.5	59.5	73.2	74.3	80.7	88.8	102	117	131	147	172	195	207	221																			
	Heating	Nom.		kW	27.99	36.24	44.84	58.45	71.9	73.28	81.39	86.29	102.09	113.54	132.02	144.34	160.28	178.33	194.13	206.57																			
Capacity control	Method			Step																																			
	Minimum capacity			%	50	38	50	38	19	50	17	25	22	19	17	25	22	19	18	17																			
EER				2.56	2.58	2.61	2.53	2.54	2.55	2.59	2.55	2.59	2.64	2.61	2.5	2.46	2.41	2.5	2.51																				
COP				2.891	2.904	2.922	2.859	2.883	2.866	2.863	2.912	2.898	2.953	2.913	2.957	2.979	2.965	2.993	2.979																				
IPLV				4.36	4.24	4.3	4.38	4.29	4.28	4.26	4.29	4.69	4.58	4.61	4.78	4.89	4.82	4.91																					
Dimensions	Unit	Height	mm	1,800												2,514																							
		Width	mm	1,195												2,282																							
		Length	mm	2,225	2,825	3,425	4,350	4,025	4,950	3,225			4,125			5,025																							
Weight	Unit			kg	985	1,095	1,195	1,350	1,530	1,830	1,855	2,260	2,410	3,340	3,350	3,340	3,530	4,427																					
	Operation weight			kg	992	1,102	1,202	1,357	1,541	1,841	1,869	2,274	2,430	3,360	3,370	3,367	3,557	4,462	4,468																				
Water heat exchanger	Type			Plate heat exchanger																																			
	Water volume			l	7				11				14				20				27				35				41										
	Water flow rate	Cooling	Nom.	l/s	3.5	4.6	5.7	7.2	8.9	9	10	10.8	12.7	14.8	16.4	17.5	20.2	22.4	24.8	26.6																			
	Water pressure drop	Cooling	Nom.	kPa	14.4	23.4	34.2	52.2	43.5	44.8	53.5	43.6	58.1	47.6	57	64.4	56.3	67.8	56	63.4																			
Air heat exchanger	Type			High efficiency fin and tube type																																			
Compressor	Type			Scroll compressor																																			
	Quantity			2				4				2				4				5				6															
Fan	Type			Direct propeller																																			
	Quantity			4				6				8				10				12				5				6				8				10			
	Air flow rate	Cooling	Nom.	l/s	6,026	9,483	12,644	12,052	15,064	15,065		18,078	23,608	28,330		39,446	38,610	37,774	48,262	47,216																			
	Speed			rpm	1,200								780																										
Sound power level	Cooling	Nom.		dB(A)	78	82	84	85	84	87		86		87	88	89	89.3	89.4	89.5	90.4	90.5																		
Sound pressure level	Cooling	Nom.		dB(A)	60	64	65	67	66	68		67		68	69	69.3	69.4	69.5	70	70.1																			
Refrigerant	Type			R-32																																			
	Charge			kg	13.3	14.7	19.3	24.5	29	34	36.2	43	40.3	47.2	50.4	79	58.5	68.8	77.6	82																			
	Circuits	Quantity		1				2				1				2																							
Piping connections	Evaporator water inlet/outlet (OD)			88.9																114.3																			
Unit	Starting current	Max		A	211.0	327.0	343.0	464.0	408.0	495.0	425.0	439.0	564.0	598.0	636.0	666.0	712.0	757.0	795.0	825.0																			
	Running current	Cooling	Nom.	A	55.0	67.0	77.0	101.0	128.0	126.0	136.0	149.0	173.0	196.0	224.0	251.0	292.0	330.0	353.0	373.0																			
Unit	Running current	Max		A	68.0	85.0	101.0	131.0	166.0	163.0	183.0	197.0	232.0	266.0	304.0	334.0	379.0	425.0	463.0	493.0																			
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400																																		

# Air cooled multi-scroll heat pump, high efficiency, standard/low sound

- › First R-32 air cooled heat pump with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



EWYT-B-XS/XL

More details and final information can be found by scanning or clicking the QR codes.



EWYT-B-XS



EWYT-B-XL

Heating & Cooling				EWYT-B-XS/XL																									
				085	115	135	175	215	215	235	265	310	350	400	440	500	560	600	630	650	VDFPAN 310	VDFPAN 350	VDFPAN 400	VDFPAN 440	VDFPAN 500	VDFPAN 560	VDFPAN 600	VDFPAN 630	VDFPAN 650
SEER				4.24	4.38	4.24	4.45	4.41	4.21	4.4	4.13	4.57	4.67	4.54	4.57	4.72	4.71	4.7	4.69	4.4	4.66	4.81	4.68	4.63	4.86	4.83	4.83	4.82	4.58
Space heating	Average climate water outlet 35°C	General	SCOP	A+																									
				3.70	3.72	3.70	3.67	3.70	3.66	3.86	3.77	3.90	3.82	3.85	3.83	3.81	3.79	3.76	3.53	3.96	3.97	3.93	3.91	3.96	3.93	3.87	3.68		
Cooling capacity	Nom.			kW																									
Heating capacity	Nom.			kW																									
Power input	Cooling	Nom.	kW																										
	Heating	Nom.	kW																										
Capacity control	Method			Step																									
	Minimum capacity			%																									
EER				3.03	2.95	2.99	2.93	3.03	2.86	3.06	3	3.06	3.05	3.02	3.01	2.95	2.93	2.9	2.92	2.95	3.06	3.05	3.01	2.95	2.92	2.9	2.91	2.94	
COP				3.295	3.345	3.405	3.411	3.434	3.363	3.444	3.425	3.448	3.441	3.405	3.473	3.395	3.369	3.327	3.308	3.198	3.44	3.433	3.397	3.466	3.388	3.362	3.32	3.301	3.186
IPLV				4.75	4.69	4.87	4.72	4.87	4.64	4.94	4.96	5	5.1	5.08	5.05	4.66	4.97	5.16	5.13	5.16	5.3	5.16	5.3	5.29	5.22	5.16	4.99		
Dimensions	Unit	Height	mm	1,800										2,514															
		Width	mm	1,195										2,282															
		Length	mm	2,825	3,425	4,025	5,550	4,625	6,150	4,125	5,025	5,925	6,825	4,125	5,025	5,925	6,825	4,125	5,025	5,925	6,825								
Weight (XS)	Unit			kg																									
	Operation weight			kg																									
Weight (XL)	Unit			kg																									
	Operation weight			kg																									
Water heat exchanger	Type			Plate heat exchanger																									
	Water volume			l																									
	Water flow rate	Cooling	Nom.	l/s																									
	Water pressure drop	Cooling	Nom.	kPa																									
Air heat exchanger	Type			High efficiency fin and tube type																									
Compressor	Type			Scroll compressor																									
	Quantity																												
Fan	Type			Direct propeller																									
	Quantity																												
	Air flow rate	Nom.	l/s																										
Speed			rpm																										
Sound power level (XS)	Cooling	Nom.	dBA																										
Sound power level (XL)	Cooling	Nom.	dBA																										
Sound pressure level (XS)	Cooling	Nom.	dBA																										
Sound pressure level (XL)	Cooling	Nom.	dBA																										
Refrigerant	Type			R-32																									
	Charge (XS)			kg																									
	Charge (XL)			kg																									
	Circuits	Quantity																											
Piping connections	Evaporator water inlet/outlet (OD)			88.9										114.3															
Unit	Starting current	Max	A																										
	Running current	Cooling	Nom.	A																									
Unit	Running current	Max	A																										
Power supply	Phase/Frequency/Voltage			Hz/V																									
				3~/50/400																									

# Air cooled multi-scroll heat pump, high efficiency, reduced sound

- › First R-32 air cooled heat pump with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



EWYT-B

More details and final information can be found by scanning or clicking the QR codes.



EWYT-B-XR

Heating & Cooling				EWYT-B-XR																						
				085	115	135	175	215	215	235	265	310	350	400	440	500	560	600	630	650						
SEER				4.21	4.37	4.21	4.41	4.16	4.42	4.43	4.13	4.74	4.8	4.82	4.63	4.92	4.89	4.83	4.79	4.72						
Space heating		Average climate water outlet 35°C	General	SCOP			Seasonal space heating eff. class			A+																
Cooling capacity				Nom.	kW	79	103	124	164	203	204	227	247	282	321	364	398	458	507	548	583	600				
Heating capacity				Nom.	kW	84.9	110.32	132.02	174.14	216.57	213.48	237.57	256.58	301.04	344.8	395.81	438.23	494.13	549.6	588.57	620.71	637.4				
Power input		Cooling	Nom.	kW		26.6	35.4	42.6	57.4	72.9	68.8	75.7	84.4	95.2	109	124	136	160	180	196	208	203				
		Heating	Nom.	kW		25.87	32.94	38.82	51.3	64.51	62.13	68.99	75.49	86.32	99.1	114.46	124.61	143.5	161.2	175.33	186.93	193.22				
Capacity control		Method		Step																						
		Minimum capacity		%		50	38	50	38	50	19	17	25	22	19	17	25	22	19	18	17					
EER				2.98	2.9	2.92	2.86	2.79	2.97	3	2.93	2.96	2.95	2.93	2.91	2.85	2.81	2.8	2.94							
COP				3.282	3.349	3.401	3.394	3.357	3.436	3.443	3.399	3.487	3.479	3.458	3.517	3.443	3.409	3.357	3.321	3.299						
IPLV				4.73	4.67	4.65	4.67	4.86	4.82	4.62	4.92	5.12	5.26	5.12	5.34	5.32	5.22	5.23	5.19							
Dimensions		Unit	Height	mm				1,800				2,514														
			Width	mm				1,195				2,282														
			Length	mm		2,825	3,425	4,025	4,625	5,550	6,150	4,125		5,025		5,925		6,825								
Weight		Unit	kg		1,110	1,170	1,250	1,430	1,610	2,030	2,330	2,380	3,140	3,240	3,810	3,910	4,366	4,456	4,920	5,020						
		Operation weight		kg		1,121	1,181	1,261	1,446	1,626	2,065	2,365	2,415	3,175	3,275	3,845	3,972	4,428	4,526	4,990	5,090					
Water heat exchanger		Type		Plate heat exchanger																						
		Water volume		l		11			16			35			62			70								
		Water flow rate	Cooling	Nom.	l/s		3.8	4.9	5.9	7.8	9.7		10.8	11.8	13.4	15.3	17.3	19	21.8	24.2	26.2	27.8	28.6			
		Water pressure drop	Cooling	Nom.	kPa		9.33	14.9	21.1	19.6	28.9	11.8	14.3	16.8	21.2	26.8	33.5	22.7	29.2	32.2	37.1	41.4	43.7			
Air heat exchanger		Type		High efficiency fin and tube type																						
Compressor		Type		Scroll compressor																						
		Quantity		2			4			5			6													
Fan		Type		Direct propeller																						
		Quantity		6		8		10		12		14		16		7		8		10		12		14		
		Air flow rate		Nom.		l/s		8,298	11,630	11,064	13,830	16,596	19,362	22,128	25,074	28,656	36,808	35,820	44,169	42,984	51,531	50,148	66,104			
		Speed		rpm		1,108		600		780																
Sound power level		Cooling	Nom.	dBA		77	81	83	85	87	84	85	86	84		85.2	85.5	86.2	86.3	86.9	87.1	91.6				
Sound pressure level		Cooling	Nom.	dBA		59	63	65	67	68	65		66	64		64.8	65.1	65.4	65.5	65.8	66	70.5				
Refrigerant		Type		R-32																						
		Charge		kg		17.4	18.4	21.5	30	40	44.6	50	53.4	54.4	62	71.5	78	89	93	103.4	106	109				
		Circuits		Quantity		1			2																	
Piping connections		Evaporator water inlet/outlet (OD)		88.9				114.3																		
Unit		Starting current		Max		A		213.0	329.0	343.0	465.0	497.0	412.0	429.0	443.0	572.0	606.0	644.0	674.0	728.0	773.0	811.0	841.0			
		Running current		Cooling		Nom.		A		53.0	65.0	75.0	100.0	124.0	123.0	133.0	145.0	169.0	192.0	214.0	237.0	276.0	315.0	339.0	360.0	353.0
Unit		Running current		Max		A		70.0	87.0	101.0	133.0	165.0	170.0	186.0	201.0	240.0	274.0	312.0	342.0	395.0	441.0	479.0	509.0			
Power supply		Phase/Frequency/Voltage		Hz/V		3~/50/400																				



# Air cooled scroll inverter heat pump, split version

- › Inverter Heat Pump in Split version
- › Daikin scroll compressor
- › High part load efficiency for low running cost
- › Glycol free application
- › Wide operation range and hot water production up to 60°C
- › Integrated hydronic module as standard



More details and final information can be found by scanning or clicking the QR codes.



EWYT-CZI

Indoor Unit		EWYT		021CZI-A1	032CZI-A1	040CZI-A1	064CZI-A2
Casing	Colour	Ivory white					
	Material	Galvanized and painted steel sheet					
Dimensions	Unit	HeightxWidthxDepth	mm	700x1,120x830			
Weight	Unit		kg	133	144		172
Operation range	Heating	Ambient	Min.~Max.	°C		-20 ~35	
		Water side	Min.~Max.	°C		20 ~60	
	Cooling	Ambient	Min.~Max.	°CDB		-20 ~45	
		Water side	Min.~Max.	°C		4 ~20	
Sound power level	Nom.		dB(A)	63.0	64.5		66.0



# Air cooled scroll inverter heat pump, split version

- › Inverter Heat Pump in Split version
- › Daikin scroll compressor
- › High part load efficiency for low running cost
- › Glycol free application
- › Wide operation range and hot water production up to 60°C
- › Integrated hydronic module as standard



More details and final information can be found by scanning or clicking the QR codes.



EWYT-CZO

Outdoor Unit		EWYT		021CZO-A1	032CZO-A1	040CZO-A1	064CZO-A2
Dimensions	Unit	HeightxWidthxDepth	mm	1,878x1,152x802	1,878x1,752x802		1,878x2,906x814
Weight	Unit		kg	265	357		620
Compressor	Quantity	1					
	Type	Scroll compressor					
Refrigerant	Type	R-32					
	GWP	675.0					
	Charge	kg	7.3	9.5	9.8	16.6	
	Charge	TCO2eq	4,928.0	6,422.0	6,635.0	11,255.0	
Sound power level	Cooling	Nom.	dB(A)	76.0	79.0	80.0	83.0
Sound pressure level	Cooling	Nom.	dB(A)	59.6	62.2	63.2	65.4
Power supply	Phase/Frequency/Voltage		Hz/V	3N~/50 /400			





# Air cooled screw inverter heat pump, standard efficiency, standard sound

- › Ideal solution for commercial comfort cooling and/or heating applications
- › Optimum ESEER values
- › 2-3 truly independent refrigerant circuits
- › Low starting current
- › DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- › Standard electronic expansion valve
- › Optimised defrost cycles
- › Partial and total heat recovery option available
- › Power factor up to 0.95
- › PID microprocessor control



EWYD-BZSS

More details and final information can be found by scanning or clicking the QR codes.




EWYD-BZSS

Heating & Cooling				EWYD-BZSS	250	270	290	320	340	370	380	410	440	460	510	530	570	
SEER																4.57	4.55	
Space heating	Average climate water outlet 35°C	General	SCOP		3.21		3.20		3.21			3.20						
Cooling capacity	Nom.			kW	253	272	291	323	337	363	380	411	433	455	515	533	569	
Heating capacity	Nom.			kW	271	298	325	334	350	380	412	445	465	477	532.86	560.55	618.33	
Power input	Cooling	Nom.		kW	91.3	101	110	117	125	135	144	154	165	163	183	189	217	
	Heating	Nom.		kW	91.4	100	108	118	126	133	143	157	167	165	177.37	184.84	208.14	
Capacity control	Method				Stepless													
	Minimum capacity			%	13.0									9.0		9		
EER					2.77	2.70	2.65	2.75	2.69	2.68	2.63	2.66	2.62	2.79	2.81		2.62	
ESEER					3.93	3.92	3.89	3.95	3.89	3.90	3.82	3.91	3.89	4.18				
COP					2.96	2.97	3.00	2.82	2.78	2.85	2.88	2.83	2.79	2.88	3.004	3.033	2.971	
IPLV					4.58	4.62		4.75	4.64	4.71	4.67	4.73	4.69	4.85	4.89	4.85	4.77	
Dimensions	Unit	Height	mm	2,335											2,280			
		Width	mm	2,254											2,254			
		Length	mm	3,547			4,428			5,329			6,659		6,659			
Weight	Unit		kg	3,410	3,455	3,500	3,870		3,940	4,010	4,390		5,015	5,495	5,735			
	Operation weight		kg	3,550	3,595	3,640	4,010		4,068	4,138	4,518		5,255	5,724	5,964	5,953		
Water heat exchanger	Type				Single pass shell & tube											Shell and tube		
	Water volume			l	138						128			240		229		218
	Water flow rate	Cooling	Nom.	l/s	12.1	13.0	13.9	15.5	16.2	17.4	18.2	19.7	20.8	21.8	24.7	25.5	27.3	
		Heating	Nom.	l/s	13.1	14.4	15.7	16.1	16.9	18.3	19.8	21.4	22.4	23.0				
Water pressure drop	Cooling	Nom.	kPa	40	46	44	50	55	60	65	74	80	47	68.4	46.5	52.4		
	Heating	Nom.	kPa	30	35	52	37	40	45	51	59	64	42					
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler											High efficiency fin and tube type			
Compressor	Type				Single screw compressor													
	Quantity				2											3	3	
Fan	Type				Direct propeller													
	Quantity				6			8			10		12		12			
	Air flow rate	Nom.	l/s	31,729	31,422	31,115	42,306		42,337	41,487	52,882		63,458	62,640	61,652	48,191		
	Speed		rpm	900											900			
Sound power level	Cooling	Nom.	dB(A)	101						102		104		103.6				
Sound pressure level	Cooling	Nom.	dB(A)	82						83		84		83.7				
Operation range	Air side	Cooling	Min.-Max.	°CDB	-10~45									---				
		Heating	Min.-Max.	°CDB	-10~20									---				
	Water side	Cooling	Min.-Max.	°CDB	-8~15									---				
		Heating	Min.-Max.	°CDB	35~55									---				
Refrigerant	Type/GWP				R-134a/1,430											R-134a/-		
	Charge			kg												141		147
	Circuits			Quantity	2											3		3
Refrigerant charge	Per circuit			kg	43.0	44.0	43.0	46.0	46.5		47.0	50.0		47.0				
	Per circuit			TCO2eq	61.5	62.9	61.5	65.8	66.5		67.2	71.5		67.2				
Piping connections	Evaporator water inlet/outlet (OD)				139.7mm											219.1mm		
Unit	Starting current	Max	A	150			181		204			224	238	245	327	355	344	
		Running current	Cooling	Nom.	A	137	150	164	176	188	202	214	229	244	246	298	310	349
		Max	A	211			212		254		288		316	336	329	433	474	458
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400											3~/50/400		



# Air cooled screw inverter heat pump, standard efficiency, low sound

- › Ideal solution for commercial comfort cooling and/or heating applications
- › Optimum ESEER values
- › 2-3 truly independent refrigerant circuits
- › Low starting current
- › DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- › Standard electronic expansion valve
- › Optimised defrost cycles
- › Partial and total heat recovery option available
- › Power factor up to 0.95
- › PID microprocessor control

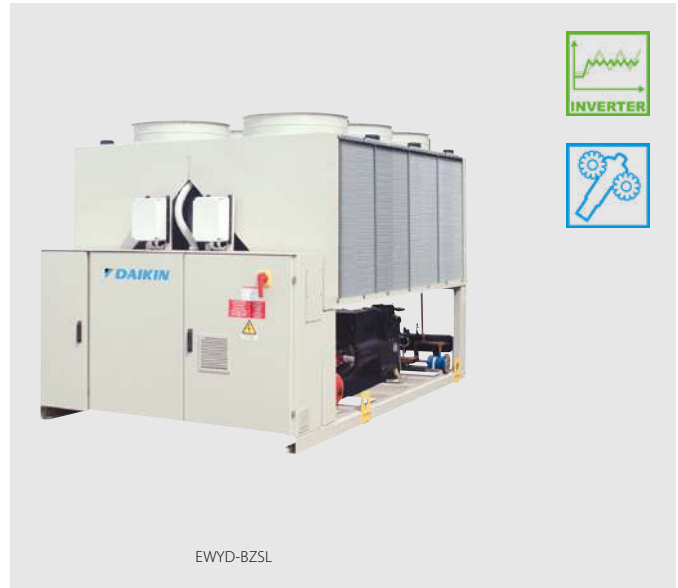

More details and final information can be found by scanning or clicking the QR codes.



EWYD-BZSL

Heating & Cooling				EWYD-BZSL	250	270	290	320	330	360	370	400	430	450	510	530	570
SEER															4.56	4.6	4.55
Space heating	Average climate water outlet 35°C	General	SCOP		3.21		3.20		3.21			3.20					
Cooling capacity	Nom.			kW	247	265	290	315	330	353	370	401	423	446	503	519	569
Heating capacity	Nom.			kW	271	298	325	334	350	380	412	445	465	477	532.86	560.55	618.33
Power input	Cooling	Nom.		kW	89.5	99.5	110	115	123	134	144	151	163	158	178	185	217
	Heating	Nom.		kW	91.4	100	108	118	126	133	143	157	167	165	177.37	184.84	208.14
Capacity control	Method				Stepless												
	Minimum capacity			%	13.0									9.0	9		
EER					2.76	2.66	2.62	2.75	2.68	2.64	2.57	2.66	2.59	2.83	2.82	2.8	2.62
ESEER					4.06	4.04	4.03	4.17	4.09	4.04	4.01	4.06	4.02	4.18			
COP					2.96	2.97	3.00	2.82	2.78	2.85	2.88	2.83	2.79	2.88	3.004	3.033	2.971
IPLV					4.90	4.96	4.91	5.17	5.08	5.12	5.06	5.22	5.13	5.07	5.03	4.99	4.89
Dimensions	Unit	Height	mm	2,335										2,280			
		Width	mm	2,254										2,254			
		Length	mm	3,547			4,428			5,329		6,659		6,659			
Weight	Unit		kg	3,750	3,795	3,840	4,210		4,280	4,350	4,730		5,525	6,005		6,245	
		Operation weight	kg	3,888	3,933	3,978	4,343		4,408	4,478	4,858		5,765	6,234		6,474	
Water heat exchanger	Type			Single pass shell & tube										Shell and tube			
	Water volume		l	138			133			128			240		229		218
	Water flow rate	Cooling	Nom.	l/s	11.8	12.7	13.9	15.1	15.8	16.9	17.7	19.2	20.3	21.4	24.1	24.9	27.3
		Heating	Nom.	l/s	13.1	14.4	15.7	16.1	16.9	18.3	19.8	21.4	22.4	23.0			
	Water pressure drop	Cooling	Nom.	kPa	38	44	42	48	53	57	62	71	77	45	65.5	44.4	52.4
Heating		Nom.	kPa	30	35	52	37	40	45	51	59	64	42				
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler										High efficiency fin and tube type			
Compressor	Type			Single screw compressor													
	Quantity			2										3	3		
Fan	Type			Direct propeller													
	Quantity			6			8			10		12		12			
	Air flow rate	Nom.	l/s											48,415	47,732	48,191	
		Cooling	Nom.	l/s	24,432	24,264	24,095	32,576		32,628	32,127	40,720		48,863			
	Speed		rpm	700										900			
Sound power level	Cooling	Nom.	dB(A)	94			95					97		97			
Sound pressure level	Cooling	Nom.	dB(A)	76										77		77.2	
Operation range	Air side	Cooling	Min.-Max.	°CDB	-10~45										---		
		Heating	Min.-Max.	°CDB	-10~20										---		
	Water side	Cooling	Min.-Max.	°CDB	-8~-15										---		
		Heating	Min.-Max.	°CDB	35~55										---		
Refrigerant	Type/GWP			R-134a/1,430										R-134a/-			
	Charge	kg												141	147		
	Circuits	Quantity		2										3			
Refrigerant charge	Per circuit	kg		43.0	44.0	43.0	46.0	46.5		47.0	50.0		47.0				
	Per circuit	TCO2eq		61.5	62.9	61.5	65.8	66.5		67.2	71.5		67.2				
Piping connections	Evaporator water inlet/outlet (OD)			139.7mm										219.1mm			
Unit	Starting current	Max	A	145	146		176	199			217	231	234	316	344		
		Running current	Cooling	Nom.	A	134	148	163	171	184	199	212	224	240	238	291	305
		Max	A	202	203		243	277			302	322	313	416	458		
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400										3~/50/400			

# Air cooled screw condensing unit, standard efficiency, standard sound

- › One refrigerant circuit with single screw compressor
- › Compact design
- › Large operation range (ambient temperature down to -18°C)
- › Extensive option list (heat recovery option available)



ERAD-E-SS/SL

MicroTech 4

More details and final information can be found by scanning or clicking the QR codes.



ERAD-E-SS

Cooling only		ERAD-E-SS		120	140	170	200	220	250	310	370	440	490			
Cooling capacity	Nom.	kW		121	144	165	196	219	251	309	370	435	488			
Power input	Cooling	Nom.	kW		42.1	51.2	57.7	65.6	74.2	77.0	93.8	123	148	161		
Capacity control	Method		Stepless													
	Minimum capacity		%		25.0											
EER					2.88	2.82	2.86	2.99	2.95	3.27	3.30	3.02	2.95	3.02		
Dimensions	Unit	Height	mm		2,273						2,223					
		Width	mm		1,292						2,236					
		Length	mm		2,165		3,065		3,965		3,070					
Weight	Unit	kg		1,584		1,741		1,936		2,679						
	Operation weight		kg		1,617		1,781		1,981		2,756					
Air heat exchanger	Type		High efficiency fin and tube type with integral subcooler													
Compressor	Type		Single screw compressor													
	Quantity		1													
Fan	Type		Direct propeller													
	Air flow rate	Nom.	l/s		10,924	10,576	16,386	15,865	21,848	21,153	32,772	31,729				
	Quantity				2		3		4		6					
	Speed	Cooling	Nom.	rpm		900										
Sound power level	Cooling	Nom.		dBA		92.0		93.0		94.0		95.0				
Sound pressure level	Cooling	Nom.		dBA		74.0				75.0		76.0				
Operation range	Saturated suction temp.		°C		-9~12											
	Condenser inlet temp.		°C		-18~48											
Refrigerant	Type / GWP		R-134a / 1,430													
	Circuits		Quantity		1											
Piping connections	Evaporator water inlet/outlet (OD)				76mm						139.7mm					
Unit	Maximum starting current		A		151		195		288		330		410			
	Nominal running current (RLA)	Cooling	A		72	88	98	110	125	129	158	204	244	266		
	Maximum running current		A		86	103	119	132	157	164	198	242	284	298		
Power supply	Phase/Frequency/Voltage		Hz/V		3~/50/400											

# Air cooled screw condensing unit, standard efficiency, low sound

- › One refrigerant circuit with single screw compressor
- › Compact design
- › Large operation range (ambient temperature down to -18°C)
- › Extensive option list (heat recovery option available)



More details and final information can be found by scanning or clicking the QR codes.



ERAD-E-SL

Cooling only		ERAD-E-SL		120	140	160	190	210	240	300	350	410	460		
Cooling capacity	Nom.			kW		116	137	159	187	209	243	298	352	409	462
Power input	Cooling	Nom.		kW		42.4	52.5	57.7	66.3	73.9	78.1	91.9	122	150	167
Capacity control	Method		Stepless												
	Minimum capacity		%		25.0										
EER					2.74	2.61	2.75	2.83	3.11	3.24	2.88	2.73	2.76		
Dimensions	Unit	Height		mm		2,273						2,223			
		Width		mm		1,292						2,236			
		Length		mm		2,165		3,065		3,965		3,070			
Weight	Unit		kg		1,684		1,841		2,036		2,789				
	Operation weight		kg		1,717		1,881		2,081		2,886				
Air heat exchanger	Type		High efficiency fin and tube type with integral subcooler												
Compressor	Type		Single screw compressor												
	Quantity		1												
Fan	Type		Direct propeller												
	Air flow rate	Nom.		l/s		8,373	8,144	12,560	12,216	16,747	16,288	25,120	24,432		
	Quantity				2		3		4		6				
	Speed	Cooling		Nom.		rpm		700							
Sound power level	Cooling	Nom.		dBA		89.0		90.0		91.0		92.0		93.0	
Sound pressure level	Cooling	Nom.		dBA		71.0				73.0		74.0			
Operation range	Saturated suction temp		°C		-9~12										
	Condenser inlet temp		°C		-18~48										
Refrigerant	Type / GWP		R-134a / 1,430												
	Circuits		Quantity		1										
Piping connections	Evaporator water inlet/outlet (OD)				76mm						139.7mm				
Unit	Maximum starting current		A		151		195		288		330		410		
	Nominal running current (RLA)	Cooling		A		73	90	98	112	125	131	155	204	249	275
	Maximum running current		A		83	100	115	128	151	158	189	234	276	290	
Power supply	Phase/Frequency/Voltage		Hz/V		3~/50/400										



EW(W)(H)(L)T~Q-A  
 Modular Water to Water Chiller and Heat Pump  
 Infinite combinations for maximum flexibility

EW(W)(H)(L)T~Q-A at a glance

For cooling and heating application

- > R32 refrigerant
- > Real modular design
- > Heat pump with inversion on water side
- > Heat pump with inversion on refrigerant side
- > Condenserless

**R-32**  
**BLUEVOLUTION**



**Standard sound version**  
 Suitable for indoor installation



**Reduced sound version**  
 Suitable for indoor and outdoor installation

## Why choose EW(W)(H)(L)T~Q-A

› Real redundancy



› Accessory manifold module customizable with options



› On board pump module



# Water cooled multi-scroll chiller reversing on refrigerant side, standard efficiency, standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › Heat pump version with reversibility on refrigerant side available, ideal for geothermal applications
- › Compact design to allow easy indoor installation or retrofit operations
- › Conceived for stacked installation of two single circuit units to reduce the footprint
- › High efficiency and reliable scroll compressor
- › High flexibility for a wide variety of applications
- › Allows sequencing control (up to 4 units) without any external device
- › Stainless steel plate heat exchanger
- › Pump (low 100 kPa and high 200 kPa lift) available for evaporator and condenser
- › MicroTech 4 controller with superior control logic and easy interface



More details and final information can be found by scanning or clicking the QR codes.



EWHQ-G-SS

Heating & Cooling				EWHQ-G-SS												
				100	120	130	150	160	190	210	240	270	340	400		
Cooling capacity	Nom.			kW	87.3	100.0	111	127	141	160	181	208	232	291	352	
Heating capacity	Nom.			kW	112	128	144	162	179	205	233	266	299	375	454	
Capacity control	Method	Step														
	Minimum capacity			%	50.0	43.0	50.0	44.0	50.0	45.0	50.0	43.0	50.0	40.0	50.0	
Power input	Cooling	Nom.			kW	22.4	25.3	28.5	32.0	35.6	41.1	46.0	53.3	59.1	73.7	88.4
	Heating	Nom.			kW	27.0	30.9	35.2	39.3	43.6	50.4	56.6	64.7	72.2	90.3	109
EER						3.90	3.95	3.91	3.96	3.95	3.90	3.93	3.90	3.92	3.95	3.98
COP						4.15	4.16	4.09	4.12	4.11	4.07	4.11	4.10	4.14	4.16	4.18
ESEER						4.70	4.84	4.65	4.86	4.80	4.89	4.86	4.83	4.79	4.90	4.83
IPLV						6.02	6.14	5.66	5.84	5.73	5.84	5.81	5.87	5.71	5.86	5.79
Dimensions	Unit	HeightxWidthxLength		mm	1,066x928x2,432			1,066x928x2,264			1,066x928x2,432			1,186x928x2,432		
Weight	Unit			kg	519	608	728	770	808	838	880	930	941	1,090	1,203	
	Operation weight			kg	558	654	782	830	873	908	995	1,019	1,031	1,202	1,334	
Water heat exchanger - evaporator	Type	Plate heat exchanger														
	Water flow rate	Cooling	Nom.	l/s	4.2	4.8	5.3	6.1	6.7	7.7	8.7	10.0	11.1	13.9	16.9	
		Heating	Nom.	l/s	4.1	4.7	5.2	5.9	6.5	7.4	8.5	9.6	10.9	13.7	16.6	
	Water pressure drop	Cooling	Nom.	kPa	44		35	30	29	31	33	31	38	42	43	
Heating		Nom.	kPa	42		33	28	27	29	32	29	37	41	42		
Water heat exchanger - condenser	Type	Plate heat exchanger														
	Water flow rate	Cooling	Nom.	l/s	6	8	10	12	13	15	17		27	34		
		Heating	Nom.	l/s	5.2	6.0	6.7	7.7	8.5	9.7	10.9	13.7	13.9	17.4	21.1	
	Water pressure drop	Cooling	Nom.	kPa	69		55	49	48	51	54	32	39	66	69	
Heating		Nom.	kPa	73		59	51	50	53	57	33	42	70	73		
Compressor	Type	Scroll compressor														
	Quantity	2														
Sound power level	Cooling	Nom.			dB(A)	80.0	83.0	85.0	87.0	88.0			90.0	92.0	93.0	
	Heating	Nom.			dB(A)	64.0	67.0	69.0	70.0	72.0			74.0	76.0	77.0	
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-8~-15											
		Heating	Min.~Max.	°CDB	-8~-15											
	Condenser	Cooling	Min.~Max.	°CDB	25~55											
		Heating	Min.~Max.	°CDB	25~55											
Refrigerant	Type/GWP	R-410A/2,087.5														
	Circuits	Quantity	1													
Refrigerant charge					kg/TCO <sub>2</sub> Eq	9.0/18.8		10.0/20.9		13.0/27.1	11.0/23.0	13.0/27.1	15.0/31.3		19.0/39.7	
Piping connections	Evaporator water inlet/outlet (OD)			1" 1/2		2" 1/2			2" 1/2			3"				
	Condenser water inlet/outlet (OD)			1" 1/2		2" 1/2			2" 1/2			3"				
Power supply	Phase/Frequency/Voltage			Hz/V		3~/50/400										
Unit	Starting current	Max		A	204	255	261	308	316	354	368	466	481	640	677	
		Running current	Cooling	Nom.	A	43	46	50	56	63	71	78	88	97	123	148
	Max		A	59	66	72	80	88	102	116	131	145	183	221		



# Water cooled multi-scroll chiller, standard efficiency, standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › Heat pump version available
- › Compact design to allow easy indoor installation or retrofit operations
- › Conceived for stacked installation of two single circuit units to reduce the footprint
- › High efficiency and reliable scroll compressor
- › High flexibility for a wide variety of applications
- › Allows sequencing control (up to 4 units) without any external device
- › Stainless steel plate heat exchanger
- › Pump (low 100 kPa and high 200 kPa lift) available for evaporator and condenser
- › MicroTech 4 controller with superior control logic and easy interface



More details and final information can be found by scanning or clicking the QR codes.



EWQ-G-SS

Cooling Only				EWQ-G-SS												
				090	100	120	130	150	170	190	210	240	300	360		
Space cooling	A Condition 35°C Pdc			kW	93.7	105.6	119	135.9	150	172.1	193.8	220.7	246.1	314.3	370.4	
	η <sub>s,c</sub>			%	209.08	215.32	233.52	227.68	233.04	233.36	220.32	235.56	231.84	236.64	211.36	
SEER					5.427	5.583	6.038	5.892	6.026	6.034	5.708	6.089	5.996	6.116	5.484	
Cooling capacity	Nom.			kW	93.7	105.6	119	135.9	150	172.1	193.8	220.7	246.1	314.3	370.4	
Power input	Cooling	Nom.		kW	21.3	24	26.9	30.5	33.9	38.9	43.8	50.74	56.1	70.2	84	
Capacity control	Method			Fixed												
	Minimum capacity			%	50	43	50	44	50	45	50	43	50	40	50	
EER					4.399	4.4	4.424	4.456	4.425	4.424	4.425	4.349	4.387	4.477	4.41	
ESEER					5.51	5.52	5.51	5.53	5.51	5.53	5.52					
IPLV					6.71	6.79	6.22	6.36	6.22	6.32	6.3	6.31	6.1	6.28	6.16	
Dimensions	Unit	Height	mm	1,066												
		Width	mm	928												
		Length	mm	2,432			2,264			2,432						
Weight	Unit	Operation weight		kg	516	606	728	762	795	832	871	921	934	1,083	1,181	
				kg	554.9	652.4	781.6	821.4	859	901.4	945.9	1,009.6	1,023.2	1,194.7	1,311.1	
Water heat exchanger - evaporator	Type			Plate heat exchanger												
	Water volume			l	6	8	10	12	13	15	17	27	34			
	Water flow rate Nom.			l/s	4.5	5.07	5.7	6.51	7.18	8.24	9.28	10.57	11.79	15.06	17.74	
Water heat exchanger - condenser	Type			Plate heat exchanger												
	Water volume			l	6	8	10	12	13	15	17	27	34			
	Water flow rate Nom.			l/s	5.52	6.23	7.05	8.04	8.87	10.17	11.43	13.02	14.53	18.46	21.81	
Compressor	Type			Driven vapour compression												
	Quantity			2												
Sound power level	Cooling	Nom.		dBA	80.0	83.0	85.0	87.0	88.0			90.0	92.0	93.0		
Sound pressure level	Cooling	Nom.		dBA	64.0	67.0	69.0	70.0	72.0			74.0	76.0		77.0	
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-10~-15											
		Heating	Min.~Max.	°CDB	-10~-15											
	Condenser	Cooling	Min.~Max.	°CDB	25~55											
		Heating	Min.~Max.	°CDB	25~55											
Refrigerant	Type/GWP			R-410A/2,087.5												
	Charge			kg	10	11			12	15	16	17	19	20		
	Circuits			Quantity	1											
Refrigerant charge	TCO2Eq			20.88	22.96			25.05	31.31	33.40	35.49	39.66	41.75			
Piping connections	Evaporator water inlet/outlet (OD)			1" 1/2				2" 1/2				3"				
	Condenser water inlet/outlet (OD)			1" 1/2				2" 1/2				3"				
Unit	Starting current Max			A	204	255	261	308	316	354	368	466	481	640	677	
	Running current	Cooling	Nom.	A	42	45	48	54	61	68	76	86	95	118	143	
		Max		A	59	66	72	80	88	102	116	131	145	183	221	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400											

# Water cooled multi-scroll chiller, standard efficiency, standard sound

- › Dual refrigerant circuit (4 scroll compressors) with single evaporator
- › Heat pump version available
- › Compact design to allow easy indoor installation or retrofit operations
- › High efficiency and reliable scroll compressor
- › Stainless steel plate heat exchanger
- › High flexibility for a wide variety of applications
- › Allows sequencing control (up to 4 units) without any external device
- › Pump (low 100 kPa and high 200 kPa lift) available for evaporator and condenser
- › MicroTech 4 controller with superior control logic and easy interface



More details and final information can be found by scanning or clicking the QR codes.



EWWQ-L-SS

Cooling only/Heating only				EWWQ-L-SS		180	205	230	260	290	330	380
Space cooling	A Condition 35°C Pdc			kW		187.4	215.1	244.3	272.6	303.2	344.5	386.8
	η <sub>s,c</sub>			%		211.72	222.72	232.76	230.32	236.76	233.32	224.84
SEER						5.493	5.768	6.019	5.958	6.119	6.033	5.821
Cooling capacity	Nom.			kW		187.4	215.1	244.3	272.6	303.2	344.5	386.8
Power input	Cooling	Nom.		kW		41.7	47.3	53.1	60.2	67.1	77.1	87
Capacity control	Method					Fixed						
	Minimum capacity			%		25	21	25	22	25	23	25
EER						4.494	4.548	4.601	4.528	4.519	4.468	4.446
ESEER						5.54		5.52	5.53	5.54	5.53	5.54
IPLV						6.77	6.84	6.35	6.38	6.31	6.32	6.36
Dimensions	Unit	Height		mm		1,970						
		Width		mm		928						
		Length		mm		2,801						
Weight	Unit			kg		877	1,062	1,285	1,347	1,439	1,498	1,559
		Operation weight		kg		957	1,156	1,401	1,469	1,575	1,641	1,723
Water heat exchanger - evaporator	Type					Plate heat exchanger						
	Water volume			l		35	41	53		65	76	
	Water flow rate Nom.			l/s		8.97	10.29	11.69	13.04	14.5	16.48	18.51
	Water pressure drop	Cooling	Nom.	kPa		28	27.6	22.6	28	25.1	32.2	31.9
Water heat exchanger - condenser	Type					Plate heat exchanger						
	Water volume			l		19	22	29		35	41	
	Water flow rate Nom.			l/s		11.02	12.66	14.4	16.12	17.9	20.38	22.8
	Water pressure drop	Cooling	Nom.	kPa		72	73	61	49	50	51	55
Compressor	Type					Driven vapour compression						
	Quantity					4						
Sound power level	Cooling	Nom.		dB(A)		83.0	86.0	88.0	90.0	91.0		
Sound pressure level	Cooling	Nom.		dB(A)		65.0	68.0	70.0	72.0	74.0	73.0	
Operation range	Evaporator	Cooling	Min.~Max.	°CDB		-10~15						
		Heating	Min.~Max.	°CDB		-10~15						
	Condenser	Cooling	Min.~Max.	°CDB		25~55						
		Heating	Min.~Max.	°CDB		25~55						
Refrigerant	Type/GWP					R-410A/2,087.5						
	Charge			kg		20	22	24	30			
	Circuits	Quantity				2						
Refrigerant charge				kg/TCO2Eq		10.0/20.9	11.0/23.0	12.0/25.1	15.0/31.3			
Piping connections	Evaporator water inlet/outlet (OD)					3"						
	Condenser water inlet/outlet (OD)					1" 1/2		2" 1/2				
Unit	Starting current	Max		A		263	320	333	388	403	456	484
		Running current	Cooling	Nom.	A		83	89	96	109	121	137
	Max		A		118	131	144	160	175	205	232	
Power supply	Phase/Frequency/Voltage			Hz/V		3~/50/400						

performances according to CSS software 10.27

# Water to water screw heat pump, standard efficiency, standard sound

- › Compact design to allow easy indoor installation or retrofit operations
- › Daikin semi-hermetic single screw stepless compressor
- › High energy efficiency both at full and part load conditions
- › Chilled water temperatures down to -10°C on standard unit
- › Optimised for use with R-134a
- › MicroTech 4 controller with superior control logic and easy interface



More details and final information can be found by scanning or clicking the QR codes.



EWWD-J-SS

Cooling & Heating				EWWD-J-SS	120	140	150	180	210	250	280
Space heating	Average climate water outlet 55°C	General	SCOP		4.03	4.11	4.16	4.17	4.17	4.23	3.83
Cooling capacity	Nom.			kW	119.7	145.7	154.3	177.3	207.3	255.3	284.1
Heating capacity	Nom.			kW	144.2	175.4	189.8	217.8	252.2	308.4	347.4
Power input	Cooling	Nom.		kW	28.0	34.0	39.5	45.3	50.4	59.9	70.0
Capacity control	Method				Stepless						
	Minimum capacity			%	25.0						
EER					4.28	4.28	3.91	3.92	4.11	4.26	4.06
COP					5.20		4.84	4.85	5.04	5.17	4.98
IPLV					5.18	5.06		5.05	5.16	5.70	4.88
Dimensions	Unit	Height		mm	1,020						
		Width		mm	913						
		Length		mm	2,684						
Weight	Unit			kg	1,177	1,233	1,334	1,366	1,416	1,600	1,607
		Operation weight		kg	1,211	1,276	1,378	1,415	1,473	1,663	1,675
Water heat exchanger - evaporator	Type				Plate heat exchanger						
	Water volume			l	14	18	14	17	20	26	
	Water flow rate	Cooling	Nom.	l/s	5.7	7.0	7.4	8.5	9.9	12.2	13.6
	Water flow rate	Heating	Nom.	l/s	9.3	11.3	12	13.8	16.1	19.8	22.1
	Water pressure drop	Cooling	Nom.	kPa	15	14	43	40	35	28	34
	Heating	Nom.	kPa	36	34	103	96	85	68	82	
Water heat exchanger - condenser	Type				Single pass shell and tube						
	Water volume			l	20		23	25	29		32
	Water flow rate	Cooling	Nom.	l/s	7.1	8.64	9.32	10.7	12.4	15.2	17.0
	Water flow rate	Heating	Nom.	l/s	6.93	8.44	9.13	10.5	12.1	14.8	16.7
	Water pressure drop	Cooling	Nom.	kPa	20	13	11		15	17	27
	Heating	Nom.	kPa	19	12	11		15	16	26	
Compressor	Type				Single screw compressor						
	Quantity				1						
Sound power level	Cooling	Nom.		dB(A)	89						
Sound pressure level	Cooling	Nom.		dB(A)	79						
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-10~-15						
	Condenser	Cooling	Min.~Max.	°CDB	23~60						
Refrigerant	Type/GWP				R-134a/1,430						
	Circuits	Quantity			1						
Refrigerant charge	Per circuit			kg/TCO <sub>2</sub> Eq	18.0/25.7	35.0/50.1	34.0/48.6	37.0/52.9		38.0/54.3	
Piping connections				mm	76.2						
Piping connections	Condenser water inlet/outlet (OD)				2" 1/2	4"					
Unit	Starting current	Max		A	153		197			290	
	Running current	Cooling	Nom.	A	48	57	67	74	83	97	109
		Max		A	85	103	114	130	154	178	201
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400						


performances according to CSS software 10.34

Fluid: Water; Fouling factor = 0m 2°C/W

Cooling performances: evaporator 12.0/7.0°C, condenser 30.0/35.0°C; Heating performances (Low temperature application): evaporator 10.0/7.0°C, condenser 30.0/35.0°C.

# Water to water screw heat pump, standard efficiency, standard sound

- > HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- > Daikin semi-hermetic single screw compressor
- > Direct expansion plate to plate evaporator
- > Shell and tube condenser
- > Silver efficiency and standard sound
- > Upgrade to new MicroTech 4 controller

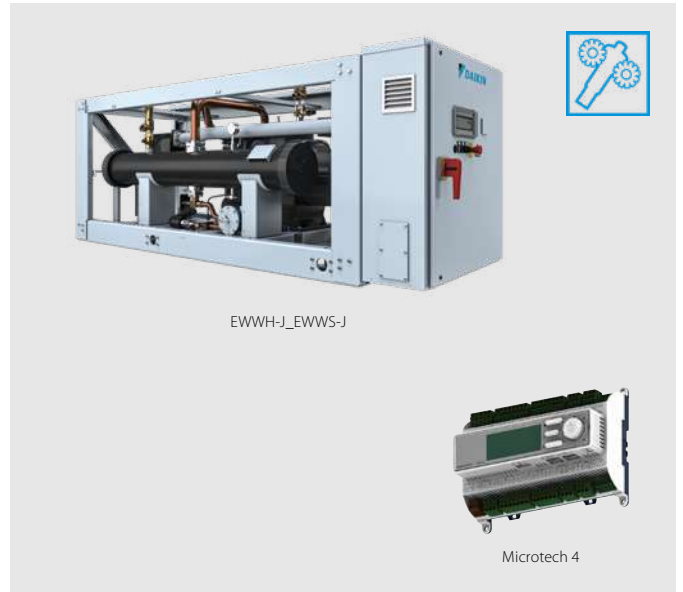

More details and final information can be found by scanning or clicking the QR codes.



EWWH-J-SS

				EWWH-J-SS	090	110	120	130	150	180	200	
Space heating	Average climate water outlet 55°C	General	SCOP		3.91	3.92	3.78	3.77	3.80	3.90	3.84	
Cooling capacity	Nom.		kW	88.77	107.1	115.1	133.5	150.1	181.6	200.6		
Heating capacity	Nom.		kW	107.2	129.2	140.9	162.3	182.2	220.5	245		
Power input	Cooling	Nom.	kW	30	36.3	41.7	47.8	54.2	65.7	74.4		
Capacity control	Method			Stepless								
	Minimum capacity		%	25								
EER				3.85	3.75	3.72	3.78	3.82	3.67	3.66		
COP				4.69	4.57	4.52	4.59	4.67	4.46	4.46		
IPLV				4.1	4.11	4.09	4.11	4.12	4.64	4.59		
Dimensions	Unit	Height	mm	1,020								
		Width	mm	913								
		Length	mm	2,684								
Weight	Unit		kg	1,177	1,233	1,334	1,366	1,416	1,600	1,607		
		Operation weight	kg	1,211	1,276	1,378	1,415	1,473	1,663	1,675		
Water heat exchanger - evaporator	Type			Plate heat exchanger								
	Water volume		l	14	18	14	17	20	26			
	Water flow rate	Cooling	Nom.	l/s	4.24	5.11	5.49	6.37	7.16	8.66	9.57	
		Heating	Nom.	l/s	6.8	8.3	8.9	10.2	11.8	13.9	15.4	
	Water pressure drop	Cooling	Nom.	kPa	10.7	10.9	19.3	19.3	17.8	16.8	20.1	
Heating		Nom.	kPa	24.9	25.9	45.6	44.9	43.7	39.2	47.4		
Water heat exchanger - condenser	Type			Single pass shell and tube								
	Water volume		l	20	20	23	25	29		32		
	Water flow rate	Cooling	Nom.	l/s	5.18	6.31	6.79	7.84	9.1	10.7	11.9	
		Heating	Nom.	l/s	6.77	8.27	8.86	10.2	11.8	13.9	15.4	
	Water pressure drop	Cooling	Nom.	kPa	9.1	9.7	8.7	9.1	9.3	12.3	12.1	
Heating		Nom.	kPa	24.9	25.9	45.6	44.9	43.7	39.2	47.4		
Compressor	Type			Single screw compressor								
	Quantity			1								
Sound power level	Cooling	Nom.	dB(A)	89								
Sound pressure level	Cooling	Nom.	dB(A)	79								
Refrigerant	Type			R-1234(ze)								
	Charge		kg	18	35	34	37		38			
	Circuits	Quantity		1								
Piping connections			mm	76.2								
Unit	Condenser water inlet/outlet		inch	2" 1/2		4		290				
	Starting current	Max	A	153				197		290		
		Running current	Cooling	Nom.	A	39	44	55	60	65	76	84
	Max		A	75	90	100	114	143	158	178		
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400								


performances according to CSS software 10.34

Fluid: Water; Fouling factor = 0m 2°C/W

Cooling performances: evaporator 12.0/7.0°C, condenser 30.0/35.0°C; Heating performances (Low temperature application): evaporator 10.0/7.0°C, condenser 30.0/35.0°C.

# Water to water screw heat pump, standard efficiency, standard sound

- › Refrigerant R-513A
- › Daikin semi-hermetic single screw compressor
- › Direct expansion plate to plate evaporator
- › Shell and tube condenser
- › Silver efficiency and standard sound
- › Upgrade to new MicroTech 4 controller

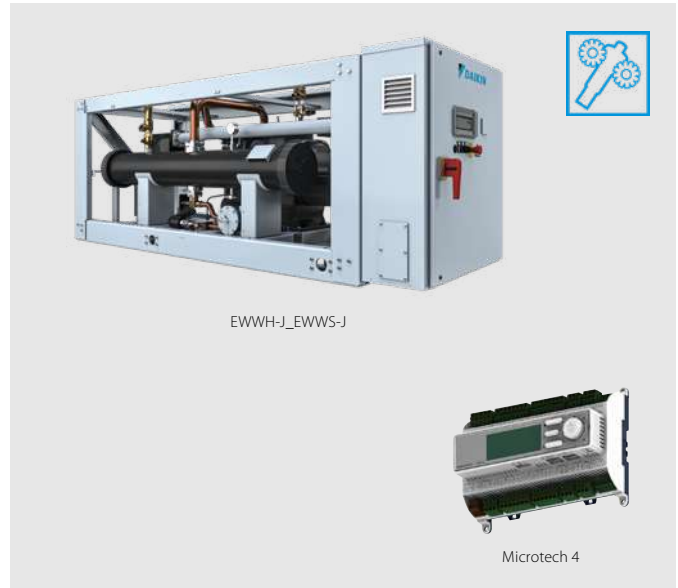

More details and final information can be found by scanning or clicking the QR codes.



EWWS-J-SS

				EWWS-J-SS		120	140	150	180	210	240	270
Space heating	Average climate water outlet 55°C	General	SCOP		3.63	3.54	3.56	3.59	3.62	3.54	3.58	
Cooling capacity	Nom.			kW	115.2	136.3	154.7	180.6	207.3	241	272.2	
Heating capacity	Nom.			kW	141.7	167.5	191.3	223	256.9	297	338.2	
Power input	Cooling	Nom.		kW	30	36.3	41.7	47.8	54.2	65.7	74.4	
Capacity control	Method				Stepless							
	Minimum capacity			%	25							
EER					3.85	3.75	3.72	3.78	3.82	3.67	3.66	
COP					4.69	4.57	4.52	4.59	4.67	4.46		
IPLV					4.1	4.11	4.09	4.11	4.12	4.64	4.59	
Dimensions	Unit	Height		mm	1,020							
		Width		mm	913							
		Length		mm	2,684							
Weight	Unit			kg	1,177	1,233	1,334	1,366	1,416	1,600	1,607	
	Operation weight			kg	1,211	1,276	1,378	1,415	1,473	1,663	1,675	
Water heat exchanger - evaporator	Type				Plate heat exchanger							
	Water volume			l	14	18	14	17	20	26		
	Water flow rate	Cooling	Nom.		l/s	5.5	6.5	7.38	8.62	9.89	11.5	13
			Heating	Nom.	l/s	8.8	10.8	12.1	13.8	15.5	19	21.1
	Water pressure drop	Cooling	Nom.		kPa	17.1	16.8	32.8	33.4	31.8	27.9	34.8
Heating			Nom.	kPa	40.1	41.7	79.4	78.1	71.5	68.9	83.3	
Water heat exchanger - condenser	Type				Single pass shell and tube							
	Water volume			l	20	20	23	25	29		32	
	Water flow rate	Cooling	Nom.		l/s	6.87	8.38	9.39	10.8	12.1	14.8	16.5
			Heating	Nom.	l/s	6.72	8.2	9.2	10.6	11.9	14.5	16.2
	Water pressure drop	Cooling	Nom.		kPa	15	16.1	15.4	15.9	15.4	22	21.6
Heating			Nom.	kPa	14.4	15.5	14.8	15.3	14.8	21.2	20.8	
Compressor	Type				Single screw compressor							
	Quantity				1							
Sound power level	Cooling	Nom.		dBA	89							
Sound pressure level	Cooling	Nom.		dBA	79							
Refrigerant	Type				R-513A							
	Charge			kg	18	35	34	37		38		
	Circuits	Quantity			1							
Piping connections				mm	76.2							
Piping connections	Condenser water inlet/outlet			inch	2" 1/2		4					
Unit	Starting current	Max		A	154			198		291		
		Running current	Cooling	Nom.	A	50	60	70	78	87	104	117
	Max		A	81	96	108	122	141	164	185		
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400							

performances according to CSS software 10.34

Fluid: Water; Fouling factor = 0m 2°C/W

Cooling performances: evaporator 12.0/7.0°C, condenser 30.0/35.0°C; Heating performances (Low temperature application): evaporator 10.0/7.0°C, condenser 30.0/35.0°C.

# The highest peak in chiller technology

The VZ chiller series were developed and manufactured to answer the growing market demands on high efficient chiller series. Thanks to the continuous evolution in components' technology, we are the first to reach the highest peak in chiller efficiency and technology.

## EWV(H)(D)(S)-VZ at a glance

### Single compressor



440kW - 1,050kW with R134a or R513A  
330kW - 790kW with R1234ze

Full inverter water cooled chiller



### Dual compressor & dual circuit unit

1,170kW - 2,070kW with R134a or R513A  
865kW - 1,540kW with R1234ze

of everything:  
2 compressors,  
2 expansion valves,  
2 condensers,...



New condenser design with integral oil separator

High efficient flooded heat exchangers



Highest efficiency in the market in its category



Unique Daikin single screw compressor technology



## Performance monitoring

With MT4, advanced algorithm implementation in the unit controller are possible, such as the **Performance Monitoring** (Option 186). This sensor-less algorithm calculates the unit cooling capacity by using refrigerant pressure and temperature readings. Electrical power is calculated either from compressor VFD power and fan, or directly measured through optional energy meter. As a standard(\*), **no extra-hardware is required**.

(\* ) For TZ-B units an additional sub-cooling temperature sensor is required.

# Why choose EWW(H)(D)(S)-VZ at a glance chiller series?

## 1 Top class efficiency

Thanks to:

- › New generation Daikin inverter screw compressors
- › New generation high efficiency heat exchangers
- › Variable volume ratio technology
- › Optimized refrigerant circuit design

## 2 Compact unit: 40% footprint reduction

Thanks to:

- › New single pass condenser technology
- › New integrated oil separator technology
- › Optional knock down panel which reduces the unit width

## 3 Application flexibility: widest operating envelope in its range

## 4 Connectivity: Daikin on site cloud platform

## 5 Future readiness: Choose for today's best solution and be ready for the future!



## Supporting tools

### Product video



Check on




[www.youtube.com/DaikinEurope](http://www.youtube.com/DaikinEurope)



### Marketing material

All marketing material can be downloaded from the business portal.  
Asset finder > Campaign > VZ chiller series

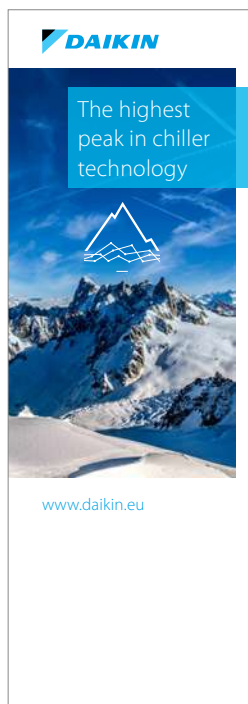

### Product profile


Want to know more about this product?

Have a look at our website and download the product profile:

[www.daikineurope.com/vzchillerseries](http://www.daikineurope.com/vzchillerseries)

# Water cooled screw inverter chiller, standard efficiency, standard sound

- › Optimized energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 65°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

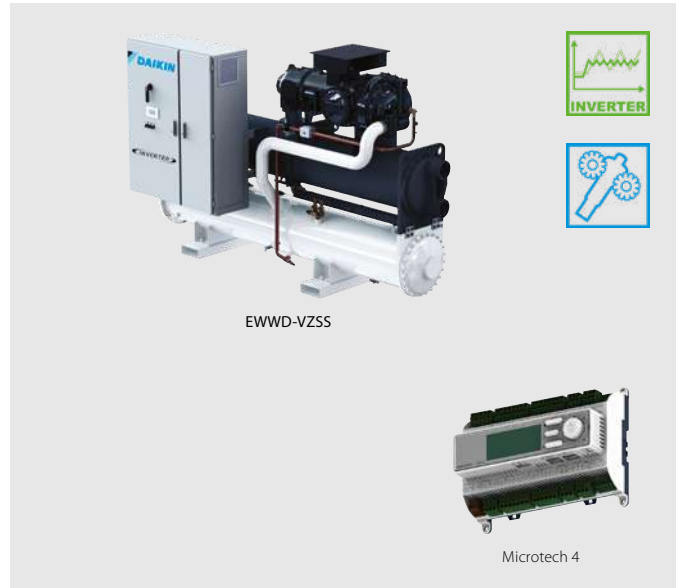

More details and final information can be found by scanning or clicking the QR codes.



EWWD-VZSS


Cooling only/Heating only				EWWD-VZSS											
				600	700	760	890	C10	C12	C13	C14	C16	C17	C19	C21
Space cooling	A Condition Pdc (35°C - 27/19)			kW											
	ηs,c			%											
SEER				8.7											
Cooling capacity				Nom. kW											
Power input				Cooling Nom. kW											
Capacity control				Method											
				Minimum capacity											
				%											
EER				5.5 5.31 5.3 5.52 5.29 5.07 5.11 5 4.93 5.08 4.93 5.08											
IPLV				9.43 9.36 9.4 9.37 9.4 9.52 9.56 9.57 9.36 9.7 9.38 9.65											
Dimensions				Unit Height mm											
				Width mm											
				Length mm											
Weight				Unit kg											
				Operation weight kg											
Water heat exchanger - evaporator				Type											
				Water volume l											
				Water flow rate Cooling Nom. l/s											
				Water pressure drop Cooling Nom. kPa											
Water heat exchanger - condenser				Type											
				Water volume l											
				Water flow rate Cooling Nom. l/s											
				Water pressure drop Cooling Nom. kPa											
Compressor				Type											
				Quantity											
Sound power level				Cooling Nom. dBA											
Sound pressure level				Cooling Nom. dBA											
Operation range				Evaporator Min.-Max. °CDB											
				Condenser Min.-Max. °CDB											
Refrigerant				Type/GWP											
				Charge kg											
				Circuits Quantity											
Piping connections				mm											
				Condenser water inlet/outlet (OD)											
				Running current Cooling Nom. A											
Unit				Running current Max. A											
Power supply				Phase/Frequency/Voltage Hz/V											

performances according to CSS software 10.33



# Water cooled screw inverter chiller, high efficiency, standard sound

- > High energy efficiency both at full and part load conditions
- > Compact footprint through stacked heat exchanger lay-out
- > Heat pump version with reversibility on water side (up to 65°C hot water production)
- > Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- > Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- > High efficient flooded type heat exchanger allowing maximum unit performances
- > One or two truly independent refrigerant circuits for outstanding reliability

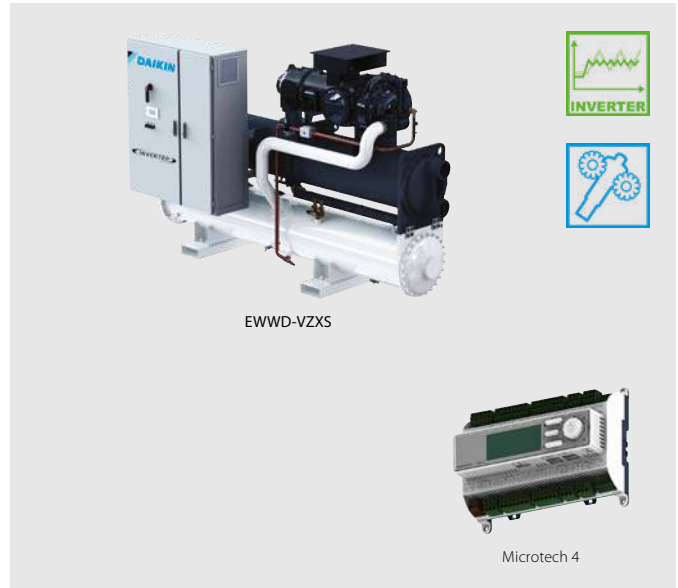

More details and final information can be found by scanning or clicking the QR codes.




EWWD-VZXS

Cooling only/Heating only		EWWD-VZXS																													
		450	500	610	710	800	900	C11	C12	C13	C14	C16	C17	C19	C21																
Space cooling	A Condition Pdc (35°C - 27/19)	kW														448.83	500.51	612.77	713.11	793.52	901.21	1,053.02	1,194.03	1,305.01	1,406.98	1,593.03	1,748.03	1,912.01	2,074.02		
	ηs,c	%														324.8	329.2	347.2	350	345.6	337.6	344.4	347.6	342.4	348	347.2	347.6	337.2	344.4		
SEER																8.32	8.43	8.88	8.95	8.84	8.64	8.81	8.89	8.76	8.9	8.88	8.89	8.63	8.81		
Cooling capacity	Nom.	kW														449	501	613	713	794	901	1,053	1,194	1,305	1,407	1,593	1,748	1,912	2,074		
Power input	Cooling	kW														81.2	89.7	108	128	146	159	192	221	244	262	296	329	365	394		
	Nom.																														
Capacity control	Method															Variable															
	Minimum capacity	%														20					10										
EER																5.53	5.58	5.64	5.54	5.43	5.67	5.46	5.38	5.34	5.36	5.38	5.31	5.23	5.25		
IPLV																9.42	9.59	9.52	9.66	9.64	9.48	9.58	9.66	9.67	9.76	9.74	9.82	9.68	9.7		
Dimensions	Unit	Height	mm														2,135	2,123	2,235	2,487	2,296	2,301	2,350	2,500	2,469	2,493					
		Width	mm														1,178	1,179	1,189	1,303	1,484	1,639	1,579	1,580	1,610	1,704	1,769				
		Length	mm														3,722	3,750	3,690	3,822	4,792	4,508	4,750	4,874							
Weight	Unit	kg														2,968	2,911	3,102	3,470	3,451	4,257	4,552	5,860	6,240	6,520	6,920	7,530	7,790	8,670		
	Operation weight	kg														3,098	3,006	3,274	3,648	3,611	4,518	4,860	6,370	6,760	7,130	7,530	8,300	8,560	9,630		
Water heat exchanger - evaporator	Type															Flooded shell and tube															
	Water volume	l		70	88	136	134	168	199	270	320	380	480																		
	Water flow rate	Cooling	Nom.	l/s		21.5	24	29.3	34.1	38	43.2	50.4	57.1	62.5	67.3	76.3	83.6	91.4	99.2												
	Water pressure drop	Cooling	Nom.	kPa		89	63	59	63	55	67	59	52	62	52	67	58	49	58												
Water heat exchanger - condenser	Type															Shell and tube															
	Water volume	l		81	92	126	145	126	217	241	240	250	290	390	290	480															
	Water flow rate	Cooling	Nom.	l/s		26.4	29.4	35.3	41.2	46.1	52	61	69.8	76.3	82.2	93.2	102	112	121												
	Water pressure drop	Cooling	Nom.	kPa		31	28	22	20	24	25	28	21	32	27	37	28														
Compressor	Type															Driven vapour compressor															
	Quantity															1					2										
Sound power level	Cooling	Nom.		dBA														97	99	101	105	107	106	107	108	109	110				
	Sound pressure level	Cooling	Nom.		dBA														78	80	82	86	88	87	88	89	90				
Operation range	Evaporator	Min.-Max.		°CDB														-12~20													
	Condenser	Min.-Max.		°CDB														19~65													
Refrigerant	Type/GWP															R-134a/1,430															
	Charge	kg		110	125	140	160	200	185	270	260	230	290	290	320	370															
	Circuits	Quantity		1										2																	
Piping connections	mm		139.7				168.3				219.1				273																
	Condenser water inlet/outlet (OD)		168.3mm				219.1mm				168.3/219.1 mm				219.1/219.1 mm																
	Running current	Cooling	Nom.		A														126	140	171	201	229	249	299	340	372	400	450	498	554
Unit	Running current	Max		A														172	191	235	280	316	342	417	470	513	559	621	696	758	834
Power supply	Phase/Frequency/Voltage		Hz/V														3~/50/400														

performances according to CSS software 10.33

# Water cooled screw inverter chiller, premium efficiency, standard sound

- › Premium energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 65°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

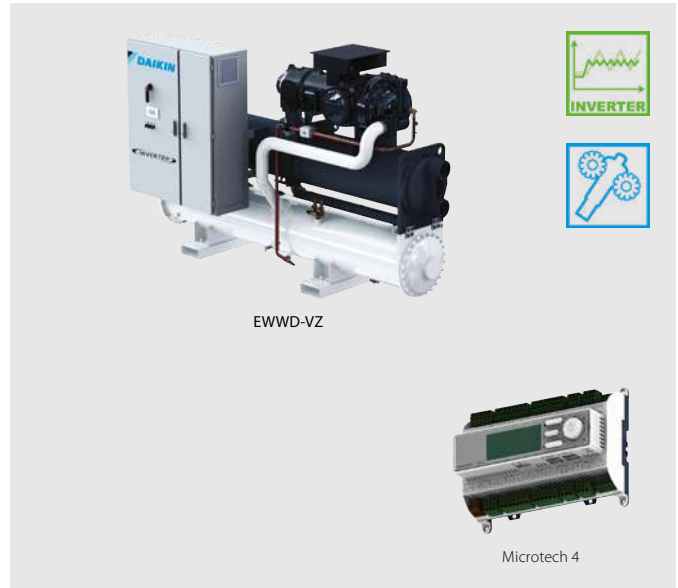

More details and final information can be found by scanning or clicking the QR codes.



EWWD-VZPS


Cooling only/ Heating only				EWWD-VZPS	505	715	910	C12	C16	C18
Space cooling	A Condition Pdc (35°C - 27/19)			kW	505.02	717.71	908.11	1,201.02	1,604.03	1,757.01
	ηs,c			%	339.6	355.2	344.4	353.6	354	350
SEER					8.69	9.08	8.81	9.04	9.05	8.95
Cooling capacity	Nom.			kW	505	718	908	1,201	1,604	1,757
Power input	Cooling	Nom.		kW	85.1	124	153	218	291	326
Capacity control	Method				Variable					
	Minimum capacity			%	20				10	
EER					5.93	5.77	5.91	5.49	5.5	5.39
IPLV					9.61	9.68	9.57	9.79	9.82	9.92
Dimensions	Unit	Height	mm	2,108	2,430	2,487	2,302	2,500	2,493	
		Width	mm	1,179	1,287	1,303	1,579	1,610	1,769	
		Length	mm	3,750	3,822		4,508	4,750	4,874	
Weight	Unit			kg	3,247	4,082	4,346	6,310	7,530	8,250
	Operation weight			kg	3,375	4,349	4,660	6,900	8,300	9,200
Water heat exchanger - evaporator	Type				Flooded shell and tube					
	Water volume			l	96	168	199	320	380	480
	Water flow rate	Cooling	Nom.	l/s	24.2	34.3	43.4	57.4	76.7	84
	Water pressure drop	Cooling	Nom.	kPa	55	42	44	38	49	41
Water heat exchanger - condenser	Type				Shell and tube					
	Water volume			l	126	217	241	270	390	470
	Water flow rate	Cooling	Nom.	l/s	29.4	41.3	52.1	69.9	93.4	102
	Water pressure drop	Cooling	Nom.	kPa	16	17	19	21		28
Compressor	Type				Driven vapour compressor					
	Quantity				1			2		
Sound power level	Cooling	Nom.		dB(A)	99	105		106	107	109
Sound pressure level	Cooling	Nom.		dB(A)	80	86		87	88	89
Operation range	Evaporator	Min.-Max.		°CDB	-12~20					
	Condenser	Min.-Max.		°CDB	19~65					
Refrigerant	Type/GWP				R-134a/1,430					
	Charge			kg	120	195	185	305	320	350
	Circuits	Quantity			1			2		
Piping connections				mm	139.7	219.1				273
	Condenser water inlet/outlet (OD)				219.1mm			219.1/219.1 mm		
Unit	Running current	Cooling	Nom.	A	138	200	247	338	447	497
	Running current	Max		A	191	280	342	470	621	696
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400					

performances according to CSS software 10.33



# Water cooled screw inverter chiller, standard efficiency, standard sound

- › Optimized energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 75°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

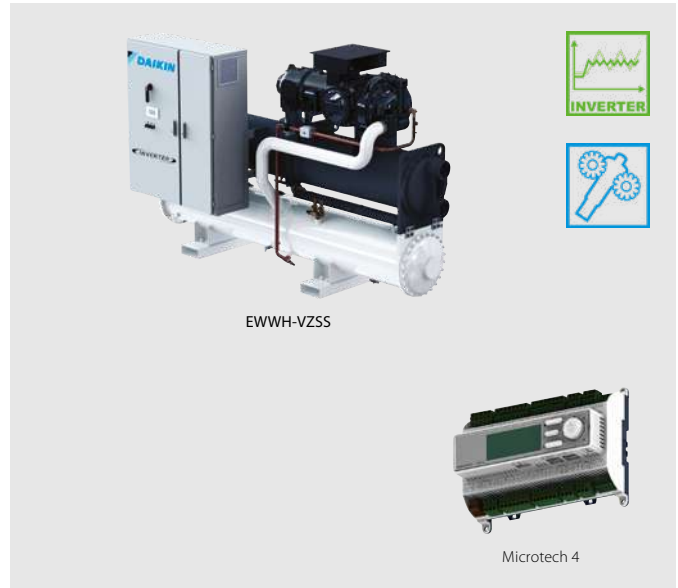

More details and final information can be found by scanning or clicking the QR codes.




EWWH-VZSS

Cooling only/Heating only				EWWH-VZSS	445	515	550	660	770	860	940	C10	C12	C13	C14	C15	
Space cooling	A Condition Pdc (35°C - 27/19)			kW	443	512	548.51	657.51	767.8	865.2	940.6	1,011.7	1,142.46	1,271.38	1,396.11	1,524.83	
	ηs,c			%	336.4	338.4	336.8	348.4	345.2	318.4	327.2	339.6	331.2	340	345.6	353.2	
SEER					8.61	8.66	8.62	8.91	8.83	8.16	8.38	8.69	8.48	8.7	8.84	9.03	
Cooling capacity	Nom.			kW	443	512	549	658	768	865	941	1,012	1,142	1,271	1,396	1,525	
Power input	Cooling	Nom.		kW	82.8	98.1	107	123	149	172	188	205	235	254	282	302	
Capacity control	Method			Variable													
	Minimum capacity			%	20						10						
EER					5.35	5.22	5.15	5.34	5.14	5.02	5	4.93	4.87	5.01	4.95	5.04	
IPLV					9.25		9.24	9.48	9.32	8.94	9.08	9.13	9.14	9.3	9.13	9.34	
Dimensions	Unit	Height	mm	2,123				2,292	2,487	2,296				2,350	2,338	2,498	
		Width	mm	1,178	1,179		1,233	1,303	1,484	1,487		1,484	1,580	1,627	1,753		
		Length	mm	3,722	3,750		3,690	3,822	4,792				4,508		4,750		
Weight	Unit	kg		2,892	2,928	2,941	3,451	4,237	5,570	5,790	5,820	6,220	6,890	7,260	8,260		
		Operation weight		kg	2,977	3,033	3,053	3,611	4,488	5,980	6,220	6,290	6,690	7,480	7,830	9,070	
Water heat exchanger - evaporator	Type			Flooded shell and tube													
	Water volume		l	88		96	134	156	230		270		320		380		
	Water flow rate	Cooling	Nom.	l/s	21.2	24.5	26.2	31.5	36.8	41.4	45	48.4	54.6	60.8	66.8	72.9	
Water heat exchanger - condenser	Water pressure drop		Nom.	kPa	46	61	52	59	64	39	46	39	50	44	53	45	
	Type			Shell and tube													
	Water volume		l	81	102		126	217	180		200		270	250	430		
Compressor	Water flow rate		Cooling	Nom.	l/s	25.5	29.6	31.8	38.1	44.8	50.3	54.8	59	66.8	74	81.4	88.7
	Water pressure drop		Cooling	Nom.	kPa	19	17	20	19	17	25	22	25	38	25	32	18
	Type			Driven vapour compression													
Sound power level	Quantity		1														
	Quantity		2														
Sound pressure level	Cooling	Nom.	dBA	101	105		107	106		107		108		110			
Refrigerant	Cooling	Nom.	dBA	82	86		88	87		88		89		90			
Piping connections	Type/GWP			R-1234(ze)/7													
	Charge		kg	125	124	105	145	190	210	230	250	220	280		320		
	Circuits		Quantity	1						2							
Unit	Running current			A	131.0		153.0	167.0	188.0	227.0	264.0	287.0	312.0	353.0	385.0	426.0	458.0
	Max		A	183	226	235	268	324	374	402	451	493	549	591	647		
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400												

performances according to CSS software 10.33

# Water cooled screw inverter chiller, high efficiency, standard sound

- › High energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 75°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

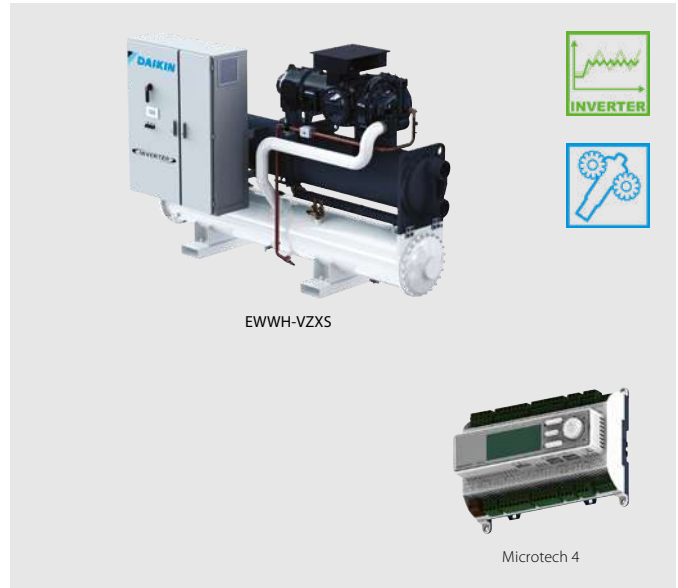

More details and final information can be found by scanning or clicking the QR codes.




EWWH-VZXS

Cooling only/Heating only				EWWH-VZXS															
				335	365	450	525	580	670	800	875	950	C11	C12	C13	C14	C15		
Space cooling	A Condition Pdc (35°C - 27/19)			kW	329.01	364.52	448	520.61	579.19	665.41	788.2	877.36	952.01	1,028.81	1,169.3	1,288.48	1,421.75	1,540.03	
	ηs,c			%	296	307.2	343.6	347.2	343.2	356	354.4	326	334	346.8			358	356.8	
SEER					7.6	7.88	8.79	8.88	8.78	9.1	9.06	8.35	8.55	8.87			9.15	9.12	
Cooling capacity	Nom.			kW	329	365	448	521	579	665	788	877	952	1,029	1,169	1,288	1,422	1,540	
Power input	Cooling			Nom.	kW	60.5	66.6	81	96	109	121	147	168	185	198	224	248	276	298
	Capacity control			Method	Variable														
EER	Minimum capacity			%	20						10								
					5.44	5.48	5.53	5.42	5.29	5.49	5.37	5.23	5.16	5.19	5.22	5.19	5.16	5.16	
IPLV					8.51	8.79	9.46	9.51	9.47	9.63	9.65	9.19	9.27	9.46	9.37	9.52	9.23	9.5	
Dimensions	Unit			Height	mm	2,135	2,123	2,235	2,487		2,296		2,301	2,350	2,500	2,469	2,493		
				Width	mm	1,178	1,179	1,189	1,303		1,484	1,639	1,579	1,580	1,610	1,704	1,769		
				Length	mm	3,722	3,750	3,690	3,822		4,792		4,508		4,750	4,874			
Weight	Unit			kg	2,968	2,911	3,102	3,470	3,451	4,257	4,552	5,860	6,240	6,520	6,920	7,530	7,790	8,670	
	Operation weight			kg	3,098	3,006	3,274	3,648	3,611	4,518	4,860	6,370	6,760	7,130	7,530	8,300	8,560	9,630	
Water heat exchanger - evaporator	Type			Flooded shell and tube															
	Water volume			l	70	88	136	134		168	199	270		320	380	480			
	Water flow rate	Cooling		Nom.	l/s	15.8	17.5	21.4	24.9	27.7	31.8	37.7	41.9	45.5	49.1	55.9	61.6	67.9	73.6
Cooling		Nom.	kPa	54	38	35	37	31	39	36	29	34	28	37	32	28	33		
Water heat exchanger - condenser	Water volume			l	81	92	126	145	126	217	241	240	250	290		390	290	480	
	Water flow rate	Cooling		Nom.	l/s	18.9	20.9	25.7	30	33.5	38.4	45.7	50.7	55.1	59.6	67.6	74.6	82.3	89.3
		Cooling		Nom.	kPa	19	16	13	12	15	13	16		13	19	16	23	16	
Compressor	Type			Driven vapour compression															
	Quantity				1						2								
Sound power level	Cooling		Nom.	dBA	97	99	101	105		107		106		107	108	109	110		
	Cooling		Nom.	dBA	78	80	82	86		88		87		88		89		90	
Refrigerant	Type/GWP			R-1234(ze)/7															
	Charge			kg	124	110	125	140	130	200	185	250	220	270	255	305	320	346	
	Circuits		Quantity		1						2								
Piping connections	mm			139.7			168.3			219.1			273						
	Condenser water inlet/outlet (OD)			168.3mm			219.1mm			168.3/219.1mm			219.1/219.1mm						
Unit	Running current	Cooling		Nom.	A	96.0	106.0	129.0	151.0	173.0	187.0	226.0	259.0	284.0	304.0	341.0	379.0	421.0	454.0
		Max		A	134	149	183	226	247	268	324	374	402	451	493	549	591	647	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400														

performances according to CSS software 10.33

# Water cooled screw inverter chiller, premium efficiency, standard sound

- › Premium energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 75°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

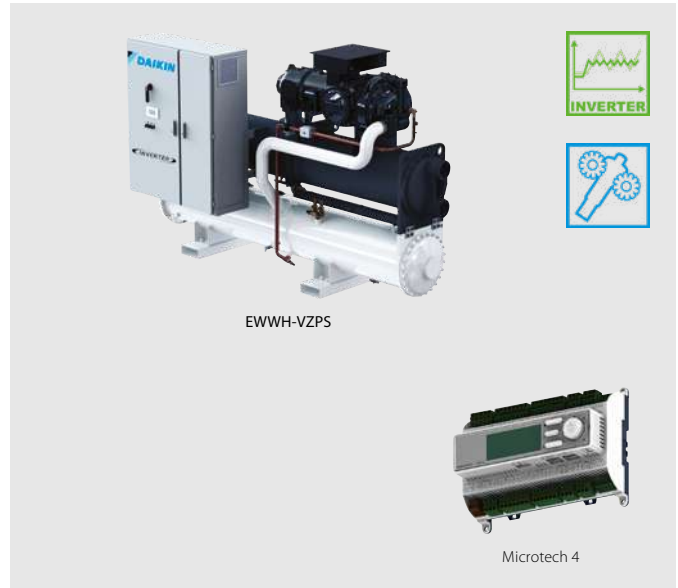


More details and final information can be found by scanning or clicking the QR codes.



EWWH-VZPS

Cooling only/Heating only				EWWH-VZPS	370	530	680	880	C12	C13
Space cooling	A Condition Pdc (35°C - 27/19)		kW	369.3	525.1	677.11	883.79	1,180.43	1,295.36	
	ηs,c		%	316.8	352.8	363.6	334.4	352.4	348.8	
SEER				8.12	9.02	9.29	8.56	9.01	8.92	
Cooling capacity	Nom.		kW	369	525	677	884	1,180	1,295	
Power input	Cooling	Nom.	kW	64.7	94.9	119	166	221	247	
Capacity control	Method		Variable							
	Minimum capacity		%	20				10		
EER				5.71	5.53	5.67	5.34	5.35	5.25	
IPLV				9.13	9.68	9.96	9.37	9.56	9.61	
Dimensions	Unit	Height	mm	2,108	2,430	2,487	2,302	2,500	2,493	
		Width	mm	1,179	1,287	1,303	1,579	1,610	1,769	
		Length	mm	3,750	3,822		4,508	4,750	4,874	
Weight	Unit		kg	3,247	4,082	4,346	6,310	7,530	8,250	
	Operation weight		kg	3,375	4,349	4,660	6,900	8,300	9,200	
Water heat exchanger - evaporator	Type		Flooded shell and tube							
	Water volume		l	96	168	199	320	380	480	
	Water flow rate	Cooling Nom.	l/s	17.7	25.1	32.3	42.2	56.4	61.9	
	Water pressure drop	Cooling Nom.	kPa	32	25	27	20	26	23	
Water heat exchanger - condenser	Type		Shell and tube							
	Water volume		l	126	217	241	270	390	470	
	Water flow rate	Cooling Nom.	l/s	21.1	30.1	38.9	50.9	68	74.9	
	Water pressure drop	Cooling Nom.	kPa	9		12	13	12	16	
Compressor	Type		Driven vapour compression							
	Quantity			1				2		
Sound power level	Cooling	Nom.	dBA	99	105		106	107	109	
Sound pressure level	Cooling	Nom.	dBA	80	86		87	88	89	
Refrigerant	Type/GWP		R-1234(ze)/7							
	Charge		kg	120	190	185	305	288	350	
	Circuits	Quantity		1				2		
Piping connections			mm	139.7	219.1			219.1		273
	Condenser water inlet/outlet (OD)			219.1mm			219.1/219.1 mm			
Unit	Running current	Cooling Max	Nom.	A	104.0	150.0	185.0	257.0	338.0	378.0
				A	149	226	268	374	493	549
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400						

performances according to CSS software 10.33

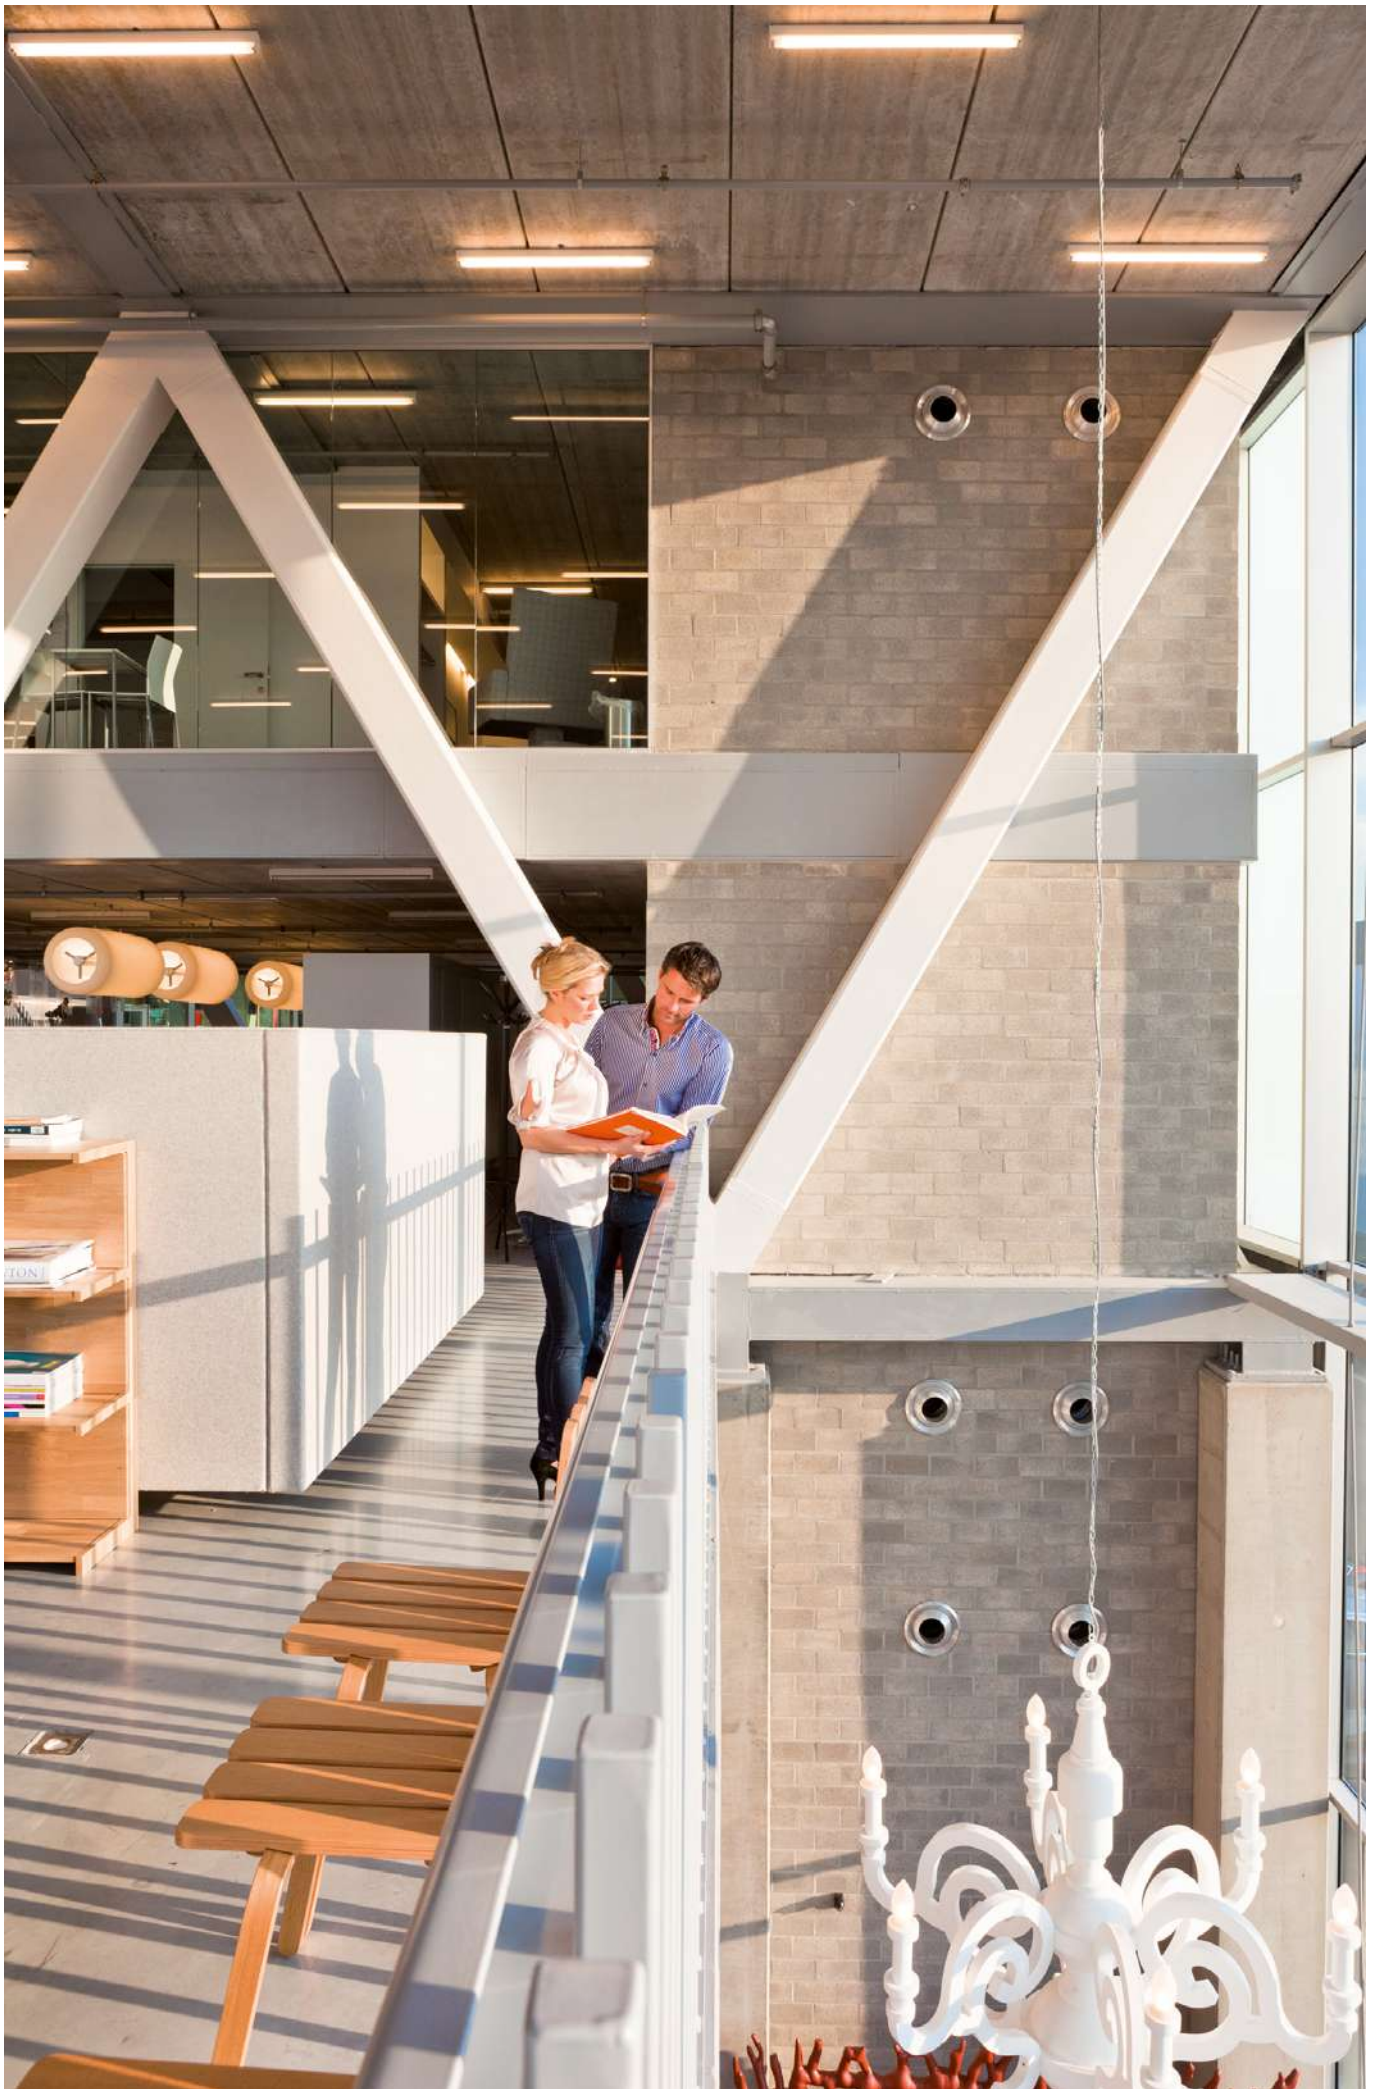



# Water to water screw inverter chiller, standard efficiency, standard sound

- › Optimized energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 60°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability



EWWS-VZ

More details and final information can be found by scanning or clicking the QR codes.



EWWS-VZSS

Cooling only/Heating only				EWWS-VZSS	600	700	740	880	C10	C12	C13	C14	C15	C17	C18	C20
Space cooling	A Condition Pdc (35°C - 27/19)		kW	599.51	693.51	743.53	879.64	1,020.09	1,148.76	1,263.41	1,351.54	1,514.87	1,689.58	1,831.98	2,013.41	
	ηs,c		%	316	314.4	313.2	320	313.2	321.2	314.8	312	297.6	313.6	304	318.4	
SEER				8.1	8.06	8.03	8.2	8.03	8.23	8.07	8	7.64	8.04	7.8	8.16	
Cooling capacity	Nom.		kW	600	694	744	880	1,020	1,149	1,263	1,352	1,515	1,690	1,832	2,013	
Power input	Cooling	Nom.	kW	120.1	143.3	154.7	175.2	212.7	251.8	273.9	301	343	367.4	413.5	437.2	
Capacity control	Method			Variable												
	Minimum capacity		%	20					10							
EER				4.99	4.84	4.81	5.02	4.8	4.56	4.61	4.49	4.42	4.6	4.43	4.61	
IPLV				9.02	9.15		8.84	8.88	9.06	9.31	9.23	8.9	9.18	8.88	9.05	
Dimensions	Unit	Height	mm	2,123			2,292	2,487	2,296			2,350	2,338	2,498		
		Width	mm	1,178	1,179		1,233	1,303	1,484	1,487		1,484	1,580	1,627	1,753	
		Depth	mm	3,722	3,750		3,690	3,822	4,792			4,508			4,750	
Weight	Unit			kg	2,892	2,928	2,941	3,451	4,237	5,570	5,790	5,820	6,220	6,890	7,260	8,260
	Operation weight		kg	2,977	3,033	3,053	3,611	4,488	5,980	6,220	6,290	6,690	7,480	7,830	9,070	
Water heat exchanger - evaporator	Type			Flooded shell and tube												
	Water volume		l	88			96	134	156	230		270		320		380
	Water flow rate	Cooling Nom.	l/s	28.7	33.3	35.7	42.2	48.9	55	60.6	64.7	72.6	80.9	87.8	96.4	
	Water pressure drop	Cooling Nom.	kPa	80	108	89	100	103	69	85	70	89	79	92	81	
Water heat exchanger - condenser	Type			Flooded Shell & Tube												
	Water volume		l	81	102		126	217	180	200		270		250	430	
	Water flow rate	Cooling Nom.	l/s	34.5	40.1	43.2	50.6	59.3	67.1	73.7	79.2	89	98.7	107	117	
	Water pressure drop	Cooling Nom.	kPa	31	29	32	29	33	43	38	44	64	41	53	36	
Compressor	Type			Driven vapour compressor												
	Quantity			1					2							
Sound power level	Cooling	Nom.	dB(A)	101	105			107	106		107		108		110	
Sound pressure level	Cooling	Nom.	dB(A)	82	86			88	87		88		89		90	
Refrigerant	Type/GWP			R-513A/631												
	Charge		kg	100	110		170	180	250	260	270	290	295	320	350	
	Circuits	Quantity		1					2							
Piping connections			mm	139.7			168.3	219.1								
			mm	168.3			219.1		168.3			219.1				

performances according to CSS software 10.33





# Water to water screw inverter chiller, high efficiency, standard sound

- › High energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 62°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability



EWWS-VZ

More details and final information can be found by scanning or clicking the QR codes.



EWWS-VZXS

Cooling only/Heating only				EWWS-VZXS	450	490	600	700	780	890	C10	C12	C13	C14	C16	C17	C19	C20
Space cooling	A Condition Pdc (35°C - 27/19)			kW	441.23	493.3	605.32	704.66	783.15	888.89	1,038.67	1,178.53	1,287.26	1,390.42	1,570.18	1,725.3	1,876.17	2,045.66
	ηs,c			%	306.4	313.6	328.4	329.2	328	328.4	328.8	331.2	326.4	329.2	331.2	326.4	323.2	326.8
SEER					7.86	8.04	8.41	8.43	8.4	8.41	8.42	8.48	8.36	8.43	8.48	8.36	8.28	8.37
Cooling capacity	Nom.			kW	441	493	605	705	783	889	1,039	1,179	1,287	1,390	1,570	1,725	1,876	2,046
Power input	Cooling	Nom.		kW	87.8	96.8	116.8	138.6	157.7	171.3	207.8	239.2	263.6	282.6	319.6	354.3	396.6	425.5
Capacity control	Method				Variable													
	Minimum capacity			%	20						10							
EER					5.02	5.1	5.18	5.09	4.97	5.19	5	4.93	4.88	4.92	4.91	4.87	4.73	4.81
IPLV					8.87	9.01	9.29	9.43	9.39	8.96	9.27	9.24	9.48	9.43	9.39	9.29	9.15	
Dimensions	Unit	Height		mm	2,135	2,123	2,235		2,487		2,296		2,301	2,350	2,500	2,469	2,493	
		Width		mm	1,178	1,179	1,189		1,303		1,484	1,639	1,579	1,580	1,610	1,704	1,769	
		Depth		mm	3,722	3,750	3,690		3,822		4,792		4,508		4,750	4,874		
Weight	Unit			kg	2,968	2,911	3,102	3,470	3,451	4,257	4,552	5,860	6,240	6,520	6,920	7,530	7,790	8,670
	Operation weight			kg	3,098	3,006	3,274	3,648	3,611	4,518	4,860	6,370	6,760	7,130	7,530	8,300	8,560	9,630
Water heat exchanger - evaporator	Type			Flooded shell and tube														
	Water volume			l	70	88	136	134		168	199	270		320		380	480	
	Water flow rate	Cooling Nom.		l/s	21.2	23.6	29	33.7	37.5	42.6	49.7	56.4	61.6	66.5	75.2	82.6	89.7	97.9
	Water pressure drop	Cooling Nom.		kPa	91	64	61	65	57	69	60	53	64	53	68	59	50	60
Water heat exchanger - condenser	Type			Flooded Shell & Tube														
	Water volume			l	81	92	126	145	126	217	241	240	250	290		390	290	480
	Water flow rate	Cooling Nom.		l/s	25.8	28.7	34.5	40.4	45.1	50.8	59.8	68	74.4	80.2	90.7	99.8	108	118
	Water pressure drop	Cooling Nom.		kPa	31	27	22	20	24	25		28		21	32	27	36	27
Compressor	Type			Driven vapour compressor														
	Quantity				1						2							
Sound power level	Cooling	Nom.		dB(A)	97	99	101	105		107		106	107	108	109	110		
Sound pressure level	Cooling	Nom.		dB(A)	78	80	82	86		88		87	88	89		90		
Refrigerant	Type/GWP			R-513A/631														
	Charge			kg	95	130	110	170	210	185	250	260	290		320		350	
	Circuits	Quantity			1						2							
Piping connections				mm	139.7			168.3			219.1			273				
				mm	168.3		219.1			168.3/219.1			219.1					

performances according to CSS software 10.33



# Water to water screw inverter chiller, premium efficiency, standard sound

- › Premium energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 62°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability



EWWS-VZ


More details and final information can be found by scanning or clicking the QR codes.



EWWS-VZPS

Cooling only/Heating only				EWWS-VZPS	500	710	900	C12	C16	C17
Space cooling	A Condition Pdc (35°C - 27/19)		kW	500.08	710.08	898.24	1,187.65	1,585.78	1,735.47	
	ηs,c		%	321.6	334	335.2	336.4		330	
SEER				8.24	8.55	8.58	8.61		8.45	
Cooling capacity	Nom.		kW	500	710	898	1,188	1,586	1,735	
Power input	Cooling	Nom.	kW	91.3	133.8	165.1	235.4	313.7	350.7	
Capacity control	Method			Variable						
	Minimum capacity		%	20		10				
EER				5.48	5.31	5.44	5.05		4.95	
IPLV				9.13	9.48	9.17	9.36	9.48	9.4	
Dimensions	Unit	Height	mm	2,108	2,430	2,487	2,302	2,500	2,493	
		Width	mm	1,179	1,287	1,303	1,579	1,610	1,769	
		Depth	mm	3,750	3,822		4,508	4,750	4,874	
Weight	Unit		kg	3,247	4,082	4,346	6,310	7,530	8,250	
	Operation weight		kg	3,375	4,349	4,660	6,900	8,300	9,200	
Water heat exchanger - evaporator	Type			Flooded shell and tube						
	Water volume		l	96	168	199	320	380	480	
	Water flow rate	Cooling	Nom.	l/s	23.9	34	43	56.8	75.8	83
		Cooling	Nom.	kPa	57	44	46	39	50	42
Water heat exchanger - condenser	Type			Flooded Shell & Tube						
	Water volume		l	126	217	241	270	390	470	
	Water flow rate	Cooling	Nom.	l/s	28.9	40.6	51.1	68.3	91.1	100
		Cooling	Nom.	kPa	16	17	19	21		27
Compressor	Type			Driven vapour compressor						
	Quantity			1			2			
Sound power level	Cooling	Nom.	dB(A)	99	105		106	107	109	
Sound pressure level	Cooling	Nom.	dB(A)	80	86		87	88	89	
Refrigerant	Type/GWP			R-513A/631						
	Charge		kg	130	180		190	320	350	
	Circuits	Quantity		1			2			
Piping connections			mm	139.7	219.1				273	
			mm	219.1						

performances according to CSS software 10.33

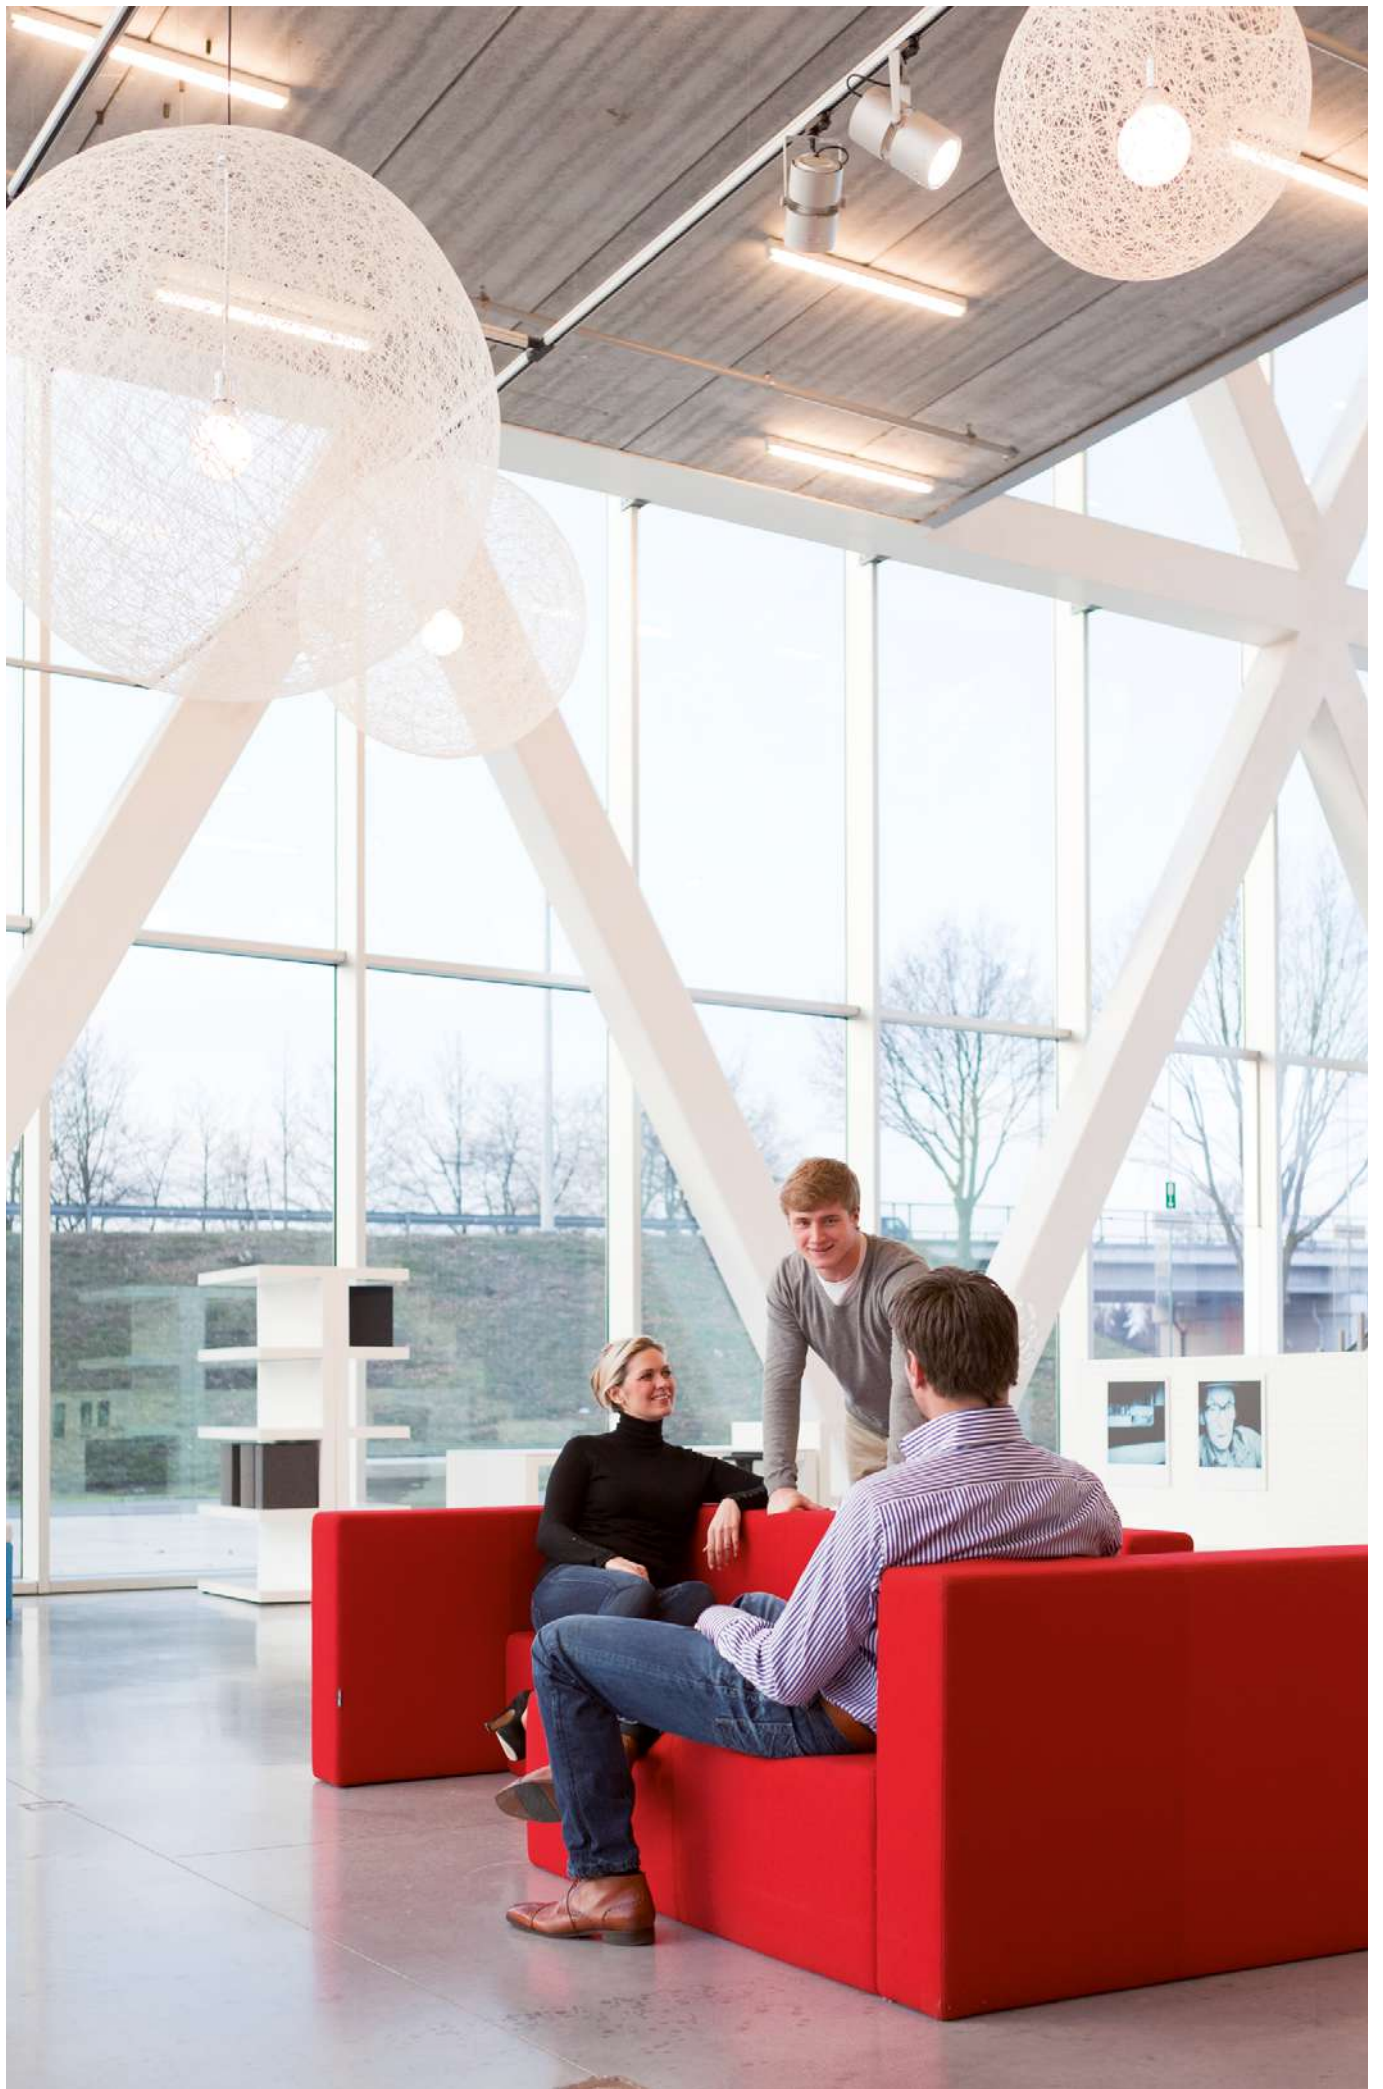



# Water cooled scroll heat pump

- › One of the most compact units on the market: 600mm x 600mm x 600mm
- › Low energy consumption
- › Low operating sound level
- › Easy installation and maintenance
- › Stainless steel plate heat exchanger
- › Low refrigerant volume
- › Standard integrated: pressure ports, flow switch, filter, shut-off valves and air purge
- › Advanced  $\mu C^2SE$  controller for direct connection to a Modbus based BMS or to a remote user interface



EWLQ-KC\_EWWQ-KC\_hydracube\_modulo\_03

More details and final information can be found by scanning or clicking the QR codes.



EWLQ-KC

<b>Cooling Only</b>				<b>EWLQ-KC</b>	<b>014</b>	<b>025</b>	<b>033</b>	<b>049</b>	<b>064</b>
Cooling capacity	Nom.		kW	12.09	19.87	28.90	39.35	57.84	
Power input	Cooling	Nom.	kW	3.74	6.11	8.43	12.03	16.41	
Capacity control	Method			Fixed					
	Minimum capacity			100			50		
EER				3.237	3.254	3.429	3.27	3.524	
Dimensions	Unit	Height	mm	600					
		Width	mm	600					
		Depth	mm	600			1,200		
Weight	Unit			kg	62	124	130	238	249
	Operation weight			kg	70	129	135	247	258
Water heat exchanger - evaporator	Type			Brazen plate					
	Water volume			l	1.47	1.96	2.74	4.47	5.88
	Water flow rate	Cooling	Nom.	l/s	0.576	0.947	1.378	1.876	2.757
	Water pressure drop	Cooling	Nom.	kPa	9.71	16.4	21.6	20.5	34.8
	Compressor	Type			Scroll compressor				
	Quantity			1			2		
Sound power level	Cooling	Nom.	dBA	69.0			76.0	72.0	79.0
Sound pressure level	Cooling	Nom.	dBA	55.2			62.1	57.6	64.6
Operation range	Evaporator Cooling	Min.~Max.	°CDB	-10 ~20					
	Condenser Heating	Min.~Max.	°CDB	20 ~55					
Refrigerant	Type/GWP			R-410A/2,088.0					
	Charge			kg	0.0				
Piping connections	Circuits			1			2		
	Quantity			1			2		
Unit	Evaporator water inlet/outlet (OD)			G1"					
	Starting current	Max	A	57.4	109.3	124.3	124.8	143.6	
	Running current	Cooling	Nom.	A	6.57	10.5	14.1	20.9	28.1
		Max	A	9.16	15.5	19.3	31.0	38.7	
Power supply	Phase/Frequency/Voltage			Hz/V 3N~/50 /400					

# Condenserless multi-scroll chiller, standard efficiency, standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › For chilled water production, to be combined with a remote condensing unit
- › Compact design to allow easy indoor installation or retrofit operations
- › Conceived for stacked installation of two single circuit units to reduce the footprint
- › High efficiency and reliable scroll compressor
- › Stainless steel plate heat exchanger



More details and final information can be found by scanning or clicking the QR codes.



EWLQ-G-SS

Cooling only				EWLQ-G-SS												
Cooling capacity	Nom.			090	100	120	130	150	170	190	210	240	300	360		
Power input	Cooling	Nom.	kW	22.4	25.8	29.2	33.0	36.8	42.0	47.0	54.2	59.9	75.6	91.8		
Capacity control	Method	Step														
	Minimum capacity			%	50.0	43.0	50.0	44.0	50.0	45.0	50.0	43.0	50.0	40.0	50.0	
EER				3.86	3.81	3.78	3.79		3.80	3.86	3.80	3.85	3.84	3.77		
Dimensions	Unit	Height	mm	1,066										1,186		
		Width	mm	928												
		Length	mm	2,743												
Weight	Unit			kg	494	578	686	714	742	773	807	838	852	967	1,046	
	Operation weight			kg	525	615	729	760	791	826	863	901	916	1,044	1,134	
Water heat exchanger - evaporator	Type	Plate heat exchanger														
	Water volume			l	6	8		10	12	13	15	17		27	34	
	Water flow rate	Nom.		l/s	4.2	4.7	5.3	6.0	6.7	7.7	8.7	9.8	11.1	13.9	16.6	
Compressor	Water pressure drop	Cooling	Nom.	kPa	44		35	29		31	33	30	38	41		
	Type	Scroll compressor														
Sound power level	Quantity	2														
	Cooling	Nom.	dB(A)	80.0	83.0	85.0	87.0	88.0			90.0	92.0	93.0			
Sound pressure level	Cooling	Nom.	dB(A)	64.0	67.0	69.0	70.0	72.0			74.0	76.0		77.0		
	Evaporator	Cooling	Min.-Max.	°CDB	-10~15											
Operation range	Condenser	Cooling	Min.-Max.	°CDB	30~60											
	Refrigerant	Type / GWP	R-410A / 2,087.5													
Piping connections	Circuits	1														
	Quantity	1														
Unit	Evaporator water inlet/outlet (OD)			1" 1/2	2" 1/2						3"					
	Starting current	Max	A	204	255	261	308	316	354	368	466	481.0	640	677		
	Running current	Cooling	Nom.	A	39	42	45	51	57	64	70	81	88	111	135	
Power supply	Max			A	59	66	72	80	88	102	116	131	145	183	221	
	Phase/Frequency/Voltage			Hz/V	3~/50/400											

# Condenserless multi-scroll chiller, standard efficiency, standard sound

- › Dual refrigerant circuit (4 scroll compressors) with single evaporator
- › For chilled water production, to be combined with a remote condensing unit
- › Compact design to allow easy indoor installation or retrofit operations
- › High efficiency and reliable scroll compressor
- › Stainless steel plate heat exchanger



More details and final information can be found by scanning or clicking the QR codes.




EWLQ-L-SS

Cooling only				EWLQ-L-SS	180	205	230	260	290	330	380	430	480	540	600	660	720
Cooling capacity	Nom.		kW	173	197	224	249	279	317	361	409	459	511	571	624	676	
Power input	Cooling	Nom.	kW	44.3	51.1	57.9	65.6	73.2	83.8	93.5	108	119	135	152	168	184	
Capacity control	Method			Step													
	Minimum capacity		%	25.0	21.0	25.0	22.0	25.0	23.0	25.0	21.0	25.0	22.0	20.0	18.0	25.0	
EER				3.91	3.86	3.87	3.79	3.81	3.78	3.86	3.79	3.84	3.78	3.76	3.71	3.67	
Dimensions	Unit	Height	mm	1,970													
		Width	mm	928													
		Length	mm	2,801													
Weight	Unit		kg	832	1,007	1,202	1,252	1,333	1,380	1,432	1,511	1,560	1,609	1,694	1,833	1,957	
	Operation weight		kg	894	1,081	1,292	1,345	1,436	1,486	1,547	1,638	1,690	1,741	1,844	1,990	2,120	
Water heat exchanger - evaporator	Type			Plate heat exchanger													
	Water volume		l	19	22	29	35	41	49	62							
	Water flow rate	Nom.	l/s	8.3	9.5	10.7	11.9	13.4	15.2	17.3	19.6	21.9	24.5	27.3	29.9	32.4	
Compressor	Water pressure drop	Cooling	Nom.	kPa	25	20	25	22	29	36	45	44	52	62			
	Type			Scroll compressor													
Sound power level	Quantity			4													
	Cooling	Nom.	dB(A)	83.0	86.0	88.0	90.0	91.0	93.0	95.0	96.0						
Sound pressure level	Cooling	Nom.	dB(A)	65.0	68.0	70.0	72.0	74.0	73.0	76.0	77.0	78.0					
	Evaporator	Cooling	Min.-Max.	°CDB	-10~15												
Operation range	Condenser	Cooling	Min.-Max.	°CDB	30~60												
	Type / GWP			R-410A / 2,087.5													
Refrigerant	Circuits			2													
	Quantity			3"													
Piping connections	Evaporator water inlet/outlet (OD)			3"													
Unit	Starting current	Max	A	263	320	333	388	403	456	484	597	626	785	822	860	898	
	Running current	Cooling	Nom.	A	78	84	90	102	114	128	141	161	176	199	223	246	269
		Max	A	118	131	144	160	175	205	232	262	290	328	366	403	441	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400													

# Condenserless screw chiller, standard efficiency, standard sound

- › Compact design to allow easy indoor installation or retrofit operations
- › Daikin semi-hermetic single screw stepless compressor
- › High energy efficiency both at full and part load conditions
- › Chilled water temperatures down to -10°C on standard unit
- › Optimised for use with R-134a
- › MicroTech 4 controller with superior control logic and easy interface

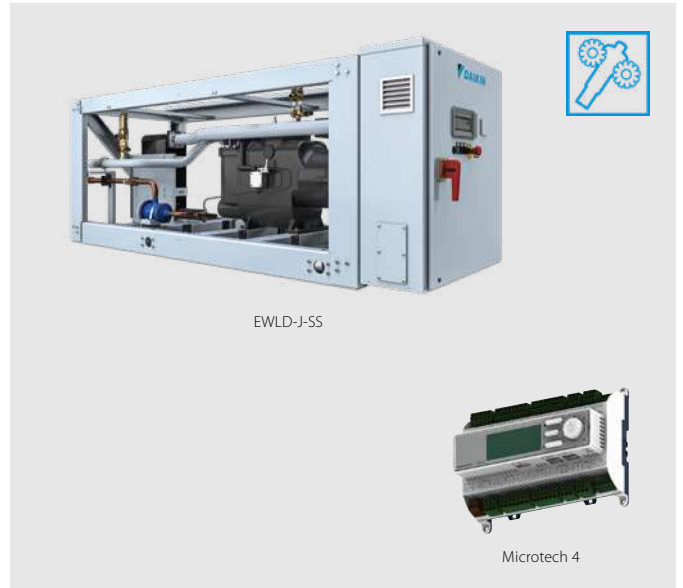

EWLD-J-SS

Microtech 4

More details and final information can be found by scanning or clicking the QR codes.




EWLD-J-SS

<b>Cooling only</b>		<b>EWLD-J-SS</b>		<b>110</b>	<b>130</b>	<b>145</b>	<b>165</b>	<b>195</b>	<b>235</b>	<b>265</b>	
Cooling capacity	Nom.		kW	110	128	142	163	191	236	264	
Power input	Cooling	Nom.	kW	31.2	38.4	43.8	50.4	56.0	66.0	75.3	
Capacity control	Method	Stepless									
	Minimum capacity		%	25.0							
EER				3.51	3.33	3.25	3.24	3.42	3.58	3.51	
Dimensions	Unit	Height	mm	1,020							
		Width	mm	913							
		Length	mm	2,684							
Weight	Unit		kg	1,124	1,141	1,237	1,263	1,305	1,489	1,489	
	Operation weight		kg	1,138	1,159	1,253	1,281	1,327	1,518	1,518	
Water heat exchanger - evaporator	Type	Plate heat exchanger									
	Water volume		l	14	18	14	17	20	26	26	
	Water flow rate	Nom.	l/s	5.2	6.1	6.8	7.8	9.2	11.3	12.6	
Compressor	Water pressure drop	Cooling	Nom.	kPa	14	13	39	37	33	26	32
	Type	Single screw compressor									
Sound power level	Quantity	1									
	Cooling	Nom.	dB(A)	89.0							
Sound pressure level	Cooling	Nom.	dB(A)	79.0							
	Evaporator	Cooling	Min.-Max.	-10~-15							
Operation range	Condenser	Cooling	Min.-Max.	25~60							
	Type / GWP	R-134a / 1,430									
Refrigerant	Circuits	Quantity		1							
	Evaporator water inlet/outlet (OD)	76.2 mm									
Piping connections	Unit	Maximum starting current	A	153		197		197	290	290	
	Nominal running current (RLA)	Cooling	A	52	62	72	81	91	107	120	
	Maximum running current	A	85	103	114	130	154	168	201		
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400							

performances according to CSS software 10.34

# Condenserless screw chiller, standard efficiency, standard sound

- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Daikin semi-hermetic single screw compressor
- › Direct expansion plate to plate evaporator
- › Shell and tube condenser
- › Silver efficiency and standard sound
- › Upgrade to new MicroTech 4 controller

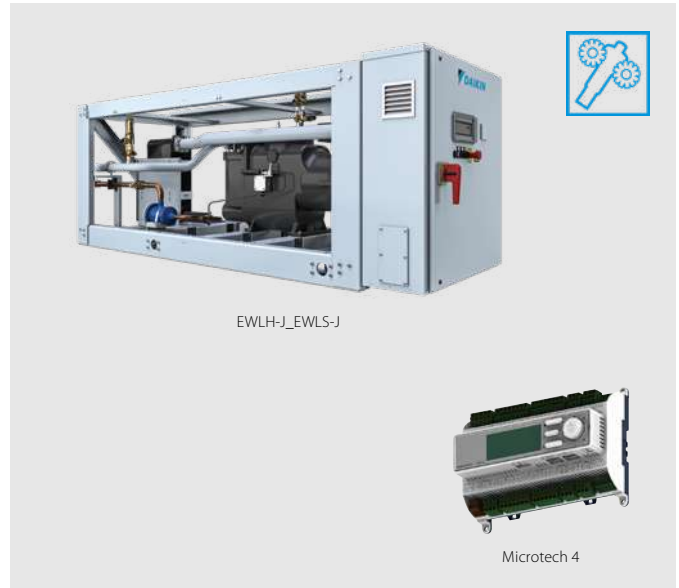

EWLH-J\_EWLS-J

Microtech 4

More details and final information can be found by scanning or clicking the QR codes.



EWLH-J-SS


				EWLH-J-SS	080	100	110	130	140	170	190	
Cooling capacity	Nom.			kW	84	102	109	127	143	174	193	
Power input	Cooling	Nom.		kW	23.3	28.1	31.8	37	41.5	49.6	56.3	
Capacity control	Method			Stepless								
	Minimum capacity			%	25							
EER					3.62		3.43	3.42	3.43	3.51	3.43	
Dimensions	Unit	Height		mm	1,020							
		Width		mm	913							
		Length		mm	2,684							
Weight	Unit			kg	1,124	1,141	1,237	1,263	1,305	1,489		
	Operation weight			kg	1,138	1,159	1,253	1,281	1,327	1,518		
Water heat exchanger - evaporator	Type			Plate heat exchanger								
	Water volume			l	14	18	14	17	20	26		
	Water flow rate	Cooling	Nom.	l/s	4	4.9	5.2	6	6.8	8.3	9.2	
				kPa	9.7	9.9	17.5	17.6	16.2	15.5	18.7	
Compressor	Type			Single screw compressor								
	Quantity				1							
Sound power level	Cooling	Nom.		dBA	88.9							
Sound pressure level	Cooling	Nom.		dBA	79							
Refrigerant	Type			R-1234(ze)								
	Circuits	Quantity			1							
Piping connections				mm	76.2							
Unit	Starting current	Max		A	153			197			290	
		Running current	Cooling	Nom.	A	42	48	59	65	72	84	92
	Max		A	75	90	100	114	143	158	178		
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50 /400							

performances according to CSS software 10.34



# Condenserless screw chiller, standard efficiency, standard sound

- › Refrigerant R-513A
- › Daikin semi-hermetic single screw compressor
- › Direct expansion plate to plate evaporator
- › Shell and tube condenser
- › Silver efficiency and standard sound
- › Upgrade to new MicroTech 4 controller

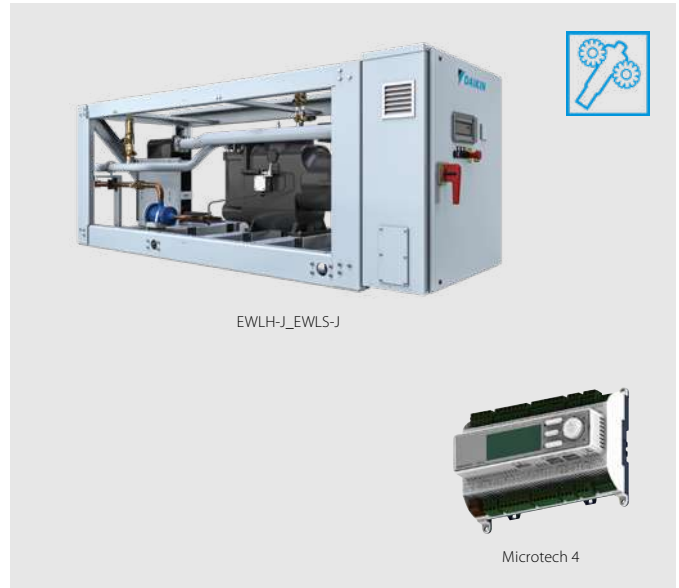

More details and final information can be found by scanning or clicking the QR codes.



EWLS-J-SS

				EWLS-J-SS		110	130	150	170	200	240	270	
Cooling capacity	Nom.		kW	111	132	150	175	200	236	268			
Power input	Cooling	Nom.		kW	32.2	38.7	44.8	51.2	58.2	69.4	78.8		
Capacity control	Method		Stepless										
	Minimum capacity		%	25									
EER				3.44	3.4	3.35	3.41	3.44	3.41	3.4			
Dimensions	Unit	Height	mm	1,020									
		Width	mm	913									
		Length	mm	2,684									
Weight	Unit			kg	1,124	1,141	1,237	1,263	1,305	1,489			
		Operation weight		kg	1,138	1,159	1,253	1,281	1,327	1,518			
Water heat exchanger - evaporator	Type		Plate heat exchanger										
	Water volume		l	14	18	14	17	20	26				
	Water flow rate	Cooling	Nom.	l/s	5.3	6.3	7.2	8.4	9.6	11.3	12.8		
	Water pressure drop	Cooling	Nom.	kPa	16	15.8	31.1	31.5	30	27	33.8		
Compressor	Type		Single screw compressor										
	Quantity			1									
Sound power level	Cooling	Nom.		dB(A)	88.9								
Sound pressure level	Cooling	Nom.		dB(A)	79								
Refrigerant	Type		R-513A										
	Circuits	Quantity			1								
Piping connections			mm	76.2									
Unit	Starting current	Max		A	154			198			291		
		Running current	Cooling	Nom.	A	54	65	75	84	94	111	125	
			Max		A	81	96	108	122	141	164	185	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400									

performances according to CSS software 10.34

# Condenserless screw chiller, standard efficiency, standard sound

- › DX shell and tube evaporator – one pass refrigerant side for easy oil circulation and return
- › Stepless single-screw compressor
- › Standard electronic expansion valve
- › Optimised for use with R-134a



More details and final information can be found by scanning or clicking the QR codes.



EWLD-I-SS

Cooling only				EWLD-I-SS																						
Cooling capacity	Nom.		kW		315	374	437	509	607	670	740	802	865	935	975	1,029	1,097	1,144	1,210	1,278	1,330	1,381	1,433			
Power input	Cooling		Nom.		kW		80.3	96.0	113	134	160	175	192	224	246	264	283	302	318	336	356	375	395			
Capacity control	Method		Stepless																							
	Minimum capacity		%		25.0					12.5					8.3											
EER					3.93	3.89	3.88	3.79	3.80	3.82	3.86	3.81	3.69	3.64	3.83	3.79	3.80	3.74	3.68	3.63						
Dimensions	Unit		Height		mm		1,899					2,325					2,415									
			Width		mm		1,464										2,135									
			Length		mm		3,114					4,391					4,426									
Weight	Unit		kg		1,861	1,869	1,884	3,331	3,339	3,347	3,356	3,364	3,412	5,146	5,167	5,188	5,208									
	Operation weight		kg		2,054	2,052	2,056	3,602	3,603	3,604	3,605	3,645	5,667	5,671	5,677	5,680										
Water heat exchanger - evaporator	Type		Single pass shell and tube																							
	Water volume		l		193	183	172	271	263	256	248	241	233	504	489	472	504	489	472							
	Water flow rate		Nom.		l/s		15.1	17.9	20.9	24.4	29.1	32.1	35.4	38.4	41.4	44.8	46.7	49.3	52.5	54.8	57.9	61.2	63.7	66.1	68.6	
Compressor	Type		Single screw compressor																							
	Quantity				1					2					3											
Sound power level	Cooling		Nom.		dB(A)		94.0	97.0					98.0	99.0	100.0					101.0	103.0					
	Sound pressure level		Cooling		Nom.		dB(A)		75.0	76.0	78.0					79.0	80.0	81.0					80.0	81.0	83.0	
Operation range	Evaporator		Cooling		Min.-Max.		°CDB																			
	Condenser		Cooling		Min.-Max.		°CDB																			
Refrigerant	Type / GWP		R-134a / 1,430																							
	Circuits		Quantity		1					2					3											
Piping connections	Evaporator water inlet/outlet (OD)		42mm																							
Unit	Maximum starting current		A		330	464					493	627	650	681					703	836	867	898	920	942		
	Nominal running current (RLA) Cooling		A		131	157	181	214	260	287	313	338	361	391	420	448	470	493	517	542	571	601	631			
	Maximum running current		A		204	233	271	299	407	436	465	504	542	570	597	670	698	737	775	814	841	868	896			
Power supply	Phase/Frequency/Voltage		Hz/V		3~/50/400																					



# Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller with superior control logic and easy interface
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design
- › Optimized for highly efficient R134a refrigerant and compatible with next generation refrigerants



More details and final information can be found by scanning or clicking the QR codes.



EWWD-DZXS

Cooling Only				EWWD-DZXS													
				320	440	530	610	640	700	880	C10	C13	C14	C15	C21		
Space cooling	A Condition Pdc (35°C - 27/19)			kW	320.01	443.01	528	610.02	638.01	699.97	883.01	1,056	1,325.26	1,402	1,564.57	2,070.42	
	ηs,c			%	334	314	324	344	349	342	350	363	349.8	362	360.6	365.4	
SEER					8.72	8.65	9.08	8.91	8.95	8.79	8.99	9.31	8.86	9.32	9.13	9.28	
Cooling capacity	Nom.			kW	320	443	528	610	638	700	883	1,056	1,325	1,402	1,565	2,070	
Power input	Cooling	Nom.		kW	66.5	88.5	102	124.7	131	126	176	205	272	256	310	391	
Capacity control	Method			Variable													
	Minimum capacity			%	30	21	16	15	18	11	7	9	8	6			
EER					4.81	5	5.14	4.89	4.85	5.53	5.01	5.15	4.88	5.46	5.04	5.3	
ESEER					7.94	7.92	8.2	7.78	8.16	8.08	8.09	8.39	-	8.29	-	-	
IPLV					9.38	9.33	9.7	9.41	9.5	9.86	9.52	9.91	9.18	10.1	9.5	9.42	
Dimensions	Unit	Height	mm	1,865				1,985				2,200	2,083	2,200	2,225	2,290	
		Width	mm	1,055				1,160				1,270	1,510	1,270	1,510		
	Length	mm	3,625				3,585				3,580	4,793	3,580	4,768	4,812		
		kg	1,700				1,900				2,000	2,850	2,600	2,900	3,600	4,350	3,800
Weight	Operation weight			kg	1,973	2,216	2,347	3,197	3,344	3,102	3,458	4,292	5,020	4,579	5,540	6,570	
	Type			Flooded shell and tube													
Water heat exchanger - evaporator	Water volume			l	70	96	107		134		156	199	271.8	229	317.4	444.3	
	Water flow rate	Nom.		l/s	15.3	21.2	25.3	29.1	30.5	33.5	42.3	50.6	-	67.2	-	-	
		Cooling	Nom.	l/s	-												
	Water pressure drop	Cooling	Nom.	kPa	47.4	40.6	45	59.1	51	61.3	64	60.4	60.1	74	61.1	71.9	
Type			Shell and tube														
Water heat exchanger - condenser	Water volume			l	83	100	120		170	188	211	263	Flooded Shell & Tube	Shell and tube	Flooded Shell & Tube		
	Water flow rate	Nom.		l/s	18.3	25.3	30.1	35.1	36.7	39.4	50.5	60.1	359.9	320	442.6	603.6	
		Cooling	Nom.	l/s	-												
	Water pressure drop	Cooling	Nom.	kPa	49.2	59.5	54.5	74	46.2	41.6	50.9	50.3	56	52.9	43	57	
Type			Driven vapour compressor														
Compressor	Quantity			1 2 1 2 3 2 3													
	Cooling	Nom.	dB(A)	87.9	88.9	89.9	91.1	91	91.1	92	93.3	99	94.3	100	101		
Sound pressure level	Cooling	Nom.	dB(A)	69.6	70.6	71.6	72.6		73.6		74.6	80	75.6	81	82		
Operation range	Evaporator	Cooling	Min.-Max.	4~20													
	Condenser	Cooling	Min.-Max.	°CDB 20~55 20~42 20~55 20~42 20~55 20~42 20~55 20~42 20~55 20~42													
Refrigerant	Type/GWP			R-134a/1,430													
	Charge			kg	120				180				230	320	230	340	390
	Circuits	Quantity		1													
Refrigerant charge				TCO2eq	172				257				329	-	329	-	
Piping connections				mm	139.7				168.3				219.1				
Piping connections				mm	139.7 168.3 219.1												
	Unit	Running current	Cooling	Nom.	A	100.55	138.22	155.23	203.41	200.56	190.23	274.86	309.17	445	383.87	471.7	588
			Max	A	134	208	166	267		196	417	331	631	392	511	589	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400												

performances according to CSS software 10.27



# Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller with superior control logic and easy interface
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design
- › Optimized for highly efficient R134a refrigerant and compatible with next generation refrigerants



EWWD-DZ

Microtech 4

More details and final information can be found by scanning or clicking the QR codes.



EWWD-DZXE



Cooling Only				EWWD-DZXE															
Space cooling				kW															
A Condition Pdc (35°C - 27/19) ηs,c				340	470	570	670	680	740	950	C10	C11	C14	C15	C17	C22			
SEER				335	316	326	345	349	346	352	339.8	365	350.6	366	359	370.2			
Cooling capacity	Nom.			341	474	566	670	682	742	946	1,038	1,130	1,437	1,478	1,685	2,173			
Power input	Cooling	Nom.		69.9	93.5	108	138.4	138	131	186	210	216	288	263	329	393			
Capacity control	Method			Variable															
	Minimum capacity			29	20	15			17	10	7	9	7	6					
EER				4.88	5.07	5.22	4.84	4.91	5.65	5.08	4.94	5.23	4.98	5.6	5.12	5.53			
ESEER				7.81	7.83	8.11	7.52	8	8.09	7.96	-	8.26	-	8.22	-	-			
IPLV				9.29	9.3	9.71	9.22	9.37	9.9	9.46	9.33	9.86	9.2	10.1	9.49	9.52			
Dimensions	Unit	Height	mm	1,865			1,985			2,082	2,200	2,083	2,200	2,225	2,290				
		Width	mm	1,055			1,160			1,510	1,270	1,510	1,270	1,510	1,510	1,510	1,510		
	Length	mm	3,625						3,585			4,688	3,580	4,793	3,580	4,768	4,812		
		mm	3,625						3,585			4,688	3,580	4,793	3,580	4,768	4,812		
Weight	Unit			kg	1,750	1,950	2,050	2,850	2,650	3,000	4,400	3,700	4,700	3,900	5,100	5,900			
	Operation weight			kg	2,033	2,276	2,407	3,197	3,354	3,162	3,568	4,970	4,412	5,370	4,699	5,890	6,920		
Water heat exchanger - evaporator	Type			Flooded shell and tube															
	Water volume			l	70	96	107	134	156	207.3	199	317.4	229	317.4	444.3				
	Water flow rate	Nom.			l/s	16.4	22.7	27.1	32	32.7	35.6	45.3	-	54.1	-	70.9	-		
		Cooling	Nom.			l/s	-						49.1	-	68	-	80.4	103	
Water pressure drop	Cooling	Nom.			kPa	54.2	46.5	51.5	71.4	58.3	68.7	73.2	61.4	68.9	70.7	82	70.7	78.9	
Water heat exchanger - condenser	Type			Shell and tube															
	Water volume			l	83	100	120	170	188	211	326.4	263	359.9	320	442.6	603.6			
	Water flow rate	Nom.			l/s	19.6	27	32.1	38.6	39.1	41.6	53.9	-	64.1	-	83	-		
		Cooling	Nom.			l/s	-						58.9	-	81.4	-	95.8	121	
Water pressure drop	Cooling	Nom.			kPa	56.4	68.4	62.4	90	52.9	46.7	58.3	44	57.6	66	58.5	50	62	
Compressor	Type			Driven vapour compressor															
	Quantity			1			2		1		2		3		2		3		
Sound power level	Cooling	Nom.			dB(A)	87.9	88.9	89.9	91.1	91	91.1	92	98	93.3	99	94.3	100	101	
Sound pressure level	Cooling	Nom.			dB(A)	69.6	70.6	71.6	72.6			73.6	79	74.6	80	75.6	81	82	
Operation range	Evaporator	Cooling	Min.~Max.			4~20													
	Condenser	Cooling	Min.~Max.			°CDB	20~55	20~42	20~55	20~42	20~55	20~42	20~55	20~42	20~55	20~42			
Refrigerant	Type/GWP			R-134a/1,430															
	Charge			kg	130			120	200	190	200	350	250	400	250	420	470		
	Circuits	Quantity			1														
Refrigerant charge			TCO2eq	186			172	286	272	286	-	358	-	358	-				
Piping connections			mm	139.7						168.3						219.1			
Piping connections			mm	139.7						168.3						219.1			
Unit	Running current	Cooling	Nom.			A	105.42	144.7	162.48	212.9	210.15	196	287.44	318.3	323.53	425.9	392	496	588
		Max			A	134	208	166	267		196	417	406	331	631	392	511	589	
Power supply	Phase/Frequency/Voltage				Hz/V	3~/50/400													

performances according to CSS software 10.27

# Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller with superior control logic and easy interface
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design



More details and final information can be found by scanning or clicking the QR codes.



EWWH-DZXS

Cooling Only				EWWH-DZXS												
				230	320	380	430	455	460	640	755	920	945	C11	C13	
Space cooling	A Condition Pdc (35°C - 27/19)			kW	227.08	318.33	376.33	455.13	454.66	474.48	637.15	752.27	917.79	945.8	1,126	1,352
	ηs,c			%	330	346		342		339	352	354	353	360.2	359.4	364.2
SEER					8.78	8.66	8.67	8.8	8.78	8.32	9.04	9.07	9.06	9.02	9.04	9.13
Cooling capacity	Nom.			kW	227	318	376	455		461	637	752	918	945.8	1,126	1,352
Power input	Cooling Nom.			kW	45.6	60.5	71.4	93.3	90.6	79.3	120.5	142.1	158.8	181	216.5	237.7
Capacity control	Method			Variable										Stepless		
	Minimum capacity			%	24	21	20	13	12	20	11	10		11		
EER					4.98	5.27		4.88	5.02	5.81	5.29		5.78	5.22	5.2	5.69
ESEER					7.78	7.97	7.98	7.89	8.06	7.76	8.26	8.3	8.16	-		
IPLV					9.37	9.52	9.56	9.44	9.5		9.74	9.78	9.74	9.54	9.57	9.71
Dimensions	Unit	Height		mm	1,865			1,985			2,200		2,083	2,225	2,290	
		Width		mm	1,055			1,160			1,270		1,510			
		Length		mm	3,625			3,585			3,580		4,793	4,768	4,812	
Weight	Unit			kg	1,700	1,900	2,000	2,850		2,600	2,900	3,600	3,800	4,350	4,750	5,500
	Operation weight			kg	1,973	2,216	2,347	3,197	3,344	3,102	3,458	4,292	4,579	5,020	5,540	6,570
Water heat exchanger - evaporator	Type			Flooded shell and tube												
	Water volume			l	70	96	107		134		156	199	229	271.8	317.4	444.3
	Water flow rate	Cooling	Nom.	l/s	10.8	15.2	18	20.5	21.7	22	30.4	35.9	43.9	45.2	53.8	64.6
Water heat exchanger - condenser	Type			Shell and tube												
	Water volume			l	83	100	120		170	188	211	263	320	359.9	442.6	603.6
	Water flow rate	Cooling	Nom.	l/s	13	18.1	21.4	24.5	26.1	25.8	36.2	42.7	51.4	53.8	64.2	76
Compressor	Type			Driven vapour compressor												
	Quantity			1			2		1	2		3				
	Sound power level	Cooling	Nom.	dB(A)	87.9	88.9	89.9	91.1	91	91.1	92	93.3	94.3	99	100	101
Sound pressure level	Cooling	Nom.	dB(A)	69.6	70.6	71.6	72.6		73.6		74.6	75.6	80	81	82	
Operation range	Evaporator Cooling	Min.~Max.		°CDB	4~20											
	Condenser Cooling	Min.~Max.		°CDB	20~55	20~42	20~55	20~42	20~55	20~42	20~55	20~42	20~55	20~42		
Refrigerant	Type/GWP			R-1234(ze)/7												
	Charge			kg	120			180		230		320	340	390		
	Circuits			Quantity	1											
Refrigerant charge				TCO2Eq	1			2		-						
Piping connections				mm	139.7			168.3		219.1						
				mm	139.7			168.3		219.1	168.3	219.1				
Unit	Running current	Cooling	Nom.	A	72	99	112	133	144	125	198	222	249	297.8	339.2	374.1
Unit	Running current	Max		A	95	150	123	190		142	300	246	284	451	370	448
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400											

performances according to CSS software 10.27



# Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller with superior control logic and easy interface
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design



EWWH-DZ

Microtech 4

More details and final information can be found by scanning or clicking the QR codes.



EWWH-DZXE



Cooling Only				EWWH-DZXE															
				245	345	405	470	480	490	685	740	810	955	C10	C12	C14			
Space cooling	A Condition Pdc (35°C - 27/19)			kW			241.98	339.33	401.93	460.88	483.83	486.57	678.69	741	802.77	944.73	1,033	1,226	1,417
	ηs,c			%			331	350		335	345	344	356	344.6	358	356	364.2		371.8
SEER							8.85	8.75	8.79	8.94	8.4	8.9	9.18	8.8	9.22	9.15	9.17		9.35
Cooling capacity	Nom.			kW			242	339	402	487	474	484	679	741	803	945	1,033	1,226	1,417
	Cooling Nom.			kW			47.9	63.4	75.1	98.7	79.5	95.1	126.3	144.6	149.4	159.2	192.9	229.5	238.3
Capacity control	Method			Variable															
	Minimum capacity			%			24	20	19	12	20	12	10	12	9	10	11		17
EER							5.05	5.35		4.93	5.97	5.09	5.37	5.13	5.37	5.93	5.35	5.34	5.94
ESEER							7.78	8.02	8	7.75	7.83	8.04	8.22	-	8.27	8.23	-		-
IPLV							9.33	9.54	9.58	9.36	9.56	9.43	9.74	9.44	9.79	9.8	9.62	9.65	9.72
Dimensions	Unit	Height		mm			1,865			1,985			2,082		2,200		2,083	2,225	2,290
		Width		mm			1,055			1,160			1,510		1,270		1,510		
		Length		mm			3,625			3,585			4,688		3,580		4,793	4,768	4,812
Weight	Unit			kg			1,750	1,950	2,050	2,850	2,650	2,850	3,000	4,400	3,700	3,900	4,700	5,100	5,900
	Operation weight			kg			2,033	2,276	2,407	3,197	3,162	3,354	3,568	4,970	4,412	4,699	5,370	5,890	6,920
Water heat exchanger - evaporator	Type			Flooded shell and tube															
	Water volume			l			70	96	107		134		156	207.3	199	229	317.4		444.3
	Water flow rate		Cooling Nom.	l/s			11.6	16.2	19.2	22.4	22.6	23.1	32.4	34.9	38.4	45.2	48.7	57.9	67
	Water pressure drop		Cooling Nom.	kPa			29.7	28.4		37.8	30.8	32	41.3	31	38.1	36.9	37	38	33
Water heat exchanger - condenser	Type			Shell and tube															
	Water volume			l			83	100	120		188	170	211	326.4	263	320	359.9	442.6	603.6
	Water flow rate		Cooling Nom.	l/s			13.9	19.2	22.8	26.7	26.4	27.7	38.5	41.8	45.5	52.8	57.8	68.8	78.4
	Water pressure drop		Cooling Nom.	kPa			28	34	31	42	18	26	29	21	28	23	33	30	26
Compressor	Type			Driven vapour compressor															
	Quantity						1		2	1	2	3	2		3				
Sound power level	Cooling Nom.		dBA			87.9	88.9	89.9	91.1		91	92	98	93.3	94.3	99	100	101	
	Sound pressure level		dBA			69.6	70.6	71.6	72.6		73.6	79	74.6	75.6	80	81	82		
Operation range	Evaporator Cooling		Min.~Max. °CDB			4~20													
	Condenser Cooling		Min.~Max. °CDB			20~55		20~42	20~55	20~42	20~55			20~42		20~55	20~42		
Refrigerant	Type/GWP			R-1234(ze)/7															
	Charge			kg			130		120	190	200		350	250		400	420	470	
	Circuits			Quantity			1												
Refrigerant charge				TCO2Eq			1			-			2			-			
Piping connections				mm			139.7			168.3			219.1			219.1			
				mm			139.7			168.3			219.1			219.1			
Unit	Running current Cooling		Nom. A			75	103	117	142	125	150	205	277	232	249	311	249		
Unit	Running current Max		A			95	150	123	190	142	190	300	286	246	284	451	370	448	
Power supply	Phase/Frequency/Voltage			Hz/V			3~/50/400												

performances according to CSS software 10.27



# Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design
- › Optimized for highly efficient R-513A refrigerant and compatible with next generation refrigerants



More details and final information can be found by scanning or clicking the QR codes.



EWWS-DZXS

Cooling Only				EWWS-DZXS	320	440	530	610	640	700	880	C10	C13	C14	C15	C21
Space cooling	A Condition Pdc (35°C - 27/19)		kW	315.85	438.98	520.21	629.71	630.64	694.46	875.77	1,043.15	1,304.67	1,390.46	1,549.85	2,027.16	
	ηs,c		%	3.416	3.376	3.54	3.448	3.508	3.428	3.508	3.636	3.448	3.624	3.552	3.608	
SEER				8.74	8.64	9.05	8.82	8.97	8.77	8.97	9.29	8.82	9.26	9.08	9.22	
Cooling capacity	Nom.		kW	316	439	520	609	631	694	876	1,043	1,305	1,390	1,550	2,027	
Power input	Cooling	Nom.	kW	67.1	90	103	126	132	127	177	205	270	257	312	384	
Capacity control	Method			Variable												
	Minimum capacity		%	30	21		16	15	18	11		7	9	8	6	
EER				4.71	4.88	5.05	4.82	4.77	5.44	4.92	5.08	4.82	5.4	4.96	5.27	
IPLV				9.31	9.25	9.61	9.29	9.44	9.77	9.45	9.83	9.1	9.96	9.38	9.34	
Dimensions	Unit	Height	mm	1,865			1,985			2,200		2,083	2,200	2,225	2,290	
		Width	mm	1,055			1,160			1,270		1,510	1,270	1,510		
		Depth	mm	3,625			3,585			3,580		4,793	3,580	4,768	4,812	
Weight	Unit		kg	1,700	1,900	2,000	2,850		2,600	2,900	3,600	4,350	3,800	4,750	5,500	
	Operation weight		kg	1,973	2,216	2,347	3,197	3,344	3,102	3,458	4,292	5,020	4,579	5,540	6,570	
Water heat exchanger - evaporator	Type			Flooded shell and tube												
	Water volume		l	70	96	107		134		156	199	272	229	317	444	
	Water flow rate	Cooling	Nom.	l/s	15.3	21.3	25.2	29.1	30.6	33.7	42.5	50.5	63.1	67.4	75	98.1
Water heat exchanger - condenser	Water pressure drop	Cooling	Nom.	kPa	47.3	40.9	44.8	59.1	51.1	61.7	64.5	59.3	59.5	74.4	61.3	70.4
	Type			Flooded Shell & Tube												
	Water volume		l	83	100	120		170	188	211	263	360	320	443	604	
Compressor	Water flow rate	Cooling	Nom.	l/s	18.4	25.4	30.1	34.9	36.8	39.6	50.8	60.2	75.9	79.5	89.9	116
	Water pressure drop	Cooling	Nom.	kPa	49.4	60.4	54.5	74.2	46.5	42.1	51.5	50.4	56.1	53.4	43.7	55.7
	Type			Driven vapour compressor												
Sound power level	Quantity			1			2		1	2		3	2	3		
	Cooling	Nom.	dBA	87.9	88.9	89.9	91.1	91.0	91.1	92.0	93.3	93.5	94.3	94.8	95.8	
Sound pressure level	Cooling	Nom.	dBA	69.6	70.6	71.6	72.6		73.6		74.6	73.9	75.6	75.2	76.2	
	Type/GWP			R-513A/631												
Refrigerant	Charge		kg	120	150	120	140	190	180	200	230	240	230	270		
	Circuits	Quantity		1												
Piping connections			mm	139.7			168.3			219.1						
			mm	139.7			168.3			219.1						





# Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design
- › Optimized for highly efficient R-513A refrigerant and compatible with next generation refrigerants



More details and final information can be found by scanning or clicking the QR codes.




EWWS-DZXE

Cooling Only				EWWS-DZXE																
				340	470	570	670	680	740	950	C10	C11	C14	C15	C17	C22				
Space cooling	A Condition Pdc (35°C - 27/19)			kW	336.72	471.24	558.03	676.76	674.49	728.69	941.72	1,024.55	1,117.07	1,419.67	1,450.66	1,652.82	2,128.56			
	ηs,c			%	3.428	3.396	3.568	3.452	3.52	3.464	3.532	3.444	3.664	3.464	3.668	3.556	3.656			
SEER				8.77	8.69	9.12	8.83	9	8.86	9.03	8.81	9.36	8.86	9.37	9.09	9.34				
Cooling capacity	Nom.			kW	337	471	558	671	674	729	942	1,025	1,117	1,420	1,451	1,653	2,129			
Power input	Cooling	Nom.		kW	70.2	95.1	108	139		129	188	209	215	287	259	324	385			
Capacity control	Method			Variable																
	Minimum capacity			%	29	20		15		17		10		7		9		7		6
EER				4.8	4.96	5.15	4.8	4.85	5.61	5.01	4.89	5.18	4.94	5.6	5.1	5.52				
IPLV				9.22	9.2	9.59	9.11	9.31	9.78	9.38	9.25	9.81	9.12	9.98	9.4	9.41				
Dimensions	Unit	Height	mm	1,865				1,985				2,082	2,200	2,083	2,200	2,225	2,290			
		Width	mm	1,055				1,160				1,510	1,270	1,510	1,270	1,510				
		Depth	mm	3,625				3,585				4,688	3,580	4,793	3,580	4,768	4,812			
Weight	Unit			kg	1,750	1,950	2,050	2,850		2,650	3,000	4,400	3,700	4,700	3,900	5,100	5,900			
		Operation weight		kg	2,033	2,276	2,407	3,197	3,354	3,162	3,568	4,970	4,412	5,370	4,699	5,890	6,920			
Water heat exchanger - evaporator	Type		Flooded shell and tube																	
	Water volume		l	70	96	107		134		156	207	199	272	229	317	444				
	Water flow rate	Cooling	Nom.	l/s	16.3	22.9	27	32	32.7	35.3	45.6	49.6	54.1	68.8	70.3	80.1	102			
Water heat exchanger - condenser	Type		Flooded Shell & Tube																	
	Water volume		l	83	100	120		170	188	211	326	263	360	320	443	604				
	Water flow rate	Cooling	Nom.	l/s	19.6	27.3	32.1	38.4	39.2	41.4	54.4	59.5	64.2	82.3	82.5	95.5	121			
Compressor	Type		Driven vapour compressor																	
	Quantity		1				2		1	2	3	2	3	2	3					
	Sound power level	Cooling	Nom.	dB(A)	87.9	88.9	89.9	91.1	91.0	91.1	92.0	92.6	93.3	93.5	94.3	94.8	95.8			
Sound pressure level	Cooling	Nom.	dB(A)	69.6	70.6	71.6	72.6		73.6		73	74.6	73.9	75.6	75.2	76.2				
Refrigerant	Type/GWP		R-513A/631																	
	Charge		kg	160	130		200		190	200	270	250	270	250	300	355				
	Circuits	Quantity	1																	
Piping connections			mm	139.7				168.3				219.1								
			mm	139.7				168.3				219.1								

# Water cooled centrifugal chiller, high efficiency, standard sound

- › Single Compressor chiller
- › High part load efficiency with Daikin VFD Unit Mounted - Refrigerant Cooled
- › Low Harmonics VFD option
- › Excellent Full Load performance
- › Unloading down to 10% without Hot Gas By Pass
- › Refrigerant flexibility with R-134a, R-1234ze and R-513A
- › Reduced refrigerant quantity
- › Touch screen operator panel
- › Unit mounted control panel
- › Rapid restart for fast start-up after power loss
- › Heat pump mode

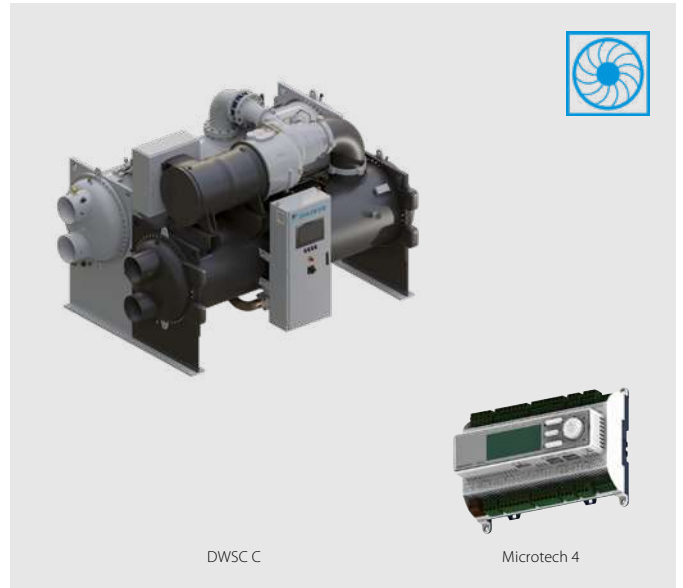

## Daikin Centrifugal Compressor

- › No compromises in application flexibility
- › Proven compressor technology (Daikin centrifugal compressor design)



### Rapid restart for fast start-up after power loss

The UPS keeps the controller switched on enabling the unit to quickly reach the full load. Focused on data center and all applications where the cooling capacity supply is crucial.



### Reduced refrigerant quantity

Thanks to the new high efficiency tubes and more compact heat exchanger design.



### Heat pump mode

With reversibility on water side whenever a heating load is demanded thus improving suitability for applications with changing load during the year.

More details and final information can be found by scanning or clicking the QR codes.



DWSC-C

Cooling Only		DWSC C	DWSC C	DWSC C
Cooling capacity	Min./Max.	kW	1,050 (1)/4,500 (1)	700 (1)/3,300 (1)
Compressor	Type		Single stage centrifugal compressor	Single stage centrifugal compressor
Refrigerant	Type		R-134a / R-513A	R-1234(ze)
Power supply	Frequency	Hz	50/60	50/60

(1) AHRI conditions

# Water cooled centrifugal chiller, high efficiency, standard sound

- › Lower equipment, installation and annual operating costs than two single compressor chillers
- › Main components can be removed or repaired without shutting down the unit as the chiller has two of everything (compressors, lubrication systems, control systems and starters)
- › Compact design for small footprint and minimized installation space
- › Unloading to 5% of full load provides improved stability of the chilled water temperature and less harmful cycling of compressors
- › High efficiency flooded type shell and tube evaporator/condensers



DWDC C

## Free cooling operation

Allows to reduce the power consumption generated by traditional mechanical cooling.



## Touch screen operator panel



Touch screen operator panel is graphically intuitive and easy to use for enhanced operator productivity. Important status and control information is available at a glance or a touch.

## Unit mounted control panel



More details and final information can be found by scanning or clicking the QR codes.



DWDC-C

Cooling Only		DWDC C	DWDC C
Cooling capacity	Min./Max.	kW	2,100 (1)/9,000 (1)
Compressor	Type		Single stage centrifugal compressor
Refrigerant	Type		R-134a / R-513A / R-1234(ze)
Power supply	Frequency	Hz	50/60

(1)AHRI conditions

## Accessories - Chillers

			Air-cooled chillers							
Panels			EWAA~BVP EWYA~BVP	EWAA~DA EWYA~DA	EWYD~BZ	EWYD~4Z	EWYT~B-	EWAAH~TZB & C	EWAD~TZB & C	EWAD~T-C
EKDICMPAB	(a) (b) (c)	iCM Primary Basic								•
EKDICMPAL	(a) (b) (c)	iCM Primary for evaporator peripherals Light						•	•	•
EKDICMPAF	(a) (b) (c)	iCM Primary for evaporator peripherals Full						•	•	•
EKDICMPWL	(a) (b) (c)	iCM primary Evaporator/Condenser Light								
EKDICMPWF	(a) (b) (c)	iCM primary Evaporator/Condenser Full								
EKDICMCTL	(a) (b)	iCM Cooling towers Light								
EKDICMCTF	(a) (b)	iCM Cooling towers Full								
EKDICMPABIO	(a) (b)	iCM Primary Basic with IO third party chiller						•	•	•
EKDICMPALIO	(a) (b)	iCM Primary Evaporator Light with IO third party chiller						•	•	•
EKTSMS		Temperature sensor for master/slave configuration					•			
EKRUMCL1		User Interface	•							
			Air-cooled chillers							
Serial Cards & Communication Modules			EWAA~BVP EWYA~BVP	EWAA~DA EWYA~DA	EWYD~BZ	EWYD~4Z	EWYT~B-	EWAAH~TZB & C	EWAD~TZB & C	EWAD~T-C
EKAC200J		Serial Card RS485/Modbus			•					
EKACBAC		Ethernet Card BACnet			•					
EKACLONP		Serial Card LON FTT 10			•					
EKACRS232		Serial Card RS232 Modem Interface (single unit only)			•					
EKACWEB		Web Server Card			•					
EKACBACMSTP		Serial Card BACnet MSTP			•					
EKACBACCERT		Serial Card BACnet pre-loaded IP/Ethernet (centrifugal chillers)								
EKACMSTPCERT		Serial Card BACnet pre-loaded MSTP (centrifugal chillers)								
EKCM200J		ModBus RTU communication module				•				
EKCMCLON		LON communication module				•	•	•	•	•
EKCMBACMSTP		BACnet/MSTP communication module				•				
EKCMBACIP		BACnet/IP communication module				•	•	•	•	•
EKDOSMWO		Daikin on Site Modem without M2M card			•	•	•	•	•	•
			Air-cooled chillers							
Other Systems & Accessories			EWAA~BVP EWYA~BVP	EWAA~DA EWYA~DA	EWYD~BZ	EWYD~4Z	EWYT~B-	EWAAH~TZB & C	EWAD~TZB & C	EWAD~T-C
EKCON		Converter RS485 to RS232			•					
EKCONUSB		Converter RS485 to USB			•					
EKMODEM		Fixed modem			•					
EKGSMOD		GSM modem			•					
EKRUPCJ		Remote display kit			•					
EKRUPCS		Local/remote display HMI				•	•	•	•	•
EKPWPPOEXT		PlantWatchPro I/O extension module for hardwiring and retrofit			•					
EKGWWEB		Gateway web (Ethernet LAN SNMP)			•					
EKGWMODEM		Gateway for modem			•					
EKAC10C		Address card for connection to BMS or Remote user interface								
EKRUMCA		Remote installed user interface								
EKLS2	(d)	Low noise kit 22/28/35/45/55/65 Hp-units								
ECB2MUCW	(e)	Controller kit								
ECB3MUCW	(e)	Controller kit								
EKRPIAHT	(g)	Digital input/output PCB								
EKRUAHTB	(g)	Remote user interface								
DTA104A62	(f)	External control adapter								
BHGP26A1	(f)	Digital pressure gauge kit								
EKQDP2M016	(g)	Differential Pressure Sensor 4-20 mA 0-160 kPa					•	•	•	•
EKQDP2M020	(g)	Differential Pressure Sensor 4-20 mA 0-250 kPa					•	•	•	•
EKQDP2M040	(g)	Differential Pressure Sensor 4-20 mA 0-400 kPa					•	•	•	•
EKQDP2M060	(g)	Differential Pressure Sensor 4-20 mA 0-600 kPa					•	•	•	•
EKDAPCONT		Containerization of one unit			•	•	•	•	•	•
EKDAPSTF		Containerization of additional units in the same container			•	•	•	•	•	•

### Notes:

- (a) Price **does not** include commissioning of panel; if commissioning is required please refer to RN17-041
- (b) iCM panels work in **cooling mode only**; heat pump versions, total heat recovery and Free cooling options on A/C and W/C chillers **are not compatible**
- (c) In case you are ordering iCM panels please add corresponding modbus RTU communication module (EKCM200J or EKAC200J) for each chiller unit controller
- (d) For 45/55/65 Hp-units 2 pieces are needed
- (e) Only available for modular units (EWWP~KAW1M)
- (f) Price available in SAP system
- (g) Differential pressure sensor are specific for iCM panels in variable primary flow management

			Water-cooled chillers							Centrifugals		
ERAD~E-	EWAT~B-	EWAD~CF	EWQ~KC	EWLQ~KC	EW_Q-G EW_Q-L	EWLD~I-	EWWS/H/D~J- EWLS/H/D~J-	EWVH~VZ	EWVD~VZ	EWVH~DZ	EWVD~DZ	DWSC & DWDC
	•				•	•	•	•	•	•	•	•
	•	•			•	•	•	•	•	•	•	•
	•	•			•	•	•	•	•	•	•	•
					•			•	•	•	•	•
					•			•	•	•	•	•
					•			•	•	•	•	•
					•			•	•	•	•	•
	•				•			•	•	•	•	•
	•											
	•				•							

			Water-cooled chillers							Centrifugals		
ERAD~E-	EWAT_B- (single)	EWAD~CF	EWQ~KC	EWLQ~KC	EW_Q-G EW_Q-L	EWLD~I-	EWVD~J- EWLD~J-	EWVH~VZ A	EWVD~VZ A	EWVH~DZ	EWVD~DZ	DWSC & DWDC
												•
												•
												•
												•
•	•	•			•	•	•	•	•	•	•	
•	•	•			•	•	•	•	•	•	•	
•	•	•			•	•	•	•	•	•	•	
•	•	•			•	•	•	•	•	•	•	
•	•	•			•	•	•	•	•	•	•	

			Water-cooled chillers							Centrifugals		
ERAD~E-	EWAT_B- (single)	EWAD~CF	EWQ~KC	EWLQ~KC	EW_Q-G EW_Q-L	EWLD~I-	EWVD~J- EWLD~J-	EWVH~VZ A	EWVD~VZ A	EWVH~DZ	EWVD~DZ	DWSC & DWDC
												•
												•
												•
												•
•	•	•			•	•	•	•	•	•	•	
												•
												•
			•	•								
			•	•								
			•	•								
			•	•								
			•	•								
			•	•								
	•	•			•	•	•	•	•	•	•	•
	•	•			•	•	•	•	•	•	•	•
	•	•			•	•	•	•	•	•	•	•
	•	•			•	•	•	•	•	•	•	•
•	•	•			•	•	•	•	•	•	•	•
•	•	•			•	•	•	•	•	•	•	•



Fan Coil Units are a highly efficient means of turning a water chiller, heat pump or hot water boiler into an efficient, quiet air conditioning system. These units are an effective solution to provide a comfortable environment for both commercial and residential applications. Daikin offers a wide range of Fan Coil Units for both concealed and exposed applications. Three models are available in flexible application. The only moving part in the units is the fan, making them ideal for use in offices, hotels and at home. The goal is to obtain the right solution, both technically and aesthetically.

# Fan coil units

Why choose Daikin fan coil units?		740
Products overview		744
Round flow cassette		746
FWC-BT/BF		746
4-way blow ceiling mounted cassette		747
FWF-BT/BF		747
Open protocol cassette		749
<b>NEW</b> FWF-DT/DF		748
FWI-AT/AF		749
FWH-AT/AF		750
Floor standing units		751
FWZ-AT/AF		751
FWV-DAT/DAF		752
Flexi type units		753
FWR-AT/AF		753
FWL-DAT/DAF		754
FWS-AT/AF		755
FWM-DAT/DAF		756
FWE-DT/DF		757
Ducted units		758
<b>NEW</b> FWE-FT/FF	low ESP	758
FWP-CT/CF	medium ESP	760
FWB-CT/CF	medium ESP	761
FWN-AT/AF	high ESP	762
FWD-AT/AF	high ESP	763
Wall mounted unit		764
FWT-GT		764
Options & accessories		766



## Fan coil units with BLDC motor

As more buildings undergo renovation, the need to be able to deliver high indoor air quality in a specific space in an **efficient and cost-effective way** without having to do a radical re-fit of the entire HVAC system has made fan coil technology an obvious solution.

Daikin has a full capacity range of **aesthetically pleasing** fan coil units with advanced controls that reliably deliver **excellent comfort levels**. And by using a refined range of advanced DC fan motors, we are able to offer flexibility while maintaining very low noise levels.

## Why choose Daikin fan coil units?

- The new brushless DC ranges reflect Daikin's commitment to developing highly efficient fan coil units that help to reduce energy consumption, without compromising on reliability and performance.
- High level quality is written large for us and we are pleased to offer high technology solutions to the market.

## Benefits for the installer

- › Reduced amount of sizes: less stock space needed
- › Modular designs for multiple configurations
- › Easy integration in BMS system via modbus protocol

## Benefits for the consultant


- › Best solution in the market in order to have top efficiency, best comfort and lowest sound levels
- › Product flexibility: wide range of options, accessories and controls

## Benefits for the end user

- › High comfort level
- › Up to 70% savings on running costs with a BLDC fan motor
- › Controller with timer programmed operating mode
- › FWECSA controller that can satisfy all customer requirements in terms of FCU management



## New generation web-based fan coil selection software

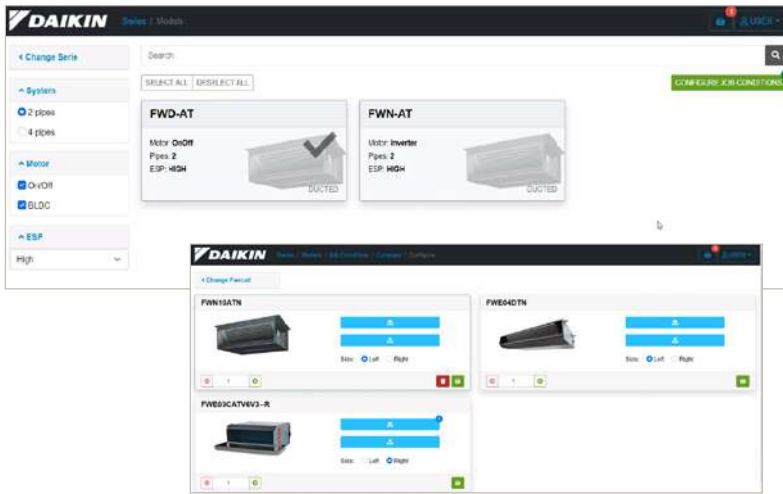

Select your FCU via our new web-based selection software:

- › Selection logic is based on the performance conditions requested and filtered by the user
- › The unit is completely configurable by the user with all the options/accessories available
- › A modular report with certified technical specifications and project summary can be printed

## BIM objects

Our Fan Coils units are available as BIM objects in Revit format, which means they can be used in Autodesk REVIT MEP and in AutoCAD 2D files.

Visit our [BIM Application Suite](#)

## BLDC fan motors Video

Learn more on the advantages of BLDC fan motors in Fan coil units:

- Higher efficiency than AC motor**
- High comfort level**
- Low sound levels**
- High flexibility level**



Check on  
**YouTube**

[www.youtube.com/DaikinEurope](http://www.youtube.com/DaikinEurope)



## Expanded FCU Controller Lineup

### FWEC2T/4T/10 Simplified electronic controller

Wired on-wall controller available in 3 models:

- › 2 pipe
- › 4 pipe
- › BLDC (with automatic speed function)
- › 230 V ON-OFF valve control (cooling/heating)
- › Dedicated temperature probe and on-board mounting kit





Coanda effect decoration panel  
for FWH/FWI-A cassette

## FWH-A (AC) & FWI-A (BLDC) New “open protocol” cassette



### Structure

- › 600x600 (02 up to 04 size)
- › 900x900 (06 up to 08 size)
- › Condensate drainage pump operates up to 0.9m
- › 4-way air discharge with RAL9003 ABS panel

### Performance

- › BLDC fan-motor technology
- › up to 5 kW for 600x600 models
- › up to 10 kW for 900x900 models

### Control

- › Compatible with FCU Daikin wired room controllers
- › The “open protocol” feature allows 3rd party controller and BMS integration through the ModBus protocol

### Options

- › Pressure Independent Control valve kit
- › ON/OFF and proportional valve kit
- › Ready to be combined with spigot for fresh air introduction and air distribution plenum



New design “fully flat” decoration panels for FWF-D cassette

## FWF-D (BLDC) New “open protocol” cassette


















### Structure & Performance

- › 600x600 module
- › BLDC fan-motor
- › Cooling capacity up to 5 kW

### Options & Controls

- › 230V ON-OFF valve available factory mounted
- › Compatible with FCU Daikin wired room controllers
- › The “open protocol” feature allows 3rd party controller and BMS integration through the ModBus protocol

# Products overview

Type	Model	Product name	Fan motor type	Capacity
Cassette	<b>Round flow cassette</b> - 900 x 900 cassette - 360° air discharge ensures uniform air flow - Integrated fresh air intake - Easy installation in corners - Standard drain pump with 850 mm lift	 FWC-BT/BF	 BLDC	Cooling: 4.0 - 8.7 kW Heating: 4.8 - 10.6 kW
	<b>4-way blow ceiling mounted cassette</b> - 600 x 600 cassette - Integrated fresh air intake - Horizontal auto swing - Easy installation in corners - Standard drain pump with 750 mm lift	FWF-BT/BF	 AC	Cooling: 1.4 - 4.9 kW Heating: 2.3 - 5.6 kW
	<b>Open Protocol Cassette</b> - 600 x 600 and 900 x 900 cassette - BLDC motor with low energy consumption up to 75% - 4-way air discharge - Open protocol for control - Condensate drainage pump up to 900 mm lift	FWI-AT/AF	 BLDC	Cooling: 1.33 - 10.5 kW Heating: 1.49 - 12.2 kW
	<b>Open Protocol Cassette</b> - 600 x 600 and 900 x 900 cassette - ON/OFF 3-speed motor - 4-way air discharge - Open protocol for control - Condensate drainage pump up to 900 mm lift	FWH-AT/AF	 AC	Cooling: 1.70 - 9.73 kW Heating: 1.97 - 11.1 kW
	<b>Open protocol cassette</b> - 600 x 600 cassette - BLDC fan-motor with improved energy efficiency - Possibility to choose the fully-flat design panel - Standard DC drain pump with 835 mm lift - Open protocol for control	FWF-DT/DF	 BLDC	Cooling: 1.3 - 5.1 kW Heating: 1.56 - 5.74 kW
Floor standing units	<b>Floor standing unit</b> - For vertical mounting - Continuous air flow regulation and fan speed modulation - Up to 70% energy savings - Low sound levels	FWZ-AT/AF	 BLDC	Cooling: 2.64 - 10.08 kW Heating: 2.46 - 11.18 kW
	<b>Floor standing unit</b> - For horizontal or vertical concealed mounting - Insulated valve packages, no extra drain pan required - Fast-on connections for electrical options: no tools needed - Easy maintenance	FVV-DAT/DAF	 AC	Cooling: 1.46 - 8.02 kW Heating: 1.90 - 10.03 kW
Flexi type units	<b>Flexi type unit</b> - For horizontal or vertical mounting - Continuous air flow regulation and fan speed modulation - Up to 70% energy savings - Low sound levels	FWR-AT/AF	 BLDC	Cooling: 2.64 - 10.08 kW Heating: 2.46 - 11.18 kW
	<b>Flexi type unit</b> - For horizontal or vertical concealed mounting - Insulated valve packages, no extra drain pan required - Fast-on connections for electrical options: no tools needed - Easy maintenance	FWL-DAT/DAF	 AC	Cooling: 1.46 - 8.02 kW Heating: 1.90 - 10.03 kW
	<b>Concealed flexi type unit</b> - For horizontal or vertical concealed mounting - Continuous air flow regulation and fan speed modulation - Up to 70% energy savings - Low sound levels	FWS-AT/AF	 BLDC	Cooling: 2.64 - 10.08 kW Heating: 2.46 - 11.18 kW
	<b>Concealed flexi type unit</b> - For horizontal or vertical concealed mounting - Insulated valve packages, no extra drain pan required - Fast-on connections for electrical options: no tools needed - Easy maintenance	FWM-DAT/DAF	 AC	Cooling: 1.46 - 8.02 kW Heating: 1.90 - 10.03 kW
	<b>Concealed flexi type</b> - For horizontal or vertical concealed mounting - Available static pressure up to 30 Pa - Easy installation and maintenance - 5/6 speed fan motor - High power air flow	FWE-DT/DF	 AC	Cooling: 1.2 - 5.6 kW Heating: 1.3 - 6.3 kW
Ducted units	<b>Ducted unit with low ESP</b> - For horizontal concealed mounting - Available static pressure up to 80 Pa - Easy installation and maintenance - 4-speed fan-motor - Improved sound quality	FWE-FT/FF	 AC	Cooling: 0.9 - 11.5 kW Heating: 1.49 - 12.05 kW
	<b>Ducted unit with medium ESP</b> - For horizontal concealed mounting - Instant adjustment to temperature and relative humidity changes - Available static pressure up to 70 Pa - Low sound levels	FWP-CT/CF	 BLDC	Cooling: 1.97 - 8.28 kW Heating: 1.99 - 8.46 kW
	<b>Ducted unit with medium ESP</b> - For horizontal concealed mounting - Available static pressure up to 60 Pa - 7-speed electrical motors (thermal protection on windings) - Easy maintenance	FWB-CT/CF	 AC	Cooling: 1.90 - 8.12 kW Heating: 1.99 - 8.46 kW
	<b>Ducted unit with high ESP</b> - For horizontal or vertical concealed mounting - Available static pressure up to 70 Pa - Easy maintenance	FWN-AT/AF	 BLDC	Cooling: 2.83 - 8.75 kW Heating: 3.63 - 18.10 kW
	<b>Ducted unit with high ESP</b> - For horizontal or vertical concealed mounting - Available static pressure from 60 up to 145 Pa - Easy maintenance	FWD-AT/AF	 AC	Cooling: 3.90 - 18.30 kW Heating: 4.05 - 21.92 kW
Wall mounted unit	<b>Wall mounted unit</b> - High aesthetic cabinet design - Optimum air distribution - Easy installation - 3-speed fan motor	FWT-GT	 AC	Cooling: 2.43 - 5.28 kW Heating: 3.22 - 7.33 kW


	1	15	2	25	3	35	4	5	6	7	8	9	10	11	12	14	15	16	17	18	20	24	
									•	•	•	•											
			•		•		•	•															
			•		•		•		•	•	•												
			•		•		•		•	•	•												
			•		•		•	•															
	•	•	•	•	•	•	•		•		•		•										
			•		•				•		•												
	•	•	•	•	•	•	•		•		•												
			•		•		•	•	•	•	•			•	•								
							•	•	•		•			•		•		•					•
							•	•	•	•	•			•	•								
							•	•	•		•			•	•								
							•	•	•	•	•			•									
							•	•	•		•			•									
			•		•		•	•	•														




# Round flow cassette

BLDC fan motor unit for ceiling mounting.  
360° air discharge

- › 360° air discharge ensures uniform air flow and temperature distribution
- › Modern style decoration panel in white (RAL9010)
- › Optional fresh air intake
- › Comfortable horizontal air discharge ensures draughtfree operation and prevents ceiling soiling



- › Possibility to shut 1 or 2 flaps for easy installation in corners
- › Standard drain pump with 850mm lift increases flexibility and installation speed

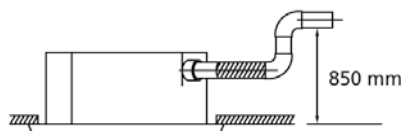

More details and final information can be found by scanning or clicking the QR codes.



FWC-BT



FWC-BF


Indoor unit			FWC-BT/BF	06	07	08	09	06	07	08	09
				2-pipe				4-pipe			
Cooling capacity (standard conditions)	Total capacity	High	kW	5.5	6.1	7.2	8.1	5.9	6.3	7.2	8.3
		Medium	kW	4.7	5.3	5.9	6.8	5.1	5.6	6.2	6.9
		Low	kW	3.9	4.5	4.8	5.4	4.3	4.6	4.8	5.7
	Sensible capacity	High	kW	4.2	4.7	5.7	6.5	4.2	4.6	5.4	6.4
Medium		kW	3.5	4.0	4.5	5.3	3.6	4.0	4.5	5.2	
Low		kW	2.8	3.3	3.5	4.1	3.1	3.3	3.5	4.0	
Heating capacity (standard conditions)	High	kW	6.8	7.7	9.2	10.6	6.9	7.8	9.2	10.4	
	Medium	kW	5.8	6.6	7.6	8.8	6.1	6.7	7.6	8.7	
	Low	kW	4.8	5.5	5.8	7.0	5.2	5.5	5.8	6.8	
Power input	High	kW	0.045	0.054	0.077	0.107	0.046	0.055	0.077	0.107	
	Medium	kW	0.040	0.046	0.058	0.076	0.041	0.047	0.059	0.077	
	Low	kW	0.034	0.037	0.039	0.045	0.035	0.038	0.040	0.046	
FCEER			116	119	113	104	124	120	112	106	
FCCOP			143	147	141	137	149	144	138	131	
Dimensions	Unit	HeightxWidthxLength	mm	288x840x840							
Weight	Unit		kg	26				29			
Fan	Type			Turbo fan							
	Quantity			1							
	Air flow rate	High	m <sup>3</sup> /h	1,068	1,236	1,518	1,776	1,032	1,200	1,476	1,746
		Medium	m <sup>3</sup> /h	894	1,038	1,200	1,410	864	1,002	1,164	1,374
Low		m <sup>3</sup> /h	720	834	888	1,044	708	804	852	1,014	
Total sound power level	High	dBA	43.0	47.0	53.0	57.0	43.0	47.0	53.0	57.0	
	Medium	dBA	36.0	39.0	44.0	49.0	36.0	39.0	44.0	49.0	
	Low	dBA	31.0	33.0	36.0	40.0	33.0	36.0	39.0	40.0	
Sound pressure level	High	dBA	29.0	33.0	39.0	43.0	29.0	33.0	39.0	43.0	
	Medium	dBA	24.0	28.0	32.0	37.0	24.0	28.0	32.0	37.0	
	Low	dBA	21.0	22.0	24.0	28.0	21.0	22.0	24.0	28.0	
Piping connections	Drain	OD	mm	VP25 (External dia.32 / internal dia. 25)							
Power supply		Phase/Frequency/Voltage	Hz/V	1~/50/220-240							
Control systems	Infrared remote control			BRC7E532F / BRC7E533F							
	Wired remote control			BRC315D7							

For standard conditions refer to Measuring Conditions table, at the end of this catalogue

# 4-way blow ceiling mounted cassette

AC fan motor unit for ceiling mounting.  
Possibility to shut 1 or 2 flaps

- › Modern style decoration panel in white (RAL9010)
- › Compact casing (570mm in width and Length) enables unit to fit flush into ceilings and match standard architectural modules, without cutting ceiling tiles
- › Comfortable horizontal auto swing ensures draughtfree operation and prevents ceiling soiling
- › Optional fresh air intake
- › Possibility to shut 1 or 2 flaps for easy installation in corners
- › Standard drain pump with 750mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.



FWF-BT



FWF-BF

Indoor unit			FWF-BT/BF	02	03	04	05	02	03	04	05
			2-pipe				4-pipe				
Cooling capacity (standard conditions)	Total capacity	High	kW	1.7	3.0	4.0	4.9	1.8	2.9	3.8	4.6
		Medium	kW	1.5	2.7	3.1	4.0	1.5	2.4	3.1	3.8
		Low	kW	1.3	2.4	2.8	2.8	1.3	1.6	2.6	2.6
	Sensible capacity	High	kW	1.4	2.0	2.7	3.5	1.5	1.8	2.5	3.2
		Medium	kW	1.2	1.7	2.0	2.7	1.2	1.5	1.9	2.5
		Low	kW	1.0	1.4	1.8	1.8	1.0	1.6	1.6	1.6
Heating capacity (standard conditions)	High	kW	2.4	3.3	4.5	5.6	3.3	3.6	4.7	5.7	
	Medium	kW	2.1	2.9	3.5	4.4	2.9	3.1	3.7	4.7	
	Low	kW	1.9	2.7	3.0	3.0	2.4	2.6	3.2	3.2	
Power input	High	kW	0.074	0.090	0.118	0.118	0.074	0.094	0.121	0.121	
	Medium	kW	0.067	0.070	0.070	0.089	0.067	0.062	0.074	0.093	
	Low	kW	0.060	0.055	0.055	0.062	0.060	0.055	0.066	0.066	
FCEER			22	40	44	45	22	33	34	40	
FCCOP			32	45	49	49	41	48	49	49	
Dimensions	Unit	HeightxWidthxLength	mm	285x575x575							
Weight	Unit		kg	19				20			
Fan	Type			Turbo fan							
	Quantity			1							
	Air flow rate	High	m <sup>3</sup> /h	456	468	660	876	468	438	618	822
		Medium	m <sup>3</sup> /h	384	390	486	648	390	366	456	612
Low		m <sup>3</sup> /h	300	318	420	420	318	300	390	390	
Total sound power level	High	dBA	44.0	50.0	55.0	55.0	44.0	46.0	52.0	57.0	
	Medium	dBA	40.0	44.0	49.0	49.0	40.0	42.0	46.0	51.0	
	Low	dBA	36.0	38.0	42.0	42.0	36.0	38.0	41.0	44.0	
Sound pressure level	High	dBA	31.0	40.0	45.0	45.0	31.0	33.0	42.0	47.0	
	Medium	dBA	27.0	33.0	39.0	39.0	27.0	29.0	35.0	41.0	
	Low	dBA	26.0	26.0	30.0	30.0	26.0	27.0	32.0	32.0	
Piping connections	Drain	OD	mm	VP20 (External dia.26 / Internal dia. 20)							
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50/220-440							
Control systems	Infrared remote control			BRC7E530 / BRC7E531							
	Wired remote control			BRC315D7							

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Open protocol BLDC cassette

BLDC fan motor unit for ceiling mounting 4-way air discharge

- › Compact casing (570mm in width and Length) enables unit to fit flush into ceilings and match standard architectural modules, without cutting ceiling tiles
- › Modern ABS or fully-flat design air intake grille
- › Reliability and sturdiness in a compact design
- › Condensate drainage pump up to 835mm lift
- › Wide range of controllers with the open protocol
- › Availability of 2-way or 3-way valves with ON-OFF actuator factory mounted



More details and final information can be found by scanning or clicking the QR codes.



FWF-D

Indoor Unit			FWF	02DF	02DT	03DT	03DF	04DF	04DT	05DT	05DF
Cooling capacity (standard conditions)	Total capacity 2-pipe	High	kW	-	2.00	3.00	-	-	4.07	5.10	-
		Medium	kW	-	1.67	2.78	-	-	3.41	4.16	-
		Low	kW	-	1.30	2.37	-	-	2.65	2.93	-
	Total capacity 4-pipe	High	kW	2.00	-	-	3.00	4.00	-	-	5.02
		Medium	kW	1.71	-	-	2.77	3.33	-	-	4.00
		Low	kW	1.44	-	-	2.30	2.58	-	-	2.64
	Sensible capacity 2-pipe	High	kW	-	1.76	2.31	-	-	3.01	3.88	-
		Medium	kW	-	1.43	2.08	-	-	2.49	3.08	-
		Low	kW	-	1.09	1.75	-	-	1.91	2.11	-
	Sensible capacity 4-pipe	High	kW	1.76	-	-	2.19	2.88	-	-	3.67
		Medium	kW	1.46	-	-	1.99	2.33	-	-	2.88
		Low	kW	1.20	-	-	1.61	1.78	-	-	1.85
Latent capacity 2-pipe	High	kW	-	0.24	0.69	-	-	1.06	1.22	-	
Latent capacity 4-pipe	High	kW	0.24	-	-	0.81	1.12	-	-	1.35	
Heating capacity (standard conditions)	Capacity 2-pipe	High	kW	-	2.54	3.30	-	-	4.26	5.74	-
		Medium	kW	-	2.05	2.96	-	-	3.48	4.34	-
		Low	kW	-	1.56	2.44	-	-	2.69	2.95	-
	Capacity 4-pipe	High	kW	3.31	-	-	4.15	4.59	-	-	5.64
		Medium	kW	2.77	-	-	3.61	3.75	-	-	4.32
		Low	kW	2.23	-	-	2.78	2.90	-	-	2.99
Power input			kW	0.017	0.018	0.019		0.024		0.045	0.047
			kW		0.01		0.02		0.01		0.02
FCEER				129	121	188	156	174	180	120	130
FCCOP				220	156	197	193	198	194	128	174
FCEER CLASS				B		A	B				
FCCOP CLASS				B	C	B				C	B
Dimensions	Unit	HeightxWidthxDepth	mm	260x642x575							
Weight	Unit		kg	16.0	14.5	15.5	17.0	15.5			
Fan	Type	Turbo fan									
	Quantity	1									
	Air flow rate	High	m <sup>3</sup> /h	477	498	516	534	612	623	860	847
		Medium	m <sup>3</sup> /h	389	388	455	463	487	496	634	607
Low		m <sup>3</sup> /h	301	278	363	356	361	369	408	367	
Total sound power level	High	dBA	41.0		42.0	44.0	48.0	47.0	54.0	56.0	
	Medium	dBA	37.0		39.0	40.0	43.0	41.0	46.0	48.0	
	Low	dBA	34.0	33.0	36.0		38.0	36.0	39.0	40.0	
Sound pressure level	High	dBA	27.0		28.0	30.0	34.0	33.0	40.0	42.0	
	Medium	dBA	23.0		25.0	26.0	29.0	27.0	32.0	34.0	
	Low	dBA	20.0	19.0	22.0		24.0	22.0	25.0	26.0	
Water flow	Cooling	High	l/h	345	344	515	516	687	699	878	864
		Medium	l/h	294	286	477	476	573	586	716	687
		Low	l/h	248	224	407	396	444	455	504	455
	Heating	High	l/h	285	437	568	357	395	733	987	485
		Medium	l/h	238	353	508	310	322	599	747	371
		Low	l/h	192	269	419	239	249	463	507	257
Piping connections Drain	OD	mm	VP20 (External dia.26 / Internal dia. 20)								
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230								

Cooling: air 27°CDB, 19°CWB; entering water 7°C; leaving water 12°C | Heating: 2-pipe: air 20°CDB, 15°CWB; entering water 45°C; leaving water 40°C | Heating: 4-pipe: air 20°CDB, 15°CWB; entering water 65°C; leaving water 55°C | The unit is not pre-charged. A minimal rest charge is present related to factory quality inspection | Airflow value measurements are performed at 20°C(DB)/15°C(WB) condition.



# Open Protocol Cassette

BLDC fan motor for a precise control of operation  
4-way air discharge

- › Two dimensional frames (600x600mm and 900x900mm)
- › Modern style ABS air intake diffusion grille
- › Low operating sound level
- › Up to 70% energy savings with brushless DC motor technology compared to traditional technology
- › Condensate drainage pump up to 900mm lift
- › Available with mounted control board or in naked version to be combinable with any controller
- › Reduced installation and commissioning time with the availability of 2-way or 3-way valves, with ON-OFF or modulating actuator, and also pressure-independent control valves



More details and final information can be found by scanning or clicking the QR codes.



FWI-AT



FWI-AF

Indoor unit				FWI-AT/FWI-AF		02	03	04	06	07	08	02	04	06	08
				2-pipe								4-pipe			
Cooling capacity (standard conditions)	Total capacity	High	kW	2.63	4.39	5.23	6.39	9.04	10.5	2.6	3.61	6.61	9.5		
		Medium	kW	2.24	3.4	3.95	5.36	7.26	8.37	2.18	2.8	5.34	7.62		
		Low	kW	1.93	2.68	2.76	4.8	5.92	6.7	1.85	2.05	4.61	6.09		
	Sensible capacity	High	kW	2.2	3.41	4.11	4.75	6.78	7.97	2.23	3.31	5.03	7.56		
		Medium	kW	1.81	2.54	2.96	3.92	5.31	6.15	1.79	2.38	3.94	5.82		
	Low	kW	1.51	1.94	1.98	3.8	4.24	4.8	1.46	1.62	3.34	4.5			
Heating capacity (standard conditions)	High	kW	3.25	4.58	5.55	7.30	10.20	12.20	3.86	4.98	9.53	12.90			
	Medium	kW	2.70	3.48	4.09	6.00	7.99	9.35	3.34	4.06	7.96	10.80			
	Low	kW	2.27	2.69	2.77	5.50	6.33	7.23	2.90	3.14	7.01	8.96			
Power input	High	kW	0.018	0.037	0.067	0.036	0.067	0.15	0.018	0.067	0.036	0.15			
	Medium	kW	0.01	0.015	0.022	0.018	0.036	0.06	0.01	0.022	0.018	0.06			
	Low	kW	0.007	0.009	0.009	0.013	0.018	0.025	0.007	0.009	0.014	0.025			
Dimensions	Unit	Height	mm	298				350				298			
		Width	mm	577				793				577			
		Depth	mm	577				793				577			
Weight	Unit	kg	23				43				23				
Casing	Material		Galvanised steel												
Decoration panel	Dimensions	Height	mm	41				75				41			
		Width	mm	730				860				730			
		Depth	mm	730				860				730			
		Weight	kg	2.5				5				2.5			
Air Filter	Type		Honeycomb polypropylene												
Fan	Type		Backward Centrifugal												
	Quantity		1												
	Air flow rate	High	m <sup>3</sup> /h	583	796	980	1,276	1,554	1,831	610	982	1,137	1,823		
Medium		m <sup>3</sup> /h	454	551	650	978	1,143	1,321	460	643	841	1,314			
Low		m <sup>3</sup> /h	397	397	397	843	864	976	356	395	687	956			
Total sound power level	High	dBA	46	54	61	45	53	58	46	61	45	58			
	Medium	dBA	40	44	49	39	45	50	40	49	39	50			
	Low	dBA	35	37	38	35	39	43	35	38	35	43			
Sound pressure level	High	dBA	38	46	61	37	45	50	46	61	45	58			
	Medium	dBA	33	36	49	31	37	42	40	49	39	50			
	Low	dBA	27	29	38	27	31	35	38	35	43				
Water flow	Cooling	High	l/h	452	754	898	1,097	1,545	1,805	447	620	1,135	1,631		
		Medium	l/h	385	584	687	921	1,245	1,436	374	480	917	1,307		
		Low	l/h	331	460	473	833	1,015	1,150	317	352	792	1,045		
	Heating	High	l/h	565	797	965	1,269	1,779	2,116	338	435	834	1,133		
		Medium	l/h	470	605	711	1,043	1,390	1,625	292	356	697	947		
		Low	l/h	395	468	481	953	1,100	1,257	254	275	613	785		
Allowed water temperature	Cooling	Min	°C	5											
	Heating	Max	°C	70											
Piping connections	Water	Inlet		1/2"				3/4"				1/2"			
		Outlet		1/2"				3/4"				1/2"			
	Drain	OD	mm	10											
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230												
Maximum absorbed current		A	0.64				1.20				0.64				
Control systems	Wired remote control		FWEC3A / FWEC3A / FWTOUCH / FWEC10												

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Open Protocol Cassette

AC fan motor unit for ceiling mounting  
4-way air discharge

- › Two dimensional frames (600x600mm and 900x900mm)
- › Modern style ABS air intake diffusion grille
- › Reliability and sturdiness in a compact design
- › Condensate drainage pump up to 900mm lift
- › Available with mounted control board or in naked version to be combinable with any controller
- › Reduced installation and commissioning time with the availability of 2-way or 3-way valves with ON-OFF or modulating actuator



More details and final information can be found by scanning or clicking the QR codes.



FWH-AT



FWH-AF

Indoor unit				FWH-AT/FWH-AF		02	03	04	06	07	08	02	03	04	06	08										
				2-pipe																						
				2-pipe						4-pipe																
Cooling capacity (standard conditions)	Total capacity	High	kW	2.53	4.31	5	7.01	8.24	9.73	2.35	3.38	3.62	7.45	9												
		Medium	kW	1.97	3.55	4.61	5.36	6.11	8.61	1.85	2.83	3.38	6.6	8.48												
		Low	kW	1.7	2.39	3.4	4.64	5.16	6.34	1.56	2.01	2.58	4.73	5.83												
	Sensible capacity	High	kW	2.14	3.18	3.79	5.29	6.1	7.35	1.94	3.38	3.02	5.81	6.98												
		Medium	kW	1.6	2.53	3.44	3.99	4.37	6.4	1.49	2.22	2.77	5.04	6.56												
	Low	kW	1.33	1.66	2.43	3.42	3.68	4.59	1.24	1.49	2	3.47	4.29													
Heating capacity (standard conditions)	High	kW	3.1	4.3	5.35	8.17	9.18	11.1	3.55	4.22	4.81	10.6	12.4													
	Medium	kW	2.33	3.44	4.92	6.06	6.53	9.53	2.88	3.62	4.54	9.6	11.7													
	Low	kW	1.97	2.29	3.49	5.16	5.22	6.71	2.53	2.75	3.67	7.20	8.64													
Power input	High	kW	0.04	0.05	0.09	0.11	0.15	0.04	0.05	0.09	0.11	0.15														
	Medium	kW	0.02	0.04	0.07	0.06	0.11	0.02	0.04	0.07	0.06	0.11														
	Low	kW	0.02	0.03	0.06	0.05	0.06	0.02	0.03	0.06	0.05	0.06														
Dimensions	Unit	Height	mm	298				350				298				350										
		Width	mm	577				793				577				793										
		Depth	mm	577				793				577				793										
Weight	Unit	kg	23				43				23				43											
Casing	Material		Galvanised steel																							
Decoration panel	Dimensions	Height	mm	41				75				41				75										
		Width	mm	730				860				730				860										
		Depth	mm	730				860				730				860										
		Weight	kg	2.5				5				2.5				5										
Air Filter	Type		Honeycomb polypropylene																							
Fan	Type		Backward Centrifugal																							
	Quantity		1																							
	Air flow rate	High	m <sup>3</sup> /h	557	640	805	1,494	1,380	1,651	533	640	805	1,380	1,651												
Medium		m <sup>3</sup> /h	379	487	717	997	902	1,380	366	487	717	1,147	1,544													
Low		m <sup>3</sup> /h	297	306	479	801	718	902	289	306	479	718	902													
Total sound power level	High	dB(A)	45	50	58	51	56	45	50	58	51	56														
	Medium	dB(A)	37	44	55	40	51	37	44	55	40	51														
	Low	dB(A)	33	40	47	35	40	33	40	47	35	40														
Sound pressure level	High	dB(A)	37	42	50	43	48	37	42	50	43	48														
	Medium	dB(A)	29	36	47	32	43	29	36	47	32	43														
	Low	dB(A)	25	32	39	27	32	25	32	39	27	32														
Water flow	Cooling	High	l/h	441	749	873	1,223	1,434	1,696	410	589	637	1,299	1,571												
		Medium	l/h	342	616	803	930	1,060	1,498	321	493	593	1,148	1,477												
		Low	l/h	295	416	593	805	893	1,097	271	351	453	822	1,010												
	Heating	High	l/h	539	747	930	1,420	1,596	1,930	311	369	421	929	1,083												
		Medium	l/h	404	597	855	1,053	1,136	1,656	258	317	398	840	1,026												
		Low	l/h	342	399	607	897	908	1,167	222	241	322	634	757												
Allowed water temperature	Cooling	Min	°C	5																						
	Heating	Max	°C	70																						
Piping connections	Water	Inlet		1/2"				3/4"				1/2"				3/4"										
		Outlet		1/2"				3/4"				1/2"				3/4"										
	Drain	OD	mm	10																						
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230																							
Maximum absorbed current		A	0.2				0.4				0.7				0.2				0.4				0.7			
Control systems	Wired remote control		FWEC1A / FWEC2A / FWEC3A / FWEC3A / FWEC3A / FWTOUCH / FWEC2T / FWEC4T																							

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Floor standing unit

BLDC fan motor unit for vertical mounting. Continuous air flow regulation and fan speed modulation

- › Up to 70% energy savings with brushless DC motor technology compared to traditional technology
- › Instant adjustment to temperature and relative humidity changes
- › Low operating sound level
- › Highly flexible solutions: multiple sizes, piping topologies and connection valves
- › Requires very little installation space



More details and final information can be found by scanning or clicking the QR codes.



FWZ-AT



FWZ-AF

Indoor unit			FWZ-AT/AF	02	03	06	08	02	03	06	08
			2-pipe				4-pipe				
Cooling capacity (standard conditions)	Total capacity	High	kW	1.94	2.91	4.48	7.93	1.77	2.86	4.64	7.79
		Medium	kW	1.69	2.37	3.64	6.2	1.55	2.32	3.79	6.12
		Low	kW	1.35	1.75	2.99	4.1	1.25	1.72	3.10	4.06
	Sensible capacity	High	kW	1.49	2.09	3.62	5.87	1.44	2.06	3.54	5.76
		Medium	kW	1.30	1.69	2.90	4.59	1.21	1.65	2.85	4.54
	Low	kW	1.04	1.25	2.31	3.04	0.97	1.23	2.27	3.01	
Heating capacity (standard conditions)	High	kW	2.15	2.94	4.88	8.37	1.76	2.68	4.64	7.35	
	Medium	kW	1.81	2.37	4.11	6.53	1.56	2.31	4.07	6.29	
	Low	kW	1.50	1.76	3.36	4.39	1.36	1.88	3.55	4.85	
Power input	High	kW	0.019	0.016	0.033	0.087	0.019	0.016	0.033	0.087	
	Medium	kW	0.01		0.02	0.038	0.01		0.02	0.038	
	Low	kW	0.01			0.013	0.01			0.013	
FCEER			B	A			B	A			
FCCOP			B	A			B	A			
Dimensions	Unit	HeightxWidthxLength	mm	564x774x226	564x984x226	564x1,190x226	564x1,404x251	564x774x226	564x984x226	564x1,190x226	564x1,404x251
Weight	Unit		kg	20.6	26.7	32.3	41.6	20.6	26.7	32.3	41.6
Casing	Colour			White - RAL9010							
Air filter	Type			Polypropylene net							
Fan	Type			Centrifugal							
	Quantity			1	2			1	2		
Air flow rate	High	Medium	m <sup>3</sup> /h	344	442	785	1,393	327	431	763	1,362
		Medium	m <sup>3</sup> /h	271	341	605	1,022	261	332	593	1,007
		Low	m <sup>3</sup> /h	211	241	470	642	205	237	460	636
Total sound power level	High	Medium	dBA	50.0	48.0	56.0	67.0	50.0	47.0	58.0	66.0
		Medium	dBA	44.0	42.0	49.0	60.0	44.0	41.0	53.0	58.0
		Low	dBA	40.0	36.0	43.0	49.0	38.0	33.0	48.0	
Sound pressure level	High	Medium	dBA	45.0	43.0	51.0	62.0	45.0	42.0	54.0	61.0
		Medium	dBA	39.0	37.0	44.0	55.0	39.0	36.0	48.0	53.0
		Low	dBA	35.0	31.0	38.0	44.0	33.0	28.0	43.0	
Electric heater	Power input (Optional)		kW	1.5	1.6	2.0	-	1.5	1.6	2.0	-
Piping connections	Drain OD		mm	16							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/230							
Control systems	Wired remote control			FWEC3A / FWEC3A / FWTOUCH / FWEC10							

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Floor standing unit

## AC fan motor unit for vertical mounting

- › Quick fixing system for wall mounted installation
- › Pre-assembled 3-way/4-port on/off valves are available
- › Valve packages are insulated, no extra drain pan required
- › Valve packages contain balancing valves and sensor pocket
- › Fast-on connections for electrical options: no tools needed
- › The air filter can easily be removed for cleaning
- › Electric heater: no relay up to 2kW capacity
- › Electric heater: equipped with two overheat cut-out thermostats



More details and final information can be found by scanning or clicking the QR codes.



FWV-DAT



FWV-DAF

Indoor unit			FWV-DAT/DAF										FWV-DAF														
			01	15	02	25	03	35	04	06	08	10	01	15	02	25	03	35	04	06	08	10					
			2-pipe										4-pipe														
Cooling capacity (standard conditions)	Total capacity	High	kW	1.50	1.69	1.91	2.36	2.87	3.45	4.23	4.41	6.53	7.78	1.42	1.64	1.74	2.32	2.81	3.36	4.16	4.57	6.46	7.64				
		Medium	kW	1.21	1.48	1.66	1.99	2.34	2.58	3.21	3.59	5.14	6.07	1.11	1.44	1.52	1.96	2.29	2.54	3.17	3.74	5.10	5.99				
		Low	kW	1.02	1.24	1.34	1.57	1.73	1.94	2.47	2.95	3.88	4.00	0.97	1.22	1.24	1.55	1.70	1.92	2.44	3.06	3.84	3.96				
	Sensible capacity	High	kW	1.16	1.25	1.37	1.82	2.05	2.69	3.05	3.55	4.73	5.72	1.10	1.22	1.41	1.79	2.01	2.61	2.99	3.47	4.67	5.61				
		Medium	kW	0.94	1.10	1.20	1.53	1.66	1.99	2.39	2.85	3.70	4.46	0.87	1.07	1.18	1.50	1.62	1.96	2.36	2.80	3.67	4.40				
	Low	kW	0.77	0.93	0.98	1.15	1.23	1.41	1.76	2.27	2.75	2.94	0.73	0.91	0.96	1.14	1.21	1.40	1.74	2.23	2.73	2.91					
Heating capacity (standard conditions)	High	kW	1.82	1.84	2.15	2.70	2.94	4.05	4.24	4.98	6.49	8.37	1.66	1.76	2.53	2.68	4.20	3.82	4.64	6.97	7.35						
	Medium	kW	1.48	1.72	1.81	2.26	2.37	3.13	3.24	4.08	5.17	6.53	1.49	1.56	2.18	2.31	3.47	3.22	4.07	6.02	6.29						
	Low	kW	1.21	1.45	1.50	1.74	1.76	2.39	2.47	3.31	3.97	4.39	1.31	1.36	1.78	1.88	2.82	2.73	3.55	5.02	4.85						
Power input	High	kW	0.037	0.053	0.057	0.056	0.065	0.098	0.182	0.244	0.037	0.053	0.057	0.056	0.065	0.098	0.182	0.244									
	Medium	kW	0.03		0.04		0.05	0.06	0.07	0.13	0.17	0.03		0.04		0.05	0.06	0.07	0.13	0.17							
	Low	kW	0.02	0.03	0.02	0.03	0.04	0.05	0.09	0.11	0.02	0.03	0.02	0.03	0.04	0.05	0.09	0.11									
Dimensions	Unit	HeightxWidthxLength	mm	564x774x226			564x984x226			564x1,190x226			564x1,400x251			564x774x226			564x984x226			564x1,190x226			564x1,400x251		
Weight	Unit		kg	19.7	20.6	25.5	26.7	31.0	30.4	32.3	41.4	41.6	19.7	20.6	25.5	26.7	31.0	30.4	32.3	41.4	41.6						
Casing	Colour		White - RAL9010																								
Air filter	Type		Polypropylene net																								
Fan	Type		Centrifugal																								
	Quantity		1					2					1					2									
Air flow rate	High	m³/h	319	344	442	640	706	785	1,011	1,393	307	330	327	432	431	628	690	763	998	1,362							
		Medium	m³/h	233	271	341	450	497	605	771	1,022	225	261	334	332	444	490	593	765	1,007							
		Low	m³/h	178	211	241	320	361	470	570	642	174	205	238	237	316	356	460	565	636							
Total sound power level	High	dB(A)	47.0	49.0	50.0	48.0	52.0	53.0	56.0	61.0	67.0	45.0	49.0	50.0	48.0	47.0	53.0	56.0	58.0	60.0	66.0						
	Medium	dB(A)	42.0	44.0	43.0	42.0	43.0	49.0	54.0	60.0	39.0	44.0	43.0	41.0	45.0	46.0	53.0	54.0	58.0								
	Low	dB(A)	37.0	38.0	40.0	35.0	36.0	35.0	43.0	47.0	49.0	33.0	40.0	38.0	34.0	33.0	36.0	39.0	48.0	46.0	48.0						
Sound pressure level	High	dB(A)	42.0	44.0	45.0	43.0	47.0	48.0	51.0	56.0	62.0	40.0	44.0	45.0	43.0	42.0	46.0	51.0	54.0	55.0	61.0						
	Medium	dB(A)	37.0	39.0	38.0	37.0	38.0	44.0	49.0	55.0	34.0	39.0	38.0	36.0	38.0	41.0	48.0	49.0	53.0								
	Low	dB(A)	32.0	33.0	35.0	30.0	31.0	30.0	38.0	42.0	44.0	28.0	33.0	29.0	28.0	29.0	32.0	43.0	41.0	43.0							
Electric heater	Power input (Optional)	kW	1.0	1.5	1.6	2.0	3.0	1.0	1.5	1.6	2.0	3.0															
Piping connections	Drain OD	mm	16																								
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230																								
Control systems	Wired remote control		FWEC1A / FWEC2A / FWEC3A / FWEC3A / FWEC3A / ECFWMB6 / FWTOUCH / FWEC2T / FWEC4T																								

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Flexi type unit

BLDC fan motor unit for horizontal or vertical mounting.  
Continuous air flow regulation and fan speed modulation

- › For wall or ceiling mounted installation: ideal solution for spaces with no false ceilings
- › Up to 70% energy savings with brushless DC motor technology compared to traditional technology
- › Instant adjustment to temperature and relative humidity changes
- › Low operating sound level
- › Highly flexible solutions: multiple sizes, piping topologies and connection valves
- › Requires very little installation space



More details and final information can be found by scanning or clicking the QR codes.



FWR-AT



FWR-AF

Indoor unit			FWR-AT/AF	2-pipe				4-pipe			
				02	03	06	08	02	03	06	08
Cooling capacity (standard conditions)	Total capacity	High	kW	1.94	2.91	4.48	7.93	1.77	2.86	4.64	7.79
		Medium	kW	1.69	2.37	3.64	6.20	1.55	2.32	3.79	6.12
		Low	kW	1.35	1.75	2.99	4.10	1.25	1.72	3.10	4.06
	Sensible capacity	High	kW	1.49	2.09	3.62	5.87	1.44	2.06	3.54	5.76
		Medium	kW	1.30	1.69	2.90	4.59	1.21	1.65	2.85	4.54
	Low	kW	1.04	1.25	2.31	3.04	0.97	1.23	2.27	3.01	
Heating capacity (standard conditions)	High	kW	2.15	2.94	4.88	8.37	1.76	2.68	4.64	7.35	
	Medium	kW	1.81	2.37	4.11	6.53	1.56	2.31	4.07	6.29	
	Low	kW	1.50	1.76	3.36	4.39	1.36	1.88	3.55	4.85	
Power input	High	kW	0.019	0.016	0.033	0.087	0.019	0.016	0.033	0.087	
	Medium	kW	0.01		0.02	0.038	0.01		0.02	0.038	
	Low	kW	0.01			0.013	0.01			0.013	
FCEER			B	A			B	A			
FCCOP			B	A			B	A			
Dimensions	Unit	HeightxWidthxLength	mm	564x774x246	564x984x246	564x1,190x246	564x1,404x271	564x774x246	564x984x246	564x1,190x246	564x1,404x271
Weight	Unit		kg	21.2	27.5	33.6	43.1	21.2	27.5	33.6	43.1
Casing	Colour			White - RAL9010							
Air filter	Type			Polypropylene net							
Fan	Type			Centrifugal							
	Quantity			1	2			1	2		
	Air flow rate	High	m <sup>3</sup> /h	344	442	785	1,393	327	431	763	1,362
		Medium	m <sup>3</sup> /h	271	341	605	1,022	261	332	593	1,007
Low		m <sup>3</sup> /h	211	241	470	642	205	237	460	636	
Total sound power level	High	dBA	50.0	48.0	56.0	67.0	50.0	47.0	58.0	66.0	
	Medium	dBA	44.0	42.0	49.0	60.0	44.0	41.0	53.0	58.0	
	Low	dBA	40.0	36.0	43.0	49.0	38.0	33.0	48.0		
Sound pressure level	High	dBA	45.0	43.0	51.0	62.0	45.0	42.0	54.0	61.0	
	Medium	dBA	39.0	37.0	44.0	55.0	39.0	36.0	48.0	53.0	
	Low	dBA	35.0	31.0	38.0	44.0	33.0	28.0	43.0		
Electric heater	Power input (Optional)		kW	1.5	1.6	2.0	-	1.5	1.6	2.0	-
Piping connections	Drain OD		mm	16							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/230							
Control systems	Wired remote control			FWEC3A / FWEC3A / FWTOUCH / FWEC10							

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Flexi type unit

## AC fan motor unit for horizontal or vertical mounting

- › Quick fixing system for wall or ceiling mounted installation
- › Pre-assembled 3-way/4-port on/off valves are available
- › Valve packages are insulated, no extra drain pan required
- › Valve packages contain balancing valves and sensor pocket
- › Fast-on connections for electrical options: no tools needed
- › The air filter can easily be removed for cleaning
- › Electric heater: no relay up to 2kW capacity
- › Electric heater: equipped with two overheat cut-out thermostats



More details and final information can be found by scanning or clicking the QR codes.



FWL-DAT



FWL-DAF

Indoor unit			FWL-DAT/DAF										FWL-DAF																													
			01		15		02		25		03		35		04		06		08		10		01		15		02		25		03		35		04		06		08		10	
			2-pipe										4-pipe																													
Cooling capacity (standard conditions)	Total capacity	High	kW		1.50	1.69	1.91	2.36	2.87	3.45	4.23	4.41	6.53	7.78	1.42	1.64	1.74	2.32	2.81	3.36	4.16	4.57	6.46	7.64																		
		Medium	kW		1.21	1.48	1.66	1.99	2.34	2.58	3.21	3.59	5.14	6.07	1.11	1.44	1.52	1.96	2.29	2.54	3.17	3.74	5.10	5.99																		
	Low	kW		1.02	1.24	1.34	1.57	1.73	1.94	2.47	2.95	3.88	4.00	0.97	1.22	1.24	1.55	1.70	1.92	2.44	3.06	3.84	3.96																			
	Sensible capacity	High	kW		1.16	1.25	1.37	1.82	2.05	2.69	3.05	3.55	4.73	5.72	1.10	1.22	1.41	1.79	2.01	2.61	2.99	3.47	4.67	5.61																		
Medium		kW		0.94	1.10	1.20	1.53	1.66	1.99	2.39	2.85	3.70	4.46	0.87	1.07	1.18	1.50	1.62	1.96	2.36	2.80	3.67	4.40																			
Low		kW		0.77	0.93	0.98	1.15	1.23	1.41	1.76	2.27	2.75	2.94	0.73	0.91	0.96	1.14	1.21	1.40	1.74	2.23	2.73	2.91																			
Heating capacity (standard conditions)	High	kW		1.82	1.84	2.15	2.70	2.94	4.05	4.24	4.98	6.49	8.37	1.66	1.76	2.53	2.68	4.20	3.82	4.64	6.97	7.35																				
	Medium	kW		1.48	1.72	1.81	2.26	2.37	3.13	3.24	4.08	5.17	6.53	1.49	1.56	2.18	2.31	3.47	3.22	4.07	6.02	6.29																				
	Low	kW		1.21	1.45	1.50	1.74	1.76	2.39	2.47	3.31	3.97	4.39	1.31	1.36	1.78	1.88	2.82	2.73	3.55	5.02	4.85																				
Power input	High	kW		0.037	0.053		0.057	0.056	0.065	0.098		0.182	0.244	0.037	0.053		0.057	0.056	0.065	0.098		0.182	0.244																			
	Medium	kW		0.03	0.04			0.05		0.06	0.07	0.13	0.17	0.03	0.04			0.05		0.06	0.07	0.13	0.17																			
	Low	kW		0.02	0.03	0.02	0.03	0.04		0.05	0.09	0.11	0.02	0.03	0.02	0.03	0.03		0.04	0.05	0.09	0.11																				
Dimensions	Unit	HeightxWidthxLength		mm		564x774x246		564x984x246		564x1,190x246		564x1,400x271		564x774x246		564x984x246		564x1,190x246		564x1,400x271																						
Weight	Unit	kg		20.6	21.2	26.5	27.5	32.5	33.5	33.6	43.1		20.6	21.2	26.5	27.5	32.5	33.5	33.6	43.1																						
Casing	Colour	White - RAL9010																																								
Air filter	Type	Polypropylene net																																								
Fan	Type	Centrifugal																																								
	Quantity			1					2					1					2																							
	Air flow rate	High	m³/h		319	344	442		640	706	785	1,011	1,393	307	330	327	432	431	628	690	763	998	1,362																			
Medium		m³/h		233	271	341		450	497	605	771	1,022	225	261	334	332	444	490	593	765	1,007																					
Low		m³/h		178	211	241		320	361	470	570	642	174	205	238	237	316	356	460	565	636																					
Total sound power level	High	dBA		47.0	49.0	50.0	48.0	52.0	53.0	56.0	61.0	67.0	45.0	49.0	50.0	48.0	47.0	53.0	56.0	58.0	60.0	66.0																				
	Medium	dBA		42.0	44.0	43.0	42.0	43.0	49.0	54.0	60.0	39.0	44.0	43.0	41.0	45.0	46.0	53.0	54.0	58.0																						
	Low	dBA		37.0	38.0	40.0	35.0	36.0	35.0	43.0	47.0	49.0	33.0	40.0	38.0	34.0	33.0	36.0	39.0	48.0	46.0	48.0																				
Sound pressure level	High	dBA		42.0	44.0	45.0	43.0	47.0	48.0	51.0	56.0	62.0	40.0	44.0	45.0	43.0	42.0	46.0	51.0	54.0	55.0	61.0																				
	Medium	dBA		37.0	39.0	38.0	37.0	38.0	44.0	49.0	55.0	34.0	39.0	38.0	36.0	38.0	41.0	48.0	49.0	53.0																						
	Low	dBA		32.0	33.0	35.0	30.0	31.0	30.0	38.0	42.0	44.0	28.0	33.0	29.0	28.0	29.0	32.0	43.0	41.0	43.0																					
Electric heater	Power input (Optional)	kW		1.0	1.5	1.6	2.0		3.0		1.0	1.5	1.6	2.0		3.0																										
Piping connections	Drain OD	mm		16																																						
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50/230																																						
Control systems	Wired remote control	FWEC1A / FWEC2A / FWEC3A / FWEC3A / ECFWMB6 / FWTOUCH / FWEC2T / FWEC4T																																								

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Concealed flexi type unit

BLDC fan motor unit for horizontal or vertical concealed mounting. Continuous air flow regulation and fan speed modulation

- › Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible
- › Up to 70% energy savings with brushless DC motor technology compared to traditional technology
- › Instant adjustment to temperature and relative humidity changes
- › Low operating sound level
- › Highly flexible solutions: multiple sizes, piping topologies and connection valves
- › Available static pressure up to 50Pa at maximum speed



More details and final information can be found by scanning or clicking the QR codes.



FWS-AT



FWS-AF

Indoor unit			FWS-AT/AF	02	03	06	08	02	03	06	08
			2-pipe				4-pipe				
Cooling capacity (standard conditions)	Total capacity	High	kW	1.94	2.91	4.48	7.93	1.77	2.86	4.64	7.79
		Medium	kW	1.69	2.37	3.64	6.2	1.55	2.32	3.79	6.12
		Low	kW	1.35	1.75	2.99	4.1	1.25	1.72	3.10	4.06
	Sensible capacity	High	kW	1.49	2.09	3.62	5.87	1.44	2.06	3.54	5.76
		Medium	kW	1.30	1.69	2.90	4.59	1.21	1.65	2.85	4.54
		Low	kW	1.04	1.25	2.31	3.04	0.97	1.23	2.27	3.01
Heating capacity (standard conditions)	High	kW	2.15	2.94	4.88	8.37	1.76	2.68	4.64	7.35	
	Medium	kW	1.81	2.37	4.11	6.53	1.56	2.31	4.07	6.29	
	Low	kW	1.50	1.76	3.36	4.39	1.36	1.88	3.55	4.85	
Power input	High	kW	0.019	0.016	0.033	0.087	0.019	0.016	0.033	0.087	
	Medium	kW	0.01		0.02	0.038	0.01		0.02	0.038	
	Low	kW	0.01		0.013		0.01		0.013		
FCEER				B	A			B	A		
FCCOP				B	A			B	A		
Dimensions	Unit	HeightxWidthxLength	mm	535x584x224	535x794x224	535x1,000x224	535x1,214x249	535x584x224	535x794x224	535x1,000x224	535x1,214x249
Weight	Unit	kg									
Air filter	Type	Polypropylene net									
Fan	Type	Centrifugal									
	Quantity	1		2		1		2			
	Air flow rate	High	m <sup>3</sup> /h	344	442	785	1,393	327	431	763	1,362
		Medium	m <sup>3</sup> /h	271	341	605	1,022	261	332	593	1,007
Low		m <sup>3</sup> /h	211	241	470	642	205	237	460	636	
Total sound power level	High	dBA	50.0	48.0	56.0	67.0	50.0	47.0	58.0	66.0	
	Medium	dBA	44.0	42.0	49.0	60.0	44.0	41.0	53.0	58.0	
	Low	dBA	40.0	36.0	43.0	49.0	38.0	33.0	48.0		
Sound pressure level	High	dBA	45.0	43.0	51.0	62.0	45.0	42.0	54.0	61.0	
	Medium	dBA	39.0	37.0	44.0	55.0	39.0	36.0	48.0	53.0	
	Low	dBA	35.0	31.0	38.0	44.0	33.0	28.0	43.0		
Electric heater	Power input (Optional)	kW	1.5	1.6	2.0	-	1.5	1.6	2.0	-	
Piping connections	Drain OD	mm	16								
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230								
Control systems	Wired remote control	FWEC3A / FWEC3A / FWTOUCH / FWEC10									

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Concealed flexi type unit

AC fan motor unit for horizontal or vertical concealed mounting

- › Quick fixing system for wall or ceiling mounted installation
- › Pre-assembled 3-way/4-port on/off valves are available
- › Valve packages are insulated, no extra drain pan required
- › Valve packages contain balancing valves and sensor pocket
- › Fast-on connections for electrical options: no tools needed
- › The air filter can easily be removed for cleaning
- › Electric heater: no relay up to 2kW capacity
- › Electric heater: equipped with two overheat cut-out thermostats
- › Available static pressure up to 50Pa at maximum speed



More details and final information can be found by scanning or clicking the QR codes.



FWM-DAT



FWM-DAF

Indoor unit			FWM-DAT/DAF										01 15 02 25 03 35 04 06 08 10 01 15 02 25 03 35 04 06 08 10														
			2-pipe										4-pipe														
Cooling capacity (standard conditions)	Total capacity	High	kW	1.50	1.69	1.91	2.36	2.87	3.45	4.23	4.41	6.53	7.78	1.42	1.64	1.74	2.32	2.81	3.36	4.16	4.57	6.46	7.64				
		Medium	kW	1.21	1.48	1.66	1.99	2.34	2.58	3.21	3.59	5.14	6.07	1.11	1.44	1.52	1.96	2.29	2.54	3.17	3.74	5.10	5.99				
		Low	kW	1.02	1.24	1.34	1.57	1.73	1.94	2.47	2.95	3.88	4.00	0.97	1.22	1.24	1.55	1.70	1.92	2.44	3.06	3.84	3.96				
	Sensible capacity	High	kW	1.16	1.25	1.37	1.82	2.05	2.69	3.05	3.55	4.73	5.72	1.10	1.22	1.41	1.79	2.01	2.61	2.99	3.47	4.67	5.61				
Medium		kW	0.94	1.10	1.20	1.53	1.66	1.99	2.39	2.85	3.70	4.46	0.87	1.07	1.18	1.50	1.62	1.96	2.36	2.80	3.67	4.40					
	Low	kW	0.77	0.93	0.98	1.15	1.23	1.41	1.76	2.27	2.75	2.94	0.73	0.91	0.96	1.14	1.21	1.40	1.74	2.23	2.73	2.91					
Heating capacity (standard conditions)	High	kW	1.82	1.84	2.15	2.70	2.94	4.05	4.24	4.98	6.49	8.37	1.66	1.76	2.53	2.68	4.20	3.82	4.64	6.97	7.35						
	Medium	kW	1.48	1.72	1.81	2.26	2.37	3.13	3.24	4.08	5.17	6.53	1.49	1.56	2.18	2.31	3.47	3.22	4.07	6.02	6.29						
	Low	kW	1.21	1.45	1.50	1.74	1.76	2.39	2.47	3.31	3.97	4.39	1.31	1.36	1.78	1.88	2.82	2.73	3.55	5.02	4.85						
Power input	High	kW	0.037	0.053	0.057	0.056	0.065	0.098	0.182	0.244	0.037	0.053	0.057	0.056	0.065	0.098	0.182	0.244	0.13	0.17	0.13	0.17					
	Medium	kW	0.03		0.04		0.05	0.06	0.07	0.13	0.17	0.03		0.04		0.05	0.06	0.07	0.13	0.17	0.03	0.17					
	Low	kW	0.02	0.03	0.02	0.03	0.04	0.05	0.09	0.11	0.02	0.03	0.02	0.03	0.04	0.05	0.09	0.11	0.02	0.03	0.02	0.03					
Dimensions	Unit	HeightxWidthxLength	mm	535x584x224			535x794x224			535x1,000x224			535x1,210x249			535x584x224			535x794x224			535x1,000x224			535x1,210x249		
Weight	Unit		kg	16.5	16.9	21.4	22.1	26.3	26.4	26.6	35.4	16.5	16.9	21.4	22.1	26.3	26.4	26.6	35.4								
Air filter	Type			Polypropylene net																							
Fan	Type			Centrifugal																							
	Quantity			1		2		1		2		1		2		1		2									
	Air flow rate	High	m <sup>3</sup> /h	319	344	442	640	706	785	1,011	1,393	307	330	327	432	431	628	690	763	998	1,362						
	Medium	m <sup>3</sup> /h	233	271	341	450	497	605	771	1,022	225	334	332	444	490	593	765	950	1,207								
	Low	m <sup>3</sup> /h	178	211	241	320	361	470	570	642	174	205	238	237	316	356	460	565	636								
Total sound power level	High	dBA	47.0	49.0	50.0	48.0	52.0	53.0	56.0	61.0	67.0	45.0	49.0	50.0	48.0	47.0	53.0	56.0	58.0	60.0	66.0						
	Medium	dBA	42.0	44.0	43.0	42.0	43.0	49.0	54.0	60.0	39.0	44.0	43.0	41.0	45.0	46.0	53.0	54.0	58.0								
	Low	dBA	37.0	38.0	40.0	35.0	36.0	35.0	43.0	47.0	49.0	33.0	40.0	38.0	34.0	33.0	36.0	39.0	48.0	46.0	48.0						
Sound pressure level	High	dBA	42.0	44.0	45.0	43.0	47.0	48.0	51.0	56.0	62.0	40.0	44.0	45.0	43.0	42.0	46.0	51.0	54.0	55.0	61.0						
	Medium	dBA	37.0	39.0	38.0	37.0	38.0	44.0	49.0	55.0	34.0	39.0	38.0	36.0	38.0	41.0	48.0	49.0	53.0								
	Low	dBA	32.0	33.0	35.0	30.0	31.0	30.0	38.0	42.0	44.0	28.0	33.0	29.0	28.0	29.0	32.0	43.0	41.0	43.0							
Electric heater	Power input (Optional)	kW	1.0	1.5	1.6	2.0	3.0	1.0	1.5	1.6	2.0	3.0															
Piping connections	Drain OD	mm	16																								
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230																								
Control systems	Wired remote control		FWEC1A / FWEC2A / FWEC3A / FWEC3A / FWEC3A / FWTOUCH / FWEC2T / FWEC4T																								

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue



# Concealed flexi type unit with low ESP

AC fan motor unit for horizontal or vertical concealed mounting

- › Low unit casing height of 200mm
- › Sirocco Fan leading to low noise operation
- › Open control
- › Factory mounted valve combinations
- › Increased flexibility of capacity setting in the field
- › The air filter can easily be removed for cleaning



More details and final information can be found by scanning or clicking the QR codes.



FWE-DT



FWE-DF

Indoor unit			FWE-DT/FWE-DF																	
			03	04	05	2-pipe				4-pipe										
			03	04	05	06	07	08	10	11	03	04	05	06	07	08	10	11		
Cooling capacity (standard conditions)	Total capacity	High	kW	1.94	2.06	2.58	3.12	3.43	3.92	5.22	5.6	1.94	2.06	2.58	3.12	3.42	3.92	5.22	5.6	
		Medium	kW	1.6	1.64	2	2.4	2.79	3.66	4.19	4.41	1.6	1.64	2	2.4	2.79	3.66	4.19	4.41	
		Low	kW	1.22	1.4	1.64	2.01	2.41	2.77	3.1	3.39	1.22	1.4	1.64	2.01	2.42	2.77	3.1	3.39	
	Fan speed 1	High	kW	1.22	1.21	1.33	1.24	2.07	2.38	2.57	2.81	1.22	1.21	1.33	1.24	2.07	2.32	2.57	2.81	
		Medium	kW	1.59	1.69	2.11	2.56	2.81	3.22	4.28	4.59	1.59	1.69	2.11	2.56	2.81	3.22	4.28	4.59	
		Low	kW	1.31	1.34	1.64	1.97	2.28	3	3.44	3.61	1.31	1.34	1.64	1.97	2.28	3	3.44	3.61	
	Latent capacity	High	kW	1	1.15	1.35	1.64	1.98	2.27	2.54	2.78	1	1.15	1.35	1.64	1.98	2.27	2.54	2.78	
		Medium	kW	1	0.99	1.09	1.02	1.7	1.95	2.11	2.3	1	0.99	1.09	1.02	1.7	1.95	2.11	2.3	
		Low	kW	0.35	0.37	0.46	0.56	0.62	0.71	0.94	1.01	0.35	0.37	0.46	0.56	0.62	0.71	0.94	1.01	
Heating capacity (standard conditions)	Capacity	High	kW	2	2.38	2.89	4	4.37	4.64	5.98	6.35	2.11	2.61	2.94	3.84	4.57	5.83	6.18		
		Medium	kW	1.69	1.99	2.32	3.36	3.6	4.39	4.96	5.17	1.81	2.37	2.58	3.09	3.93	4.34	4.87	5.07	
	Low	kW	1.34	1.78	1.98	2.94	3.15	3.56	3.89	4.17	1.47	2.23	2.36	2.69	3.57	3.57	3.87	4.14		
	Fan speed 1	kW	1.34	1.6	1.68	2.13	2.74	3.2	3.37	3.6	1.47	2.11	2.16	1.91	3.22	3.39	3.6	3.6		
Power input	High	kW	0.03	0.03	0.04	0.06	0.07	0.10	0.11	0.03	0.03	0.04	0.06	0.07	0.10	0.11	0.11			
	Medium	kW		0.03		0.05		0.06			0.03		0.05		0.06		0.06			
	Low	kW		0.03				0.04			0.03				0.04		0.04			
	Fan speed 1	kW		0.03		0.04		0.03			0.03		0.04		0.03		0.03			
Dimensions	Unit	Height	mm	200																
		Width	mm	795		995		1,200				795		995		1,200				
		Depth	mm	610																
	Packed unit	Height	mm	205																
		Width	mm	925		1,125		1,325				925		1,125		1,325				
		Depth	mm	745																
Weight	Unit	kg	17.5	18.5	22		25.5			18	19	22.5		26		30				
	Packed unit	kg	20	21	25		29			21	22	26		30						
Casing	Colour		Metal																	
	Material		Galvanised sheet metal																	
Air filter	Type		Plastic Frame / PP Filter Net (G1)																	
	Fan		Sirocco fan																	
Fan	Quantity		2			3			4			2			3			4		
	Air flow rate	High	m <sup>3</sup> /h	407	385	488	677	725	1,032	1,116	407	385	488	677	725	1,032	1,116			
		Medium	m <sup>3</sup> /h	326	306	374	527	570	669	798	846	326	306	374	527	570	669	798	846	
		Low	m <sup>3</sup> /h	235	263	304	446	481	555	619	235	263	304	446	481	555	619			
		Fan speed 1	m <sup>3</sup> /h	235	227	243	290	397	436	489	235	227	243	290	397	436	489			
Total sound power level	High	dB(A)	45	44		50		57	59	45	44		50		57	59				
	Medium	dB(A)	39	38	41	44	42	46	51	52	39	38	41	44	42	46	51	52		
	Low	dB(A)	33	34	37	39		34	43	44	33	34	37	39		34	43	44		
	Fan speed 1	dB(A)		33		30		31	38	40		33		30		31	38	40		
Water flow	Cooling	High	l/h	334	354	443	536	589	674	897	962	334	354	443	536	589	674	897	962	
		Medium	l/h	275	282	343	412	479	630	720	757	275	282	343	412	479	630	720	757	
		Low	l/h	210	241	282	345	415	477	534	583	210	241	282	345	415	477	534	583	
		Fan speed 1	l/h	210	209	228	213	354	409	442	483	210	209	228	213	354	409	442	483	
	Heating	High	l/h	344	409	496	689	751	797	1,029	1,092	182	225	253	330	393	502	531	531	
		Medium	l/h	290	343	400	577	618	755	852	888	156	203	222	266	338	374	419	436	
		Low	l/h	230	306	341	505	542	613	669	717	126	192	203	231	307	333	356	356	
		Fan speed 1	l/h	126	182	186	164		277	291	310	230	275	289	366	471	550	579	620	
Piping connections	Drain	OD	mm																	
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230																	
Current input	High	A	0.01	0.02	0.03	0.02	0.04	0.05	0.01	0.02	0.03	0.02	0.04	0.05						
	Medium	A	0.01		0.02		0.04		0.01		0.02		0.04							
	Low	A	0.01		0.02		0.01	0.03		0.02		0.01		0.02		0.01	0.03			
Control systems	Wired remote control		FWEC1A / FWEC2A / FWEC3A / FWECSA / FWTOUCH / FWE2T / FWEC4T																	

Heating: indoor temp. 20°CDB, 15°CWB; entering water temp. 65°C, water temperature drop 10K. | Heating: indoor temp. 20°CDB, 15°CWB; entering water temp. 45°C, water temperature drop 5K. | Inlet/outlet water temperature 7/12 °C; inlet air temperature 27°C DB 19°C WB

# Concealed ceiling unit with low ESP

## AC fan motor unit for horizontal concealed mounting

- › Easy installation and maintenance
- › 4-speed fan motor
- › Wired electronic controllers range
- › Available static pressure up to 80Pa
- › Wide operating range
- › Standard left and right side water connection
- › Additional drain pan as standard
- › G2 plastic frame filter
- › Open protocol control
- › Factory mounted valve available as option
- › Reduced sound noise thanks to the thinner heat exchanger

Indoor Unit			FWE-FF	04FF	05FF	06FF	08FF	10FF	12FF	14FF	16FF	20FF	24FF	
Cooling capacity (standard conditions)	Total capacity 4-pipe	High	kW	2.01 (1)	2.40 (1)	3.40 (1)	4.20 (1)	4.69 (1)	5.39 (1)	6.97 (1)	7.98 (1)	10.00 (1)	11.30 (1)	
		Medium	kW	1.69 (1)	1.99 (1)	3.04 (1)	3.31 (1)	4.18 (1)	4.84 (1)	6.60 (1)	7.19 (1)	8.51 (1)	10.13 (1)	
		Low	kW	1.37 (1)	1.61 (1)	2.29 (1)	2.19 (1)	3.28 (1)	3.35 (1)	5.77 (1)	5.81 (1)	6.79 (1)	7.51 (1)	
		Fan speed 1	kW	0.90 (1)	1.10 (1)	1.76 (1)	1.30 (1)	2.21 (1)	2.25 (1)	4.79 (1)	5.03 (1)	5.50 (1)	6.09 (1)	
	Sensible capacity 4-pipe	High	kW	1.56 (1)	1.93 (1)	2.74 (1)	3.28 (1)	3.71 (1)	4.27 (1)	5.63 (1)	6.63 (1)	8.28 (1)	9.47 (1)	
		Medium	kW	1.29 (1)	1.57 (1)	2.43 (1)	2.48 (1)	3.24 (1)	3.79 (1)	5.10 (1)	5.85 (1)	6.88 (1)	8.47 (1)	
		Low	kW	1.02 (1)	1.21 (1)	1.83 (1)	1.62 (1)	2.54 (1)	2.58 (1)	4.24 (1)	4.35 (1)	5.28 (1)	5.91 (1)	
		Fan speed 1	kW	0.67 (1)	0.81 (1)	1.37 (1)	0.95 (1)	1.65 (1)	1.69 (1)	3.51 (1)	3.72 (1)	4.17 (1)	4.67 (1)	
	Latent capacity 4-pipe	High	kW	0.45 (1)	0.47 (1)	0.66 (1)	0.92 (1)	0.99 (1)	1.12 (1)	1.34 (1)	1.35 (1)	1.72 (1)	1.82 (1)	
	Heating capacity (standard conditions)	Capacity 4-pipe	High	kW	2.38 (2)	2.45 (2)	3.23 (2)	4.80 (2)	5.20 (2)	6.45 (2)	6.75 (2)	7.60 (2)	9.60 (2)	11.10 (2)
			Medium	kW	2.00 (2)	2.06 (2)	2.90 (2)	3.79 (2)	4.43 (2)	5.47 (2)	6.15 (2)	6.75 (2)	7.94 (2)	10.00 (2)
			Low	kW	1.66 (2)	1.72 (2)	2.21 (2)	2.65 (2)	3.33 (2)	3.50 (2)	4.93 (2)	5.84 (2)	6.98 (2)	
Fan speed 1			kW	1.21 (2)	1.25 (2)	1.72 (2)	1.82 (2)	2.27 (2)	2.38 (2)	3.65 (2)	4.14 (2)	4.97 (2)		
Power input	High	kW	0.054 (3)		0.076 (3)	0.094 (3)	0.109 (3)	0.122 (3)	0.170 (3)	0.189 (3)	0.176 (3)	0.224 (3)		
	Medium	kW	0.04 (3)		0.06 (3)	0.07 (3)	0.08 (3)		0.14 (3)		0.13 (3)	0.15 (3)		
	Low	kW	0.04 (3)		0.05 (3)	0.06 (3)	0.07 (3)		0.12 (3)		0.11 (3)	0.13 (3)		
Casing	Colour	Metal												
Decoration panel	Dimensions Unit	HeightxWidthxDepth	mm	253x728x570			253x1,087x570			253x1,362x570		253x1,677x570		
Fan	Type	Centrifugal (Blade: Forward - curve)												
	Air flow rate	High	m <sup>3</sup> /h	465 (3)	638 (3)	854 (3)	931 (3)	1,082 (3)	1,467 (3)	1,692 (3)	1,707 (3)	1,990 (3)		
		Medium	m <sup>3</sup> /h	379 (3)	555 (3)	668 (3)	805 (3)	931 (3)	1,314 (3)	1,467 (3)	1,382 (3)	1,751 (3)		
		Low	m <sup>3</sup> /h	307 (3)	400 (3)	467 (3)	620 (3)		1,021 (3)		1,001 (3)	1,184 (3)		
		Fan speed 1	m <sup>3</sup> /h	216 (3)	301 (3)	325 (3)	436 (3)		730 (3)		714 (3)	855 (3)		
Total sound power level	High	dBA	49.0 (4)	50.0 (4)	59.0 (4)	55.0 (4)	57.0 (4)	61.0 (4)		64.0 (4)	59.0 (4)	64.0 (4)		
	Medium	dBA	45.0 (4)		56.0 (4)	49.0 (4)	54.0 (4)	58.0 (4)		61.0 (4)	54.0 (4)	61.0 (4)		
	Low	dBA	40.0 (4)		48.0 (4)	41.0 (4)	49.0 (4)		52.0 (4)		48.0 (4)	51.0 (4)		
	Fan speed 1	dBA	32.0 (4)	33.0 (4)	41.0 (4)	35.0 (4)	43.0 (4)		45.0 (4)		43.0 (4)	44.0 (4)		
Sound pressure level	High	dBA	38.0 (5)	39.0 (5)	48.0 (5)	44.0 (5)	46.0 (5)	50.0 (5)		53.0 (5)	48.0 (5)	53.0 (5)		
	Medium	dBA	34.0 (5)		45.0 (5)	38.0 (5)	43.0 (5)	47.0 (5)		50.0 (5)	43.0 (5)	50.0 (5)		
	Low	dBA	29.0 (5)		37.0 (5)	30.0 (5)	38.0 (5)		41.0 (5)		37.0 (5)	40.0 (5)		
	Fan speed 1	dBA	21.0 (5)	22.0 (5)	30.0 (5)	24.0 (5)	32.0 (5)		34.0 (5)		32.0 (5)	33.0 (5)		
Water flow	Cooling	High	l/h	346 (1)	413 (1)	585 (1)	722 (1)	807 (1)	927 (1)	1,198 (1)	1,372 (1)	1,719 (1)	1,943 (1)	
		Medium	l/h	291 (1)	342 (1)	522 (1)	569 (1)	718 (1)	832 (1)	1,135 (1)	1,237 (1)	1,464 (1)	1,742 (1)	
		Low	l/h	236 (1)	277 (1)	394 (1)	377 (1)	563 (1)	576 (1)	992 (1)	998 (1)	1,168 (1)	1,292 (1)	
		Fan speed 1	l/h	155 (1)	189 (1)	303 (1)	224 (1)	380 (1)	388 (1)	823 (1)	865 (1)	947 (1)	1,047 (1)	
Water flow	Heating	High	l/h	504 (2)	517 (2)	686 (2)	919 (2)	995 (2)	1,233 (2)	1,277 (2)	1,420 (2)	1,790 (2)	2,073 (2)	
		Medium	l/h	424 (2)	435 (2)	615 (2)	753 (2)	847 (2)	1,045 (2)	1,171 (2)	1,277 (2)	1,504 (2)	1,890 (2)	
		Low	l/h	353 (2)	361 (2)	469 (2)	547 (2)	637 (2)	669 (2)	948 (2)	1,142 (2)	1,344 (2)		
		Fan speed 1	l/h	256 (2)	262 (2)	365 (2)	384 (2)	434 (2)	456 (2)	700 (2)	849 (2)	954 (2)		

(1)Inlet/outlet water temperature 7/12 °C; inlet air temperature 27°C DB 19°C WB | (2)Heating: indoor temp. 20°CDB, 15°CWB; entering water temp. 45°C, water temperature drop 5K. | (3)Airflow value measurements are performed at 20°C(DB)/15°C(WB) condition. | (4)Sound power level according to ISO3741 | (5)The sound pressure level is measured via a microphone at 1m distance of the unit.



More details and final information can be found by scanning or clicking the QR codes.



FWE-FT



FWE-FF

Indoor Unit			FWE-FT	04FT	05FT	06FT	08FT	10FT	12FT	14FT	16FT	20FT	24FT	
Cooling capacity (standard conditions)	Total capacity 2-pipe	High	kW	2.10 (1)	2.50 (1)	3.45 (1)	4.40 (1)	4.81 (1)	5.60 (1)	7.06 (1)	8.05 (1)	10.30 (1)	11.50 (1)	
		Medium	kW	1.75 (1)	2.10 (1)	3.13 (1)	3.60 (1)	4.30 (1)	5.06 (1)	6.69 (1)	7.38 (1)	8.84 (1)	10.48 (1)	
		Low	kW	1.40 (1)	1.70 (1)	2.39 (1)	2.40 (1)	3.40 (1)	3.50 (1)	5.90 (1)	5.98 (1)	7.08 (1)	7.90 (1)	
		Fan speed 1	kW	0.90 (1)	1.10 (1)	1.81 (1)	1.35 (1)	2.31 (1)	2.32 (1)	4.98 (1)	5.01 (1)	5.72 (1)	6.30 (1)	
	Sensible capacity 2-pipe	High	kW	1.68 (1)	2.06 (1)	2.84 (1)	3.38 (1)	3.89 (1)	4.53 (1)	5.81 (1)	6.82 (1)	8.72 (1)	9.86 (1)	
		Medium	kW	1.36 (1)	1.69 (1)	2.53 (1)	2.77 (1)	3.42 (1)	4.09 (1)	5.37 (1)	6.14 (1)	7.31 (1)	8.97 (1)	
		Low	kW	1.08 (1)	1.31 (1)	1.92 (1)	1.82 (1)	2.68 (1)	2.76 (1)	4.56 (1)	4.68 (1)	5.64 (1)	6.37 (1)	
		Fan speed 1	kW	0.69 (1)	0.83 (1)	1.44 (1)	1.01 (1)	1.77 (1)	1.78 (1)	3.75 (1)	3.82 (1)	4.44 (1)	4.95 (1)	
Latent capacity 2-pipe	High	kW	0.42 (1)	0.44 (1)	0.61 (1)	1.02 (1)	0.92 (1)	1.07 (1)	1.25 (1)	1.22 (1)	1.58 (1)	1.64 (1)		
Heating capacity (standard conditions)	Capacity 2-pipe	High	kW	2.93 (2)	3.00 (2)	3.99 (2)	5.34 (2)	5.78 (2)	7.17 (2)	7.43 (2)	8.26 (2)	10.41 (2)	12.05 (2)	
		Medium	kW	2.47 (2)	2.53 (2)	3.58 (2)	4.38 (2)	4.93 (2)	6.08 (2)	6.81 (2)	7.43 (2)	8.75 (2)	10.99 (2)	
		Low	kW	2.05 (2)	2.10 (2)	2.73 (2)	3.18 (2)	3.70 (2)	3.89 (2)	5.51 (2)	5.51 (2)	6.64 (2)	7.82 (2)	
		Fan speed 1	kW	1.49 (2)	1.53 (2)	2.13 (2)	2.23 (2)	2.52 (2)	2.65 (2)	4.07 (2)	4.07 (2)	4.94 (2)	5.55 (2)	
Power input	High	kW	0.058 (3)		0.082 (3)		0.096 (3)		0.103 (3)		0.115 (3)		0.222 (3)	
	Medium	kW	0.05 (3)		0.06 (3)		0.08 (3)		0.17 (3)		0.12 (3)		0.21 (3)	
	Low	kW	0.04 (3)		0.05 (3)		0.06 (3)		0.14 (3)		0.10 (3)		0.17 (3)	
Dimensions	Unit	HeightxWidthxDepth	mm	253x728x570			253x1,090x570			253x1,360x570		253x1,680x570		
Casing	Colour			Metal										
Fan	Type			Centrifugal (Blade: Forward - curve)										
	Air flow rate	High	m <sup>3</sup> /h	492 (3)	683 (3)	949 (3)	989 (3)	1,155 (3)	1,534 (3)	1,776 (3)	1,812 (3)	2,090 (3)		
		Medium	m <sup>3</sup> /h	398 (3)	592 (3)	734 (3)	850 (3)	989 (3)	1,368 (3)	1,534 (3)	1,455 (3)	1,831 (3)		
		Low	m <sup>3</sup> /h	319 (3)	421 (3)	503 (3)	646 (3)	1,052 (3)	1,036 (3)	1,036 (3)	1,220 (3)			
		Fan speed 1	m <sup>3</sup> /h	218 (3)	312 (3)	338 (3)	444 (3)	738 (3)	720 (3)	864 (3)				
Total sound power level	High	dBA	49.0 (4)	50.0 (4)	58.0 (4)	54.0 (4)	57.0 (4)	61.0 (4)	60.0 (4)	64.0 (4)	58.0 (4)	64.0 (4)		
	Medium	dBA	44.0 (4)	56.0 (4)	48.0 (4)	54.0 (4)	57.0 (4)	58.0 (4)	60.0 (4)	53.0 (4)	60.0 (4)			
	Low	dBA	39.0 (4)	47.0 (4)	40.0 (4)	48.0 (4)	51.0 (4)	51.0 (4)	53.0 (4)	47.0 (4)	50.0 (4)			
	Fan speed 1	dBA	31.0 (4)	40.0 (4)	34.0 (4)	42.0 (4)	44.0 (4)	42.0 (4)	43.0 (4)					
Sound pressure level	High	dBA	38.0 (5)	39.0 (5)	47.0 (5)	43.0 (5)	46.0 (5)	50.0 (5)	49.0 (5)	53.0 (5)	47.0 (5)	53.0 (5)		
	Medium	dBA	33.0 (5)	34.0 (5)	45.0 (5)	37.0 (5)	43.0 (5)	46.0 (5)	47.0 (5)	49.0 (5)	42.0 (5)	49.0 (5)		
	Low	dBA	28.0 (5)	36.0 (5)	29.0 (5)	37.0 (5)	37.0 (5)	40.0 (5)	36.0 (5)	36.0 (5)	39.0 (5)			
	Fan speed 1	dBA	20.0 (5)	29.0 (5)	23.0 (5)	31.0 (5)	33.0 (5)	31.0 (5)	31.0 (5)	32.0 (5)				
Water flow	Cooling	High	l/h	361 (1)	430 (1)	592 (1)	757 (1)	827 (1)	964 (1)	1,213 (1)	1,384 (1)	1,771 (1)	1,978 (1)	
		Medium	l/h	301 (1)	361 (1)	538 (1)	618 (1)	740 (1)	870 (1)	1,151 (1)	1,270 (1)	1,519 (1)	1,802 (1)	
		Low	l/h	241 (1)	292 (1)	410 (1)	413 (1)	584 (1)	602 (1)	1,014 (1)	1,029 (1)	1,217 (1)	1,359 (1)	
		Fan speed 1	l/h	155 (1)	189 (1)	311 (1)	232 (1)	396 (1)	399 (1)	857 (1)	861 (1)	983 (1)	1,083 (1)	
	Heating	High	l/h	504 (2)	517 (2)	686 (2)	919 (2)	995 (2)	1,233 (2)	1,277 (2)	1,420 (2)	1,790 (2)	2,073 (2)	
Water flow	Heating	Medium	l/h	424 (2)	435 (2)	615 (2)	753 (2)	847 (2)	1,045 (2)	1,171 (2)	1,277 (2)	1,504 (2)	1,890 (2)	
		Low	l/h	353 (2)	361 (2)	469 (2)	547 (2)	637 (2)	669 (2)	948 (2)	1,142 (2)	1,344 (2)		
		Fan speed 1	l/h	256 (2)	262 (2)	365 (2)	384 (2)	434 (2)	456 (2)	700 (2)	849 (2)	954 (2)		

(1)Inlet/outlet water temperature 7/12 °C; inlet air temperature 27°C DB 19°C WB | (2)Heating: indoor temp. 20°CDB, 15°CWB; entering water temp. 45°C, water temperature drop 5K. | (3)Airflow value measurements are performed at 20°C(DB)/15°C(WB) condition. | (4)Sound power level according to ISO3741 | (5)The sound pressure level is measured via a microphone at 1m distance of the unit.

# Concealed ceiling unit with medium ESP

BLDC fan motor unit for horizontal concealed mounting. Continuous air flow regulation and fan speed modulation

- › Available in District Cooling version for both 2 and 4 pipe applications
- › Up to 50% energy savings with brush-less DC motor technology compared to traditional technology
- › Instant adjustment to temperature and relative humidity changes
- › Low operating sound level
- › Highly flexible solutions: multiple sizes, piping topologies and connection valves
- › Heat exchanger up to 4 rows
- › Available static pressure up to 80Pa at maximum speed



More details and final information can be found by scanning or clicking the QR codes.



FWP-CT



FWP-CF

Indoor unit	FWP-CT/CF	04		05			06			08			10			11			15			17			
		min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max
<b>2-pipe</b>																									
Speed		2,5,7			1,5,7			1,6,7			1,4,7			1,6,7			1,6,7			5,6,7			5,6,7		
Declared speed		2,5,7			1,5,7			1,6,7			1,4,7			1,6,7			1,6,7			5,6,7			5,6,7		
Control voltage (E)	V	2.90	8.00	9.00	4.30	7.50	8.40	4.50	7.40	8.30	5.40	8.30	9.90	3.40	7.60	8.50	3.40	7.60	8.50	6.80	7.50	8.30	6.80	7.50	8.30
Rated air flow (E)	m <sup>3</sup> /h	109	246	276	171	275	341	195	360	402	305	532	652	333	687	760	333	687	760	1,050	1,163	1,289	1,050	1,163	1,289
Available static pressure (E)	Pa	10	50	63	19	50	77	19	50	63	17	50	75	12	50	61	12	50	61	40	50	60	40	50	60
Power input (E)	W	6	25	33	10	24	39	10	26	35	22	51	77	11	54	68	11	54	68	105	128	162	105	128	162
Maximum current absorption	A	0.32			0.60			0.84			0.84			0.91			0.91			3.52			3.52		
Total cooling capacity (1)(E)	kW	0.93	1.76	1.95	1.29	1.95	2.34	1.59	2.74	3.04	1.98	3.26	3.79	2.29	4.34	4.75	2.51	4.91	5.35	6.28	6.81	7.38	7.04	7.64	8.28
Sensible cooling capacity (1)(E)	kW	0.62	1.25	1.39	0.91	1.39	1.66	1.09	1.91	2.11	1.48	2.48	2.92	1.67	3.21	3.51	1.77	3.45	3.76	4.64	5.03	5.46	4.96	5.38	5.84
FCEER class (E)		A																		C			B		
Water flow (2)	l/h	161	306	340	222	339	408	274	476	527	343	568	664	394	753	828	432	850	930	1,094	1,190	1,295	1,225	1,332	1,448
Water pressure drop (2)(E)	kPa	2	5	6	3	6	8	3	7	9	3	8	11	2	7	8	3	10	12	13	16	18	20	23	-
Heating capacity (3)(E)	kW	0.88	1.21	1.99	1.33	1.98	2.35	1.59	2.80	3.10	2.35	3.71	4.31	2.54	4.76	5.17	2.63	5.03	5.49	6.68	7.22	7.80	7.18	7.80	8.46
FCCOP class (E)		A																		B					
Water flow (3)	l/h	153	315	346	231	345	408	276	488	538	408	644	749	441	827	898	457	875	955	1,162	1,256	1,356	1,248	1,355	1,471
Water pressure drop (3)(E)	kPa	1	4	5	2	5	7	2	6	8	4	9	11	2	7	8	3	9	11	12	14	16	17	19	22
Standard coil - number of rows		3			3			4			3			3			4			3			4		
Total sound power level (4)	dB(A)	28	49	52	39	50	54	39	50	54	38	52	58	38	55	58	38	55	58	61	63	69	61	63	69
Inlet + radiated sound power level (4)(E)	dB(A)	26	47	50	37	48	52	37	48	52	36	50	56	36	53	56	36	53	56	59	61	67	59	61	67
Outlet sound power level (4)(E)	dB(A)	25	46	49	36	47	51	36	47	51	35	49	55	35	52	55	35	52	55	58	60	66	58	60	66
Water content - standard coil	dm <sup>3</sup>	1.20			1.20			2.20			1.60			2.50			3.30			2.50			3.30		
Cross-section area of power cables (5)	mm <sup>2</sup>	1.00			1.00			1.00			1.00			1.00			1.00			1.50			1.50		
<b>4-pipe</b>																									
Speed		2,5,7			1,5,7			1,6,7			1,4,7			1,6,7			1,6,7			5,6,7			5,6,7		
Declared speed		2,5,7			1,5,7			1,6,7			1,4,7			1,6,7			1,6,7			5,6,7			5,6,7		
Control voltage (E)	V	2.90	7.90	8.90	4.50	7.30	8.90	4.50	7.40	8.30	5.40	8.30	9.90	3.40	7.60	8.50	3.40	7.60	8.50	6.80	7.50	8.30	6.80	7.50	8.30
Rated air flow (E)	m <sup>3</sup> /h	109	243	270	170	272	336	195	357	398	302	524	642	333	683	755	333	683	755	1,050	1,163	1,289	1,050	1,163	1,289
Available static pressure (E)	Pa	10	50	63	19	50	77	19	50	63	17	50	75	12	50	61	12	50	61	40	50	60	40	50	60
Power input (E)	W	6	25	32	10	23	39	10	26	35	21	50	77	11	54	67	11	54	67	105	128	162	105	128	162
Maximum current absorption	A	0.32			0.60			0.84			0.84			0.91			0.91			3.52			3.52		
Total cooling capacity (1)(E)	kW	0.93	1.74	1.91	1.28	1.93	2.31	1.59	2.72	3.01	1.95	3.22	3.75	2.29	4.32	4.72	2.51	4.88	5.32	6.28	6.81	7.38	7.04	7.64	8.28
Sensible cooling capacity (1)(E)	kW	0.62	1.24	1.36	0.90	1.38	1.64	1.09	1.89	2.09	1.47	2.44	2.89	1.67	3.19	3.48	1.77	3.43	3.74	4.64	5.03	5.46	4.96	5.38	5.84
FCEER class (E)		A																		C			B		
Water flow (2)	l/h	161	302	333	221	335	404	274	473	522	339	562	656	394	749	822	432	846	925	1,094	1,190	1,295	1,225	1,332	1,448
Water pressure drop (2)(E)	kPa	2	5	6	3	6	8	3	7	9	3	8	11	2	7	8	3	10	12	13	16	18	20	23	26
Heating capacity (3)(E)	kW	1.14	1.93	2.06	1.55	2.07	2.32	2.09	3.09	3.29	2.80	3.82	4.24	3.40	5.17	5.45	3.40	5.17	5.45	6.42	6.73	7.06	6.42	6.73	7.06
FCCOP class (E)		A																		C			B		
Water flow (3)	l/h	100	169	180	136	181	204	183	271	288	245	334	371	297	452	477	297	452	477	562	589	618	562	589	618
Water pressure drop (3)(E)	kPa	1	2	3	2	3	3	2	3	4	3	5	6	6	13	14	6	13	14	19	21	22	19	21	22
Total sound power level (4)	dB(A)	28	49	52	39	50	54	39	50	54	38	52	58	38	55	58	38	55	58	61	63	69	61	63	69
Standard coil - number of rows		3+1			3+1			4+1			3+1			3+1			4+1			3+1			4+1		
Inlet + radiated sound power level (4)(E)	dB(A)	26	47	50	37	48	52	37	48	52	36	50	56	36	53	56	36	53	56	59	61	67	59	61	67
Outlet sound power level (4)(E)	dB(A)	25	46	49	36	47	51	36	47	51	35	49	55	35	52	55	35	52	55	58	60	66	58	60	66
Water content - standard coil	dm <sup>3</sup>	0.47			0.47			0.59			0.59			0.97			0.97			0.97			0.97		
Cross-section area of power cables (5)	mm <sup>2</sup>	1.00			1.00			1.00			1.00			1.00			1.00			1.50			1.50		
Power supply cable type		N07V-K																							
Safety fuse F	A	1			1			1			1			1			1			2			2		
Fuses type		gG																							
Power supply Phase/Frequency	Hz	1~/50																							
Control systems	Wired remote control	FWEC3A / FWEC3A / FWTOUCH / FWEC10																							

(1) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity) according to EN1397:2015 | (2) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity) | (3) Water temperature 45°C / 40°C, air temperature 20°C | (4) Sound power measured according to standards ISO 3741 and ISO 3742 | (5) Sound pressure measured at a distance of 4 m in a free field with a directivity factor of 1 | (E) EUROVENT certified data

# Concealed ceiling unit with medium ESP

AC fan motor unit for horizontal concealed mounting

- › Compact dimensions, can easily be mounted in a narrow ceiling void
- › Heat exchanger up to 4 rows
- › Drain pan to collect the condensate from: heat exchanger and regulating valves -reversible water connections
- › The air filter can easily be removed for cleaning
- › Available static pressure up to 80Pa at maximum speed



More details and final information can be found by scanning or clicking the QR codes.



FWB-CT



FWB-CF

Indoor unit	FWB-CT/CF	04		05			06			08			10			11			15			17			
		min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max
<b>2-pipe</b>																									
Speed		2,5,7			1,5,7			1,6,7			1,4,7			1,6,7			1,6,7			5,6,7			5,6,7		
Declared speed		2,5,7			1,5,7			1,6,7			1,4,7			1,6,7			1,6,7			5,6,7			5,6,7		
Rated air flow (E)	m <sup>3</sup> /h	109	246	276	171	275	341	195	360	402	305	532	652	333	687	760	333	687	760	1,050	1,163	1,289	1,050	1,163	1,289
Available static pressure (E)	Pa	10	50	63	19	50	77	19	50	63	17	50	75	12	50	61	12	50	61	40	50	60	40	50	60
Power input (E)	W	24	57	82	34	69	106	34	85	106	76	143	192	76	167	192	76	167	192	235	280	332	235	280	332
Maximum current absorption	A	0.40			0.56			0.56			1.10			1.10			1.10			2.10			2.10		
Total cooling capacity (1)(E)	kW	0.92	1.72	1.90	1.27	1.90	2.27	1.57	2.69	2.96	1.92	3.17	3.68	2.22	4.22	4.63	2.44	4.79	5.23	6.15	6.66	7.21	6.91	7.49	8.12
Sensible cooling capacity (1)(E)	kW	0.61	1.21	1.34	0.89	1.34	1.59	1.07	1.86	2.03	1.42	2.39	2.81	1.60	3.09	3.39	1.70	3.33	3.64	4.51	4.88	5.29	4.83	5.23	5.67
FCEER class (E)		D																							
Water flow (1)	l/h	160	306	340	222	339	408	274	476	527	343	568	664	394	753	828	432	850	930	1,095	1,191	1,295	1,225	1,333	1,448
Water pressure drop (2)(E)	kPa	2	5	6	3	6	8	3	7	9	3	8	11	2	7	8	3	10	12	13	16	18	20	23	26
Heating capacity (3)(E)	kW	0.88	1.81	1.99	1.33	1.98	2.35	1.59	2.80	3.10	2.35	3.71	4.31	2.54	4.76	5.17	2.63	5.03	5.49	6.68	7.22	7.80	7.18	7.80	8.46
FCCOP class (E)		D																							
Water flow (3)	l/h	153	315	346	231	345	408	276	488	538	408	644	749	442	827	898	457	875	955	1,162	1,256	1,357	1,248	1,356	1,472
Water pressure drop (3)(E)	kPa	1	4	5	2	5	7	2	6	8	4	9	11	2	7	8	3	9	11	12	14	16	17	20	23
Standard coil - number of rows		3			3			4			3			3			4			3			4		
Total sound power level (4)	dB(A)	28	49	52	39	50	54	39	50	54	38	52	58	38	55	58	38	55	58	61	63	69	61	63	69
Inlet + radiated sound power level (4)(E)	dB(A)	26	47	50	37	48	52	37	48	52	37	50	58	36	53	56	36	53	56	59	61	67	59	61	67
Outlet sound power level (4)(E)	dB(A)	25	46	49	36	47	51	36	47	51	35	47	56	35	52	55	35	52	55	58	60	66	58	60	66
Water content - standard coil	dm <sup>3</sup>	1.20			1.20			1.60			1.60			2.50			3.30			2.50			3.30		
Power supply cable type		N07V-K																							
Cross-section area of power cables (5)	mm <sup>2</sup>	1.00			1.00			1.00			1.50			1.50			1.50			1.50			1.50		
Safety fuse F	A	1			1			1			2			2			2			2			2		
Fuses type		gG																							
Power supply Phase/Frequency	Hz	1~/50																							
Control systems Wired remote control		FWEC1A / FWEC2A / FWEC3A / FWEC3A / FWTOUCH / FWEC2T / FWEC4T																							
<b>4-pipe</b>																									
Speed		2,5,7			1,5,7			1,6,7			1,4,7			1,6,7			1,6,7			5,6,7			5,6,7		
Declared speed		2,5,7			1,5,7			1,6,7			1,4,7			1,6,7			1,6,7			5,6,7			5,6,7		
Rated air flow (E)	m <sup>3</sup> /h	109	243	270	170	272	336	195	357	398	302	524	642	333	683	755	333	683	755	1,050	1,163	1,289	1,050	1,163	1,289
Available static pressure (E)	Pa	10	50	63	19	50	77	19	50	63	17	50	75	12	50	61	12	50	61	40	50	60	40	50	60
Power input (E)	W	24	57	82	34	69	106	34	85	106	76	143	192	76	167	192	76	167	192	235	280	332	235	280	332
Maximum current absorption	A	0.40			0.56			0.56			1.10			1.10			1.10			2.10			2.10		
Total cooling capacity (1)(E)	kW	0.92	1.70	1.86	1.26	1.88	2.24	1.57	2.67	2.93	1.89	3.13	3.64	2.22	4.20	4.60	2.44	4.76	5.20	6.15	6.66	7.21	6.91	7.49	8.12
Sensible cooling capacity (1)(E)	kW	0.61	1.20	1.31	0.88	1.33	1.57	1.07	1.84	2.01	1.41	2.35	2.78	1.60	3.07	3.36	1.70	3.31	3.62	4.51	4.88	5.29	4.83	5.23	5.67
FCEER class (E)		D																							
Water flow (1)	l/h	160	302	333	221	335	404	274	473	522	339	562	656	394	749	822	432	846	925	1,095	1,191	1,295	1,225	1,333	1,448
Water pressure drop (2)(E)	kPa	2	5	6	3	6	8	3	7	9	3	8	11	2	7	8	3	10	12	13	16	18	20	23	26
Heating capacity (3)(E)	kW	1.14	1.93	2.06	1.55	2.07	2.32	2.09	3.09	3.29	2.80	3.82	4.24	3.40	5.17	5.45	3.40	5.17	5.45	6.42	6.73	7.06	6.42	6.73	7.06
FCCOP class (E)		D																							
Water flow (3)	l/h	100	169	180	136	181	204	183	271	288	245	334	371	297	452	477	297	452	477	562	590	618	562	590	618
Water pressure drop (3)(E)	kPa	1	2	3	2	3	3	2	3	4	3	5	6	6	13	14	6	13	14	19	21	22	19	21	22
Total sound power level	dB(A)	28	49	52	39	50	54	39	50	54	38	52	58	38	55	58	38	55	58	61	63	69	61	63	69
Additional coil - number of rows (4)	dB(A)	1																							
Inlet + radiated sound power level (4)(E)	dB(A)	26	47	50	37	48	52	37	48	52	36	50	56	36	53	56	36	53	56	59	61	67	59	61	67
Outlet sound power level (4)(E)	dB(A)	25	46	49	36	47	51	37	48	51	35	49	55	35	52	55	35	52	55	58	60	66	58	60	66
Water content - standard coil	dm <sup>3</sup>	0.47			0.59			0.59			0.97			0.97			0.97			0.97			0.97		

(1) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity) according to EN1397:2015 | (2) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity) | (3) Water temperature 65°C / 55°C, air temperature 20°C | (4) Sound power measured according to standards ISO 3741 and ISO 3742 | (5) Sound pressure measured at a distance of 4 m in a free field with a directivity factor of 1 | (E) EUROVENT certified data

# Concealed ceiling unit with high ESP

BLDC fan motor unit for horizontal or vertical mounting. Continuous air flow regulation and fan speed modulation

- › Up to 70% energy savings with brushless DC motor technology compared to traditional technology
- › Instant adjustment to temperature and relative humidity changes
- › Low operating sound level
- › Highly flexible solutions: multiple sizes, piping topologies and connection valves
- › The air filter can easily be removed for cleaning
- › Straight duct connector mounted to discharge side
- › Available static pressure up to 120Pa at maximum speed



More details and final information can be found by scanning or clicking the QR codes.



FWN-AT



FWN-AF

Indoor unit			FWN-AT/AF		04	05	06	07	08	10	04	05	06	07	08	10	
					2-pipe						4-pipe						
Cooling capacity (standard conditions)	Total capacity	High	kW	3.80	4.65	6.01	6.65	7.57	8.49	3.76	4.61	5.91	6.55	7.46	8.35		
		Medium	kW	3.47	4.20	5.65	6.25	6.84	7.62	3.44	4.17	5.58	6.17	6.75	7.52		
		Low	kW	2.83	3.38	5.22	5.78	6.20	6.84	2.82	3.36	5.17	5.71	6.14	6.77		
	Sensible capacity	High	kW	2.98	3.56	4.47	5.04	6.29	6.83	2.95	3.53	4.39	4.97	6.19	6.71		
		Medium	kW	2.70	3.19	4.20	4.73	5.60	6.07	2.68	3.17	4.15	4.66	5.52	5.98		
		Low	kW	2.19	2.54	3.90	4.35	5.01	5.40	2.18	2.52	3.84	4.30	4.96	5.34		
Heating capacity (standard conditions)	High	kW	4.05	4.83	6.42	7.26	7.88	8.93	3.91	3.89	5.72	5.65	7.99	7.94			
	Medium	kW	3.69	4.36	6.03	6.80	7.11	8.04	3.68	3.66	5.51	5.45	7.47	7.44			
	Low	kW	3.04	3.55	5.59	6.29	6.47	7.28	3.23	3.23	5.25	5.21	7.02	6.99			
Power input	High	kW	0.112		0.152		0.248		0.112		0.152		0.248				
	Medium	kW	0.07		0.13		0.17		0.73		0.13		0.17				
	Low	kW	0.04		0.10		0.12		0.45		0.40		0.10				
FCEER			C	B	C				B		C						
FCCOP			B	A	B		C		B		C						
Dimensions	Unit	HeightxWidthxLength	mm	559x754x280			559x964x280			559x1,170x280		559x754x280		559x964x280		559x1,170x280	
Weight	Unit		kg	32.5	33.3	40.6	41.7	47.3	48.7	34.7	35.5	43.2	44.4	50.3	51.7		
Air filter	Type		Acrylic - Filtering class EU2														
Fan	Type		Centrifugal														
	Quantity		1		2				1		2						
	Air flow rate	High	m <sup>3</sup> /h	802	791	1,238	1,203	1,606	1,581	793	783	1,211	1,182	1,576	1,550		
		Medium	m <sup>3</sup> /h	700	692	1,134	1,107	1,384	1,371	694	686	1,115	1,088	1,362	1,349		
Low		m <sup>3</sup> /h	534	532	1,019	1,000	1,207	1,198	531	529	1,005	985	1,192	1,184			
Total sound power level	High	dBA	66.0		69.0		72.0		66.0		69.0		72.0				
	Medium	dBA	61.0		63.0		67.0		61.0		63.0		67.0				
	Low	dBA	54.0	59.0	61.0	62.0	54.0	59.0	61.0	62.0							
Sound pressure level	High	dBA	61.0		64.0		67.0		61.0		64.0		67.0				
	Medium	dBA	56.0		58.0		62.0		56.0		58.0		62.0				
	Low	dBA	49.0		54.0		56.0		49.0		54.0		56.0				
Electric heater	Power input (Optional)	kW	2.0		6.0		9.0		2.0		6.0		9.0				
Piping connections	Drain OD	mm	17														
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230														
Control systems	Wired remote control		FWEC3A / FWEC3A / FWTOUCH / FWEC10														

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Concealed ceiling unit with high ESP

AC fan motor unit for horizontal or vertical concealed mounting

- › Quick fixing system for wall or ceiling mounted installation
- › Straight duct connector mounted to discharge side
- › The air filter can easily be removed for cleaning
- › Available static pressure up to 180Pa at maximum speed



More details and final information can be found by scanning or clicking the QR codes.



FWD-AT



FWD-AF

Indoor unit			FWD-AT/AF														
			04	06	08	10	12	16	18	04	06	08	10	12	16	18	
			2-pipe						4-pipe								
Cooling capacity (standard conditions)	Total capacity	High	kW	3.65	5.71	7.33	8.25	11.86	15.92	17.74	3.62	5.60	7.20	8.10	11.66	15.84	17.66
		Medium	kW	3.36	5.39	6.63	7.41	10.12	13.83	15.36	3.33	5.32	6.54	7.31	10.00	13.77	15.29
		Low	kW	2.74	4.99	6.03	6.68	8.42	11.63	12.92	2.73	4.92	5.97	6.61	8.33	11.59	12.87
	Sensible capacity	High	kW	2.83	4.16	6.04	6.58	9.22	12.21	13.49	2.80	4.08	5.94	6.46	9.06	12.14	13.41
Medium		kW	2.59	3.94	5.39	5.86	7.75	10.43	11.40	2.57	3.89	5.31	5.77	7.66	10.38	11.34	
Low		kW	2.10	3.66	4.84	5.23	6.35	8.61	9.37	2.09	3.60	4.79	5.17	6.29	8.58	9.34	
Heating capacity (standard conditions)	High	kW	4.05	6.42	7.88	8.93	12.72	17.29	19.05	3.91	5.72	7.99	7.94	14.43	19.30	19.20	
	Medium	kW	3.69	6.03	7.11	8.04	10.84	15.05	16.40	3.68	5.51	7.47	7.44	12.63	17.17	17.03	
	Low	kW	3.04	5.59	6.47	7.28	9.06	12.68	13.73	3.23	5.25	7.02	6.99	10.86	14.88	14.79	
Power input	High	kW	0.265	0.460	0.505	0.750	1.300	0.265	0.460	0.505	0.750	1.300					
	Medium	kW	0.19	0.39	0.38	0.54	1.09	0.19	0.39	0.38	0.54	1.09					
	Low	kW	0.14	0.35	0.29	0.37	0.87	0.14	0.35	0.29	0.37	0.87					
Dimensions	Unit	HeightxWidthxLength	mm	559x754x280	559x964x280	559x1,170x280	718x1,170x353	718x1,380x353	559x754x280	559x964x280	559x1,170x280	718x1,170x353	718x1,380x353				
Weight	Unit		kg	32.5	40.6	47.3	48.7	65.3	77.0	79.5	34.7	43.2	50.3	51.7	70.9	83.4	85.9
Air filter	Type		Acrylic fiber - Filtering class G2 (G4 on request)														
Fan	Type		Centrifugal														
	Quantity		1	2						1	2						
	Air flow rate	High	m <sup>3</sup> /h	802	1,241	1,609	1,584	2,380	3,206	3,175	794	1,212	1,573	1,550	2,328	3,186	3,155
		Medium	m <sup>3</sup> /h	700	1,134	1,384	1,371	1,898	2,641	2,604	694	1,115	1,362	1,349	1,871	2,626	2,590
Low		m <sup>3</sup> /h	534	1,021	1,208	1,200	1,485	2,092	2,073	532	1,004	1,194	1,186	1,466	2,084	2,065	
Total sound power level	High	dBA	66.0	69.0	72.0	74.0	78.0	66.0	69.0	72.0	74.0	78.0					
	Medium	dBA	61.0	63.0	67.0	60.0	73.0	61.0	64.0	67.0	73.0						
	Low	dBA	54.0	59.0	62.0	60.0	69.0	54.0	61.0	62.0	60.0	69.0					
Sound pressure level	High	dBA	61.0	64.0	67.0	69.0	73.0	61.0	64.0	67.0	69.0	73.0					
	Medium	dBA	56.0	58.0	62.0	68.0	56.0	59.0	62.0	68.0							
	Low	dBA	49.0	54.0	57.0	55.0	64.0	49.0	56.0	57.0	55.0	64.0					
Electric heater	Power input (Optional)	kW	2.0	6.0	9.0	12.0	2.0	6.0	9.0	12.0							
Piping connections	Drain OD	mm	17														
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230														
Control systems	Wired remote control		FWEC1A / FWEC2A / FWEC3A / FWEC3A / FWETOUCH / FWEC2T / FWEC4T														

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Wall mounted unit

## AC fan motor unit for wall mounting

- › High aesthetic cabinet design
- › Optimum air distribution
- › Easy to install
- › Wireless remote control up to 9 m distance
- › 3-speed fan motor
- › Wide operating range
- › Low operating sound level thanks to tangential fan
- › Insulated with self-extinguishing class 1 heat insulation
- › Removable washable air filter (self-extinguishing class 1)



More details and final information can be found by scanning or clicking the QR codes.



FWT-GT

Indoor unit			FWT-GT	02	03	04	05	06	
			2-pipe						
Cooling capacity (standard conditions)	Total capacity	High	kW	2.40	2.67	3.27	4.49	5.21	
		Medium	kW	2.20	2.23	2.79	4.02	4.32	
		Low	kW	1.94	2.02	2.52	3.76	4.04	
	Sensible capacity	High	kW	1.82	1.99	2.60	3.38	4.03	
		Medium	kW	1.73	1.69	2.21	3.00	3.52	
		Low	kW	1.50	1.49	1.91	2.77	3.22	
Heating capacity (standard conditions)	High	kW	2.71	2.96	3.71	5.07	6.23		
	Medium	kW	2.41	2.62	3.29	4.51	5.38		
	Low	kW	2.06	2.25	2.75	4.03	4.83		
Power input	High	kW	0.031	0.032	0.042	0.053	0.072		
	Medium	kW	0.03		0.04	0.05	0.07		
	Low	kW	0.03		0.04	0.05	0.06		
FCEER				D		C		D	
FCCOP				C					
Dimensions	Unit	HeightxWidthxLength	mm	288x800x206			310x1,070x224		
Weight	Unit		kg	9.00			14.0		
Casing	Colour	White							
Air filter	Type	Washable Saranet							
Fan	Type	Cross flow fan							
	Quantity	1							
	Air flow rate	High	m <sup>3</sup> /h	442	476	629	866	1,053	
		Medium	m <sup>3</sup> /h	391	425	544	765	883	
Low		m <sup>3</sup> /h	340	374	442	663	782		
Total sound power level	High	dBA	45.0	48.0	55.0		59.0		
	Medium	dBA	41.0	44.0	50.0	51.0	54.0		
	Low	dBA	36.0	39.0	45.0	47.0	51.0		
Sound pressure level	High	dBA	34.0	35.0	42.0		46.0		
	Medium	dBA	29.0	30.0	39.0	38.0	42.0		
	Low	dBA	25.0		32.0	34.0	39.0		
Piping connections	Drain OD	mm	19						
Power supply	Phase/Frequency/Voltage	Hz/V	1N~/50/220-240						
Control systems	Infrared remote control	WRC-HPC							
	Wired remote control	MERCA / SRC-HPA							

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue





## Options & accessories - Fan coil units: Panels and Controls

INDOOR UNITS		FWC-BT/BF	FWF-BT/BF	FWF-DT/DF	FWH-AT/AF	FWI-AT/AF	FWZ-AT/AF	FWV-DAT/DAF	FWR-AT/AF
Panels	Decoration panel 600x600		BYFQ60B	BYFQ60B	FPAN02A (2 up to 4 class)	FPAN02A (2 up to 4 class)			
	Decoration panel 900x900	BYCQ140C			FPAN06A (6 up to 8 class)	FPAN06A (6 up to 8 class)			
	Coanda effect decoration panel 600x600				FCND02A (2 up to 4 class)	FCND02A (2 up to 4 class)			
	Design panel			BYFQ60CW (white) BYFQ60CS (silver)					
	Adaptor for design panel			EKR1P1CA55A					
	Panel spacer for reducing required installation height	KDBQ44B60	KDBQ44B60	KDBQ44B60					
	Sealing member of air discharge outlet	KDBHQ55C140	KDBH44BA60	KDBH44BA60					
	Spigot for fresh air				SPFA11A (2 up to 4 class) SPFA12A (6 up to 8 class)	SPFA11A (2 up to 4 class) SPFA12A (6 up to 8 class)			
	Air distribution plenum				PPAI02A (2 up to 4 class) PPAI06A (6 up to 8 class)	PPAI02A (2 up to 4 class) PPAI06A (6 up to 8 class)			
	Rear panel						ERP02A6 (2 class) ERP03A6 (3 class) ERP06A6 (6 class) ERP10A6 (8 class)	ERP02A6 (1, 15 & 2 class) ERP03A6 (25 & 3 class) ERP06A6 (35, 4 & 6 class) ERP10A6 (8 & 10 class)	ERP02A6 (2 class) ERP03A6 (3 class) ERP06A6 (6 class) ERP10A6 (8 class)
Air intake & discharge grille						EAIDF02A6 (2 class) EAIDF03A6 (3 class) EAIDF06A6 (6 class) EAIDF10A6 (10 class)	EAIDF02A6 (1, 15 & 2 class) EAIDF03A6 (25 & 3 class) EAIDF06A6 (35, 4 & 6 class) EAIDF10A6 (8 & 10 class)	EAIDF02A6 (2 class) EAIDF03A6 (3 class) EAIDF06A6 (6 class) EAIDF10A6 (10 class)	
Individual control systems & network	Wired remote controller (standard)	BRC315D	BRC315D		FWEC1A			FWEC1A	
	Wired remote controller (advanced)				FWEC2A			FWEC2A	
	Wired remote controller (advanced Plus)			FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A
	Simplified electronic controller (2 pipe)			FWEC10	FWEC2T	FWEC10	FWEC10	FWEC2T	FWEC10
	Simplified electronic controller (4 pipe)			FWEC10	FWEC4T	FWEC10	FWEC10	FWEC4T	FWEC10
	Wireless controller (heat pump)	BRC7F532F	BRC7E530						
	Controller electromechanical							ECFWMB6	
	Split controller - power control board			FWECSAP	FWECSAP	FWECSAP	FWECSAP	FWECSAP	FWECSAP
	Split controller - control panel			FWECSAC	FWECSAC	FWECSAC	FWECSAC	FWECSAC	FWECSAC
	Split controller - touch screen control panel			FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)
	On-board mounting kit for wired remote controller						FWECKA	FWECKA	FWECKA
	On-board mounting kit for simplified controller						FWCKRX (right side) FWCKLX (left side)	FWCKRX (right side) FWCKLX (left side)	FWCKRX (right side) FWCKLX (left side)
	Wall-mounting kit for wired remote controller			FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA
Centralised control systems	Central remote control	DCS302CA51	DCS302CA51						
	Unified ON/OFF control	DCS301BA51	DCS301BA51						
	Schedule timer	DST301BA51	DST301BA51						
Building Management System & Standard protocol interface	Intelligent Touch Manager	DCM601A5A	DCM601A5A						
	Intelligent Touch Controller	DCS601C51C	DCS601C51C						

1. Decoration panel code includes wireless controller

Options & accessories - Fan coil units: Panels and Controls

FWL-DAT/DAF	FWS-AT/AF	FWM-DAT/DAF	FWE-DT/DF	FWE-FT/FF	FWP-CT/CF	FWB-CT/CF	FWD-AT/AF	FWN-AT/AF	FWT-GT
ERP02A6 (1, 15 & 2 class) ERP03A6 (25 & 3 class) ERP06A6 (35, 4 & 6 class) ERP10A6 (8 & 10 class)									
EAIDF02A6 (1, 15 & 2 class) EAIDF03A6 (25 & 3 class) EAIDF06A6 (35, 4 & 6 class) EAIDF10A6 (8 & 10 class)	EAIDF02A6 (2 class) EAIDF03A6 (3 class) EAIDF06A6 (6 class) EAIDF10A6 (10 class)	EAIDF02A6 (1, 15 & 2 class) EAIDF03A6 (25 & 3 class) EAIDF06A6 (35, 4 & 6 class) EAIDF10A6 (8 & 10 class)							
FWEC1A		FWEC1A	FWEC1A	FWEC1A		FWEC1A	FWEC1A		MERCA
FWEC2A		FWEC2A	FWEC2A	FWEC2A		FWEC2A	FWEC2A		
FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	
FWEC2T	FWEC10	FWEC2T	FWEC2T	FWEC2T	FWEC10	FWEC2T	FWEC2T	FWEC10	
FWEC4T	FWEC10	FWEC4T	FWEC4T	FWEC4T	FWEC10	FWEC4T	FWEC4T	FWEC10	
									WRC-HPC
ECFWMB6		ECFWMB6							
FWECSAP	FWECSAP	FWECSAP	FWECSAP	FWECSAP	FWECSAP	FWECSAP	FWECSAP	FWECSAP	
FWECSAC	FWECSAC	FWECSAC	FWECSAC	FWECSAC	FWECSAC	FWECSAC	FWECSAC	FWECSAC	
FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	
FWECKA									
FWCKRX (right side) FWCKLX (left side)									
FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	

## Options & accessories - Fan coil units: Filters and Valves

INDOOR UNITS		FWC-BT/BF	FWF-BT/BF	FWF-DT/DF	FWH-AT/AF	FWI-AT/AF	FWZ-AT/AF	FWV-DAT/DAF	FWR-AT/AF
ON/OFF valves 230V	3-ways 230V ON/OFF valve kit (2-pipe)	EKMV3C09B	EKMV3C09B	EKWV3V3W5A	E2C3V02A (2 up to 4 class) E2C3V06A (6 up to 8 class)	E2C3V02A (2 up to 4 class) E2C3V06A (6 up to 8 class)	E2MV03A6 (2, 3 & 6 class) E2MV10A6 (8 class)	E2MV03A6 (1 up to 35 class) E2MV06A6 (4 & 6 class) E2MV10A6 (8 & 10 class)	E2MV03A6 (2, 3 & 6 class) E2MV10A6 (8 class)
	3-ways 230V ON/OFF valve kit (4-pipe)	EKMV3C09B x2	EKMV3C09B x2	EKWV3V3W5A x2	E4C3V02A (2 up to 4 class) E4C3V06A (6 up to 8 class)	E4C3V02A (2 up to 4 class) E4C3V06A (6 up to 8 class)	E4MV03A6 (2, 3 & 6 class) E4MV10A6 (8 class)	E4MV03A6 (1 up to 35 class) E4MV06A6 (4 & 6 class) E4MV10A6 (8 & 10 class)	E4MV03A6 (2, 3 & 6 class) E4MV10A6 (8 class)
	2-ways 230V ON/OFF valve kit (2-pipe)	EKMV2C09B	EKMV2C09B	EKWV2V3W5A	E2C2V02A (2 up to 4 class) E2C2V06A (6 up to 8 class)	E2C2V02A (2 up to 4 class) E2C2V06A (6 up to 8 class)			
	2-ways 230V ON/OFF valve kit (4-pipe)	EKMV2C09B x2	EKMV2C09B x2	EKWV2V3W5A x2	E4C2V02A (2 up to 4 class) E4C2V06A (6 up to 8 class)	E4C2V02A (2 up to 4 class) E4C2V06A (6 up to 8 class)			
	2-ways 230V ON/OFF valve kit (cooling heat exchanger)						E2MV2B07A6 (2, 3 & 6 class) E2MV2B10A6 (8 class)	E2MV2B07A6 (1 up to 6 class) E2MV2B10A6 (8 & 10 class)	E2MV2B07A6 (2 up to 6 class) E2MV2B10A6 (8 class)
	2-ways 230V ON/OFF valve kit (additional heat exchanger)						E2MV2B07A6	E2MV2B07A6	E2MV2B07A6
	3-ways 230V ON/OFF valve kit (additional heat exchanger)								
	Simplified 3-ways 230V ON/OFF valve kit (2-pipe)						E2MVD03A6 (2 & 3 class) E2MVD06A6 (6 class) E2MVD10A6 (8 class)	E2MVD03A6 (1 up to 35 class) E2MVD06A6 (4 & 6 class) E2MVD10A6 (8 & 10 class)	E2MVD03A6 (2 & 3 class) E2MVD06A6 (6 class) E2MVD10A6 (8 class)
	Simplified 3-ways 230V ON/OFF valve kit (4-pipe)						E4MVD03A6 (2 & 3 class) E4MVD06A6 (6 class) E4MVD10A6 (8 class)	E4MVD03A6 (1 up to 35 class) E4MVD06A6 (4 & 6 class) E4MVD10A6 (8 & 10 class)	E4MVD03A6 (2 & 3 class) E4MVD06A6 (4 & 6 class) E4MVD10A6 (8 & 10 class)
ON/OFF valves 24V	3-ways 24V ON/OFF valve kit (cooling heat exchanger)				E2C324V02A (2 up to 4 class) E2C324V06A (6 up to 8 class)	E2C324V02A (2 up to 4 class) E2C324V06A (6 up to 8 class)	E2M2V03A6 (2 & 3 class) E2M2V06A6 (6 class) E2M2V10A6 (8 class)	E2M2V03A6 (1 up to 35 class) E2M2V06A6 (4 & 6 class) E2M2V10A6 (8 & 10 class)	E2M2V03A6 (2 & 3 class) E2M2V06A6 (6 class) E2M2V10A6 (8 class)
	3-ways 24V ON/OFF valve kit (4-pipe)				E4C324V02A (2 up to 4 class) E4C324V06A (6 up to 8 class)	E4C324V02A (2 up to 4 class) E4C324V06A (6 up to 8 class)	E4M2V03A6 (2 & 3 class) E4M2V06A6 (6 class) E4M2V10A6 (8 class)	E4M2V03A6 (1 up to 35 class) E4M2V06A6 (4 & 6 class) E4M2V10A6 (8 & 10 class)	E4M2V03A6 (2 & 3 class) E4M2V06A6 (6 class) E4M2V10A6 (8 class)
	2-ways 24V ON/OFF valve kit (cooling heat exchanger)				E2C224V02A (2 up to 4 class) E2C224V06A (6 up to 8 class)	E2C224V02A (2 up to 4 class) E2C224V06A (6 up to 8 class)	E2M2V207A6 (2, 3 & 6 class) E2M2V210A6 (8 class)	E2M2V207A6 (1 up to 6 class) E2M2V210A6 (8 & 10 class)	E2M2V207A6 (2, 3 & 6 class) E2M2V210A6 (8 class)
	2-ways 24V ON/OFF valve kit (additional heat exchanger)				E4C224V02A (2 up to 4 class) E4C224V06A (6 up to 8 class)	E4C224V02A (2 up to 4 class) E4C224V06A (6 up to 8 class)	E2M2V207A6	E2M2V207A6	E2M2V207A6
	2-ways 24V ON/OFF valve kit (4-pipe)								

FWL-DAT/DAF	FWS-AT/AF	FWM-DAT/DAF	FWE-DT/DF	FWE-FT/FF	FWP-CT/CF	FWB-CT/CF	FWD-AT/AF	FWN-AT/AF	FWT-GT
E2MV03A6 (1 up to 35 class) E2MV06A6 (4 & 6 class) E2MV10A6 (8 & 10 class)	E2MV03A6 (2, 3 & 6 class) E2MV10A6 (8 class)	E2MV03A6 (1 up to 35 class) E2MV06A6 (4 & 6 class) E2MV10A6 (8 & 10 class)	E3V2VN02V3WA	EK02WV3V3W5A (4 up to 10 class) EK04WV3V3W5A (14 & 16 class) EK06WV3V3W5A (20 & 24 class)	E4V2N05OV3WA (4 & 5 class) E4V2N08OV3WA (6 & 8 class) E2MV10B6 (10 up to 17 class)	E4V2N05OV3WA (4 & 5 class) E4V2N08OV3WA (6 & 8 class) E2MV10B6 (10 up to 17 class)	ED2MV04A6 (4 class) ED2MV10A6 (6, 8 & 10 class) ED2MV18A6 (12 up to 18 class)	ED2MV04A6 (4 & 5 class) ED2MV10A6 (6 up to 10 class) ED2MV18A6 (12 up to 18 class)	
E4MV03A6 (1 up to 35 class) E4MV06A6 (4 & 6 class) E4MV10A6 (8 & 10 class)	E4MV03A6 (2, 3 & 6 class) E4MV10A6 (8 class)	E4MV03A6 (1 up to 35 class) E4MV06A6 (4 & 6 class) E4MV10A6 (8 & 10 class)	E3V4VN02V3WA	EK02WV3V3W5A x 2 (4 up to 10 class) EK04WV3V3W5A x 2 (14 & 16 class) EK06WV3V3W5A x 2 (20 & 24 class)	E4V2N05OV3WA + E4VHN08OV3WA (4 up to 5 class) E4V2N08OV3WA + E4VHN08OV3WA (6 up to 8 class) E2MV10B6 + E4VHN17OV3WA (10 up to 17 class)	E4V2N05OV3WA + E4VHN08OV3WA (4 up to 5 class) E4V2N08OV3WA + E4VHN08OV3WA (6 up to 8 class) E2MV10B6 + E4VHN17OV3WA (10 up to 17 class)	ED4MV04A6 (4 class) ED4MV10A6 (6, 8 & 10 class) ED4MV18A6 x 2 (12 up to 18 class)	ED4MV04A6 (4 & 5 class) ED4MV10A6 (6 up to 10 class) ED2MV18A6 x 2 (12 up to 18 class)	
			E2V2VN01V3WA	EK02WV2V3W5A (4 up to 10 class) EK04WV2V3W5A (14 & 16 class) EK06WV2V3W5A (20 & 24 class)			ED2MV2B04A6 (4 class) ED2MV2B10A6 (6 up to 10 class) ED2MV2B18A6 (12 up to 18 class)	ED2MV2B04A6 (4 & 5 class) ED2MV2B10A6 (6 up to 10 class) ED2MV2B18A6 (12 up to 18 class)	
			E2V4VN01V3WA	EK02WV2V3W5A (4 up to 10 class) EK04WV2V3W5A (14 & 16 class) EK06WV2V3W5A (20 & 24 class)	E2MV2B07A6 + E2MV2B07A6 (4 up to 8 class) E2MV2B10A6 + E2MV2B07A6 (10 up to 17 class)	E2MV2B07A6 + E2MV2B07A6 (4 up to 8 class) E2MV2B10A6 + E2MV2B07A6 (10 up to 17 class)	ED4MV2B04A6 (4 class) ED4MV2B10A6 (6 up to 10 class) ED2MV2B18A6 x 2 (12 up to 18 class)	ED4MV2B04A6 (4 & 5 class) ED4MV2B10A6 (6 up to 10 class) ED2MV2B18A6 x 2 (12 up to 18 class)	
E2MV2B07A6 (1 up to 6 class) E2MV2B10A6 (8 & 10 class)	E2MV2B07A6 (2 up to 6 class) E2MV2B10A6 (8 class)	E2MV2B07A6 (1 up to 6 class) E2MV2B10A6 (8 & 10 class)			E2MV2B07A6 (4 up to 8 class) E2MV2B10A6 (8 & 10 class)	E2MV2B07A6 (4 up to 8 class) E2MV2B10A6 (10 up to 17 class)			
E2MV2B07A6	E2MV2B07A6	E2MV2B07A6			E2MV2B07A6	E2MV2B07A6			
					E4VHN08OV3WA (4 up to 8 class) E4VHN17OV3WA (10 up to 17 class)	E4VHN08OV3WA (4 up to 8 class) E4VHN17OV3WA (10 up to 17 class)			
E2MVD03A6 (1 up to 35 class) E2MVD06A6 (4 & 6 class) E2MVD10A6 (8 & 10 class)	E2MVD03A6 (2 & 3 class) E2MVD06A6 (6 class) E2MVD10A6 (8 class)	E2MVD03A6 (1 up to 35 class) E2MVD06A6 (4 & 6 class) E2MVD10A6 (8 & 10 class)							
E4MVD03A6 (1 up to 35 class) E4MVD06A6 (4 & 6 class) E4MVD10A6 (8 & 10 class)	E4MVD03A6 (2 & 3 class) E4MVD06A6 (4 & 6 class) E4MVD10A6 (8 & 10 class)	E4MVD03A6 (1 up to 35 class) E4MVD06A6 (4 & 6 class) E4MVD10A6 (8 & 10 class)							
E2M2V03A6 (1 up to 35 class) E2M2V06A6 (4 & 6 class) E2M2V10A6 (8 & 10 class)	E2M2V03A6 (2 & 3 class) E2M2V06A6 (6 class) E2M2V10A6 (8 class)	E2M2V03A6 (1 up to 35 class) E2M2V06A6 (4 & 6 class) E2M2V10A6 (8 & 10 class)			E4V2N05O24WA (4 & 5 class) E4V2N08O24WA (6 & 8 class) E4V2N17O24WA (10 up to 17 class)	E4V2N05O24WA (4 & 5 class) E4V2N08O24WA (6 & 8 class) E4V2N17O24WA (10 up to 17 class)			
E4M2V03A6 (1 up to 35 class) E4M2V06A6 (4 & 6 class) E4M2V10A6 (8 & 10 class)	E4M2V03A6 (2 & 3 class) E4M2V06A6 (6 class) E4M2V10A6 (8 class)	E4M2V03A6 (1 up to 35 class) E4M2V06A6 (4 & 6 class) E4M2V10A6 (8 & 10 class)							
E2M2V207A6 (1 up to 35 class) E2M2V210A6 (8 & 10 class)	E2M2V207A6 (2, 3 & 6 class) E2M2V210A6 (8 class)	E2M2V207A6 (1 up to 35 class) E2M2V210A6 (8 & 10 class)			E2M2V207A6 (4 up to 8 class) E2M2V210A6 (10 up to 17 class)	E2M2V207A6 (4 up to 8 class) E2M2V210A6 (10 up to 17 class)			
E2M2V207A6	E2M2V207A6	E2M2V207A6			E2M2V207A6	E2M2V207A6			
					E2M2V207A6 + E2M2V207A6 (4 up to 8 class) E2M2V210A6 + E2M2V207A6 (10 up to 17 class)	E2M2V207A6 + E2M2V207A6 (4 up to 8 class) E2M2V210A6 + E2M2V207A6 (10 up to 17 class)			

Options & accessories - Fan coil units: Filters and Valves

INDOOR UNITS	FWC-BT/BF	FWF-BT/BF	FWF-DT/DF	FWH-AT/AF	FWI-AT/AF	FWZ-AT/AF	FWV-DAT/DAF	FWR-AT/AF
Proportional valves	3-ways proportional valve kit (2-pipe)			E2C3PV02A (2 up to 4 class) E2C3PV06A (6 up to 8 class)	E2C3PV02A (2 up to 4 class) E2C3PV06A (6 up to 8 class)	E2MPV03A6 (2 & 3 class) E2MPV06A6 (6 class) E2MPV10A6 (8 class)	E2MPV03A6 (1 up to 35 class) E2MPV06A6 (4 & 6 class) E2MPV10A6 (8 & 10 class)	E2MPV03A6 (2 & 3 class) E2MPV06A6 (6 class) E2MPV10A6 (8 class)
	3-ways proportional valve kit (additional heat exchanger)			E4C3PV02A (2 up to 4 class) E4C3PV06A (6 up to 8 class)	E4C3PV02A (2 up to 4 class) E4C3PV06A (6 up to 8 class)			
	3-ways proportional valve kit (4-pipe)					E4MPV03A6 (2 & 3 class) E4MPV06A6 (6 class) E4MPV10A6 (8 class)	E4MPV03A6 (1 up to 35 class) E4MPV06A6 (4 & 6 class) E4MPV10A6 (8 & 10 class)	E4MPV03A6 (2 & 3 class) E4MPV06A6 (6 class) E4MPV10A6 (8 class)
	2-ways proportional valve kit (cooling heat exchanger)			E2C2PV02A (2 up to 4 class) E2C2PV06A (6 up to 8 class)	E2C2PV02A (2 up to 4 class) E2C2PV06A (6 up to 8 class)	E2MPV207A6 (2, 3 & 6 class) E2MPV210A6 (8 class)	E2MPV207A6 (1 up to 6 class) E2MPV210A6 (8 & 10 class)	E2MPV207A6 (2, 3 & 6 class) E2MPV210A6 (8 class)
	2-ways proportional valve kit (additional heat exchanger)			E4C2PV02A (2 up to 4 class) E4C2PV06A (6 up to 8 class)	E4C2PV02A (2 up to 4 class) E4C2PV06A (6 up to 8 class)	E2MPV207A6	E2MPV207A6	E2MPV207A6
	2-ways proportional valve kit (4-pipe)							
Pressure independent controlled valves	Pressure independent controlled valves ON-OFF 230V (2-pipe)			E2C2PICV02A (2 up to 4 class) E2C2PICV06A (6 up to 8 class)	E2C2PICV02A (2 up to 4 class) E2C2PICV06A (6 up to 8 class)	FWZSVPIC2V15 (2 class) FWZSVPIC2V20 (3 & 6 class) FWZSVPIC2V25 (8 class)	FWZSVPIC2V15 (1 class) FWZSVPIC2V20 (15 up to 25 class) FWZSVPIC2V25 (3 up to 6 class) FWZSVPIC2V25 (8 up to 10 class)	FWZSVPIC2V15 (2 class) FWZSVPIC2V20 (3 & 6 class) FWZSVPIC2V25 (8 class)
	Pressure independent controlled valves ON-OFF 230V (4-pipe)			E4C2PICV02A (2 up to 4 class) E4C2PICV06A (6 up to 8 class)	E4C2PICV02A (2 up to 4 class) E4C2PICV06A (6 up to 8 class)	FWZSVPIC2V1515 (2 class) FWZSVPIC2V2015 (3 & 6 class) FWZSVPIC2V2520 (8 class)	FWZSVPIC2V1010 (1 class) FWZSVPIC2V1515 (15 up to 25 class) FWZSVPIC2V2015 (3 up to 6 class) FWZSVPIC2V2520 (8 up to 10 class)	FWZSVPIC2V1515 (2 class) FWZSVPIC2V2015 (3 & 6 class) FWZSVPIC2V2520 (8 class)
	Pressure independent controlled valves modulating 24V (2-pipe)			E2C2PRPICV02A (2 up to 4 class) E2C2PRPICV06A (6 up to 8 class)	E2C2PRPICV02A (2 up to 4 class) E2C2PRPICV06A (6 up to 8 class)			
	Pressure independent controlled valves modulating 24V (4-pipe)			E4C2PRPICV02A (2 up to 4 class) E4C2PRPICV06A (6 up to 8 class)	E4C2PRPICV02A (2 up to 4 class) E4C2PRPICV06A (6 up to 8 class)			
Adapters	Installation box/ Mounting plate for adapter PCBs (when there is no space in the switchbox)	KRP1H98A	KRP1BB101					
	Wiring adapter for electrical appendices	KRP2A52 (2) KRP4AA53 (2)	KRP2A52 (2) KRP4AA53 (2)					
	Remote ON/OFF		EKROROA					
	Remote sensor	KRCS01-4	KRCS01-1					
	Optional PCB for MODBUS connection	EKFCMBCB	EKFCMBCB					
	Wiring adapter with 4 output signals for valve control PCB	EKRP1C11	EKRP1C11					
	Temperature sensor kit for wired remote controller			FWTSKA	FWTSKA	FWTSKA	FWTSKA	FWTSKA
	Relative humidity sensor kit for wired remote controller			FWHska	FWHska	FWHska	FWHska	FWHska
	Water temperature sensor for simplified controller			FWCSWA	FWCSWA	FWCSWA	FWCSWA	FWCSWA
	Fan stop thermostat						YFSTA6	
Master-slave interface				EPIMSa6		EPIMSa6		
Power interface								




## Options & accessories - Fan coil units: Others

INDOOR UNITS	FWC-BT/BF	FWF-BT/BF	FWF-DT/DF	FWH-AT/AF	FWI-AT/AF	FWZ-AT/AF	FWV-DAT/DAF	FWR-AT/AF
Fresh air intake kit (direct installation type)		KDDQ44XA60	KDDQ44XA60					
Fresh air intake	KDDP55C160-1 + KDDP55D160-2					EFA02A6 (2 class) EFA03A6 (3 class) EFA06A6 (6 class) EFA10A6 (8 class)	EFA02A6 (1, 15 & 2 class) EFA03A6 (25 & 3 class) EFA06A6 (35, 4 & 6 class) EFA10A6 (8 & 10 class)	
Long-life filter		KAFQ441BA60	KAFQ441BA60					
Electrical box with earth terminal (2 blocks)	KJB212A	KJB212A						
Electrical box with earth terminal (3 blocks)	KJB311A	KJB311A						
Electrical box with earth terminal	KJB411A	KJB411A						
Electric heater (standard)						EEH02A6 (2 class) EEH03A6 (3 class) EEH06A6 (6 class) EEH10A6 (8 class)	EEH01A6 (1 class) EEH02A6 (15 & 2 class) EEH03A6 (25 & 3 class) EEH06A6 (35, 4 & 6 class) EEH10A6 (8 & 10 class)	EEH02A6 (2 class) EEH03A6 (3 class) EEH06A6 (6 class) EEH10A6 (8 class)
Electric heater (big)								
Additional heat exchanger						ESRH02A6 (2 class) ESRH03A6 (3 class) ESRH06A6 (6 class) ESRH10A6 (8 class)	ESRH02A6 (1, 15 & 2 class) ESRH03A6 (25 & 3 class) ESRH06A6 (35, 4 & 6 class) ESRH10A6 (8 & 10 class)	ESRH02A6 (2 class) ESRH03A6 (3 class) ESRH06A6 (6 class) ESRH10A6 (8 class)
Supporting feet						ESFV06A6 (2, 3 & 6 class) ESFV10A6 (8 class)	ESFV06A6 (1 up to 6 class) ESFV10A6 (8 & 10 class)	ESFV06A6 (2, 3 and 6 class) ESFV10A6 (8 class)
Supporting feet and grille						ESFVG02A6 (2 class) ESFVG03A6 (3 class) ESFVG06A6 (6 class) ESFVG10A6 (8 class)	ESFVG02A6 (1, 15 & 2 class) ESFVG03A6 (25 & 3 class) ESFVG06A6 (35, 4 & 6 class) ESFVG10A6 (8 & 10 class)	
Front air intake kit								
Plenum box with rectangular connections								
Plenum box with circular connections								
Plenum box (not insulated insulated) with circular connections (supply side)								
Plenum box (insulated) with circular connections (supply side)								
Plenum box (insulated) with circular connections (intake side)								
Cover box for electric connections								
G2 Filter								
G4 Filter								
Vertical auxiliary drain pan				included	included	EDPVB6	EDPVB6	EDPVB6
Horizontal auxiliary drain pan						EDPHB6	EDPHB6	EDPHB6
Drain pump	included	included	included	included	included	CDRP1A	CDRP1A	CDRP1A (only vertical installation)
Vertical installation kit (Wall Mounted)								



FWL-DAT/DAF	FWS-AT/AF	FWM-DAT/DAF	FWE-DT/DF	FWE-FT/FF	FWP-CT/CF	FWB-CT/CF	FWD-AT/AF	FWN-AT/AF	FWT-GT
							EDMFA04A6 (4 class) EDMFA06A6 (6 class) EDMFA10A6 (8 & 10 class) EDMFA12A6 (12 class) EDMFA18A6 (16 & 18 class)	EDMFA04A6 (4 & 5 class) EDMFA06A6 (6 & 7 class) EDMFA10A6 (8 & 10 class)	
EEH01A6 (1 class) EEH02A6 (15 & 2 class) EEH03A6 (25 & 3 class) EEH06A6 (35, 4 & 6 class) EEH10A6 (8 & 10 class)	EEH02A6 (2 class) EEH03A6 (3 class) EEH06A6 (6 class) EEH10A6 (8 class)	EEH01A6 (1 class) EEH02A6 (15 & 2 class) EEH03A6 (25 & 3 class) EEH06A6 (35, 4 & 6 class) EEH10A6 (8 & 10 class)			EH060V3A (4 & 5 class) EH100V36A (6 & 8 class) EH200V36A (10 up to 17 class)	EH060V3A (4 & 5 class) EH100V36A (6 & 8 class) EH200V36A (10 up to 17 class)	EDEH04A6 (4 class) EDEHS06B6 (6 class) EDEHS10B6 (8 & 10 class) EDEHS12B6 (12 class) EDEHS18B6 (16 & 18 class)	EDEH04A6 (4 & 5 class) EDEHS06B6 (6 & 7 class) EDEHS10B6 (8 & 10 class)	
							EDEH04A6 (4 class) EDEHB06A6 (6 class) EDEHB10A6 (8 & 10 class) EDEHB12A6 (12 class) EDEHB18A6 (16 & 18 class)	EDEH04A6 (4 & 5 class) EDEHB06A6 (6 & 7 class) EDEHB10A6 (8 & 10 class)	
ESRH02A6 (1, 15 & 2 class) ESRH03A6 (25 & 3 class) ESRH06A6 (35, 4 & 6 class) ESRH10A6 (8 & 10 class)	ESRH02A6 (2 class) ESRH03A6 (3 class) ESRH06A6 (6 class) ESRH10A6 (8 class)	ESRH02A6 (1, 15 & 2 class) ESRH03A6 (25 & 3 class) ESRH06A6 (35, 4 & 6 class) ESRH10A6 (8 & 10 class)			EAHD04A (4 & 5 class) EAHD06A (6 & 8 class) EAHD10A (10 up to 17 class)	EAHD04A (4 & 5 class) EAHD06A (6 & 8 class) EAHD10A (10 up to 17 class)			
ESFV06A6 (1 up to 6 class) ESFV10A6 (8 & 10 class)	ESFV06A6 (2, 3 & 6 class) ESFV10A6 (8 class)	ESFV06A6 (1 up to 6 class) ESFV10A6 (8 & 10 class)	ESFH01D5 (installation leg for vertical application)						
	CONV02A6 (2 class) CONV03A6 (3 class) CONV06A6 (6 class) CONV10A6 (8 class)	CONV02A6 (1, 15 & 2 class) CONV03A6 (25 & 3 class) CONV06A6 (35, 4 & 6 class) CONV10A6 (8 & 10 class)			EDFAI04A (4 & 5 class) EDFAI06A (6 & 8 class) EDFAI10A (10 up to 17 class)	EDFAI04A (4 & 5 class) EDFAI06A (6 & 8 class) EDFAI10A (10 up to 17 class)			
							PRD04A6 (4 class) PRD06A6 (6 class) PRD08A6 (8 & 10 class) PRD12A6 (12 class) PRD16A6 (16 & 18 class)	PRD04A6 (4 & 5 class) PRD06A6 (6 & 7 class) PRD08A6 (8 & 10 class)	
							PCIC04A6 (4 class) PCIC06A6 (6 class) PCIC08A6 (8 & 10 class) PCIC12A6 (12 class) PCIC16A6 (16 & 18 class)	PCIC04A6 (4 & 5 class) PCIC06A6 (6 & 7 class) PCIC08A6 (8 & 10 class)	
					PLT1NAA (4 & 5 class) PLT2NAA (6 & 8 class) PLT3NAA (10 up to 17 class)	PLT1NAA (4 & 5 class) PLT2NAA (6 & 8 class) PLT3NAA (10 up to 17 class)			
	EPCC02A6 (2 class) EPCC03A6 (3 class) EPCC06A6 (6 class) EPCC10A6 (8 class)	EPCC02A6 (1.15 & 2 class) EPCC03A6 (25 & 3 class) EPCC06A6 (35, 4 & 6 class) EPCC10A6 (8 & 10 class)			PLT1CAA (4 & 5 class) PLT2CAA (6 & 8 class) PLT3CAA (10 up to 17 class)	PLT1CAA (4 & 5 class) PLT2CAA (6 & 8 class) PLT3CAA (10 up to 17 class)			
	EICC02A6 (2 class) EICC03A6 (3 class) EICC06A6 (6 class) EICC10A6 (8 class)	EICC02A6 (1.15 & 2 class) EICC03A6 (25 & 3 class) EICC06A6 (35, 4 & 6 class) EICC10A6 (8 & 10 class)							
					FWBOX	FWBOX			
				EKAF02G5A (4 up to 6 class) EKAF03G5A (8 up to 12 class) EKAF02G5A x 2 (14 up to 16 class) EKAF02G5A + EKAF03G5A (20 up to 24 class)					
					FG4T1AA (4 & 5 class) FG4T2AA (6 & 8 class) FG4T3AA (10 up to 17 class)	FG4T1AA (4 & 5 class) FG4T2AA (6 & 8 class) FG4T3AA (10 up to 17 class)	FSDG404A (4 class) FSDG406A (6 class) FSDG408A (8 & 10 class) FSDG412A (12 class) FSDG416A (16 & 18 class)	FSDG404A (4 & 5 class) FSDG406A (6 & 7 class) FSDG408A (8 & 10 class)	
EDPVB6	EDPVB6	EDPVB6	ESFD01D6				EDDPV10A6 (4, 6, 8, 10 class) EDDPV18A6 (12, 16 & 18 class)	EDDPV10A6	
EDPHB6	EDPHB6	EDPHB6		included	EDPD7 (4 up to 8 class) EDPD9 (10 up to 17 class)	EDPD7 (4 up to 8 class) EDPD9 (10 up to 17 class)	EDDPH10A6 (4, 6, 8, 10 class) EDDPH18A6 (12, 16 & 18 class)	EDDPH10A6	
CDRP1A (only vertical installation)	CDRP1A	CDRP1A			CDRP1A	CDRP1A	CDRP1A	CDRP1A	
			ESFH02D5						

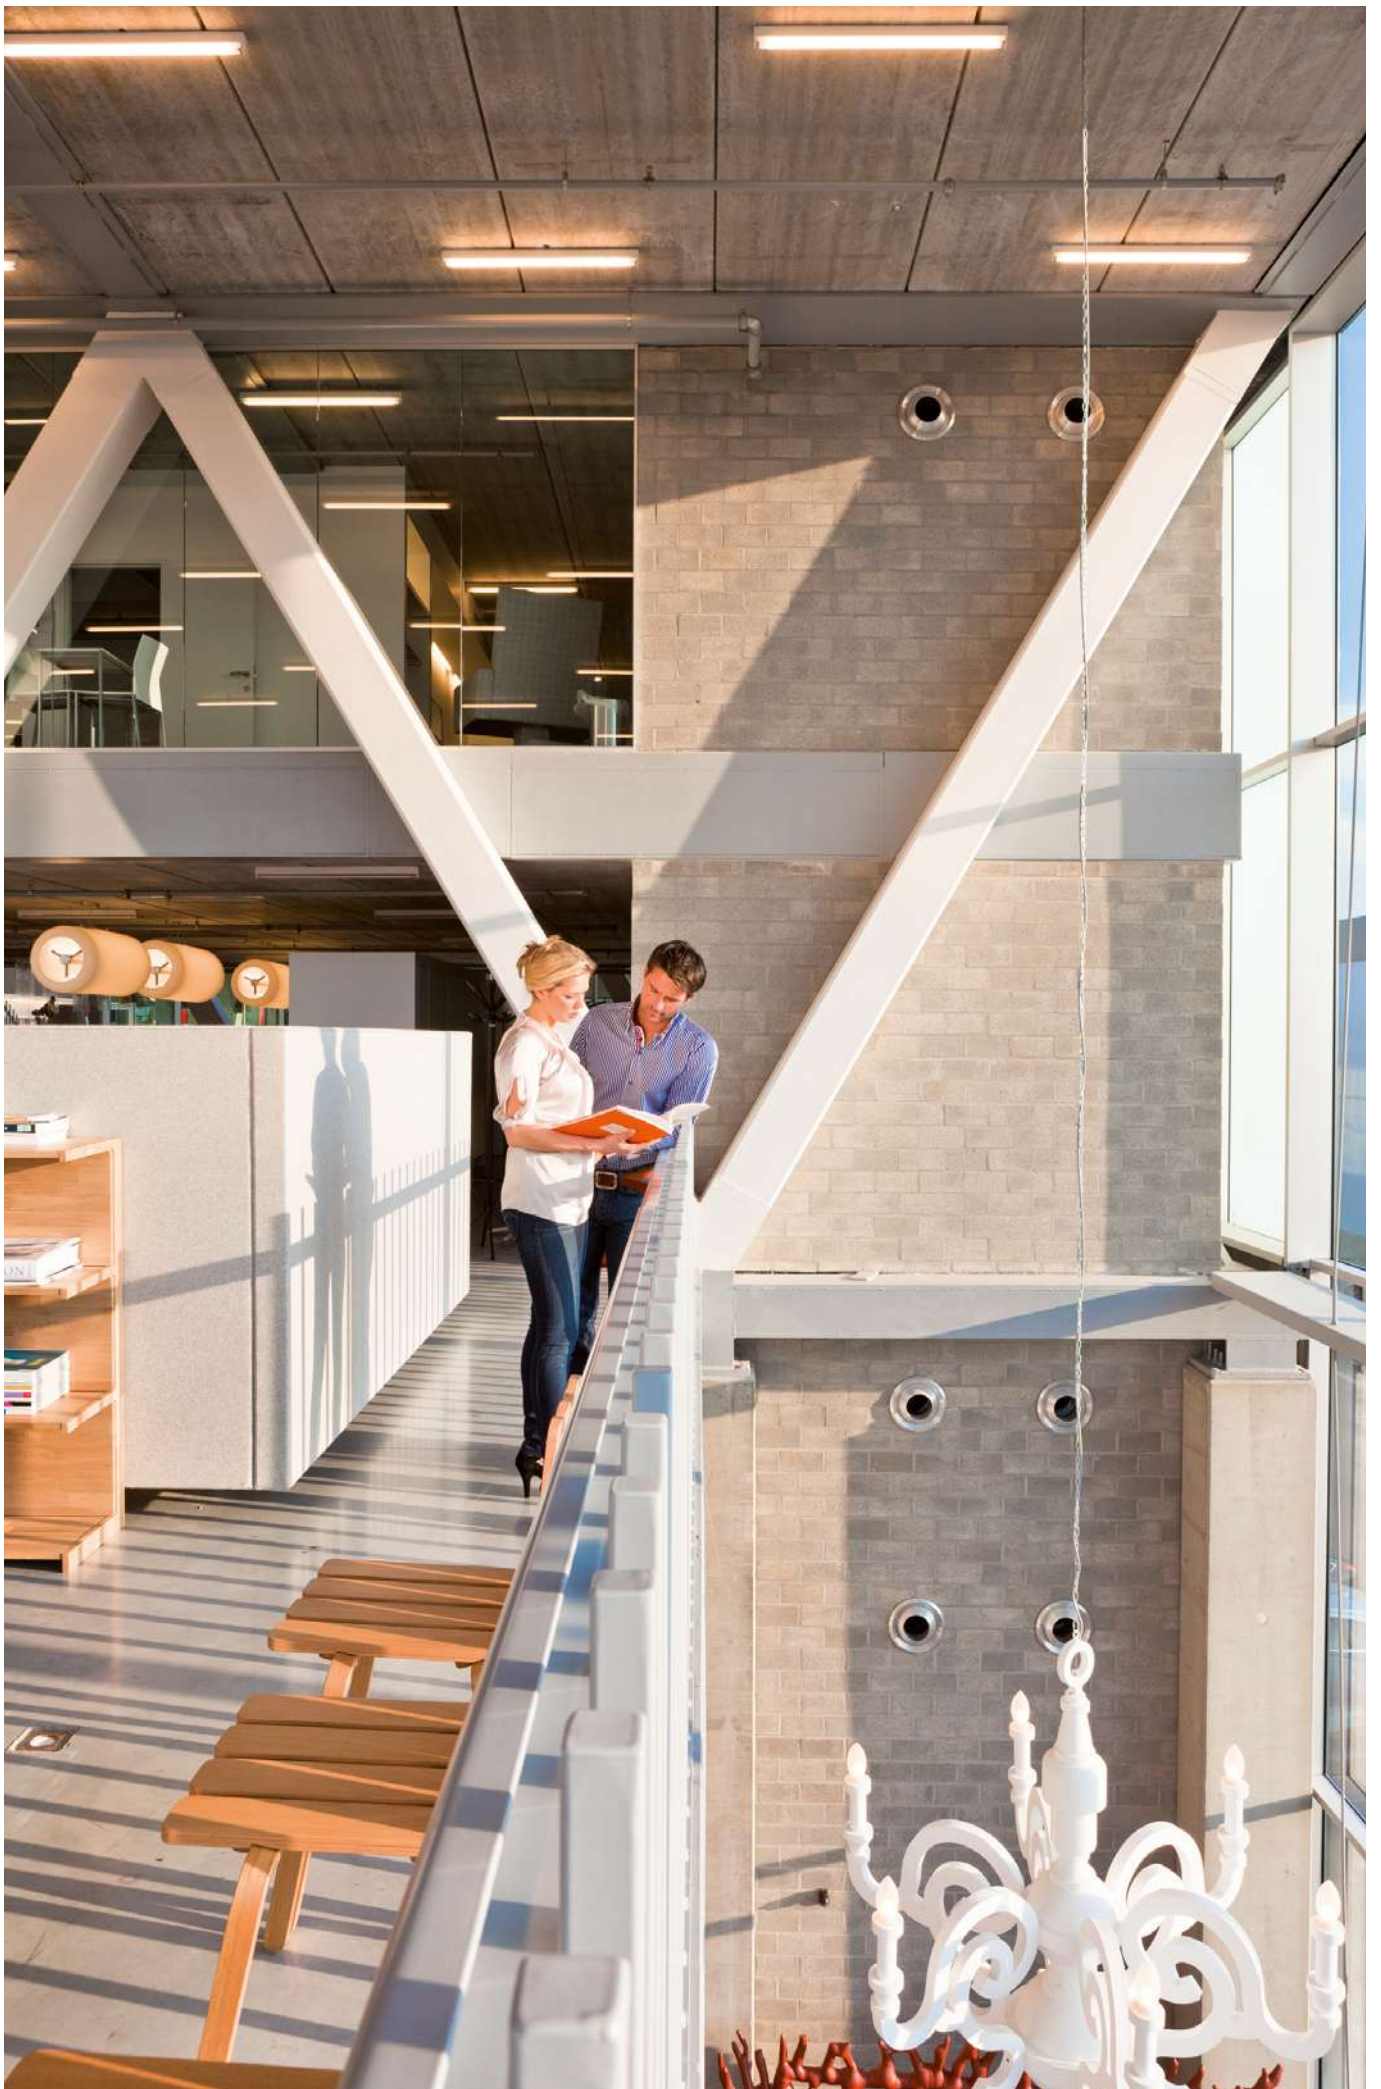

# Air handling units

<a href="#">Why choose Daikin air handling units?</a>	776
<a href="#">Products overview</a>	780
Software and Eurovent certification	781
The working principle at a glance	782
Professional and Digital Controls	784
Modular R	786
Modular P	787
Modular L	788
Modular T	789
Daikin fresh air package	790

# Daikin air handling units



## Why choose Daikin air handling units?

- › Maximum energy efficiency and indoor air quality
- › Wide range of functions and options
- › **High quality** components
- › **Innovative** technology: Unique features and state of the art technology for short payback
- › Operation **efficiency** and **energy savings**
- › Outstanding **reliability** and **performance**
- › Various applications are possible including air conditioning applications, industry-type process cooling, and large-scale district heat source systems
- › Plug and play concept for easy installation and commissioning
- › Unique Daikin fresh air package available for connection of AHU to VRV or ERQ

## Certifications

- › Eurovent certified performances
- › Exceeding 2018 ErP – ECODESIGN requirements
- › Certified according to the Hygiene Directive VDI 6022 (Modular L and Professional ranges)
- › Certified according to the Hygiene Directive DIN 1946 (Professional range)
- › RLT certified performances



## The unique quality of Daikin AHU is accomplished by:

### Panels

- › The outer panel is Pre-painted with Corrosion Class RC5
- › The inner panel is made of Aluzinc with Corrosion Class RC4

### Gasket

- › Liquid gasket technology drastically reduces unit air leakage

### Frame

- › All anodized aluminium which has the highest corrosion resistance compared to natural aluminium
- › Unique Daikin thermal break (35 mm or 27 mm thermal break). Polyamide bars design to enhance thermal break unit performances
- › Distinctive Section to section thermal break profile to ensure thermal break design on the whole unit
- › Rounded profile for increased ease of cleaning

### IAQ

- › Flush internal surface and rounded corner flush surface to avoid the retention of dirt and to be easily cleanable
- › Wide filtration possibility to reduce pollution

### Plug & Play Controls

- › Pre-commissioned and Factory-tested control for quicker on site commissioning
- › Sole manufacturer to provide a complete AHU DX solution from a single manufacturer available for connection of AHU to VRV or ERQ (everything factory-mounted)

# Marketing tools

- > Watch the time-lapse video of a Daikin AHU construction on [www.youtube.com/daikineurope](http://www.youtube.com/daikineurope)
- > Watch the Modular L promotional video on [www.youtube.com/daikineurope](http://www.youtube.com/daikineurope)
- > Download our brochure on air handling units from [my.daikin.eu](http://my.daikin.eu)
- > Get the access to the selection tool <http://tools.daikinapplied.eu> to select your air handling units in a few clicks.
- > Download the Modular L "Daikin Air Design" App on the App stores for iOS and Android




- > Consult the "Argue Card" document to support in promoting the Modular L range (available on request – refer to your Daikin AHU specialist)



# BIM models

- > Get the Modular L and T BIM models on [bim.daikin.eu](http://bim.daikin.eu)
- > Get the BIM tool plugin for Revit for Professional and Modular R/P series

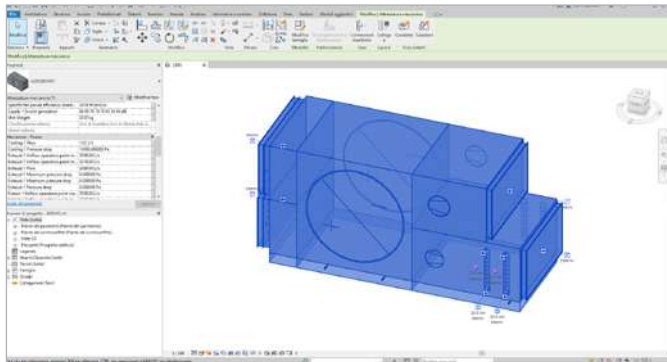

# Benefits for the installer

## Plug and play design

- > Pre-programmed and factory-tested controls for an easier and fast commissioning
- > Low voltage fast connectors between AHU sections
- > Flush mounted or external electrical control panel

## Daikin Fresh air package

- > Plug & Play connection of Professional or Modular AHU to Daikin VRV and ERQ
- > Factory-mounted package contains expansion valves, electronic interface and sensors

# Benefits for the consultant

## Quick selection tool

- > In-house developed web software with improved user interface and preset parameters ensure that you can always find the optimum and most energy efficient product for your application
- > Extremely flexible design
- > Infinite variable sizes (increments of 1 cm)

## BIM models

- > Regardless if your AHU is standard or fully customized, BIM models are available and can be downloaded with just a few clicks

# Benefits for the end user

## Customized or standard

- > Amazing tailor-made capability to meet the specific customer needs with the Professional range or fast availability thanks to the "make to stock" standard Modular L and T range

## Efficient control logic

- > Open communication protocols (BACnet and Modbus) that guarantee BMS, and iTM compatibility
- > Energy efficient controls with reduced energy and operating cost
- > Highest efficiency ensure savings on energy consumption costs





D-AHU MODULAR R  
INSTALLATION



COMFORTABLE  
INDOOR CLIMATE

# Products overview

## Centralized ventilation

### D-AHU Professional

- › Infinite variable sizes
- › Tailored to the individual customer



750 m<sup>3</sup>/h  
up to 144,000 m<sup>3</sup>/h

### D-AHU Modular R

- › Pre-configured sizes
- › Plug and play concept
- › EC Fan technology
- › Heat recovery wheel (sorption and sensible technology)
- › Compact design



500 m<sup>3</sup>/h  
up to 25,000 m<sup>3</sup>/h

### D-AHU Modular P

- › Pre-configured sizes
- › Plug and play concept
- › EC Fan technology
- › High efficiency aluminium counter flow PHE
- › Compact design




500 m<sup>3</sup>/h  
up to 25,000 m<sup>3</sup>/h



## Selection software

### ASTRA Web

- > Quick AHU selection that will save you precious time, drastically reducing selection time through the new software interface.
- > Very competitive solution available within the Wizard thanks to pre-uploaded parameters.
- > High selection quality, thanks to the intelligence embedded within the software core.

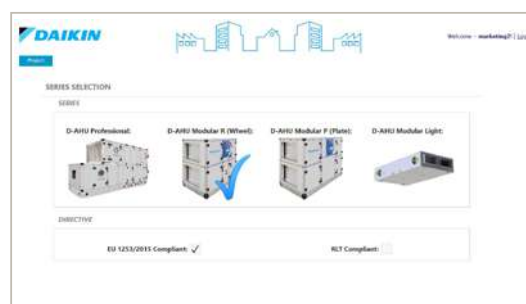

Quickly select your air handling unit by following the wizard:

- 1 Select the series: D-AHU Professional, D-AHU Modular R, D-AHU Modular P, Modular L and Modular T
- 2 Insert the air flow supply and return
- 3 Insert the summer/winter air supply setpoint
- 4 Insert the summer/winter outdoor and extract temperature



You will get immediately your 3D result and it's ready to customize!

Now, you will be able to modify your unit (adding or changing components) in order to have a product that meets all your needs.

When finished a technical report, price list, fan curve chart can be generated. These final reports can be downloaded in different formats.



## Eurovent certification

Daikin Applied Europe S.p.A. participates in the Eurovent Certified Performance programme for Air Handling Units. Check ongoing validity of certificate: [www.eurovent-certification.com](http://www.eurovent-certification.com) or [www.certiflash.com](http://www.certiflash.com)




Result Energy TermiC° S2&F2		Eurovent Classification according to EN1886				
D1	Casing strength class	D1	D2	D3		
	Max. relative deflection mm x m <sup>-1</sup>	4.00	10.00	Exceeding10		
L1	Casing air leakage class at -400 Pa	L1	L2	L3		
	Max. leakage rate (f <sub>400</sub> ) l x s <sup>-1</sup> x m <sup>-2</sup>	0.15	0.44	1.32		
L1	Casing air leakage lass at +700 Pa	L1	L2	L3		
	Max. leakage rate (f <sub>700</sub> ) l x s <sup>-1</sup> x m <sup>-2</sup>	0.22	0.63	1.90		
ePM <sub>1</sub> 80% (F9)	Filter bypass leakage class	ePM <sub>1</sub> 80% (F9)	ePM <sub>1</sub> 70% (F8)	ePM <sub>1</sub> 50% (F7)	ePM <sub>2.5</sub> 50% (M6)	ISO Coarse
	Max. filter bypass leakage rate k in % of the volume flow rate	0.50	1	2	4	6
T2	Thermal transmittance	T1	T2	T3	T4	T5
	(U) W x m <sup>-2</sup> x K <sup>-1</sup>	U <= 0.5	0.5 < U <= 1	1 < U <= 1.4	1.4 < U <= 2	No requirements
TB2	Thermal bridging factor	TB1	TB2	TB3	TB4	TB5
	(kb)	0.75 < K <sub>b</sub> <= 1	0.6 < K <sub>b</sub> <= 0.75	0.45 < K <sub>b</sub> <= 0.6	0.3 < K <sub>b</sub> <= 0.45	No requirements

# The working principle at a glance

Typical configurations for Daikin air handling units provide a versatile range of functions. Our system offers numerous options for customisation through an extensive range of variations and added functionality.

## Supply side

- › Damper section including ventilation grilles, factory-mounted actuators
- › Premium efficiency filters with factory-mounted differential pressure manometer
- › Heat recovery system (cross flow and counter flow plate heat exchanger or rotary heat exchanger)
- › Mixing box with damper and factory-mounted actuators
- › Heating/cooling coil section with stainless steel condensate tray and drip protection
- › Supply air fan, EC technology (with hinged door, opening drive monitoring, mounted and cabled lighting and ON/OFF switch)



### Fans

- › EC plug fan
- › Forward curved fan
- › Backward curved fan
- › Backward airfoil blades fan
- › Plug fan

### Exchangers

- › Water coils
- › Steam coils
- › Direct expansion coil
- › Superheated water coils
- › Electric coils

### Humidifiers


- › Evaporative humidifier without pump (loss water)
- › Evaporative humidifier with re-circulating pump
- › Steam humidifier with direct steam production
- › Steam humidifier with local distributor
- › Atomized water spray humidifier

### Plug and Play control solution

- › Air flow control
- › Air temperature control
- › Chilled water and DX cooling system control
- › Free cooling
- › CO<sub>2</sub> automatic control
- › Air temperature control (supply, return, ambient)
- › Variable Air Volume (VAV) and Constant Air Volume (CAV) systems


### Unique section to section thermal break profile

- › Thermal bridge free for the entire AHU
- › Smooth interior surface with improved IAQ (Indoor Air Quality)

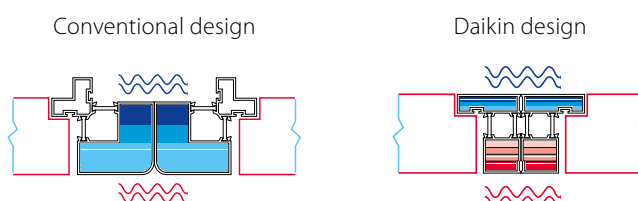

### Return side

- › Premium efficiency filters with factory-mounted differential pressure manometer
- › Exhaust air fan, EC technology (with hinged door, opening drive monitoring, mounted and cabled lighting and ON/OFF switch)
- › Mixing box with damper and factory-mounted actuators
- › Heat recovery system (cross flow and counter flow plate heat exchanger or rotary heat exchanger)
- › Damper section including ventilation grilles, factory-mounted actuators



### Heat recovery systems

- › Heat wheel, sensible or sorption
- › Cross flow and Counter flow plate heat exchangers
- › Run-around coils

### Other section

- › Attenuator section
- › Mixing box section with actuators or manual controlled dampers
- › Empty section

### Filters

- › Synthetic pleated filter
- › Flat filter aluminium mesh
- › Rigid bag filter
- › Soft bag filter
- › High efficiency filter
- › Carbon absorption filter
- › Carbon deodorizing filter

### Accessories

- › Control features
- › Frost protection
- › Manometers
- › Drive guard
- › Roof
- › ...

# Professional

Flexible solution for custom applications



## Highlights

- › Air flow from 750 m<sup>3</sup>/h to 144,000 m<sup>3</sup>/h, for all customer needs
- › Indoor and outdoor versions
- › Custom designed to facilitate the transport and the assembly on site
- › Smooth interior surface with improved IAQ (Indoor Air Quality)
- › DX cooling system integration (VRV IV and ERQ coupling capability)
- › Daikin Digital Control compatible
- › Different heat recovery systems: heat wheel (sensible, enthalpy or sorption), cross flow and counter flow plate heat exchangers, run-around coils
- › Wide range of fans selectable: EC, AC plug, belt driven (forward curved, backward curved and backward airfoil blades)
- › Heating/cooling coil section with stainless steel condensate tray and drip protection
- › Different humidifiers available depending on customer needs
- › Premium efficiency filters with factory mounted differential pressure manometer
- › Profile in anodized aluminum with or without thermal break
- › Base frame in Galvanized steel, Aluminium, Stainless Steel 430 or 316
- › Panel insulation in polyurethane foam or mineral wool
- › Different material options selectable for internal, external panel skin: Pre-coated, Aluzinc, Aluminium, Stainless Steel 304 or 316
- › Wide range of accessories
- › Possibility to import BIM objects in Autodesk® Revit, thanks to a dedicated free plug-in available for [download](#)



# Daikin Digital Control

## Plug and play control system



### Highlights

- › Free cooling/free heating management
- › VRV direct expansion systems management
- › Chilled water system control
- › Eco and reduced night modes
- › Up to 310 I/O (inputs/outputs)
- › All components internally wired
- › Fast connection between sections
- › Programming schedule
- › Indoor Air Quality (IAQ) controlled by CO<sub>2</sub> Probe
- › Regulation logic: Temperature Supply, Return, Ambient
- › Preloaded control parameters simplify the field commissioning
- › Unit delivered tested and programmed in the factory ensuring high quality level
- › Time and cost savings thanks to easy assembly on site
- › Minimum maintenance required
- › No involvement of external company or need of a third-party warranty thanks to integration of low and high voltage
- › User friendly control interface
- › Supervision and Control management local, remote options (Modbus, Bacnet)
- › Maximum flexibility in selecting the product and control feature directly from selection software



# Daikin On Site

## Control everywhere

The Daikin On Site platform offers different features and functions to monitor and control the unit.

The monitoring system makes available dashboards, remote access, scheduling, online graphics, diagnostics, software upgrade.



# Modular R

Side connected rotary heat recovery air handling unit


## Highlights

- › 10 predefined sizes
- › Airflow from 700 m<sup>3</sup>/h to 18,000 m<sup>3</sup>/h (ErP 2018)
- › Rotary heat recovery (Sensible or Sorption)
- › Compact design (only 720 mm depth)
- › Indoor and outdoor versions
- › Thermal bridge free for the entire AHU
- › Smooth interior surface with improved IAQ (Indoor Air Quality)
- › Indoor air quality compliant with VDI 6022 hygiene guideline
- › Chilled water system control
- › DX cooling system integration (VRV IV and ERQ coupling capability)
- › Advanced control features
- › Monitoring and control through Daikin iTM
- › Nominal air flow programmed at factory
- › Air flow or pressure control (Variable Air Volume - Constant Air Volume)
- › Free cooling capability
- › Economy and Night mode operation
- › Possibility to import BIM objects in Autodesk® Revit



Modular R

## Air flow range

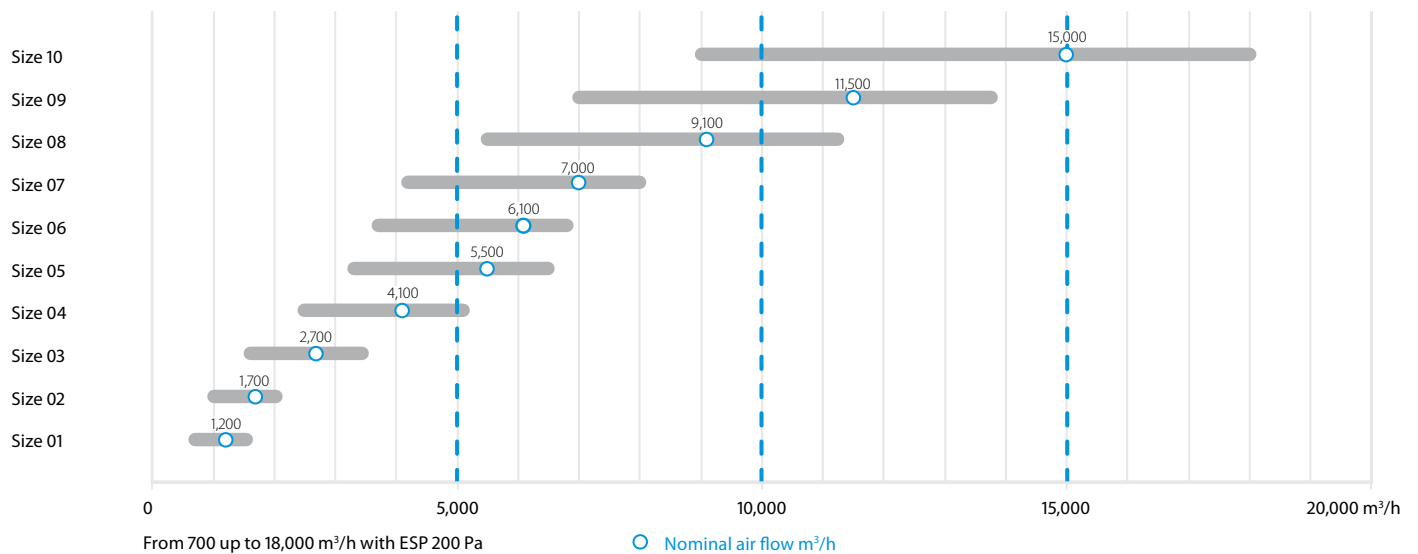

## Technical details

More details and final information can be found by scanning or clicking the QR codes.



Modular R

Modular R			1	2	3	4	5	6	7	8	9	10	
Airflow	m <sup>3</sup> /h		1,200	1,700	2,700	4,100	5,500	6,100	7,000	9,100	11,500	15,000	
Temp. efficiency winter	%		76.9	76.7	77	77.2	78.5	77	78.4	78.7	77.9	78.2	
External static pressure	Nom. Pa		200										
Current (1)	Nom. A		2.6	3.65	2.24	3.27	4.23	5.14	5.79	6.92	9.39	12.56	
Power input (1)	Nom. kW		0.6	0.84	1.36	1.98	2.56	3.11	3.51	4.19	5.69	7.61	
SFPv (2)	kW/m <sup>3</sup> /s		1.553	1.507	1.451	1.521	1.387	1.549	1.525	1.432	1.487	1.551	
Electrical supply	Phase	ph	1				3						
	Frequency	Hz	50										
	Voltage	V	230				400						
Dimensions unit	Width	mm	720	820	990	1,200	1,400	1,600	1,940	2,300			
	Height	mm	1,320		1,540	1,740		1,920	2,180	2,460	2,570		
	Length	mm	1,700	1,800	1,920	2,080	2,280	2,400	2,450	2,280	2,400		
Weight unit	kg		325	350	475	575	750	790	950	1,330	1,410	1,750	

(1) Measured with dirty filters | (2) SFPv is a parameter that quantifies the fan efficiency (the lower it is the better will be). This reduces if airflow decreases.

# Modular P

Side connected plate heat recovery air handling unit


## Highlights

- › 10 predefined sizes
- › Airflow from 700 m<sup>3</sup>/h to 21,000 m<sup>3</sup>/h (ErP 2018)
- › Counterflow plate heat recovery
- › Compact design (only 720 mm depth)
- › Indoor and outdoor versions
- › Thermal bridge free for the entire AHU
- › Smooth interior surface with improved IAQ (Indoor Air Quality)
- › Indoor air quality compliant with VDI 6022 hygiene guideline
- › Chilled water system control
- › DX cooling system integration (VRV IV and ERQ coupling capability)
- › Advanced control features
- › Monitoring and control through Daikin iTM
- › Nominal air flow programmed at factory
- › Air flow or pressure control (Variable Air Volume - Constant Air Volume)
- › Free cooling capability
- › Economy and Night mode operation
- › Possibility to import BIM objects in Autodesk® Revit, thanks to a dedicated free plug-in available for [download](#)



Modular P

## Air flow range

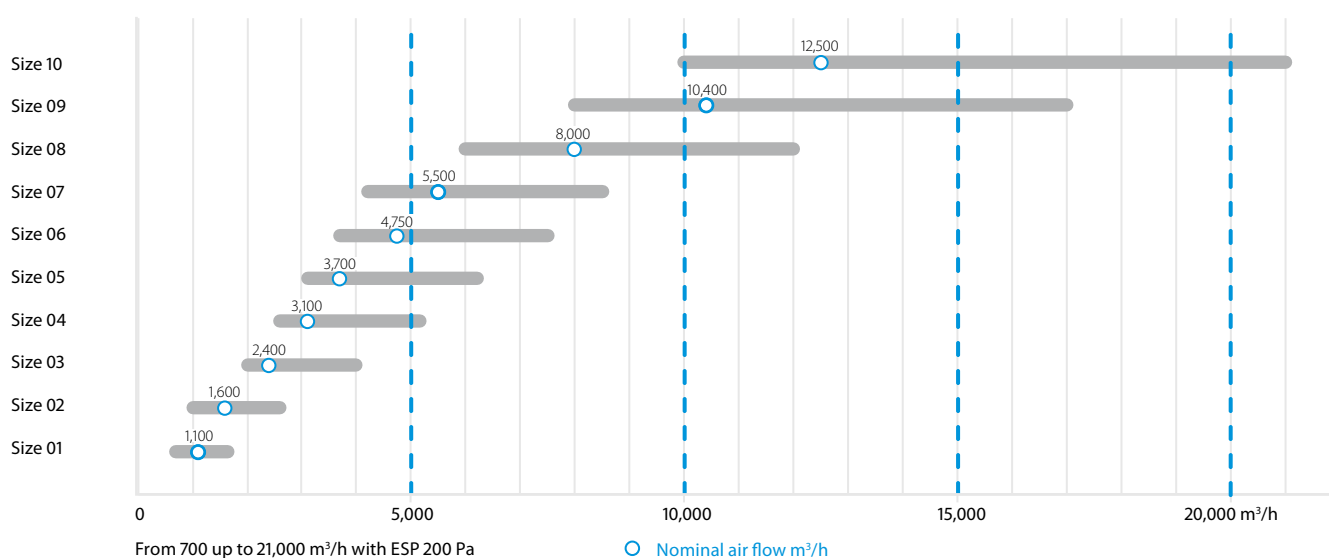

## Technical details

More details and final information can be found by scanning or clicking the QR codes.



Modular P

Modular P			1	2	3	4	5	6	7	8	9	10		
Airflow	m <sup>3</sup> /h		1,100	1,600	2,400	3,100	3,700	4,750	5,500	8,000	10,400	12,500		
Heat exchanger thermal efficiency (1)	%		88.1	87	87.2	87.1		92.1		91.8	92.9			
External static pressure	Nom.	Pa	200											
Current (2)	Nom.	A	1.78	2.48	2.08	2.73	3.45	4.58	5.25	7.53	9.55	11.55		
Power input (2)	Nom.	kW	0.41	0.57	0.83	1.09	1.38	1.83	2.10	3.01	3.82	4.62		
SFPv (3)		kW/m <sup>3</sup> /s	1.183	1.092	1.090	1.113	1.118	1.210	1.207	1.216	1.148	1.166		
Electrical supply	Phase	ph	1				3							
	Frequency	Hz							50					
	Voltage	V	230							400				
Dimensions unit	Width	mm	720	820	990	1,200	1,400		1,600	1,940		2,300		
	Height	mm	1,320		1,540	1,740		1,920		2,180	2,460	2,570		
	Length	mm	2,030	2,200	2,610	2,660	2,800	3,210	3,340	3,840	4,060	4,190		
Weight unit		kg	343	358	512	604	785	852	964	1,449	1,700	2,071		

(1) Winter design condition: Outdoor: -10°C, 90% Indoor: 22°C, 50% | (2) Measured with dirty filters | (3) SFPv is a parameter that quantifies the fan efficiency (the lower it is, the better it will be). This reduces if airflow decreases.




# Modular L


False ceiling heat recovery unit

## Highlights

- > 6 Predefined sizes
- > Plug & Play control solution
- > Compact unit from 280 mm height (for air flow up to 550 m<sup>3</sup>/h)
- > Wide air flow coverage from 150 to 3,400 m<sup>3</sup>/h
- > Right and left configuration
- > Pro (open control platform) and Smart (Daikin control platform) version
- > Excellent indoor air quality (IAQ). Up to ePM1 80% (F9) filtration level with possibility to have a prefilter up to ePM1 50% (F7) for the best IAQ
- > VDI 6022 Certified
- > BIM file available at [www.daikin.eu/BIM](http://www.daikin.eu/BIM)

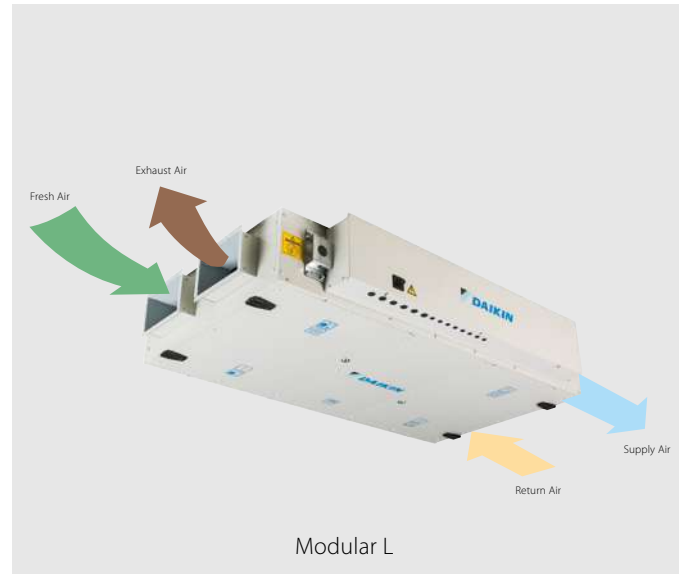

## Air flow range

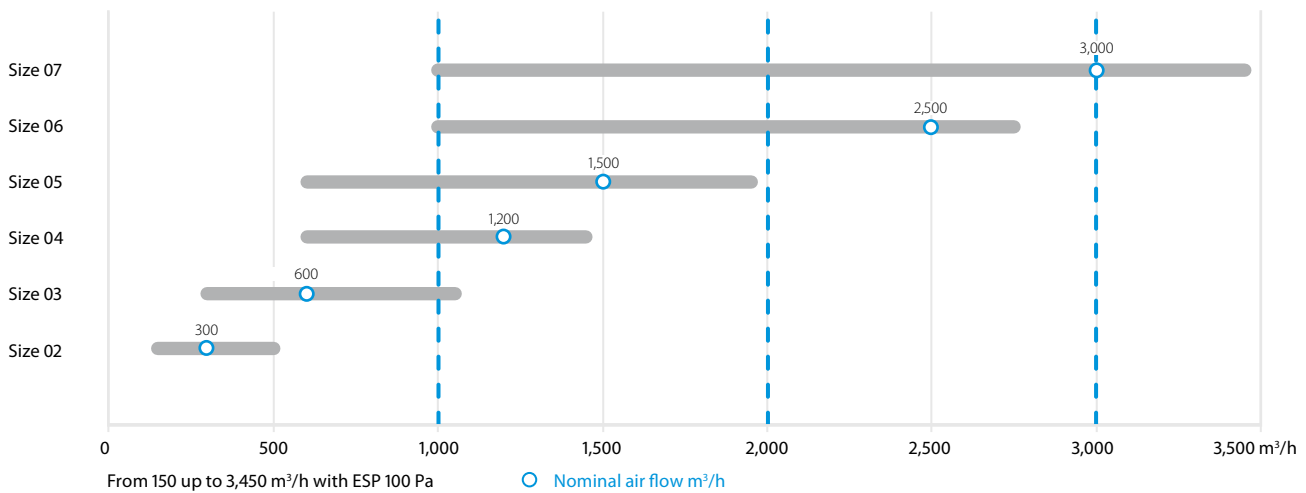

## Technical details

More details and final information can be found by scanning or clicking the QR codes.



Modular L

Modular L			ALB02*B*	ALB03*B*	ALB04*B*	ALB05*B*	ALB06*B*	ALB07*B*
Size (1)			02	03	04	05	06	07
Airflow	m <sup>3</sup> /h		300	600	1,200	1,600	2,500	3,000
Heat exchanger thermal efficiency (2)	%		90		91	90	91	90
External pressure static	Pa		100					
Current	A		0.61	1.39	2.26	2.87	5.17	6.26
Power input	kW		0.14	0.32	0.52	0.66	1.19	1.44
SFPv	kW/m <sup>3</sup> /s		1.27	1.55	1.32	1.38	1.49	1.54
Electrical supply	Phase	ph	1					
	Frequency	Hz	50/60					
	Voltage	V	220/240 Vac					
Main unit Dimensions	Width	mm	920	1100	1600		2000	
	Height	mm	280	350	415		500	
	Length	mm	1660	1800	2000			
Rectangular duct flange	Width	mm	250	400	500		700	
	Height (3)	mm	150	200	300		400	
Sound unit power level	dB(A)		54	61	62	57	64	62
Sound unit pressure level (3)	dB(A)		47	54	55	50	57	55
Weight Unit	Kg		125	180	270	280	350	360

(1) All size available in Smart or Pro version and right or left handing | (2) Winter design condition: Outdoor: -10°C, 90% Indoor: 22°C, 50% | (3) Simple source reference value at 1 meter, directivity factor Q=4 (quarter sphere) and non-reverberant field. Allowances on declared values: +/- 3dB | All data in the table refer to Modular L Pro. For Modular L Smart can be different. Please refer to Databook or Astra selection software for more details.



# Modular T

Top connected heat recovery unit


## Highlights

- › 5 Predefined sizes
- › Plug & Play control solution
- › Compact unit from 550 mm width (for unit up to 1,100 m<sup>3</sup>/h)
- › Wide air flow coverage from 200 to 4,200 m<sup>3</sup>/h
- › Right and left configuration
- › Pro (open control platform) and Smart (Daikin control platform) version
- › Excellent indoor air quality (IAQ). Up to three filtration stages: more than 90% PM1 in outdoor air are deleted achieving the best IAQ
- › DX and water coil available as option
- › Recirculation mixing damper (option)
- › BIM file available at [www.daikin.eu/BIM](http://www.daikin.eu/BIM)



Modular T

## Air flow range

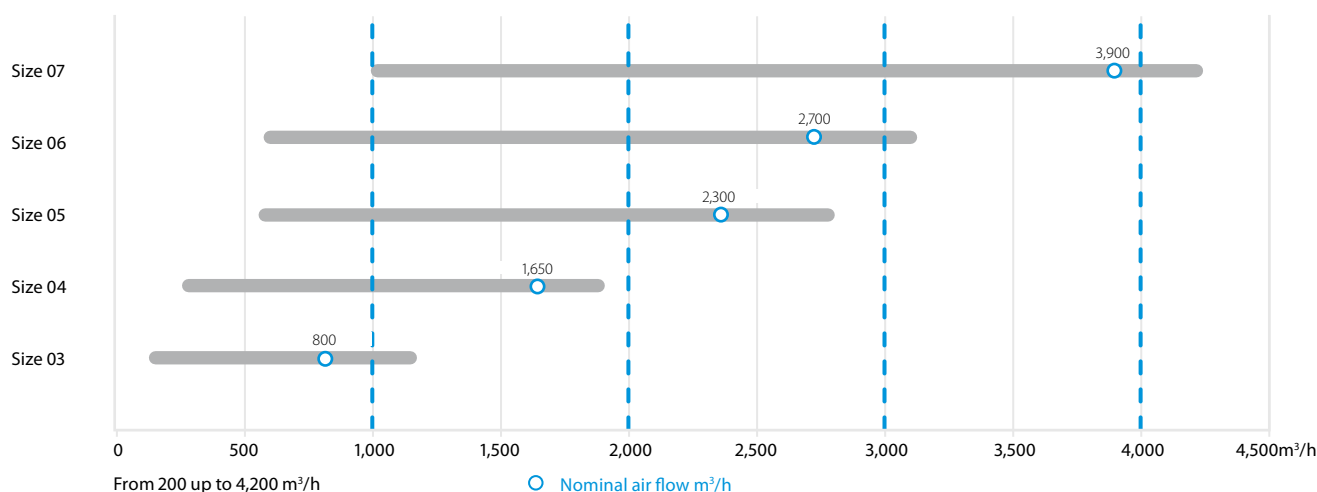

## Technical details

More details and final information can be found by scanning or clicking the QR codes.



Modular T

Modular T		ATB03*A*	ATB04*A*	ATB05*A*	ATB06*A*	ATB07*A*
Size (1)		03	04	05	06	07
Airflow	m <sup>3</sup> /h	800	1,650	2,300	2,700	3,900
Heat exchanger thermal efficiency (2)	%	89.3	88.3	85.1	85.5	90.8
External static pressure	Pa			100		
Current	A	1.70	3.39	4.61	5.17	7.87
Power input	kW	0.39	0.78	1.06	1.19	1.81
SFPv (5)	kW/m <sup>3</sup> /s	1.47	1.5	1.49	1.41	1.5
Electrical supply	Phase	ph				
	Frequency	Hz				
	Voltage	V				
Main unit dimensions	Width	550	790	790	790	890
	Height	mm <sup>3</sup>				
	Length	1,580	1,650	2,170 (4)	2,620 (5)	2,950 (5)
Circular duct flange	Diameter	255	315	355	400	500
Unit sound power level	dBA	57	52	55		58
Unit sound pressure level (6)	dBA	50	45	48		51
Weight Unit	Kg	200	250	400	500	620

(1) All size available in Smart or Pro version and right or left handing | (2) Outdoor condition: -5°C, 90% Indoor condition: 25°C, 50% | (3) Including feet and duct connections | (4) Size 05 is provided in two sections | (5) Size 06 and 07 are provided in three sections | (6) Simple source reference value at 1 meter, directivity factor Q=4 (quarter sphere) and non-reverberant field. Allowances on declared values: +/- 3dB

# Daikin fresh air package



## Plug and play connection of AHU to Daikin VRV and ERQ


The Daikin fresh air package provides a complete solution, including all unit controls (expansion valve, control box and AHU controller) and sensors factory mounted and configured.

### Higher efficiency

Daikin heat pumps are renowned for their high energy efficiency. Integrating the AHU with a heat recovery system is even more effective since an office system can frequently be in cooling mode while the outdoor air is too cold to be brought inside in an unconditioned state. In this case heat from the offices is merely transferred to heat up the cold incoming fresh air.

### High comfort levels


Daikin ERQ and VRV units respond rapidly to fluctuations in supply air temperature, resulting in a steady indoor temperature and resulting in high comfort levels for the end user. The ultimate is the VRV range which improves comfort even more by offering continuous heating, also during defrost.

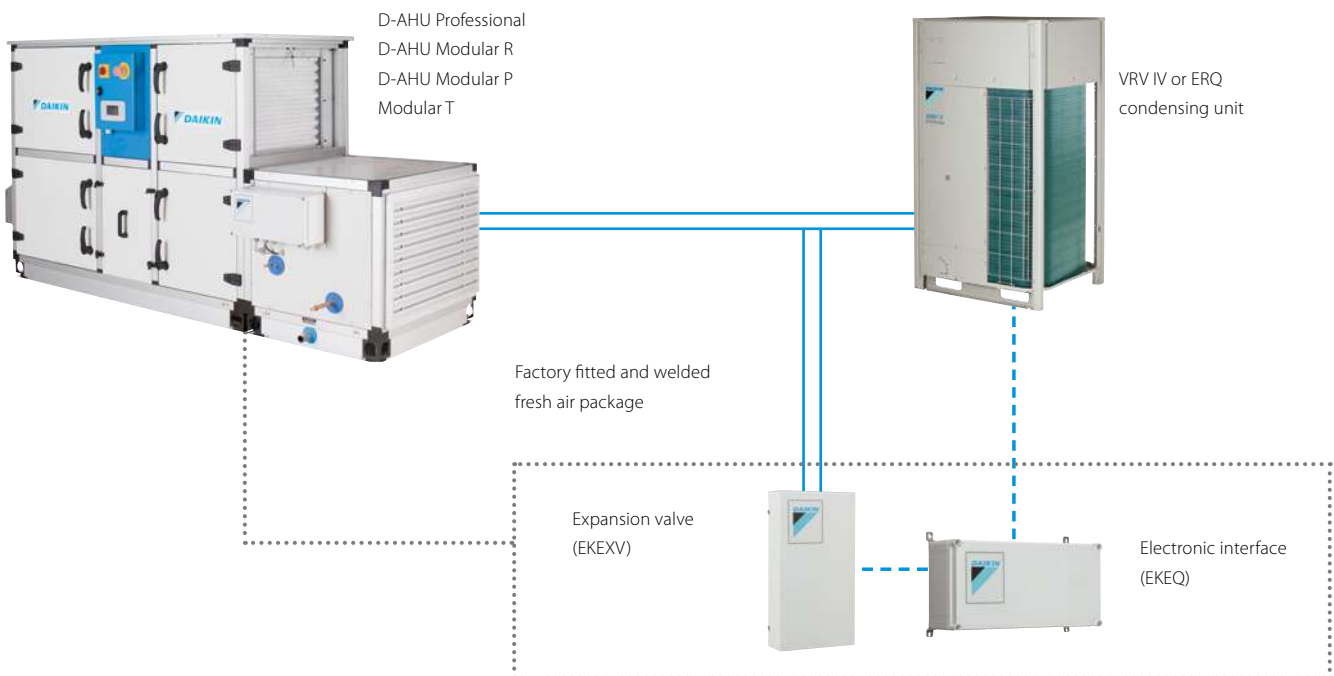

For more information on the connection of VRV or ERQ DX units with air handling units refer to the chapter Commercial ventilation & air purification of this catalogue





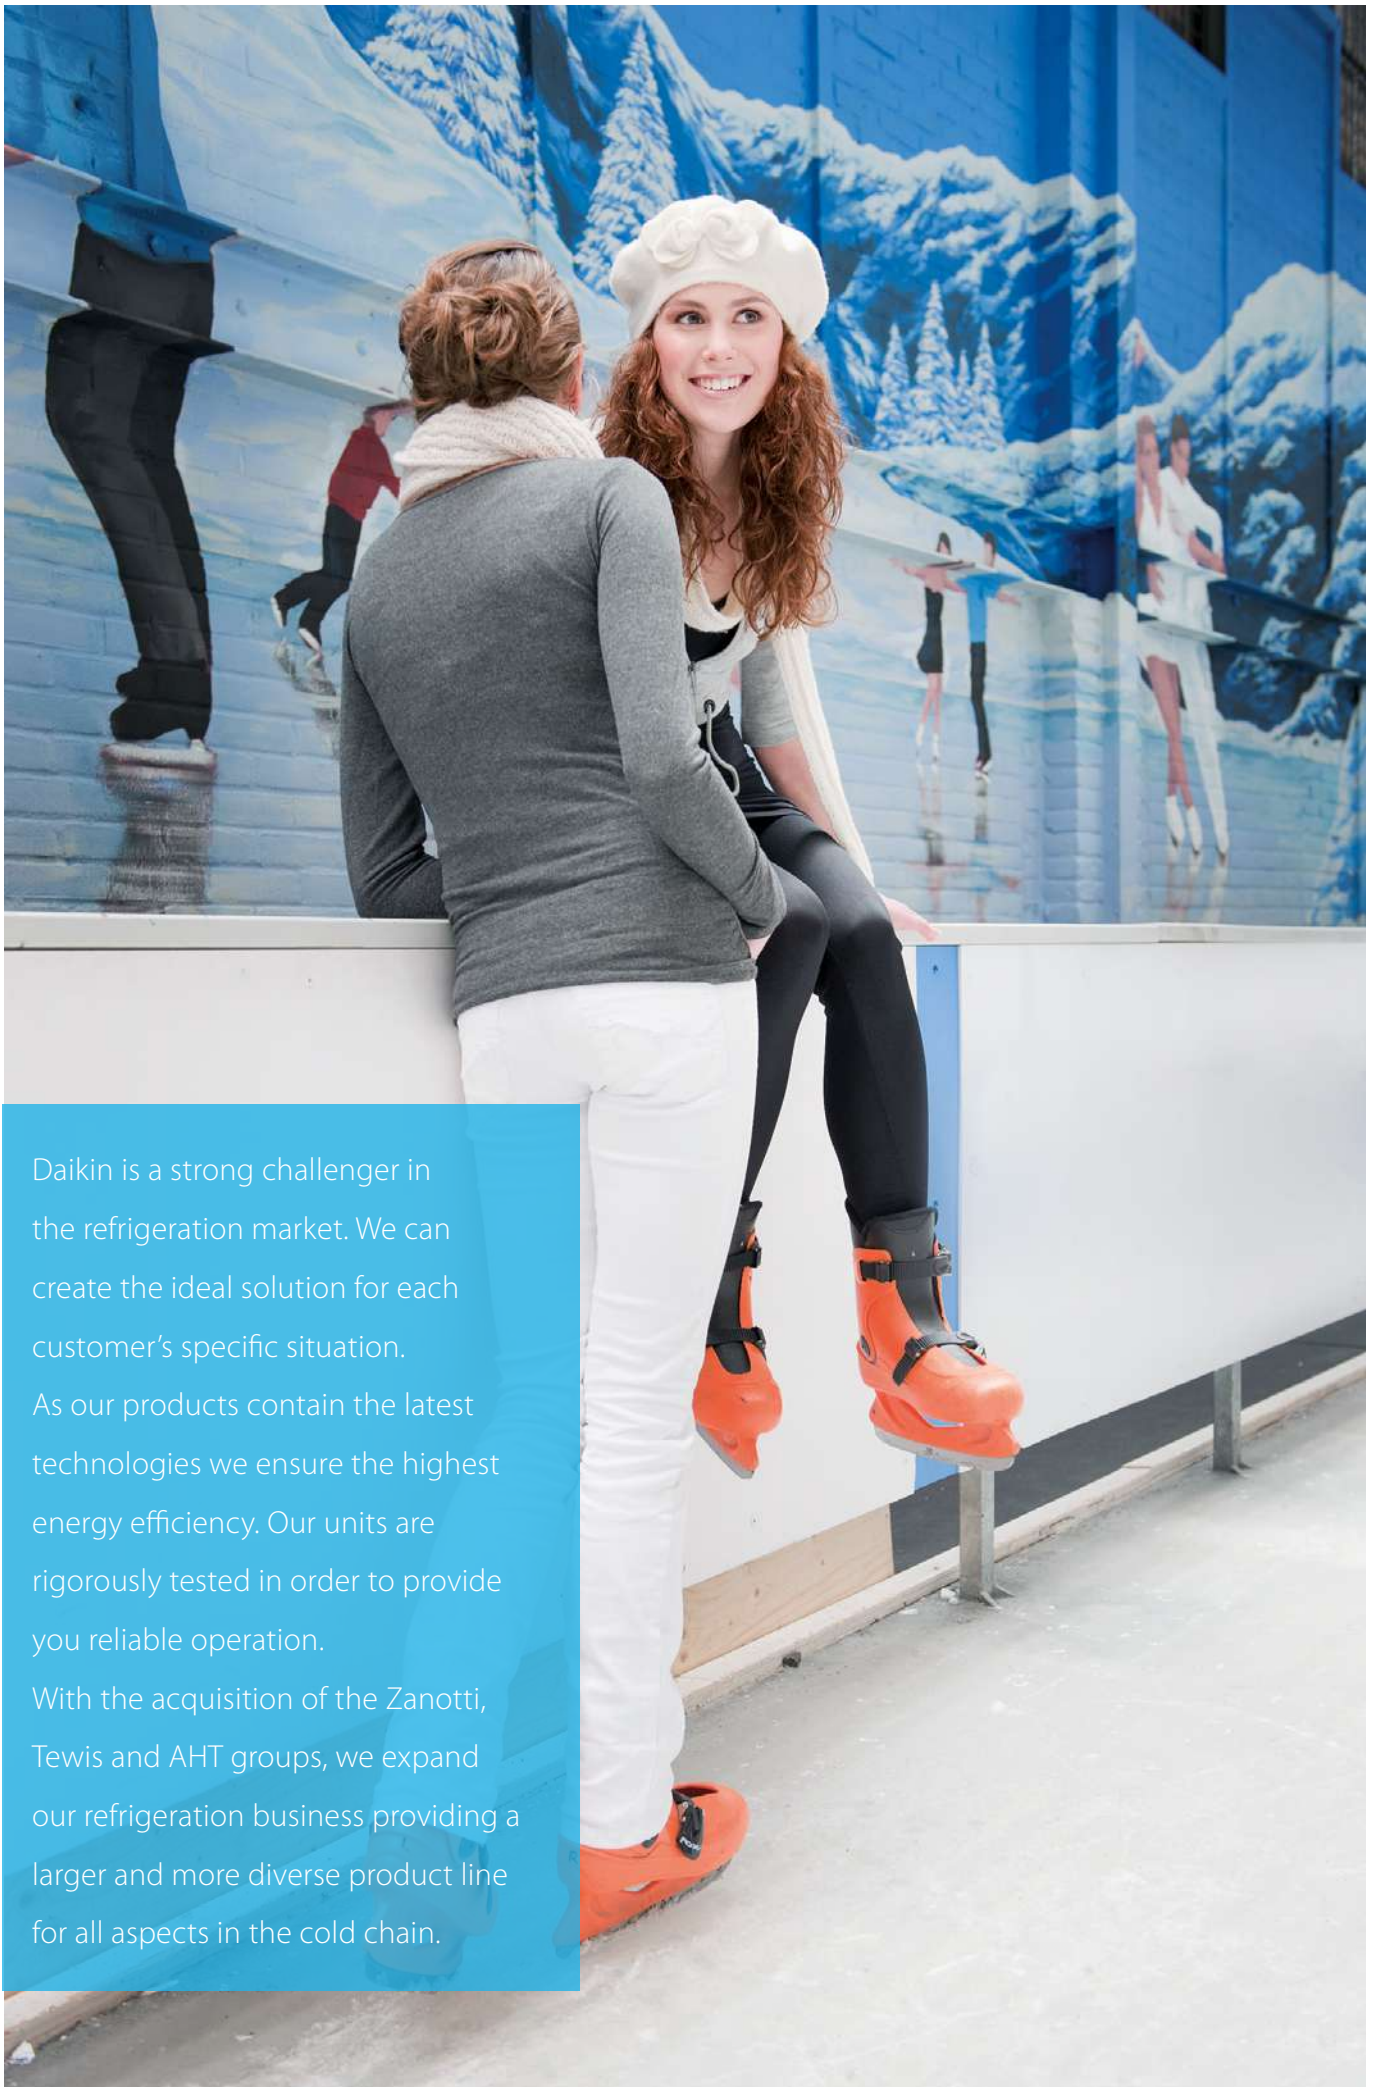

Daikin is a strong challenger in the refrigeration market. We can create the ideal solution for each customer's specific situation.

As our products contain the latest technologies we ensure the highest energy efficiency. Our units are rigorously tested in order to provide you reliable operation.

With the acquisition of the Zanotti, Tewis and AHT groups, we expand our refrigeration business providing a larger and more diverse product line for all aspects in the cold chain.

# Refrigeration

Why choose Daikin?	796
Daikin Refrigeration Group	798

<b>Plug and Play solutions for cold rooms and wine rooms</b>	<b>802</b>
Monoblocks	804
Bi-Blocks	812
Monoblocks for wine application	815

## Drying and ageing units 817

<b>Condensing units</b>	<b>821</b>
JEHCCU / JEHSCU	822
CI-B	826
ZEAS	828

<b>CO<sub>2</sub> condensing units</b>	<b>833</b>
CO <sub>2</sub> ZEAS	834
GCU/HCU	836
NOVA	838
NV66	839
NV66+	840

## Multi-compressor packs and racks 842

<b>Integrated Solutions</b>	<b>850</b>
Conveni-Pack	852
CO <sub>2</sub> Conveni-Pack	854

<b>Evaporators</b>	<b>866</b>
Evaporators range	867

<b>Options</b>	<b>869</b>
ZEAS and Conveni-Pack	869

## Transport Refrigeration 873

<b>Product Portfolio</b>	<b>876</b>
<b>Van – Direct-Drive</b>	<b>879</b>
Invisible Direct-Drive	880
Zero Direct-Drive	882
<b>Van – Electric</b>	<b>885</b>
Invisible Electric	886
Zero Electric	888
<b>Light Truck</b>	<b>893</b>
SFZ	894
<b>Truck</b>	<b>897</b>
Uno	898
Uno Undermount	902
<b>Trailer</b>	<b>905</b>
Exigo	906
<b>Services</b>	<b>909</b>

Any refrigeration system that contains fluorinated greenhouse gases is in scope of the F-gas regulations.

For fully/partially pre-charged equipment: contains fluorinated greenhouse gases. Actual refrigerant charge depends on the final unit construction, details can be found on the unit labels.

For non pre-charged equipment (including, but not limited to racks): its functioning relies on fluorinated greenhouse gases.

The F-gas regulations do not apply to systems that contain only natural refrigerants such as propane (R-290) and carbon dioxide (R-744).

Refrigerant	GWP AR4	GWP AR5
R-134A	1,430	1,300
R-407C	1,774	1,620
R-407F	1,825	1,670
R-407H	1,490	1,380
R-410A	2,088	1,920
R-448A	1,387	1,270
R-449A	1,397	1,280
R-452A	2,141	1,945
R-290	3	3
R-744	1	1



Inverter technology



Scroll compressor



Screw compressor



Reciprocating compressor



Swing compressor


# Cold Chain Expertise

From production to delivery

## Reshaping the future of cold chain supply

Combining refrigeration expertise with innovative technology, Daikin's comprehensive product portfolio delivers integrated temperature control solutions that improve quality and safety through every link in the distribution process from point of origin to the final consumer. Our range of products and services provide the flexibility to meet diverse customer needs across a range of applications, during production, storage, retail and transit. Energy-efficient technologies with low-GWP refrigerants provide reliable and cost-effective operation, safeguarding perishable supplies, whatever the climate, while protecting the environment.

We will leverage our strengths **to cover the entire cold chain.**

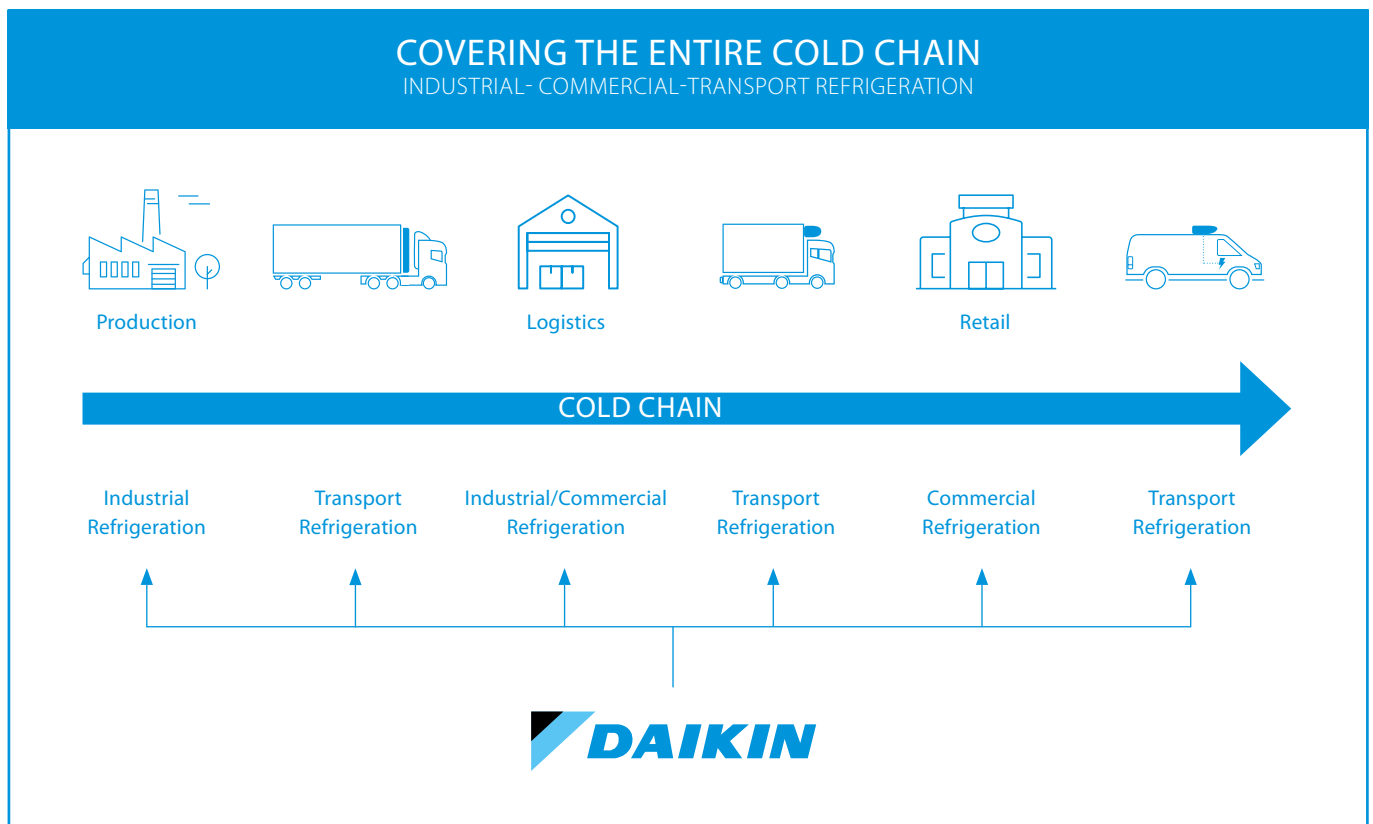

# Vision 2050

## Daikin Environmental Policy

Adopted in 2015, the Paris Agreement contains a target for the latter half of this century of reducing greenhouse gas emissions to net zero and limiting global warming by less than 2°C compared to pre-industrial levels. In the spirit of the Paris Agreement, Daikin has formulated Environmental Vision 2050, with a target of reducing greenhouse gas emissions to net zero by 2050. We have established a reduction target for 2030 and incorporated this into our efforts under the Fusion 25 Strategic Management Plan.



## Our Vision 2050

We will reduce the greenhouse gas emissions generated throughout the entire lifecycle of our products by 2050. Furthermore, we are committed to creating solutions that link society and customers as we work with stakeholders to reduce greenhouse gas emissions to net zero. Using IoT and AI, and open innovation attempts, we will meet the world's needs for air solutions by providing safe and healthy air environments while at the same time contributing to solving global environmental problems.

## Refrigeration Medium-Term Outlook

In our Cold Chain business, we are moving towards low-GWP and HFC-free natural refrigerants, while ensuring the correct safety standards are established in our markets. We maintain continuous focus on reducing the energy consumption of all our products. In the Transport Refrigeration industry, we will strive to lead the shift towards electrification and phase-down the reliance on combustion engine technologies.

## Net-zero product lifecycle

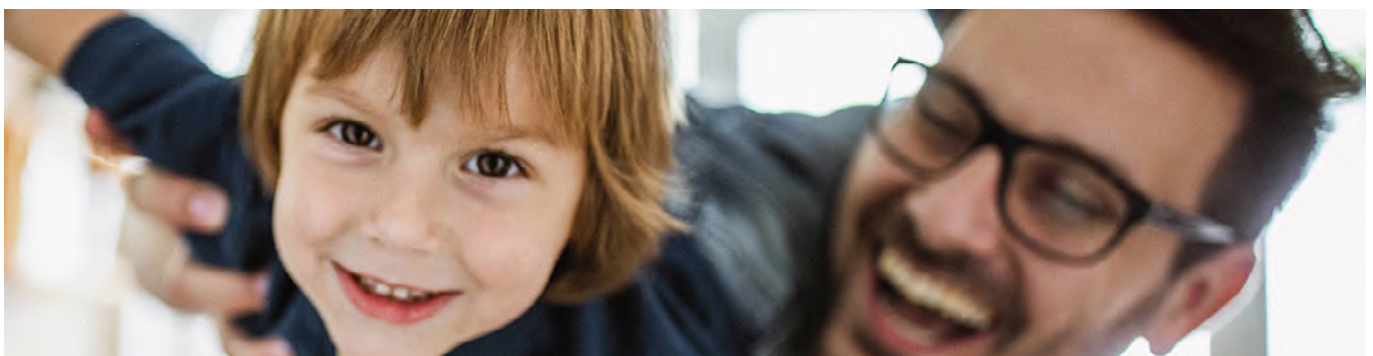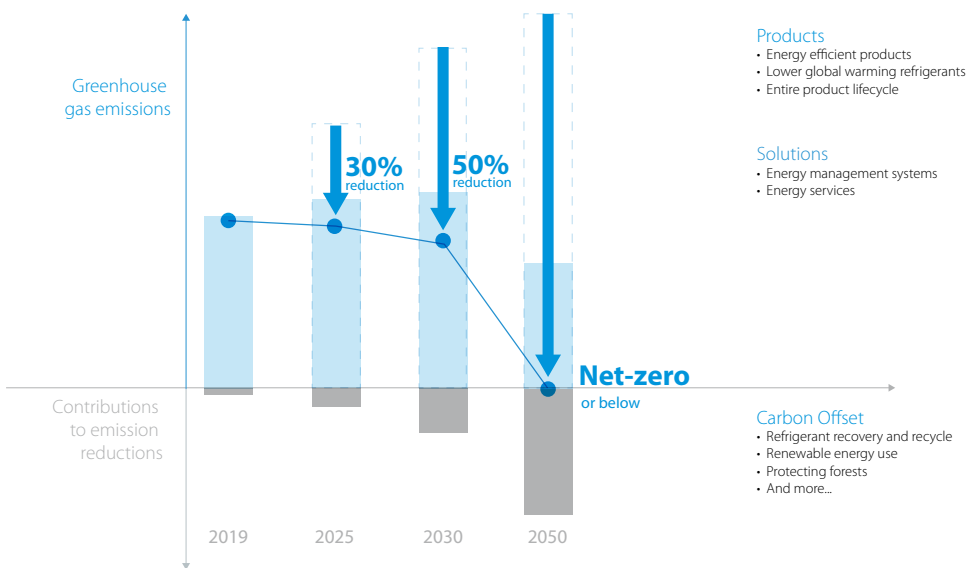








# Why choose Daikin?


## We know refrigeration inside out

- We have over 100 years of experience in the Refrigeration business.
- We can meet all refrigeration needs from farm to fork, thanks to our wide range of refrigeration products.
- Innovative and reliable own technology and expertise on refrigerants, controls and compressors!
- Your advisor for solutions to meet your needs in line with legislation (F-gas regulation, ecodesign,...) and with focus on reliability, safety, Total Equivalent Warming Impact (see page 7) and running cost.




# Controlled temperatures throughout the whole supply chain


<p>POST HARVEST PROCESSING</p> 	<p>FOOD PROCESSING</p> 	<p>WAREHOUSING</p> 	<p>FOOD RETAIL</p> 
		<p>RESTAURANTS/PUBS</p> 	<p>HOME DELIVERY SOLUTIONS</p> 
		<p>PHARMA SOLUTIONS</p> 	



Truck - Transport ref  
**LONG** Distances


















Light truck - Transport ref  
**MEDIUM** Distances



Van - Transport ref  
**SHORT** Distances

# We can meet all refrigeration needs from farm to fork

Our extended product line-up is able to provide solutions for:

<p>FOOD RETAIL</p> 	<p>EVENT SPACES</p> 	<p>COLD STORAGE</p> 	<p>CATERING</p> 
<p>CHILLED TRANSPORT</p> 	<p>HOTELS</p> 	<p>ICE SKATING RINKS</p> 	<p>CLEANROOMS/HOSPITALS</p> 
<p>BREWERY</p> 	<p>BAR</p> 	<p>FISHERY</p> 	<p>SEASONING (CHEESE/MEAT)</p> 
<p>BUTCHERS</p> 	<p>RESTAURANTS</p> 	<p>INDUSTRY</p> 	<p>...</p> <p><b>We can fulfill any refrigeration need</b></p>

# Daikin Refrigeration – United in cold



Hubbard Products Ltd., is one of the UK's leading designers, manufacturers and suppliers of commercial cooling equipment and has earned an enviable Global reputation for innovation and design-led excellence.



## Daikin Chemicals

Daikin Chemicals is one of the world's foremost manufacturer of fluorochemical products and is a leading expert in that field. We strive to find new possibilities for living and industry by making the most of fluorine characteristics using our own exclusively developed technologies.



Daikin Europe N.V. is a major European producer of air conditioners, heating systems and refrigeration equipment, with approximately 5,500 employees throughout Europe and major manufacturing facilities based in Belgium, the Czech Republic, Germany, Italy, Turkey and the UK. Globally, Daikin is renowned for its pioneering approach to product development and the unrivalled quality and versatility of its integrated solutions.



AHT develops, manufactures and sells refrigerating and freezing showcases specifically suited for food retailers. Leading the "plug-in" type showcases segment, AHT leads the market by the active launch of new products corresponding to evolving store layouts. Furthermore, utilizing its technological capabilities and business resources, AHT serves large accounts which include major food retail chains worldwide.



Tewis is a leading company in the design and engineering of refrigeration systems. Along with their expertise in customising controls (including monitoring), Tewis offers total comprehensive solutions for Refrigeration and Climate applications. Over the last few years, Tewis has focused on developing a range of CO<sub>2</sub> based refrigeration systems and has established a long-lasting relationship with key Spanish and Portuguese food retailers. Its mission and philosophy to date has been to achieve high reliability and realise remarkable energy savings for their customer base.



Zanotti is a refrigeration specialist founded in 1962. With over 50 years of experience in food storing services covering the needs of commercial and industrial refrigeration, but also the needs of the transportation of fresh and frozen products. Zanotti changed the refrigeration world from the early days with the introduction of the Uniblock, an all in one plug and play refrigeration unit for cold rooms. Today they employ more than 600 people, with three production facilities and an annual turnover of approx 130 million Euro.




# Meeting customer needs!

Depending on type of application, location and customers interest/values, the optimal refrigeration solution for the customer can potentially be different! **Thanks to our wide product portfolio, Daikin can offer what a customer really needs!**

The DNA of our Advice is:

- ✓ Safety and Reliability
- ✓ Reducing the Total Equivalent Warming Impact (TEWI)

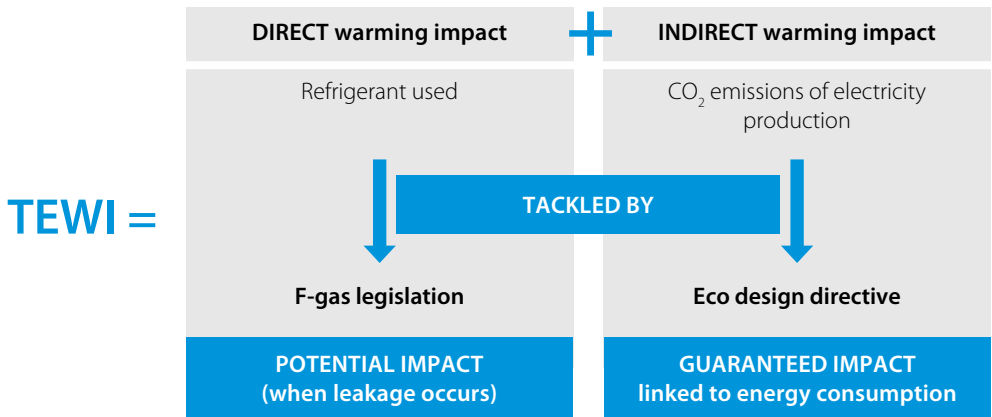

Reduction of CO<sub>2</sub> emissions is one of the main priorities for the future. A refrigeration plant’s global warming effect is the combination of the possible refrigerant losses (Direct warming impact) and the CO<sub>2</sub> emissions caused by electricity production (Indirect warming impact). Country per country situation is different, however on average in Europe CO<sub>2</sub> release at energy production is quite high (average 0.45kg/kwh of Electrical Energy)! Due to this, there is a significant greenhouse effect over the lifetime of the refrigeration plant and efficiency is thus one of the crucial focus points in reducing TEWI! When various refrigeration solutions are being compared it is thus important to take into account both aspects as in some cases optimizing the direct warming impact (eg: changing refrigerant) will have an opposite effect on the indirect warming impact!

- ✓ Reducing your running cost

Through focus on reliability & quality, through extensive testing on each product, and energy efficiency our aim is to reduce your operational cost to the absolute minimum!






E. LECLERC, HYPERMARKET  
ZEAS



BEER COOLING FACILITY,  
CHILLED WITH ZEAS



EDEKA, SUPERMARKET  
CONVENI-PACK (2) AND ZEAS (1)





# Plug and Play solutions for cold rooms and wine rooms

# Zanotti

## Touch control


Zanotti presents the new "Touch Screen" control panel for GM monobloc units and GS split units. This new one User interface consists of keypad and display and allows easy access to all manual functions of the units.



GM Monoblock Unit

GS Split Unit

The control of the refrigeration cycle, switching the unit on and off, the lighting in the cold room, activating the manual defrost process and setting the parameters are the features that are more intuitive with the new keyboard.

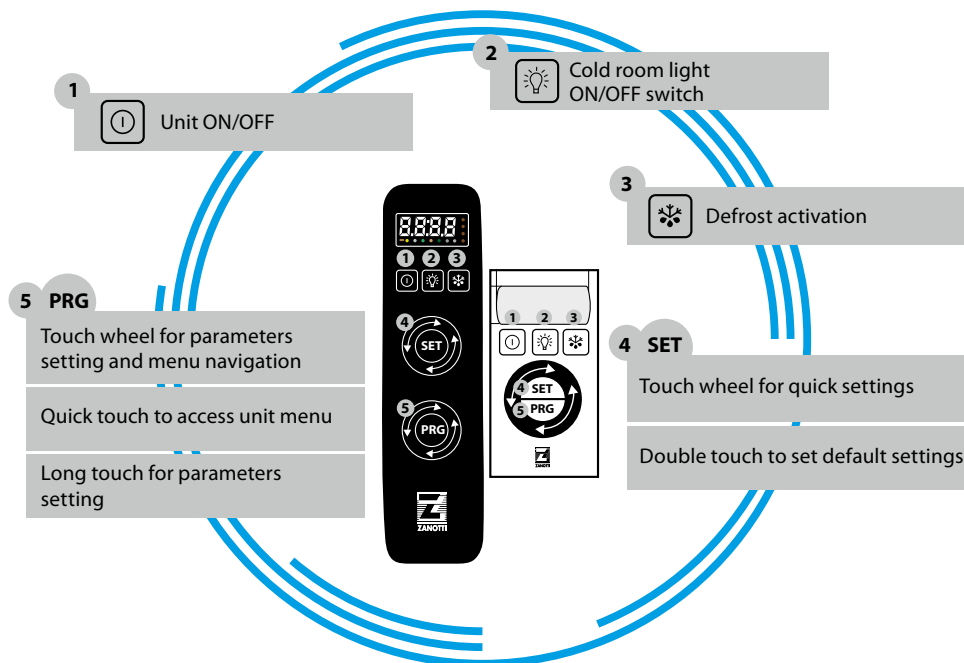

## for two units in a cold storage cell

### ALTERNATIVE REMOTE CONTROL

› For cold rooms where it is required by law to maintain a certain temperature (Products for hospitals, Pharmaceutical products) for safety and control it is necessary to install 2 units in the same cold room, so that they can always be working in alternate hours - when one is off, the other unit is working.

› If an aggregate in full function gets blocked, the second aggregate starts automatically. When the temperature for remote controls with thermostat is not achieved for a certain period of time (product feed, open cell door for longer period of time,...), the unit changes into the standby function.

- › Remote control for two aggregates. Adjustable timer for alternate operation.
- › In case of device failure of one the refrigeration units, the control can be switched on the other unit nearby. Alarm message through Lamp and buzzer.
- › Thermostat for Safety at high Temperatures in the cold room (only with models with Thermostat).

**For customized options, please contact your sales representative.**






# Inverter Monoblock for Refrigeration | Model B

## Standard equipment

- › Inverter driven hermetic reciprocating compressor
  - › 50/60 Hz power supply
  - › CE certified
  - › Microchannel condenser
  - › Filter dryer
  - › Condenser fan ON/OFF controlled by temperature probe
  - › Electronic thermal expansion valve
  - › Condensate evaporation tray
  - › Hot gas defrost
  - › Propane refrigerant charge (each circuit) => 130gr
  - › Electronic control board
  - › Electrical switchboard with protection fuses
  - › Fixed calibration HP switch with automatic reset
  - › Automatic elimination of condensation water
- 
- › 5 m cable for power supply
  - › 2 m cold room lighting cable (Light bulb and bulb as option)
  - › 5 m micro-switch door cable (Microswitch as option)
  - › 5 m cable for door heater

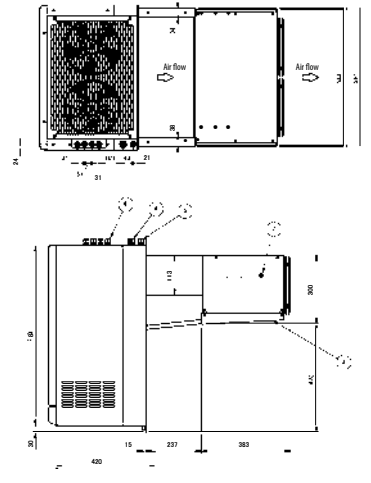

More details and final information can be found by scanning or clicking the QR codes.

LMSEY

		LMSEY2A-AYE01	LMSEY2A19AYE01	LMSEY2A25AYE01
Dimensions of the unit	Height	mm		780
	Depth	mm		1,040
	Width	mm		620
Dimensions of the packaged unit	Height	mm		1,030
	Depth	mm		1,120
	Width	mm		720
Weight of the unit	Weight	kg		83.5
Weight of the packaged unit	Weight	kg		107.5
Characteristics of the hole where to accommodate the units (through the wall installation)	Height	mm		335
	Width	mm		595
Characteristics of the holes where to accommodate the units (straddle installation)	Height	mm		177
	Width	mm		43
Refrigerant	Type			R290
	GWP			3
N° of circuits	Charge per circuit	kg		2
Refrigerant	Voltage/phase/frequency	V/ph/Hz		0.13
Power supply				400/3/50-60
Voltage range (Min/Max)		V		360V/440V
Rated input power		W	1,765 (MT) / 1,208 (LT)	2,275 (MT) / 1,563 (LT)
Rated input current		A	4,645 (MT) / 3,179 (LT)	5,987 (MT) / 4,113 (LT)
MCA (Max Current Amps)		A	11.3	14.6
MFA (Max Fuse Amps)		A		25
TOCA (Total overcurrent Amps)		A		18.5
Compressor	Type	m <sup>3</sup> /h	Hermetic reciprocating inverter driven	
Air flow rate condenser (1)		m <sup>3</sup> /h		939
Air flow rate evaporator (1)				1,114
Air throw evaporator (2)		m		9.6
PED category				1
IP category				20
Defrost	Type			Hot gas
Operating sound pressure (3)		dB(A)		43.9
Operation range ambient temp.	Min	°C		5
	Max	°C		45
Operation range cold room temp.	Min	°C		-25
	Max	°C		10

(1) According to EN ISO 5801 | (2) According to CECOMAF GT 6-001 (final velocity = 0.25 m/s) | (3) According to UNI EN ISO 3746

# Monoblock units suitable for container

## Main Characteristics

- › Hermetic compressor
- › Outdoor installation frame
- › Power supply 220-230/1N~/50 or 380-400/3N~/50
- › Ari + Axial fan
- › Condenser fan pressure switch (frame 1, 2, 3 only)
- › Condenser fan pressure controlled fan speed regulator (frame 4, 5, 6 only)
- › Prearrangement for supervision system (frame 4, 5, 6 only)
- › Voltage monitor (frame 4, 5, 6 only)
- › Filter dryer on liquid line
- › Four-pole condenser fan
- › Expansion through capillary tube (expansion valve only in dual-temperature units)
- › Separator/accumulator on suction line
- › Condensate water evaporation drip tray
- › Hot gas defrost
- › Refrigerant charge
- › Electronic controller
- › Switchboard with protection fuses
- › Condenser fan pressure switch
- › Adjustable Lp switch with automatic reset
- › Adjustable Hp switch with automatic reset
- › 100mm insulated panel for wall mounting
- › Crankcase heater
- › Double defrost solenoid valve
- › External power supply plug
- › 1m cold room lighting cable
- › 3m door micro-switch cable
- › Cataphoresis for condenser coil
- › Cataphoresis for evaporator coil



AS-H



### Cooling capacity calculation conditions

Medium temperature units: [TC=0°C | TA=30°C]

Low temperature units: [TC=-20°C | TA=30°C]

Dual-temperature units: [TC=-20°C | TA=30°C]


	Medium temperature units								Low temperature units		
	MAS106EA23XH	MAS107EA23XH	MAS211EA23XH	MAS320EB23XH	MAS430EB24TH	MAS535EB24TH	MAS545EB24TH	MAS660EB24TH	BAS110DA23XH	BAS112DA23XH	BAS117DA23XH
Refrigerant	R134a								R452A		
Power supply V/Ph~/Hz	220-230/1N~/50				380-400/3N~/50				230/1N~/50		
HP compressor	3/4	1	1.2	3.5	5	6.5	8.5	10	1	1.2	1.7
Defrost	Hot gas										
PED category	0			1		2			0		
Working temperature °C	+10 ÷ -5								-15 ÷ -25		
Cooling capacity Watt	1,140	1,422	1,816	3,492	4,981	6,988	8,290	10,424	662	905	1,164

	Low temperature units						Dual-temperature units				
	BAS218DA23XH	BAS320DB23XH	BAS330DB23XH	BAS445DB24TH	BAS450DB24TH	BAS560DB24TH	BAS680DB24TH	PAS330DB23XH	PAS450DB24TH	PAS565DB24TH	PAS695DB24TH
Refrigerant	R452A										
Power supply V/Ph~/Hz	230/1N~/50						400/3N~/50				
HP compressor	1.7	2	3	4	5	7.5	10	3	5	7.5	10
Defrost	Hot gas										
PED category	0	0	0	2		0		2			
Working temperature °C	-15 ÷ -25						+10 ÷ -5 -15 ÷ -25				
Cooling capacity Watt	1,436	2,384	2,581	3,628	4,541	6,689	8,663	2,581	4,541	6,689	8,663

# Monoblock units suitable for products storage in mobile cold rooms

## Main Characteristics

- › Scroll compressor
- › Outdoor installation frame
- › Power supply 380-400/3N~/50
- › Air + Axial fan
- › Condenser fan pressure switch (frame 3 only)
- › Condenser fan pressure controlled fan speed regulator (frame 4, 5, 6 only)
- › Prearrangement for supervision system
- › Voltage monitor
- › Filter dryer on liquid line
- › Four-pole condenser fan
- › Expansion through capillary tube (expansion valve only in dual-temperature units)
- › Separator/accumulator on suction line
- › Condensate water evaporation drip tray
- › Hot gas defrost
- › Refrigerant charge
- › Electronic controller
- › Switchboard with protection fuses
- › Condenser fan pressure switch
- › Adjustable Lp switch with automatic reset
- › Adjustable Hp switch with automatic reset
- › 100mm insulated panel for wall mounting
- › Crankcase heater
- › Double defrost solenoid valve (from model 430 for MT / from model 450 for BT)
- › External power supply plug
- › 1m cold room lighting cable
- › 3m door micro-switch cable
- › Cataphoresis for condenser coil
- › Cataphoresis for evaporator coil

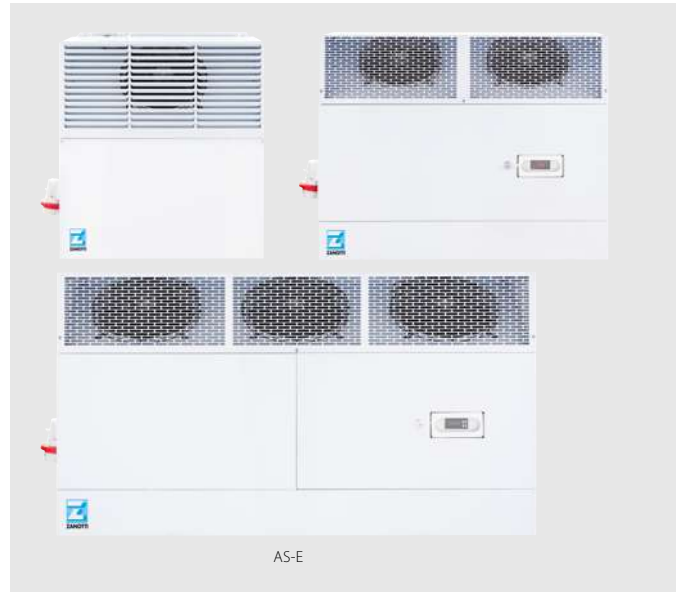

## Cooling capacity calculation conditions

Medium temperature units: [TC=0°C | TA=30°C]

Low temperature units: [TC=-20°C | TA=30°C]

Dual-temperature units: [TC=-20°C | TA=30°C]

		Medium temperature units									
		MAS320EB23TE	MAS430EB24TE	MAS535EB24TE	MAS545EB24TE	MAS660EB24TE	MAS320BB23TE	MAS430BB24TE	MAS535BB24TE	MAS545BB24TE	MAS660BB24TE
Refrigerant		R134a					R449A				
Supply voltage	V/Ph~/Hz	380-400/3N~/50									
HP compressor		4	6	7	9	10	2.3	3.5	4	6	7.5
Defrost		Hot gas									
PED category		1				2		1			2
Working temperature	°C	+10 ÷ -5									
Cooling capacity	Watt	3,770	5,942	7,462	9,007	12,084	3,561	5,606	6,853	9,325	11,011
		Low temperature units					Dual-temperature units				
		BAS330BB23TE	BAS450BB24TE	BAS555BB24TE	BAS560BB24TE	BAS680BB24TE	PAS330BB23TE	PAS450BB24TE	PAS565BB24TE	PAS695BB24TE	
Refrigerant		R449A									
Supply voltage	V/Ph~/Hz	380-400/3N~/50									
HP compressor		3.5	5	6	7.5	10	3.5	5	7.5	10	
Defrost		Hot gas									
PED category		1			2		1			2	
Working temperature	°C	-15 ÷ -25					+10 ÷ -5 -15 ÷ -25				
Cooling capacity	Watt	2,753	4,100	5,100	6,233	8,127	2,753	4,100	6,233	8,127	

# Monoblock units suitable for medium-large size cold rooms and freezing tunnels

Extreme versatility of use, suitable for freezing tunnels

The RS series models are monoblock units characterized by extreme versatility of use, ideal for medium-large rooms.

- › Extreme versatility of use, low-medium temperatures, polyvalent temperatures and freezing tunnels
- › Suitable for different types of applications
- › Compact and highly resistant to any environmental condition
- › Solenoid valve and thermostatic valve for high efficiency
- › Control panel with electromechanical instrumentation for controlling all the functionalities of the machine



Medium temperature units	MRS150TEB23GXX	MRS245NEB23GXX	MRS245TEB23GXX	MRS250NEB23GXX	MRS250TEB23GXX	MRS251TEB23GXX	MRS351NEB23GXX	MRS351TEB23GXX	
Refrigerant	R134a/R449A								
Power supply	V/Ph~/Hz 380-400/3N~/50								
Compressor type	Semi-hermetic								
HP compressor	5		12		15		25	30	
Defrost	Hot gas								
PED category	2								
Working temperature	°C +10 ÷ -5								
Cooling capacity [TC=0°C   TA=30°C]	9,164	12,657	16,096	20,284	24,165	28,414	35,852	40,837	
Medium temperature units	MRS150TBB23GXX	MRS245NBB23GXX	MRS245TBB23GXX	MRS250NBB23GXX	MRS250TBB23GXX	MRS251TBB23GXX	MRS351NBB23GXX	MRS351TBB23GXX	
Refrigerant	R134a				R449A				
Power supply	V/Ph~/Hz 380-400/3N~/50								
Compressor type	Semi-hermetic								
HP compressor	4	5	7.5	10	15	20	25	30	
Defrost	Hot gas								
PED category	2								
Working temperature	°C +10 ÷ -5								
Cooling capacity [TC=0°C   TA=30°C]	10,068	14,408	17,858	23,630	26,544	26,114	35,976	38,891	
Low temperature units	BRS150NBB23GXX	BRS150TBB23GXX	BRS245NBB23GXX	BRS245TBB23GXX	BRS250NBB23GXX	BRS250TBB23GXX	BRS251TBB23GXX	BRS351NBB23GXX	BRS351TBB23GXX
Refrigerant	R449A								
Power supply	V/Ph~/Hz 380-400/3N~/50								
Compressor type	Semi-hermetic								
HP compressor	7.5	10	12.5	15	20	25	30	40	50
Defrost	Hot gas								
PED category	2								
Working temperature	°C -15 ÷ -25								
Cooling capacity [TC=-20°C   TA=30°C]	8,191	8,670	11,102	14,423	18,531	21,344	23,648	31,599	35,030
Freezing and dual-temperature units	Freezing				Dual-temperature				
	CRS150NBB23GXX	CRS150TBB23GXX	CRS250NBB23GXX	CRS250TBB23GXX	PRS150TBB23GXX	PRS245TBB23GXX	PRS251TBB23GXX		
Refrigerant	R449A								
Power supply	V/Ph~/Hz 380-400/3N~/50								
Compressor type	Semi-hermetic								
HP compressor	7.5	10	15	25	10	15	30		
Defrost	Hot gas								
PED category	2								
Working temperature	°C -30 ÷ -50				°C +5 ÷ -5 -15 ÷ -25				
Cooling capacity Freezing [TC=30°C   TEV=-35°C] Dual-temperature [TC=-20°C   TA=30°C]	5,188	7,373	16,721	22,251	8,669	14,123	21,923		


# Monoblock system for low and medium temperature refrigeration

For wall mounted installation in small and medium sized cold rooms

- > Rapid mounting on the wall of the cold room by straddle-mounting, which is ideal for new installations or through-wall mounting and refurbishment projects
- > Metallic grey coloured finish of the outdoor unit
- > The white colour of the evaporator blends unobtrusively with the cold room walls
- > Compressor compartment insulated with suitable soundproofing material to reduce sound levels
- > Microchannel condensers available in order to reduce the refrigerant charge as much as possible and ensuring higher energy efficiency
- > The units are provided with a new generation control panel with an easy-to-use interface



## Installation type

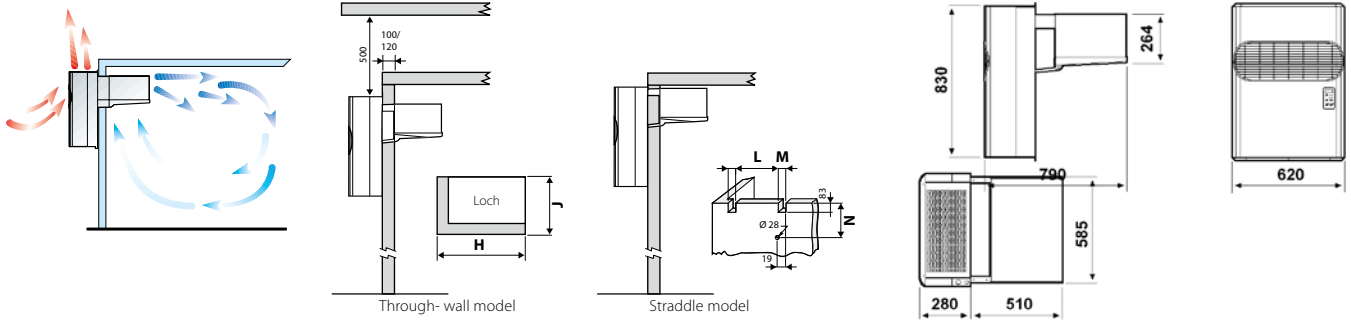

More details and final information can be found by scanning or clicking the QR codes.



GM

Medium temperature units		MGM103EA11XA	MGM105EA11XA	MGM106EA11XA	MGM107EA11XA	MGM110EA11XA	MGM211EA11XA	MGM212EB11XA	MGM315EB11XA	MGM320EB11XA	
Refrigerant		R134a					R134a				
Power supply	V/Ph~/Hz	220-230/1N~/50					380-400/3N~/50				
HP compressor		1/2	5/8	3/4	1	1.2	1.2	2.3	3	3.5	
Defrost		Hot gas					Hot gas				
PED category		0					0				
Working temperature	°C	+10 ÷ -5					+10 ÷ -5				
Cooling capacity [TC=0°C   TA=30°C]	Watt	855	978	1,120	1,315	1,351	1,806	2,034	3,079	3,351	
Low temperature units		BGM110DA11XA	BGM112DA11XA	BGM117DA11XA	BGM218DA11XA	BGM220DB11XA	BGM320DB11XA	BGM330DB11XA	BGM340DB11XA		
Refrigerant		R452A					R452A				
Power supply	V/Ph~/Hz	220-230/1N~/50					380-400/3N~/50				
HP compressor		1	1.2	1.7	1.7	2	3	4			
Defrost		Hot gas					Hot gas				
PED category		0					0				
Working temperature	°C	-15 ÷ -25					-15 ÷ -25				
Cooling capacity [TC=-20°C   TA=30°C]	Watt	679	889	1,155	1,429	1,688	2,491	2,701	3,160		

# Monoblock system for low and medium temperature refrigeration




For wall mounted installation in medium sized cold rooms

- › Rapid mounting on the wall of the cold room by through-wall mounting
- › Extremely fast to assemble, reducing installation time and cost
- › The white colour of the evaporator blends unobtrusively with the cold room walls
- › Very compact and very efficient
- › Remote electronic command station with easy-to-use user interface programmable according to various system requirements
- › Low temperature models are available. Please contact your local dealer



AS

## Installation type

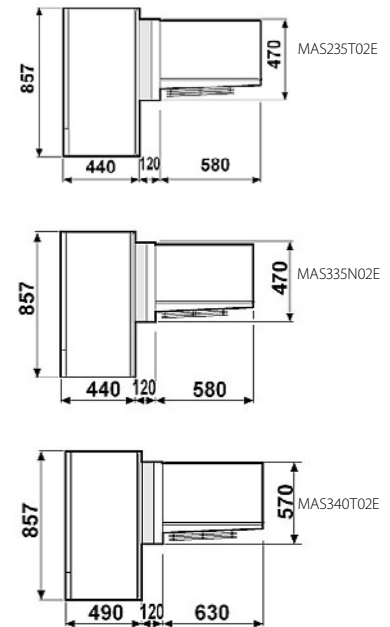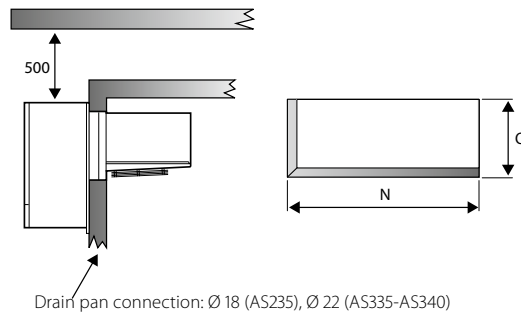

More details and final information can be found by scanning or clicking the QR codes.



AS

	Medium temperature units				Low temperature units		
	MAS430EB13XX	MAS535EB13XX	MAS545EB13XX	MAS660EB13XX	BAS450DB13XX	BAS560DB13XX	BAS680DB13XX
Refrigerant	R134a				R452A		
Power supply V/Ph~/Hz	380-400/3N~/50						
HP compressor	5	6.5	8.5	10	5	7.5	10
Defrost	Hot gas						
PED category	1						2
Working temperature °C	+10 ÷ -5						
Cooling capacity [TC=0°C   TA=30°C] Watt	4,981	6,988	8,290	10,424	-		
Cooling capacity [TC=-20°C   TA=30°C] Watt	-				4,541	6,689	8,663


# Monoblock system for low and medium temperature refrigeration

For roof mounted installation in small and medium sized cold rooms

- › Rapid mounting on the roof of the cold room
- › Ceiling assembly leaves the space inside the cold room completely free
- › The white colour of the evaporator blends unobtrusively with the cold room walls
- › Extremely fast to assemble, reducing installation time and cost
- › Best surface-to-capacity ratio
- › Remote electronic command station with easy-to-use user interface programmable according to various system requirements



## Installation type

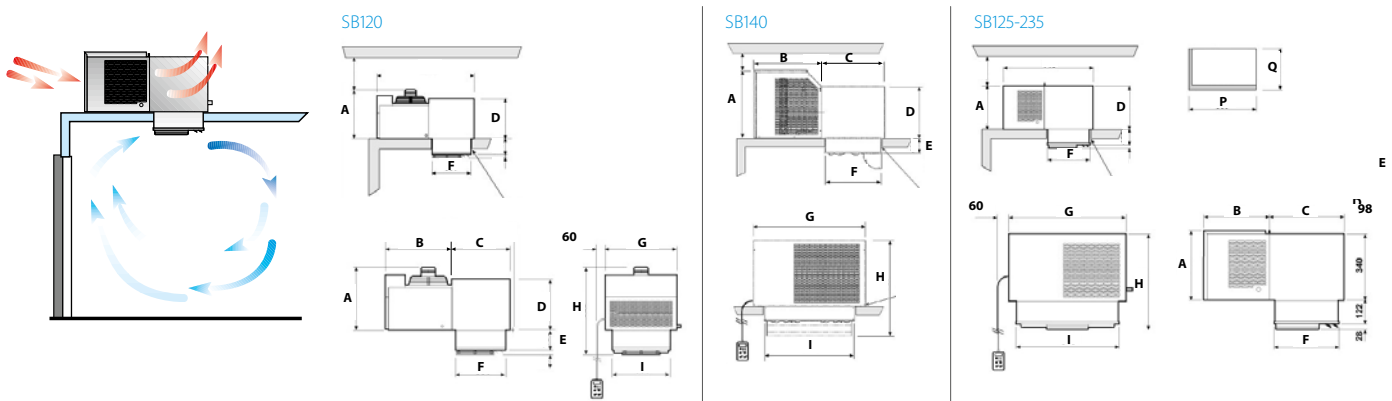

More details and final information can be found by scanning or clicking the QR codes.



SB

Medium temperature units		MSB005EA11XX	MSB106EA11XX	MSB107EA11XX	MSB210EA11XX	MSB212EB11XX	MSB315EB11XX	MSB320EB11XX	MSB425EB11XX	MSB530EB13XX	
Refrigerant		R134a									
Power supply	V/Ph~/Hz	220-230/1N~/50					380-400/3N~/50				
HP compressor		5/8	3/4	1	1.2	2.3	3	3.5	4	5	
Defrost		Hot gas									
PED category		0								1	
Working temperature	°C	+10 ÷ -5									
Cooling capacity	Watt	857	1,120	1,338	1,799	2,022	3,282	3,550	3,774	4,871	
		[TC=0°C   TA=30°C]									
Low temperature units		BSB010DA11XX	BSB117DA11XX	BSB220DB11XX	BSB330DB11XX	BSB440DB11XX	BSB545DB13XX	BSB550DB13XX			
Refrigerant		R452A									
Power supply	V/Ph~/Hz	220-230/1N~/50					380-400/3N~/50				
HP compressor		3/4	1.7	2	3	3.5	4	5			
Defrost		Hot gas									
PED category		0						2			
Working temperature	°C	-15 ÷ -25									
Cooling capacity	Watt	628	1,162	1,699	2,596	3,097	3,890	4,849			
		[TC=-20°C   TA=30°C]									


# Refrigeration split type units designed for use in small to medium rooms

## Condensing unit for wall mounted installation

- › Wide versatility of installation of condensing part and evaporating part
- › Condensing part body with metallic grey finishing
- › The white color of the evaporator part blends discreetly with the walls of the cold room
- › Compressor compartment is ready to be insulated with suitable sound-absorbing material to reduce noise levels
- › Micro-channel condensers available to reduce the refrigerant charge as much as possible and ensure higher energy efficiency



## Installation type



More details and final information can be found by scanning or clicking the QR codes.



GS

Medium temperature units		SB.MGS103EA12XX	SB.MGS105EA12XX	SB.MGS106EA12XX	SB.MGS107EA12XX	SB.MGS110EA12XX	SB.MGS211EA12XX	SB.MGS212EB12XX	SB.MGS315EB13XX	SB.MGS320EB13XX	
Refrigerant		R134a									
Power supply	V/Ph~/Hz	220-230/1N~/50					380-400/3N~/50				
HP compressor		1/2	5/8	3/4	1	1.2		2.3	3	3.5	
Defrost		Electric									
PED category		0									
Working temperature	°C	+10 ÷ -5									
Cooling capacity [TC=0°C   TA=30°C]	Watt	855	978	1,120	1,315	1,351	1,806	2,034	3,079	3,351	
Low temperature units		SB.BGS110DA12XX	SB.BGS112DA12XX	SB.BGS117DA12XX	SB.BGS218DA12XX	SB.BGS220DB12XX	SB.BGS320DB13XX	SB.BGS330DB13XX	SB.BGS340DB13XX		
Refrigerant		R452A									
Power supply	V/Ph~/Hz	220-230/1N~/50					380-400/3N~/50				
HP compressor		1	1.2	1.7		2	3		4		
Defrost		Electric									
PED category		0								2	
Working temperature	°C	-15 ÷ -25									
Cooling capacity [TC=-20°C   TA=30°C]	Watt	679	889	1,155	1,429	1,688	2,491	2,701	3,160		




# Refrigeration split type units suitable for small-medium cold rooms

Condensing unit for floor standing or roof mounted installation

- › Condensing unit for floor or roof installation and evaporator for ceiling mounting
- › Extremely quick mounting thanks to the quick coupling joints
- › Reduced installation times and costs
- › Best surface-capacity ratio



## Installation type



More details and final information can be found by scanning or clicking the QR codes.



SP-O

Medium temperature units		SB.MSP106EA12XX	SB.MSP107EA12XX	SB.MSP212EA12XX	SB.MSP315EB13XX	SB.MSP320EB13XX		
Refrigerant		R134a						
Power supply	V/Ph~/Hz	220-230/1N~/50			380-400/3N~/50			
HP compressor		3/4	1	1.2	3	3.5		
Defrost		Electric						
PED category		0						
Working temperature	°C	+10 ÷ -5						
Cooling capacity [TC=0°C   TA=30°C]	Watt	1,140	1,422	1,816	3,188	3,492		
Low temperature units		SB.BSP110DA12XX	SB.BSP112DA12XX	SB.BSP117DA12XX	SB.BSP218DA12XX	SB.BSP220DB12XX	SB.BSP320DB13XX	SB.BSP330DB13XX
Refrigerant		R452A						
Power supply	V/Ph~/Hz	220-230/1N~/50				380-400/3N~/50		
HP compressor		1	1.5	1.7	2	3		
Defrost		Electric						
PED category		0						
Working temperature	°C	-15 ÷ -25						
Cooling capacity [TC=-20°C   TA=30°C]	Watt	662	905	1,164	1,436	1,719	2,384	2,581


# Split units suitable for outdoor installation and for small-medium cold rooms

## Condensing unit for floor standing or roof mounted installation

- › Condensing unit for floor or roof installation and evaporator for ceiling mounting
- › Thermostatic expansion valve for an optimal refrigerant flow rate and for higher energy efficiency
- › Extremely quick mounting thanks to the quick coupling joints
- › Reduced installation times and costs
- › Best surface-capacity ratio



## Installation type



More details and final information can be found by scanning or clicking the QR codes.



DB-O

Medium temperature units	SB.MDB106EA12XX	SB.MDB107EA12XX	SB.MDB212EB12XX	SB.MDB315EB13XX	SB.MDB320EB13XX	SB.MDB425EB13XX	
Refrigerant	R134a						
Power supply V/Ph~/Hz	220-230/1N~/50			380-400/3N~/50			
HP compressor	3/4	1	1.2	3	3.5	4	
Defrost	Electric						
PED category	1						
Working temp. °C	+10 ÷ -5						
Cooling capacity [TC=0°C   TA=30°C] Watt	1,140	1,422	1,816	3,188	3,492	3,948	
Cooling capacity [TC=-20°C   TA=30°C] Watt	-						
Medium temperature units	SB.MDB530EB13XX	SB.MDB635EB13XX	SB.MDB645EB13XX	SB.MDB706EB13XX	SB.MDB707EB13XX		
Refrigerant	R134a						
Power supply V/Ph~/Hz	380-400/3N~/50						
HP compressor	3.7	4.8	6.3	7.4	9.5		
Defrost	Electric						
PED category	2						
Working temp. °C	+10 ÷ -5						
Cooling capacity [TC=0°C   TA=30°C] Watt	5,070	7,293	8,779	11,014	14,069		
Cooling capacity [TC=-20°C   TA=30°C] Watt	-						
Low temperature units	SB.BDB110DA12XX	SB.BDB112DA12XX	SB.BDB117DA12XX	SB.BDB218DA12XX	SB.BDB220DB12XX	SB.BDB320DB13XX	SB.BDB330DB13XX
Refrigerant	R452A						
Power supply V/Ph~/Hz	220-230/1N~/50			380-400/3N~/50			
HP compressor	1	1.5	1.7		2		3
Defrost	Electric						
PED category	1						
Working temp. °C	-15 ÷ -25						
Cooling capacity [TC=0°C   TA=30°C] Watt	-						
Cooling capacity [TC=-20°C   TA=30°C] Watt	662	905	1,164	1,436	1,719	2,384	2,581
Low temperature units	SB.BDB440DB13XX	SB.BDB445DB13XX	SB.BDB550DB13XX	SB.BDB660DB13XX	SB.BDB680DB13XX	SB.BDB710DB13XX	SB.BDB713DB13XX
Refrigerant	R452A						
Power supply V/Ph~/Hz	380-400/3N~/50						
HP compressor	3.5	4	3.7	5.5	7.5	9.6	11
Defrost	Electric						
PED category	2						
Working temp. °C	-15 ÷ -25						
Cooling capacity [TC=0°C   TA=30°C] Watt	-						
Cooling capacity [TC=-20°C   TA=30°C] Watt	3,283	3,604	4,925	7,492	8,940	11,537	12,735

\* Only for external use





# Monoblock units for wine application

Monoblock system suitable for through-wall installation

- › Accurate humidity and temperature control to guarantee the quality of products (e.g. wines)
- › Integrated humidifier available depending on model to have one unit which covers it all: perfect humidity & temperature control
- › Electronic controller managing both temperature and humidity of the cold room



## Installation type

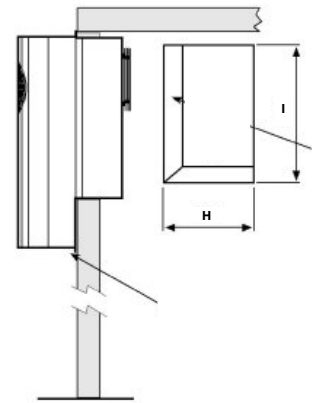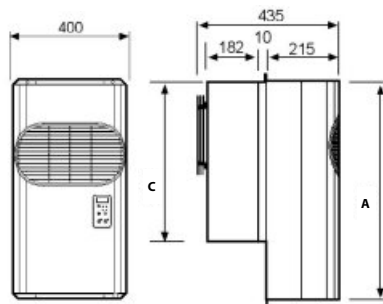

More details and final information can be found by scanning or clicking the QR codes.



RCV

	RCV103EA12S3	RCV105EA12S3	RCV206EA12S3	RCV207EA12S3
Refrigerant	R134a			
Power supply	V/Ph~/Hz 220-230/1N~/50			
HP compressor	1/3	3/8	1/2	3/4
PED category	0			
Working temperature	°C +20 ÷ +10			
Range RH	% 60-80			
Cooling capacity [TC=10°C   TA=30°C]	Watt 593	912	1,336	1,935



# Bi-block system for wine application

Compact condensing unit and small-sized wall or ceiling mounted evaporators

- › Accurate humidity and temperature control to guarantee the quality of products (e.g. wines)
- › Thermostatic expansion valve ensuring optimum capacity in accordance with the required load for better energy efficiency
- › Integrated humidifier available depending on model to have one unit which covers it all: perfect humidity & temperature control
- › Electronic controller managing both temperature and humidity of the cold room



## Installation type

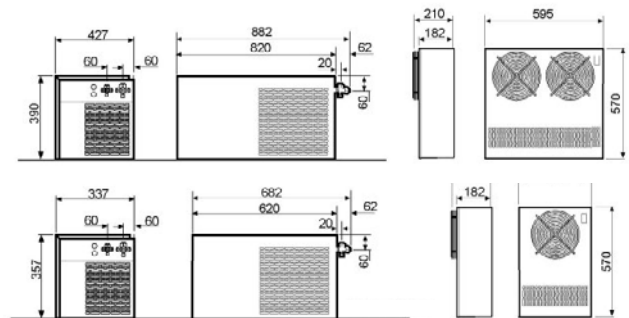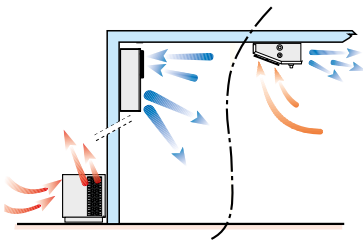

More details and final information can be found by scanning or clicking the QR codes.



RDV

	SB.RDV103EA12S3	SB.RDV105EA12S3	SB.RDV206EA12S3	SB.RDV207EA12S3	SB.RDV103EA12S7	SB.RDV105EA12S7	SB.RDV206EA12S7	SB.RDV207EA12S7
Refrigerant	R134a				R134a			
Power supply	220-230/1N~/50				220-230/1N~/50			
HP compressor	1/3	3/8	1/2	3/4	1/3	3/8	1/2	3/4
Evaporator type	Wall mounting evaporator				Ceiling mounting evaporator			
PED category	1				1			
Working temperature	+20 ÷ +10				+20 ÷ +10			
Range RH	60-80				60-80			
Cooling capacity [TC=10°C   TA=30°C]	593	912	1,336	1,935	593	912	1,336	1,935



## Drying and ageing units

# Monoblock and bi-block units for drying and ageing of meat and cheese

For small and medium size coldrooms

- › Quick and easy installation
- › Low noise and vibration
- › Electronic control
- › Constant and detailed control of temperature and humidity level during operation
- › Compact and functional, with removable panels to allow easy access to internal components
- › More units available suitable for large coldrooms




## SAS: Drying and ageing units for small and medium cold rooms

- › Coldroom temperature: **+10°C to +25°C**
- › Humidity: **till 60%**

## SAR: Units for post-salting resting of hams for small and medium cold rooms

- › Coldroom temperature: **+2°C to +4°C**
- › Humidity: **till 40%**

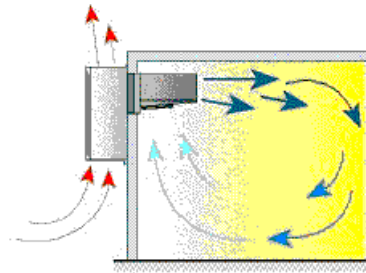

## Cooling capacity:

- › from 2,900 to 15,900 Watt

SAR	Monoblock units			Bi-block units		
	SAR212DB13SM	SAR320DB13SM	SAR430DB13SM	SB.SAR212DB13SS	SB.SAR320DB13SS	SB.SAR430DB13SS
Refrigerant	R452A			R452A		
Power supply	380-400/3N~/50			380-400/3N~/50		
HP compressor	1.5	2	4	1.5	2	4
Defrost	Hot gas			Hot gas		
PED category	1		2	1		2
Working temperature	+10 ÷ -5			+10 ÷ -5		
Range RH	40-60			40-60		
Cooling capacity [TC=10°C   TA=30°C]	2,900	4,500	7,250	2,900	4,500	7,250

SAS	Monoblock units					Bi-block units				
	SAS212EB10SM	SAS320EB10SM	SAS430EB10SM	SAS545EB10SM	SAS660EB10SM	SB.SAS212EB10SS	SB.SAS320EB10SS	SB.SAS430EB10SS	SB.SAS545EB10SS	SB.SAS660EB10SS
Refrigerant	R134a									
Power supply	380-400/3N~/50									
HP compressor	1	1.5	3	5	7.5	1	1.5	3	5	7.5
Drying	5	11	23	36	45	5	11	23	36	45
Drying	200	400	600	950	1,200	200	400	600	950	1,200
Ageing	20	40	70	125	160	20	40	70	125	160
Ageing	600	1,000	2,000	3,000	4,000	600	1,000	2,000	3,000	4,000
PED category	1		2			1		2		
Working temperature	+25 ÷ +10									
Range RH	60-80									
Cooling capacity [TC=10°C   TA=30°C]	3,400	4,900	8,200	12,800	15,900	3,400	4,900	8,200	12,800	15,900

# Air Handling Units for industrial drying

## Main Characteristics

- › Frascold semihermetic compressor + Thermal overload protection
- › Power supply 380-400/3N~/50
- › Air + Axial fan (remote)
- › Embedded main electrical switchboard and remote control panel with Vision Touch controller + switch to select static/ventilated evaporator
- › Hot gas defrost
- › Magnetothermal switches
- › Liquid line predisposition for connection to static evaporators
- › Cataphoresis to the evaporator and heat recovery coil
- › Remote air cooled condenser
- › Soft start on centrifugal fan (starting from 15HP unit)
- › Liquid Receiver + Liquid receiver shut off valves
- › Safety valve
- › Filter dryer
- › Sight glass
- › Four-pole condenser fan
- › Thermostatic valve expansion
- › Evaporator centrifugal fan
- › Air suction duct
- › Condensing unit with refrigerant charge
- › Switchboard with automatic switches
- › Adjustable calibration Hp switch with manual reset
- › Adjustable calibration Lp switch with automatic reset
- › Pressure controlled condenser fan speed regulator
- › Humidity control during dehumidification with heat recovery
- › Temperature control in hot with electric heaters
- › Humidity control in humidification with automatic water supply
- › Crankcase heater
- › Fresh air intake
- › Evaporator/heat recovery coil Copper/Aluminium with cataphoresis treatment
- › Heat recovery coil + heating with electrical heaters
- › Embedded main switchboard and remote control panel with Vision Touch Controller




## Air distribution systems with textile channels

The UAV industrial drying units are equipped with large and efficient evaporators with centrifugal fan, capable of generating air flow from 1,500 to 14,600m<sup>3</sup>/h.

This allows, thanks to the special galvanized sheet T-shaped ducts designed according to the room dimensions, an optimized distribution of the treated air in the room suitable for the required process.

The T-shaped ducts are complete with motorized damper.

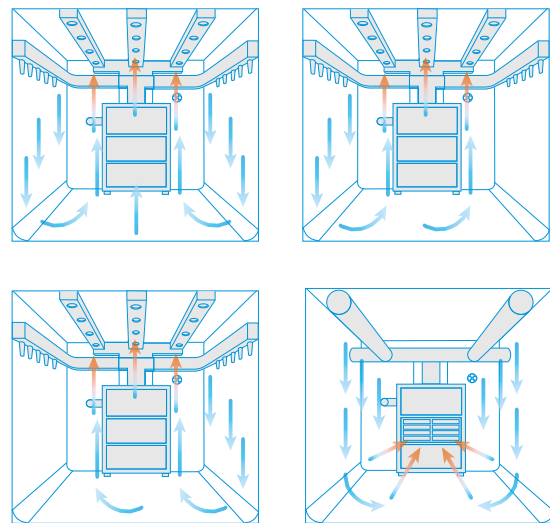

**For customized options, please contact your sales representative.**

	SB.UAV102 RBB12EAX	SB.UAV203 RBB12EAX	SB.UAV204 RBB12EAX	SB.UAV305 RBB12EAX	SB.UAV307 RBB12EAX	SB.UAV410 RBB12EAX	SB.UAV515 RBB12EAX	SB.UAV520 RBB12EAX	SB.UAV625 RBB12EAX	SB.UAV630 RBB12EAX	SB.UAV735 RBB12EAX
Refrigerant	R449A										
Power supply	V/Ph~/Hz 380-400/3N~/50										
HP compressor	2	3	4	5	7,5	10	15	20	25	30	35
Cold room volume	m <sup>3</sup> 20	30	40	60	75	90	130	160	180	200	250
Product quantity	kg 400	800	1,200	1,600	2,000	2,400	3,200	4,800	6,400	8,000	10,000
PED category	2										
Working temperature	°C +25 ÷ +10										
Range RH	% 60-80										
Cooling capacity [TC=10°C   TA=30°C]	Watt 7,200	10,600	13,000	14,400	27,000	33,000	38,000	45,500	59,000	68,000	87,000

# Air handling units for industrial ageing

## Main Characteristics

- › Frascold semihermetic compressor + Thermal overload protection
- › Power supply 380-400/3N~/50
- › Air + Axial fan (remote)
- › Embedded main electrical switchboard and remote control panel with Vision Touch controller + switch to select static/ventilated evaporator
- › Hot gas defrost
- › Magnetothermal switches
- › Liquid line predisposition for connection to static evaporators
- › Cataphoresis to the evaporator and heat recovery coil
- › Remote air cooled condenser
- › Soft start on centrifugal fan (starting from 15HP unit)
- › Liquid Receiver + Liquid receiver shut off valves
- › Safety valve
- › Filter dryer
- › Sight glass
- › Four-pole condenser fan
- › Thermostatic valve expansion
- › Evaporator centrifugal fan
- › Air suction duct
- › Condensing unit with refrigerant charge
- › Switchboard with automatic switches
- › Adjustable calibration Hp switch with manual reset
- › Adjustable calibration Lp switch with automatic reset
- › Pressure controlled condenser fan speed regulator
- › Humidity control during dehumidification with heat recovery
- › Temperature control in hot with electric heaters
- › Humidity control in humidification with automatic water supply
- › Crankcase heater
- › Fresh air intake
- › Evaporator/heat recovery coil Copper/Aluminium with cataphoresis treatment
- › Heat recovery coil + heating with electrical heaters
- › Embedded main switchboard and remote control panel with Vision Touch Controller




## Air distribution systems with textile channels

The USV industrial drying units are equipped with large and efficient evaporators with centrifugal fan, capable of generating air flow from 1,500 to 14,600m<sup>3</sup>/h.

This allows, thanks to the special galvanized sheet T-shaped ducts designed according to the room dimensions, an optimized distribution of the treated air in the room suitable for the required process.

The T-shaped ducts are complete with motorized damper.

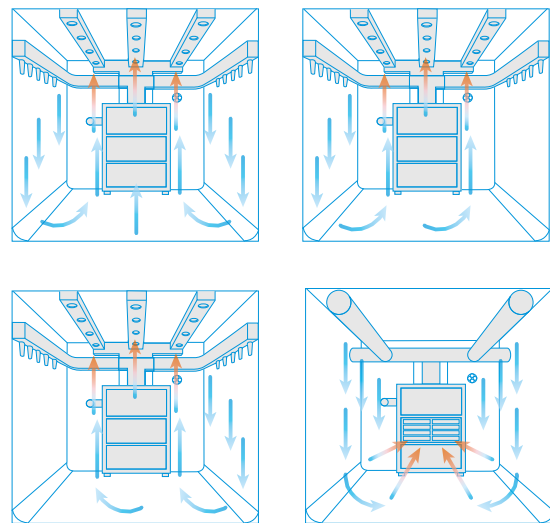

**For customized options, please contact your sales representative.**

	SB.USV102 RBB12EAX	SB.USV203 RBB12EAX	SB.USV204 RBB12EAX	SB.USV305 RBB12EAX	SB.USV307 RBB12EAX	SB.USV410 RBB12EAX	SB.USV515 RBB12EAX	SB.USV520 RBB12EAX	SB.USV625 RBB12EAX	SB.USV630 RBB12EAX	SB.USV735 RBB12EAX
Refrigerant	R449A										
Power supply	V/Ph~/Hz 380-400/3N~/50										
HP compressor	2	3	4	5	7.5	10	15	20	25	30	35
Cold room volume	m <sup>3</sup> 75	90	120	180	225	240	390	490	550	680	800
Product quantity	kg 1,200	2,400	3,600	5,400	7,200	9,000	10,800	14,400	19,200	24,000	30,000
PED category	2										
Working temperature	°C +25 ÷ +10										
Range RH	% 60-80										
Cooling capacity [TC=10°C   TA=30°C]	Watt 7,200	10,600	13,000	14,400	27,000	33,000	38,000	45,500	59,000	68,000	87,000





# Condensing units

# Condensing unit for commercial refrigeration with reciprocating technology



## Refrigeration solution for small food retailers

- › Designed specifically for small capacity refrigeration applications in small food stores (eg. in bakeries and butchers), cold rooms, bottle coolers and display cabinets
- › Compact and lightweight for even the smallest of city centre locations
- › All components can be accessed, making maintenance quick and easy
- › Ideal for urban applications: sound proofing and low operating sound levels mean the unit is quiet
- › The optimised compressor range and increased condenser surface deliver high levels of energy efficiency and reliability is ensured by using high quality components and production processes
- › Micro channel heat exchanger technology reduces the amount of refrigerant used in the system, lowering environmental impact

More details and final information can be found by scanning or clicking the QR codes.



JEHCCU-CM3



JEHCCU-CM1

Medium Temperature Refrigeration			JEHCCU-CM1/CM3													
			0040CM1	0050CM1	0051CM1	0063CM1	0067CM1	0077CM1	0095CM1	0100CM1	0113CM1	0140CM1	0170CM1	0140CM3	0170CM3	
Refrigerating capacity (1)	Medium temperature (t)	R-134a Nom kW	0.59	-	0.89	1.06	-	1.29	1.60	-	-	-	-	-	-	
		R-407A Nom kW	-	0.80	-	-	1.07	-	-	-	1.33	1.66	1.92	-	1.92	-
		R-407F Nom kW	-	0.86	-	-	1.15	-	-	-	1.41	1.74	2.08	-	2.08	-
		R-448A Nom kW	-	0.87	-	-	1.12	-	-	-	1.35	1.64	2.15	2.57	2.15	2.57
		R-449A Nom kW	-	0.87	-	-	1.12	-	-	-	1.35	1.64	2.15	2.57	2.15	2.57
		R-452A Nom kW	-	0.95	-	-	1.23	-	-	-	1.48	1.79	2.20	2.69	2.20	2.69
Seasonal energy performance ratio SEPR	Te -10°C	R-134a	1.50	-	1.77	1.77	-	1.85	1.86	-	-	-	-	-	-	-
		R-407A	-	1.59	-	-	1.62	-	-	-	1.66	1.78	1.74	-	1.66	-
		R-407F	-	1.77	-	-	1.76	-	-	-	1.77	1.85	1.93	-	1.85	-
		R-448A	-	1.66	-	-	1.64	-	-	-	1.64	1.71	2.09	1.73	2.00	1.76
		R-449A	-	1.66	-	-	1.64	-	-	-	1.64	1.71	2.09	1.73	2.00	1.76
		R-452A	-	1.67	-	-	1.67	-	-	-	1.68	1.73	1.92	1.65	1.83	1.73
Parameters at full load and ambient temp. 25°C	Te -10°C	R-134a Declared COP (COP2)	1.84	-	2.01	2.05	-	2.22	2.30	-	-	-	-	-	-	
		R-407A Declared COP (COP2)	-	1.69	-	-	1.69	-	-	-	1.74	1.90	1.87	-	2.09	-
		R-407F Declared COP (COP2)	-	1.93	-	-	1.94	-	-	-	1.95	2.07	2.22	-	1.78	-
		R-448A Declared COP (COP2)	-	1.91	-	-	1.90	-	-	-	1.89	1.95	2.42	1.93	2.11	2.01
		R-449A Declared COP (COP2)	-	1.91	-	-	1.90	-	-	-	1.89	1.95	2.42	1.93	2.32	2.01
		R-452A Declared COP (COP2)	-	1.90	-	-	1.90	-	-	-	1.90	1.98	2.18	1.85	2.32	1.99
Parameters at full load and ambient temp. 32°C (Point A)	Te -10°C	R-134a Rated COP (COPA)	1.5	-	1.77	1.77	-	1.85	1.86	-	-	-	-	-	-	
		R-407A Rated COP (COPA)	-	1.59	-	-	1.62	-	-	-	1.66	1.78	1.74	-	1.66	-
		R-407F Rated COP (COPA)	-	1.77	-	-	1.76	-	-	-	1.77	1.85	1.93	-	1.85	-
		R-448A Rated COP (COPA)	-	1.66	-	-	1.64	-	-	-	1.64	1.71	2.09	1.73	2.00	1.76
		R-449A Rated COP (COPA)	-	1.66	-	-	1.64	-	-	-	1.64	1.71	2.09	1.73	2.00	1.76
		R-452A Rated COP (COPA)	-	1.67	-	-	1.67	-	-	-	1.68	1.73	1.92	1.65	1.83	1.73
Parameters at full load and ambient temp. 43°C	Te -10°C	R-134a Rated cooling capacity (PA) kW	0.59	-	0.89	1.06	-	1.29	1.60	-	-	-	-	-	-	
		R-407A Rated cooling capacity (PA) kW	-	0.80	-	-	1.07	-	-	-	1.33	1.66	1.92	-	1.92	-
		R-407F Rated cooling capacity (PA) kW	-	0.86	-	-	1.15	-	-	-	1.41	1.74	2.08	-	2.08	-
		R-448A Rated cooling capacity (PA) kW	-	0.87	-	-	1.12	-	-	-	1.35	1.64	2.15	2.57	2.15	2.57
		R-449A Rated cooling capacity (PA) kW	-	0.87	-	-	1.12	-	-	-	1.35	1.64	2.15	2.57	2.15	2.57
		R-452A Rated cooling capacity (PA) kW	-	0.95	-	-	1.23	-	-	-	1.48	1.79	2.20	2.69	2.20	2.69
		R-134a Rated power input (DA) kW	0.39	-	0.50	0.60	-	0.70	0.86	-	-	-	-	-	-	-
		R-407A Rated power input (DA) kW	-	0.50	-	-	0.66	-	-	-	0.80	0.94	1.11	-	1.16	-
		R-407F Rated power input (DA) kW	-	0.49	-	-	0.65	-	-	-	0.79	0.94	1.07	-	1.12	-
		R-448A Rated power input (DA) kW	-	0.53	-	-	0.68	-	-	-	0.82	0.96	1.03	1.49	1.08	1.46
		R-449A Rated power input (DA) kW	-	0.53	-	-	0.68	-	-	-	0.82	0.96	1.03	1.49	1.08	1.46
		R-452A Rated power input (DA) kW	-	0.57	-	-	0.74	-	-	-	0.88	1.03	1.15	1.63	1.20	1.55
		R-134a Declared COP (COP3)	1.42	-	1.40	1.40	-	1.49	1.50	-	-	-	-	-	-	-
		R-407A Declared COP (COP3)	-	1.42	-	-	-	-	-	-	-	-	1.56	-	1.47	-
		R-407F Declared COP (COP3)	-	1.46	-	-	-	-	-	-	-	-	1.58	-	1.49	-
		R-448A Declared COP (COP3)	-	1.27	-	-	1.26	-	-	-	1.25	1.33	1.62	1.42	1.53	1.43
		R-449A Declared COP (COP3)	-	1.27	-	-	1.26	-	-	-	1.25	1.33	1.62	1.42	1.53	1.43
		R-452A Declared COP (COP3)	-	1.31	-	-	1.32	-	-	-	1.34	1.37	1.52	1.35	1.44	1.39
		R-134a Cooling capacity (P3) kW	-	-	0.75	0.86	-	1.06	1.34	-	-	-	-	-	-	-
		R-407A Cooling capacity (P3) kW	-	0.75	-	-	-	-	-	-	-	-	1.79	-	1.78	-
		R-407F Cooling capacity (P3) kW	-	0.79	-	-	-	-	-	-	-	-	1.85	-	1.84	-
		R-448A Cooling capacity (P3) kW	-	0.73	-	-	0.91	-	-	-	1.10	1.34	1.79	2.23	1.77	2.20
		R-449A Cooling capacity (P3) kW	-	0.73	-	-	0.91	-	-	-	1.10	1.34	1.79	2.23	1.77	2.20
		R-452A Cooling capacity (P3) kW	-	0.80	-	-	1.01	-	-	-	1.23	1.46	1.83	2.28	1.81	2.26
R-134a Power input (D3) kW	0.36	-	0.53	0.62	-	0.71	0.89	-	-	-	-	-	-	-		
R-407A Power input (D3) kW	-	0.53	-	-	-	-	-	-	-	-	1.15	-	1.21	-		
R-407F Power input (D3) kW	-	0.54	-	-	-	-	-	-	-	-	1.17	-	1.23	-		
R-448A Power input (D3) kW	-	0.58	-	-	0.73	-	-	-	0.88	1.01	1.11	1.57	1.16	1.54		
R-449A Power input (D3) kW	-	0.58	-	-	0.73	-	-	-	0.88	1.01	1.11	1.57	1.16	1.54		
R-452A Power input (D3) kW	-	0.61	-	-	0.77	-	-	-	0.92	1.06	1.20	1.69	1.26	1.62		
Dimensions	Unit	HeightxWidthxDepth	607x876x420													
Weight	Unit	kg	49	57	56	58	57	58	67	68	67	68	67	68		
Compressor	Type		Reciprocating compressor													
	Piston displacement	m³/h	1.8	3.18	3.79	2.64	4.51	5.69	3.18	4.21	4.52	4.52	4.52	4.52		
Fan	Type		Axial													
	Sound pressure level	Nom. dBA	28													
Piping connections	Liquid line connection	inch	1/4"						3/8"							
	Suction line connection	inch	3/8"						1/2"							
Refrigerant	Type/GWP		R-134a/1,430	R-452A/2,141	R-134a/1,430	R-452A/2,141	R-134a/1,430	R-452A/2,141	R-407A/2,107	R-448A/1,387	R-449A/1,397	R-452A/2,141	R-407A/2,107	R-448A/1,387	R-449A/1,397	
	Type 2 - GWP Type 2		-	R-407A/2,107	-	R-407A/2,107	-	R-407A/2,107	-	R-448A/1,387	R-449A/1,397	-	R-448A/1,387	R-449A/1,397	-	
	Type 3 - GWP Type 3		-	R-407F/1,825	-	R-407F/1,825	-	R-407F/1,825	-	R-448A/1,387	R-449A/1,397	-	R-448A/1,387	R-449A/1,397	-	
	Type 4 - GWP Type 4		-	R-448A/1,387	-	R-448A/1,387	-	R-448A/1,387	-	R-449A/1,397	R-449A/1,397	-	R-449A/1,397	R-449A/1,397	-	
	Type 5 - GWP Type 5		-	R-449A/1,397	-	R-449A/1,397	-	R-449A/1,397	-	R-449A/1,397	R-449A/1,397	-	R-449A/1,397	R-449A/1,397	-	
	GWP Type 6		-	-	-	-	-	-	-	-	-	-	-	-	-	
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50 /230													

(1) Refer to condition: Outside ambient temperature = 32°C, Evaporation temperature = -10°C and Return Gas 20°C (medium temperature application) | (2) Average sound pressure level is measured at 10m in anechoic room

# Condensing unit for commercial refrigeration with scroll technology

Refrigeration solution for small food retailers

- › Designed specifically for small capacity refrigeration applications in small food stores (eg. in bakeries and butchers), cold rooms, bottle coolers and display cabinets
- › Compact and lightweight for even the smallest of city centre locations
- › All components can be accessed, making maintenance quick and easy
- › Ideal for urban applications: sound proofing and low operating sound levels mean the unit is quiet
- › The optimised compressor range and increased condenser surface deliver high levels of energy efficiency and reliability is ensured by using high quality components and production processes
- › Micro channel heat exchanger technology reduces the amount of refrigerant used in the system, lowering environmental impact



Medium Temperature Refrigeration			JEHSCU-CM1/CM3		0200CM1	0250CM1	0300CM1	0200CM3	0250CM3	0300CM3	0350CM3	0360CM3	0400CM3	0500CM3	0600CM3	0680CM3	0800CM3	1000CM3					
Refrigerating capacity	Medium temperature (1)	R-134a Nom	kW		2.13	-	-	2.24	-	-	3.48	3.80	4.37	-	-	-	8.21	10.75					
		R-407A Nom	kW		3.48	4.09	-	3.45	4.05	4.69	-	5.77	6.76	8.28	9.54	10.7	12.95	-	-				
		R-407F Nom	kW		3.33	3.82	4.63	3.33	3.94	4.58	-	5.73	6.75	8.18	9.59	-	12.9	-	-				
		R-407H Nom	kW		-	-	-	3.30	3.76	4.51	-	-	5.96	-	9.24	10.3	12.3	-	-				
		R-448A Nom	kW		3.33	3.82	4.73	3.33	3.82	4.73	5.46	5.76	6.37	7.88	9.45	10.5	12.8	15.85	-				
		R-449A Nom	kW		3.33	3.82	4.73	3.33	3.82	4.73	5.46	5.76	6.37	7.88	9.45	10.5	12.8	15.85	-				
Seasonal energy performance ratio SEPR	Te-10°C	R-134a	kW		1.92	-	-	2.19	-	-	2.08	2.36	2.36	-	-	-	3.10	3.37					
		R-407A	kW		2.18	2.06	-	2.12	1.99	1.92	-	3.48	3.79	3.21	3.19	2.96	3.12	-	-				
		R-407F	kW		1.92	1.83	1.74	1.88	1.83	1.69	-	3.22	3.49	3.07	3.12	-	2.95	-	-				
		R-407H	kW		-	-	-	1.93	2.02	1.80	-	3.15	3.03	-	2.90	2.68	3.24	-	-				
		R-448A	kW		2.02	1.93	1.85	2.02	1.93	1.85	2.72	3.02	3.13	2.97	3.22	2.96	2.88	2.83	-	-			
		R-449A	kW		2.02	1.93	1.85	2.02	1.93	1.85	2.72	3.02	3.13	2.97	3.22	2.96	2.88	2.83	-	-			
Annual electricity consumption Q	Te-10°C	R-134a	kWh/a		-	-	-	-	-	-	-	10,187	10,973	15,848	18,408	22,240	25,491	10,750					
		R-407A	kWh/a		-	-	-	-	-	-	-	10,933	11,873	16,401	18,903	-	26,882	-	-				
		R-407F	kWh/a		-	-	-	-	-	-	-	10,664	12,082	-	19,576	23,664	-	-	-				
		R-407H	kWh/a		-	-	-	-	-	-	-	12,363	11,736	12,512	16,305	18,395	22,298	27,302	34,432				
		R-448A	kWh/a		-	-	-	-	-	-	-	12,363	11,736	12,512	16,305	18,395	22,298	27,302	34,432				
		R-449A	kWh/a		-	-	-	-	-	-	-	12,363	11,736	12,512	16,305	18,395	22,298	27,302	34,432				
Parameters at full load and ambient temp. 25°C	Declared COP (COP2)	R-134a	kW		2.21	-	-	2.62	-	-	-	-	-	-	-	-	-	2.49	2.7				
		R-407A	kW		2.61	2.44	-	2.55	2.36	2.26	-	-	-	-	-	-	-	-	-				
		R-407F	kW		2.46	2.33	2.21	2.39	2.29	2.14	-	-	-	-	-	-	-	-	-				
		R-407H	kW		-	-	-	2.37	2.48	2.21	-	-	-	-	-	-	-	-	-				
		R-448A	kW		2.53	2.32	2.23	2.53	2.32	2.23	-	-	-	-	-	-	-	-	-				
		R-449A	kW		2.53	2.32	2.23	2.53	2.32	2.23	-	-	-	-	-	-	-	-	-				
Parameters at part load and ambient temp. 25°C (Point B)	Declared COP (COPB)	R-134a	kW		-	-	-	-	-	-	2.77	2.90	2.60	2.51	2.37	2.55	-	-					
		R-407A	kW		-	-	-	-	-	-	2.53	2.66	2.36	2.39	-	2.5	-	-					
		R-407F	kW		-	-	-	-	-	-	2.47	2.37	-	2.32	2.17	2.68	-	-					
		R-407H	kW		-	-	-	-	-	-	2.18	2.56	2.51	2.41	2.39	2.18	2.33	2.26	-				
		R-448A	kW		-	-	-	-	-	-	2.18	2.56	2.51	2.41	2.39	2.18	2.33	2.26	-				
		R-449A	kW		-	-	-	-	-	-	2.18	2.56	2.51	2.41	2.39	2.18	2.33	2.26	-				
Parameters at full load and ambient temp. 32°C (Point A)	Rated COP (COPA)	R-134a	kW		1.92	-	-	2.19	-	-	2.08	2.36	2.36	-	-	-	2.2	2.21					
		R-407A	kW		2.18	2.06	-	2.12	1.99	1.92	-	2.24	2.28	2.11	2.05	1.93	2.08	-	-				
		R-407F	kW		1.92	1.83	1.74	1.88	1.83	1.69	-	1.97	2.10	1.88	1.91	-	2.1	-	-				
		R-407H	kW		-	-	-	1.93	2.02	1.80	-	-	1.89	-	1.92	1.78	2.2	-	-				
		R-448A	kW		2.02	1.93	1.85	2.02	1.93	1.85	1.77	2.04	1.98	1.78	1.96	1.79	2.05	1.83	-	-			
		R-449A	kW		2.02	1.93	1.85	2.02	1.93	1.85	1.77	2.04	1.98	1.78	1.96	1.79	2.05	1.83	-	-			
Parameters at full load and ambient temp. 43°C	Declared COP (COP3)	R-134a	kW		1.42	-	-	1.52	-	-	1.09	2.83	3.22	4.43	4.83	5.85	6.23	8.68					
		R-407A	kW		1.31	1.36	1.31	1.31	1.36	1.31	1.26	1.41	1.37	1.24	1.42	1.32	-	-					
		R-407F	kW		1.31	1.36	1.31	1.31	1.36	1.31	1.26	1.41	1.37	1.24	1.42	1.32	-	-					
		R-407H	kW		1.87	-	-	-	-	-	-	3.06	-	-	-	-	7.26	9.46					
		R-448A	kW		2.80	3.35	4.12	2.80	3.35	4.12	4.78	4.99	5.57	6.79	8.29	9.25	-	-					
		R-449A	kW		2.80	3.35	4.12	2.80	3.35	4.12	4.78	4.99	5.57	6.79	8.29	9.25	-	-					
Parameters at part load and ambient temp. 15°C (Point C)	Declared COP (COPC)	R-134a	kW		1.32	-	-	2.02	-	-	3.54	4.08	5.46	5.82	7.00	-	-						
		R-407A	kW		2.14	2.47	3.14	2.14	2.47	3.14	3.78	3.54	4.08	5.46	5.82	7.00	-	-					
		R-407F	kW		2.14	2.47	3.14	2.14	2.47	3.14	3.78	3.54	4.08	5.46	5.82	7.00	-	-					
		R-407H	kW		-	-	-	-	-	-	-	3.71	4.02	3.43	-	-	3.26	3.58					
		R-448A	kW		-	-	-	-	-	-	3.46	3.69	3.24	3.35	3.13	3.14	-	-					
		R-449A	kW		-	-	-	-	-	-	3.34	3.22	-	3.3	-	3.14	-	-					
Parameters at part load and ambient temp. 5°C (Point D)	Declared COP (COPD)	R-134a	kW		-	-	-	-	-	-	3.18	3.34	3.20	3.06	2.84	3.47	-	-					
		R-407A	kW		-	-	-	-	-	-	2.88	3.18	3.34	3.20	3.15	2.85	3.02	3.01					
		R-407F	kW		-	-	-	-	-	-	2.88	3.18	3.34	3.20	3.15	2.85	3.26	3.01					
		R-407H	kW		-	-	-	-	-	-	-	-	-	-	3.15	2.85	3.26	3.01					
		R-448A	kW		-	-	-	-	-	-	4.85	5.41	4.40	-	-	4.25	4.66						
		R-449A	kW		-	-	-	-	-	-	4.48	5.05	4.43	4.49	4.1	4.25	-	-					
Dimensions	Unit	HeightxWidthxDepth	mm		662x1,101x444						872x1,353x575						1,727x1,348x641						
		Weight	kg		70	72	74	70	72	74	74	112	119	123	125	126	222	226					
		Compressor	Type		Reciprocating compressor						Scroll compressor						Reciprocating compressor						
		Piston displacement	m³/h		5.9	6.8	8.6	5.9	6.8	8.6	9.9	9.9	11.4	14.4	17.1	18.8	22.1	29.1					
		Fan	Type		Axial						Axial						Axial						
		Sound pressure level	Nom.		dBa		33	34	36	33	34	36	39	37	37	38	40	40	43	43			
Piping connections	Liquid line connection	inch		3/8"						1/2"						3/4"							
	Suction line connection	inch		3/4"						1 1/8"						1 3/8"							
Refrigerant	Type/GWP	Type		R-134a/1,430	R-407A/2,107	R-407A/1,387	R-134a/1,430	R-407A/2,107	R-407A/1,387	R-407F/1,825	R-407F/1,825	R-134a/1,430.0	R-134a/1,430	R-407A/2,107	R-407A/1,387	R-407F/1,825	R-407F/1,825	R-407H/1,495.0	R-407H/1,387	R-448A/1,387	R-448A/1,387	R-449A/1,397	
	Type 2 - GWP	Type 2		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Type 3 - GWP	Type 3		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Type 4 - GWP	Type 4		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Type 5 - GWP	Type 5		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Type 6 - GWP	Type 6		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50 /230						3~/50 /400													

(1) Refer to condition: Outside ambient temperature = 32°C, Evaporation temperature = -10°C and Return Gas 20°C (medium temperature application) | (2) Average sound pressure level is measured at 10m in anechoic room

# Condensing unit for commercial refrigeration with scroll / reciprocating technology

Refrigeration solution for small food retailers

- › Designed specifically for small capacity refrigeration applications in small food stores (eg. in bakeries and butchers), cold rooms, bottle coolers and display cabinets
- › Compact and lightweight for even the smallest of city centre locations
- › All components can be accessed, making maintenance quick and easy
- › Ideal for urban applications: sound proofing and low operating sound levels mean the unit is quiet
- › The optimised compressor range and increased condenser surface deliver high levels of energy efficiency and reliability is ensured by using high quality components and production processes
- › Micro channel heat exchanger technology reduces the amount of refrigerant used in the system, lowering environmental impact



Low Temperature Refrigeration			JEHCCU-CL1/JEHSCU-CL3	0115CL1	0135CL1	0180CL3	0210CL3	0300CL3	0400CL3	0500CL3	0600CL3	0750CL3	0950CL3 EVI
Refrigerating capacity	Medium temperature (1)	R-407A	Nom	kW									
		R-407F	Nom	kW									
		R-448A	Nom	-	0.98	1.36	1.62	2.53	-	3.49	4.81	4.86	
		R-449A	Nom	-	0.98	1.36	1.62	2.53	-	-	-	4.86	
		R-452A	Nom	0.64	0.81	1.13	1.53	-	-	-	-	-	4.86
Seasonal energy performance ratio SEPR	R-407A	Te -35°C	-										
	R-407F	Te -35°C	-										
	R-448A	Te -35°C	-	1.00	1.00	0.97	1.67	-	1.64	1.64	-	1.76	
	R-449A	Te -35°C	-	1.00	1.00	0.97	1.67	-	1.64	1.64	-	1.76	
	R-452A	Te -35°C	1.05	0.98	1.07	1.05	-	-	-	-	-	1.76	
Annual electricity consumption Q	R-407A	Te -35°C	kWh/a										
	R-407F	Te -35°C	kWh/a										
	R-448A	Te -35°C	-	-	-	-	10,212	12,364	15,026	-	-	20,958	
	R-449A	Te -35°C	-	-	-	-	10,730	13,018	15,878	21,856	-	22,348	
Parameters at full load and ambient temp. 25°C	R-448A	Te -35°C	Declared COP (COP2)	-	1.15	1.09	1.16	-	-	-	-	-	1.51
	R-449A	Te -35°C	Declared COP (COP2)	-	1.15	1.09	1.16	-	-	-	-	-	1.51
	R-452A	Te -35°C	Declared COP (COP2)	1.20	1.15	1.26	1.25	-	-	-	-	-	1.51
Parameters at part load and ambient temp. 25°C (Point B)	R-407A	Te -35°C	Declared COP (COPB)	-	-	-	-	1.24	1.25	1.35	-	-	1.35
	R-407F	Te -35°C	Declared COP (COPB)	-	-	-	-	1.23	1.23	-	-	-	1.35
	R-448A	Te -35°C	Declared COP (COPB)	-	-	-	-	1.30	-	1.29	1.43	1.43	1.42
	R-449A	Te -35°C	Declared COP (COPB)	-	-	-	-	1.30	-	1.29	1.43	1.43	1.42
Parameters at full load and ambient temp. 32°C (Point A)	R-407A	Te -35°C	Rated COP (COPA)	-	-	-	-	0.98	0.97	0.93	-	-	1.08
	R-407F	Te -35°C	Rated COP (COPA)	-	-	-	-	0.95	0.93	-	-	-	1.08
	R-448A	Te -35°C	Rated COP (COPA)	-	1.00	1.00	0.97	1.02	-	0.83	1.18	1.24	1.24
	R-449A	Te -35°C	Rated COP (COPA)	-	1.00	1.00	0.97	1.02	-	0.83	1.18	1.24	1.24
Parameters at full load and ambient temp. 43°C	R-452A	Te -35°C	Rated COP (COPA)	1.05	0.98	1.08	1.05	-	-	-	-	-	1.24
	R-407A	Te -35°C	Rated cooling capacity (PA)	kW									
	R-407F	Te -35°C	Rated cooling capacity (PA)	kW									
	R-448A	Te -35°C	Rated cooling capacity (PA)	-	0.98	1.36	1.62	2.53	-	3.49	4.81	4.86	
	R-449A	Te -35°C	Rated cooling capacity (PA)	-	0.98	1.36	1.62	2.53	-	3.49	4.81	4.86	
	R-452A	Te -35°C	Rated cooling capacity (PA)	0.64	0.81	1.13	1.53	-	-	-	-	-	4.86
	R-407A	Te -35°C	Rated power input (DA)	kW									
	R-407F	Te -35°C	Rated power input (DA)	kW									
	R-448A	Te -35°C	Rated power input (DA)	-	0.98	1.36	1.67	2.48	-	4.19	4.08	3.93	
	R-449A	Te -35°C	Rated power input (DA)	-	0.98	1.36	1.67	2.48	-	4.19	4.08	3.93	
	R-452A	Te -35°C	Rated power input (DA)	0.61	0.83	1.06	1.47	-	-	-	-	-	3.93
	R-407A	Te -35°C	Declared COP (COP3)	-									
	R-407F	Te -35°C	Declared COP (COP3)	-									
	R-448A	Te -35°C	Declared COP (COP3)	-	-	-	-	0.67	0.66	0.64	0.73	-	-
	R-449A	Te -35°C	Declared COP (COP3)	-	-	-	-	0.62	-	0.46	0.81	-	-
	Parameters at part load and ambient temp. 15°C (Point C)	R-452A	Te -35°C	Declared COP (COP3)	0.82	0.71	-	-	0.68	0.68	-	0.46	0.81
R-407A		Te -35°C	Cooling capacity (P3)	kW									
R-407F		Te -35°C	Cooling capacity (P3)	kW									
R-448A		Te -35°C	Cooling capacity (P3)	-	-	-	-	2.01	2.40	2.88	3.79	-	-
R-449A		Te -35°C	Cooling capacity (P3)	-	-	-	-	2.04	-	-	-	-	-
R-452A		Te -35°C	Cooling capacity (P3)	0.49	0.57	-	-	2.23	-	2.82	4.26	-	-
R-407A		Te -35°C	Power input (D3)	kW									
R-407F		Te -35°C	Power input (D3)	kW									
R-448A		Te -35°C	Power input (D3)	-	-	-	-	3.29	-	6.15	5.28	-	-
R-449A		Te -35°C	Power input (D3)	-	-	-	-	3.29	-	6.15	5.28	-	-
R-452A		Te -35°C	Power input (D3)	0.60	0.81	-	-	2.11	3.29	-	6.15	5.28	-
R-407A		Te -35°C	Declared COP (COPC)	-									
R-407F		Te -35°C	Declared COP (COPC)	-									
R-448A		Te -35°C	Declared COP (COPC)	-	-	-	-	1.69	1.69	1.68	-	-	1.74
R-449A		Te -35°C	Declared COP (COPC)	-	-	-	-	1.68	1.69	-	-	-	1.67
Parameters at part load and ambient temp. 5°C (Point D)		R-407A	Te -35°C	Declared COP (COPD)	-	-	-	-	1.75	-	1.78	1.71	1.75
	R-407F	Te -35°C	Declared COP (COPD)	-	-	-	-	1.75	-	1.78	1.71	1.75	
	R-448A	Te -35°C	Declared COP (COPD)	-	-	-	-	2.25	2.25	2.1	-	2.13	
	R-449A	Te -35°C	Declared COP (COPD)	-	-	-	-	2.22	2.2	-	-	1.97	
Dimensions	Unit	HeightxWidthxDepth	mm										
	Weight		kg										
	Compressor	Type	Reciprocating compressor										
Fan	Type		Axial										
	Sound pressure level	Nom.	dB(A)										
Piping connections	Liquid line connection		inch										
	Suction line connection		inch										
Refrigerant	Type/GWP		-										
	Type 2 - GWP Type 2		R-404A/3,921.6	R-404A/3,922	R-448A/1,387	R-448A/1,387	R-404A/3,922	R-404A/3,922	R-404A/3,922	R-404A/3,922	R-404A/3,922	R-404A/3,922	R-404A/3,922
	Type 3 - GWP Type 3		-	R-452A/2,141	R-449A/1,397	R-449A/1,397	R-449A/1,397	R-407A/2,107	R-407A/2,107	R-407A/2,107	R-448A/1,387	R-407F/1,825	R-407F/1,825
	Type 4 - GWP Type 4		-	-	R-452A/2,141	R-452A/2,141	-	-	-	-	-	-	R-448A/1,387
	Type 5 - GWP Type 5		-	-	-	-	-	-	-	-	-	-	R-449A/1,397
Power supply	Phase/Frequency/Voltage		Hz/V										
			1~/50/230										

1) Refer to condition: Outside ambient temperature = 32°C, Evaporation temperature = -35°C and Return Gas 20°C (low temperature application) | 2) Average sound pressure level is measured at 10m in anechoic room | \* Condition with high discharge temperature



# Condensing units with inverter driven compressor

High reliability, low cost and easy installation

- › Power supply 380-400/3N~/50
- › Pressure controlled fan speed controller
- › Crankcase heater
- › Oil separator
- › Power control box with magnetothermic switches + thermal protection + electronic controller
- › Inverter
- › Oil separator + condenser fans speed regulator with pressure probe
- › Liquid receiver with safety valve + liquid line
- › HP + LP pressure switches, Crankcase heater
- › Antivibration eliminators on suction and discharge line
- › Condenser with 6 poles axial fans
- › Condensing unit under nitrogen pressure
- › Muffler on discharge line
- › Residential Soundproofing



- › Electrical box: power control box with thermal protection and capacity regulation
- › Soundproofing: double noise insulation (residential)

		GCI2010B3B1D4R		GCI2020B3B1D4R		GCI2022B3B1D4R		GCI2030B3B1D4R		GCI2040B3B1D4R		GCI3050B3B1D4R		GCI3060B3B1D4R		GCI4120B3B1D4R					
Frame type		2																3		4	
Power supply	V/ph~/Hz	380-400/3N~/50																			
Max absorbed current (70Hz)	A	2.7	3.6	4.1	5.6	7.2	8.4	10.3	13.3												
Max absorbed power (70Hz)	kW	1.3	1.8	2.1	3.0	4.0	4.7	5.8	7.8												
Working temperature	°C	+5 ÷ -20																			
Compressor	Type	Semihhermetic																			
	Brand	Bitzer																			
	Model	2HES-1Y	2FES-2Y	2EES-2Y	2CES-3Y	4EES-4Y	4DES-5Y	4CES-6Y	4PES-12Y												
	Refrigerant	R134a																			
Condenser	Fin pitch	2.1																			
	Fans nr.	1								2											
	Fans ø	450																			
	Model	1ph-6P																			
	Air flow	2,943				2,701				5,850				5,366							
	Noise pressure level at 10 m (50Hz)	33	34	35	35	39	40	41	42												
Connections	Suction	ø mm		16		18		22		22		28		28		35		35			
	Liquid	ø mm		10																	
	Standard liquid receiver	5.7								10				21							
	PED category	1																			
	Unit net weight	kg		160		170		193		195		210		225		230		300			
Cooling capacity	Min./Max. Tev 5°C	Tamb 20°C	kW	2.63/6.01	3.81/8.43	4.65/10.19	6.6/14.04	8.66/17.46	10.65/22.27	12.72/25.72	18.23/34.95										
		Tamb 25°C	kW	2.49/5.68	3.56/7.89	4.37/9.59	6.22/13.23	8.14/16.4	10/20.91	11.95/24.16	17.02/32.63										
		Tamb 30°C	kW	2.34/5.36	3.32/7.35	4.18/9.99	5.84/12.42	7.62/15.35	9.35/19.56	11.18/22.61	15.83/30.35										
		Tamb 35°C	kW	2.2/5.04	3.08/6.82	3.83/8.4	5.47/11.63	7.1/14.31	8.71/18.22	10.42/21.07	14.66/28.11										
		Tamb 40°C	kW	2.07/4.72	2.84/6.28	3.56/7.82	5.09/10.84	6.59/13.28	8.07/16.89	9.66/19.54	13.52/25.91										
		Tamb 45°C	kW	1.93/4.41	2.6/5.76	3.3/7.24	4.72/10.05	6.08/12.26	7.44/15.57	8.91/18.02	12.4/23.77										
	Tev 0°C	Tamb 20°C	kW	2.18/4.99	3.18/7.04	3.9/8.55	5.59/11.89	7.44/15	9/18.84	10.86/21.97	15.72/30.14										
		Tamb 25°C	kW	2.06/4.71	2.97/6.58	3.66/8.03	5.26/11.19	6.98/14.08	8.45/17.69	10.2/20.63	14.66/28.11										
		Tamb 30°C	kW	1.94/4.44	2.76/6.12	3.43/7.52	4.94/10.51	6.53/13.17	7.9/16.54	9.55/19.31	13.62/26.11										
		Tamb 35°C	kW	1.82/4.16	2.56/5.67	3.2/7.02	4.62/9.83	6.09/12.27	7.36/15.39	8.9/17.99	12.59/24.14										
		Tamb 40°C	kW	1.7/3.89	2.36/5.22	2.97/6.52	4.3/9.16	5.65/11.38	6.81/14.25	8.25/16.68	11.58/22.21										
		Tamb 45°C	kW	1.58/3.62	2.16/4.78	2.75/6.03	3.99/8.49	5.21/10.5	6.27/13.13	7.6/15.37	10.6/20.33										
	Tev -5°C	Tamb 20°C	kW	1.79/4.09	2.61/5.79	3.22/7.06	4.66/9.92	6.3/12.69	7.5/15.69	9.14/18.47	13.32/25.55										
		Tamb 25°C	kW	1.69/3.86	2.44/5.4	3.02/6.62	4.38/9.33	5.91/11.91	7.04/14.73	8.58/17.35	12.41/23.8										
		Tamb 30°C	kW	1.59/3.62	2.27/5.02	2.82/6.19	4.11/8.75	5.52/11.14	6.58/13.76	8.03/16.23	11.51/22.06										
		Tamb 35°C	kW	1.48/3.39	2.1/4.64	2.63/5.77	3.85/8.18	5.14/10.37	6.12/12.8	7.48/15.12	10.61/20.35										
		Tamb 40°C	kW	1.38/3.16	1.93/4.27	2.44/5.35	3.58/7.62	4.77/9.61	5.66/11.85	6.93/14.02	9.74/18.67										
		Tamb 45°C	kW	1.28/2.93	1.76/3.91	2.25/4.94	3.32/7.06	4.39/8.86	5.21/10.9	6.39/12.92	8.88/17.03										
	Tev -10°C	Tamb 20°C	kW	1.45/3.31	2.11/4.68	2.62/5.74	3.82/8.13	5.25/10.57	6.14/12.84	7.55/15.26	11.07/21.22										
		Tamb 25°C	kW	1.36/3.11	1.97/4.36	2.45/5.37	3.59/7.65	4.92/9.91	5.76/12.05	7.09/14.34	10.29/19.74										
		Tamb 30°C	kW	1.27/2.91	1.83/4.05	2.29/5.01	3.37/7.17	4.6/9.26	5.38/11.26	6.64/13.42	9.52/18.25										
		Tamb 35°C	kW	1.19/2.72	1.69/3.74	2.13/4.66	3.15/6.7	4.28/8.62	5/10.46	6.18/12.5	8.75/16.78										
		Tamb 40°C	kW	1.1/2.52	1.55/3.43	1.97/4.32	2.93/6.23	3.96/7.98	4.62/9.67	5.73/11.58	8/15.33										
		Tamb 45°C	kW	1.02/2.33	1.42/3.14	1.81/3.98	2.71/5.77	3.64/7.34	4.25/8.88	5.28/10.67	7.26/13.91										
	Tev -20°C	Tamb 20°C	kW	1.15/2.63	1.68/3.71	2.08/4.57	3.08/6.55	4.29/8.66	4.93/10.32	6.12/12.38	8.99/17.24										
		Tamb 25°C	kW	1.08/2.47	1.56/3.45	1.95/4.27	2.89/6.14	4.02/8.11	4.63/9.68	5.75/11.63	8.34/15.99										
		Tamb 30°C	kW	1.01/2.3	1.44/3.2	1.81/3.98	2.7/5.75	3.75/7.57	4.32/9.03	5.38/10.88	7.68/14.73										
		Tamb 35°C	kW	0.93/2.13	1.33/2.95	1.68/3.69	2.52/5.37	3.49/7.03	4.01/8.38	5.01/10.13	7.03/13.48										
		Tamb 40°C	kW	0.86/1.97	1.22/2.7	1.55/3.41	2.34/4.99	3.22/6.49	3.77/7.4	4.64/9.38	6.38/12.23										
		Tamb 45°C	kW	0.79/1.81	1.11/2.46	1.43/3.13	2.17/4.61	2.96/5.96	3.39/7.09	4.27/8.63	5.74/11										
	Tev -15°C	Tamb 20°C	kW	0.92/2.06	1.3/2.89	1.63/3.57	2.43/5.16	3.45/6.96	3.89/8.13	4.87/9.85	7.12/13.66										
		Tamb 25°C	kW	0.84/1.92	1.21/2.67	1.51/3.32	2.27/4.83	3.23/6.5	3.64/7.62	4.58/9.25	6.58/12.62										
		Tamb 30°C	kW	0.78/1.78	1.11/2.47	1.4/3.08	2.12/4.51	3/6.05	3.39/7.1	4.28/8.65	6.02/11.55										
		Tamb 35°C	kW	0.72/1.64	1.02/2.26	1.3/2.84	1.98/4.2	2.78/5.61	3.14/6.57	3.98/8.04	5.46/10.47										
		Tamb 40°C	kW	0.66/1.5	0.93/2.07	1.19/2.61	1.83/3.9	2.56/5.16	2.89/6.04	3.67/7.42	4.9/9.39										
		Tamb 45°C	kW	0.6/1.36	0.85/1.88	1.09/2.38	1.69/3.59	2.34/4.72	2.63/5.51	3.36/6.8	4.34/8.32										

# Condensing units with inverter driven compressor

High reliability, low cost and easy installation

- › Power supply 380-400/3N~/50
- › Pressure controlled fan speed controller
- › Crankcase heater
- › Oil separator
- › Power control box with magnetothermic switches + thermal protection + electronic controller
- › Inverter
- › Oil separator + condenser fans speed regulator with pressure probe
- › Liquid receiver with safety valve + liquid line
- › HP + LP pressure switches, Crankcase heater
- › Antivibration eliminators on suction and discharge line
- › Condenser with 6 poles axial fans
- › Condensing unit under nitrogen pressure
- › Muffler on discharge line
- › Residential Soundproofing



- › Electrical box: power control box with thermal protection and capacity regulation
- › Soundproofing: double noise insulation (residential)

		HCI	HCI2015B2B1D4R	HCI2018B2B1D4R	HCI2020B2B1D4R	HCI2030B2B1D4R	HCI2050B2B1D4R	HCI3060B2B1D4R	HCI4120B2B1D4R	HCI4140B2B1D4R	
		2				3			4		
Frame type											
Power supply	V/ph/Hz	380-400/3N~/50									
Max absorbed current (70Hz)	A	3.0	3.4	4.3	6.0	7.4	10.1	11.8	14.5		
Max absorbed power (70Hz)	kW	1.4	1.7	2.2	3.1	4.2	5.6	6.8	8.5		
Working temperature	°C	-15 ÷ -40									
Compressor	Type	Semihhermetic									
	Brand	Bitzer									
	Model	2GES-2Y	2FES-2Y	2DES-2Y	4FES-3Y	4DES-5Y	4CES-6Y	4PES-12Y	4NES-14Y		
	Refrigerant	R449A									
Condenser	Fin pitch	mm									
	Fans nr.	1			2						
	Fans ø	mm									
	Model	ph/p									
	Air flow	m³/h			2,701			5,366			
	Noise pressure level at 10 m (50Hz)	dB(A)		34		35		36		37	
Connections	Suction	Ø mm		16		22		28		35	
	Liquid	Ø mm		10		12		12		21	
	Standard liquid receiver	lt		2.3		5.7		10		21	
	PED category	2									
	Unit net weight	kg		170		193		208		215	
Cooling capacity	Min./Max. Tev 5°C	Tamb 20°C	kW	2.27/5.1	2.82/6.22	3.88/8.38	5.18/10.71	7.14/14.06	9.3/19.06	12.68/23.34	15.36/28.01
		Tamb 25°C	kW	2.1/4.73	2.61/5.77	3.6/7.77	4.8/9.92	6.6/13	8.63/17.68	11.65/21.44	14.12/25.76
		Tamb 30°C	kW	1.93/4.34	2.4/5.3	3.32/7.17	4.42/9.15	6.08/11.96	7.97/16.33	10.63/19.57	12.9/23.53
		Tamb 35°C	kW	1.76/3.95	2.18/4.82	3.05/6.58	4.06/8.4	5.57/10.96	7.33/15.02	9.63/17.73	11.7/21.33
		Tamb 40°C	kW	1.58/3.56	1.96/4.33	2.78/6	3.71/7.68	5.07/9.98	6.71/13.75	8.65/15.93	10.5/19.16
		Tamb 45°C	kW	1.41/3.16	1.74/3.84	2.51/5.43	3.38/6.98	4.59/9.04	6.11/12.52	7.7/14.17	9.33/17.01
	Tev 0°C	Tamb 20°C	kW	1.82/4.09	2.27/5.02	3.19/6.89	4.31/8.91	6/11.81	7.77/15.92	10.69/19.69	13.02/23.75
		Tamb 25°C	kW	1.68/3.79	2.1/4.64	2.94/6.36	3.98/8.22	5.53/10.88	7.19/14.73	9.79/18.02	11.95/21.79
		Tamb 30°C	kW	1.54/3.47	1.92/4.25	2.71/5.85	3.66/7.56	5.07/9.98	6.62/13.56	8.9/16.38	10.89/19.86
		Tamb 35°C	kW	1.4/3.15	1.74/3.85	2.47/5.34	3.34/6.91	4.63/9.11	6.07/12.43	8.03/14.78	9.84/17.95
		Tamb 40°C	kW	1.25/2.82	1.55/3.43	2.24/4.85	3.04/6.29	4.2/8.27	5.53/11.34	7.18/13.21	8.81/16.06
		Tamb 45°C	kW	1.1/2.48	1.36/3.01	2.02/4.36	2.75/5.69	3.79/7.46	5.02/10.29	6.34/11.68	7.79/14.21
	Tev -5°C	Tamb 20°C	kW	1.43/3.21	1.79/3.96	2.57/5.55	3.52/7.27	4.94/9.73	6.38/13.07	8.83/16.25	10.82/19.73
		Tamb 25°C	kW	1.32/2.97	1.65/3.65	2.37/5.11	3.24/6.69	4.54/8.93	5.88/12.05	8.04/14.81	9.98/18.06
		Tamb 30°C	kW	1.21/2.71	1.51/3.33	2.16/4.68	2.96/6.12	4.14/8.16	5.4/11.05	7.28/13.4	9/16.41
		Tamb 35°C	kW	1.09/2.45	1.36/3	1.97/4.25	2.69/5.57	3.77/7.41	4.93/10.09	6.53/12.02	8.1/14.77
		Tamb 40°C	kW	0.97/2.17	1.2/2.65	1.77/3.83	2.44/5.04	3.4/6.69	4.48/9.17	5.8/10.68	7.22/13.16
		Tamb 45°C	kW	0.84/1.89	1.04/2.29	1.58/3.42	2.19/4.53	3.05/6	4.04/8.28	5.09/9.37	6.35/11.58
	Tev -10°C	Tamb 20°C	kW	1.09/2.45	1.38/3.05	2.02/4.37	2.81/5.81	3.97/7.82	5.12/10.49	7.1/13.06	8.77/16
		Tamb 25°C	kW	1.01/2.27	1.27/2.8	1.85/4.01	2.57/5.32	3.63/7.15	4.7/9.63	6.43/11.84	8/14.59
		Tamb 30°C	kW	0.92/2.06	1.15/2.54	1.69/3.65	2.34/4.84	3.3/6.5	4.3/8.8	5.78/10.64	7.23/13.2
		Tamb 35°C	kW	0.82/1.84	1.03/2.27	1.52/3.29	2.12/4.38	2.98/5.86	3.9/8	5.14/9.47	6.48/11.82
		Tamb 40°C	kW	0.72/1.61	0.9/1.98	1.36/2.93	1.9/3.94	2.67/5.26	3.53/7.23	4.53/8.33	5.74/10.46
		Tamb 45°C	kW	0.61/1.37	0.76/1.67	1.2/2.59	1.7/3.51	2.38/4.68	3.16/6.48	3.92/7.22	5.01/9.13
	Tev -20°C	Tamb 20°C	kW	0.8/1.81	1.02/2.26	1.55/3.34	2.18/4.51	3.1/6.1	4/8.19	5.51/10.15	6.9/12.59
		Tamb 25°C	kW	0.74/1.66	0.94/2.07	1.41/3.04	1.98/4.1	2.81/5.54	3.65/7.48	4.95/9.12	6.25/11.41
		Tamb 30°C	kW	0.67/1.5	0.84/1.86	1.27/2.74	1.79/3.7	2.53/4.99	3.31/6.79	4.41/8.11	5.61/10.24
		Tamb 35°C	kW	0.59/1.32	0.74/1.64	1.13/2.45	1.61/3.32	2.27/4.46	2.99/6.13	3.87/7.13	4.98/9.09
		Tamb 40°C	kW	0.5/1.12	0.63/1.4	1/2.15	1.43/2.96	2.01/3.96	2.68/5.49	3.35/6.17	4.36/7.96
		Tamb 45°C	kW	0.41/0.92	0.51/1.13	0.86/1.86	1.26/2.61	1.77/3.48	2.38/4.88	2.85/5.25	3.75/6.85
	Tev -15°C	Tamb 20°C	kW	0.56/1.26	0.72/1.58	1.13/2.45	1.63/3.36	2.32/4.56	3.16/5	4.09/7.53	5.22/9.51
		Tamb 25°C	kW	0.51/1.14	0.65/1.44	1.02/2.2	1.46/3.03	2.08/4.09	2.72/5.57	3.62/6.67	4.68/8.53
		Tamb 30°C	kW	0.45/1.01	0.58/1.28	0.91/1.96	1.31/2.7	1.85/3.64	2.44/5.01	3.16/5.82	4.14/7.55
		Tamb 35°C	kW	0.38/0.86	0.5/1.1	0.79/1.71	1.16/2.39	1.63/3.2	2.18/4.46	2.72/5	3.61/6.59
		Tamb 40°C	kW	0.31/0.7	0.4/0.89	0.68/1.47	1.01/2.09	1.42/2.79	1.92/3.94	2.28/4.2	3.1/5.65
		Tamb 45°C	kW	0.23/0.52	0.3/0.66	0.57/1.23	0.87/1.8	1.22/2.39	1.68/3.45	1.86/3.43	2.59/4.73



## ZEAS condensing unit for medium and low temperature refrigeration

### Why choose ZEAS?

Whether it is restaurants, supermarkets or event halls – Zeas from Daikin is as individual as the requirements of the industries where it is used.

#### High energy efficiency

- › Daikin DC inverter scroll compressor with economizer technology
- › DC inverter fan technology
- › Eco-design compliant

#### Reliable operation

- › Zeas condensing units are rigorously tested on the assembly line
- › Proven inverter scroll technology
- › Proven onboard innovating economizer technology
- › Anti-corrosion treatment on the housing ensures long life even in extreme conditions

#### BENEFITS

- › **Lower energy bills**  
The use of Daikin proven DC technology results in lower energy bill compared to the use of standard ON/OFF units and even other capacity controller refrigeration units
- › **Our units are future proof**  
Combining Daikin innovating economizer technology with in house DC technology results in very high efficient units allowing us to outperformed the most severe eco-design minimum performance for the coming decades

#### BENEFITS

- › **Optimal food conservation**  
Accurate temperature and humidity control can be easily suited to the requirements for different foods and beverages resulting in less waste of precious products
- › **Longer lifetime expectation of our compressor**  
Less thermal stress on our bearings and motor windings due to the implementation of Daikin High quality DC technology in our compressor
- › **Longer lifetime expectations of our units**  
The use of our innovating economizer technology in our units guarantee that our the compressor always operates within his operating envelop even in the most harvest conditions: excessive superheat at the inlet of the compressor resulting from improper quality of installation on the refrigerated cabinets side
- › **No leaks**  
Each new Daikin designed unit is put on a vibration plate in the factory to be sure that no leak and component damage can occur during transport. Even further, in the assemble line the Zeas unit undergo several leak test
- › **No “dead on arrival”**  
ALL units leaving the factory, have already run at the end of the assembly line
- › **Lower installation cost**  
Due to the use of the onboard economizer technology and the use of the correct low GWP refrigerant we only required the use of smaller pipes compared to other traditional systems, thus also lowered the refrigerant charge of the system





### Small foot print and low weight

- › Extremely compact and space-saving design
- › Easy to install, even in the smallest spaces
- › Indoor installation possible
- › Best surface to capacity ration on the market
- › Low weight thanks to compact design

### Peace of mind

- › Quiet operation, unobtrusive for customers and neighbours
  - High grade sound on panels and compressors
  - Condenser fans designed to limit the noise
  - 4 low noise operation settings including night mode
- › Wide temperature range allows multiple cabinet, freezer and cold room combinations

### Intelligent control

- › Unit can be connected to third party monitoring system
- › Remote control of target evaporation temperature, reset errors and other functions
- › Refrigeration unit can be controlled remotely through a power full interface

### BENEFITS

- › **Only light weight supporting structures are required**
- › **No installation restrictions anymore**  
Our mini Zeas due to his compact design, light weight and very silent operation can be installed everywhere!
- › **No special crane are required**  
The ZEAS units are so compact that it can fit in an elevator


### BENEFITS

- › **Happy neighbours and no installation restrictions anymore**  
The focus on sound criteria during the design of the units results in the most silent unit(s) of the market (till 25 dB(A) @ 10 m free field conditions)

### BENEFITS

- › **Quick installation and commissioning**  
Advanced software solution for easy system configuration and commissioning
- › **Peace of mind**  
Easy monitoring of ZEAS unit by third party Building Management Systems through the use of our Modbus interface

# ZEAS, the smart choice for medium and low temperature refrigeration

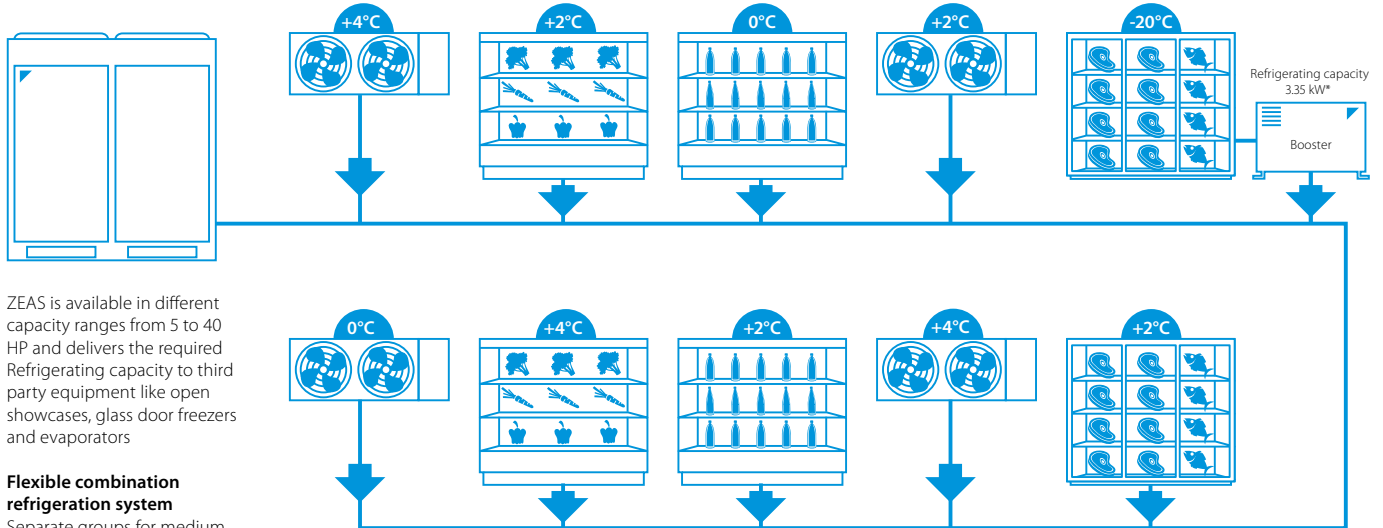

ZEAS is available in different capacity ranges from 5 to 40 HP and delivers the required Refrigerating capacity to third party equipment like open showcases, glass door freezers and evaporators

### Flexible combination refrigeration system

Separate groups for medium and low temperature cooling, each with multiple cabinets and different temperatures. This flexibility and energy savings of up to 50% are only possible with ZEAS-systems.


**Operating range**  
Ambient temperatures: -20°C to +43 °C  
Evaporating temperatures: -45°C to +10°C

\*  $T_e = -35^\circ\text{C}$ ,  $T_c = -10^\circ\text{C}$ , 10 K SH,  $T_{amb} = 32^\circ\text{C}$   
\* Only Zeas. Not applicable for Mini-Zeas and Multi-Zeas

## Why R-410A?

R-410A is a lower GWP refrigerant (less than 2,500) than R404A and is fully F-gas compliant. It's future proof: it can be used even after 2030!


### Use of refrigerant in refrigeration system with a refrigeration lower than 40 kW

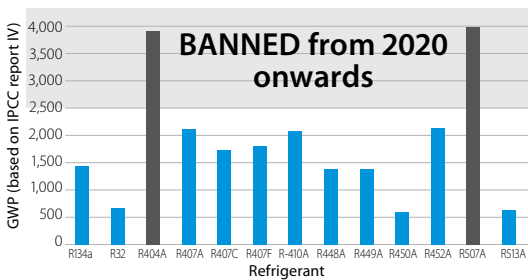

### Contributes to reducing installation cost and refrigerant charge

R-410A is a high pressure refrigerant which for the same swept volume can deliver much more refrigeration capacity than standard mid pressure and low pressure refrigerants.

#### Delivered capacity per used refrigerant

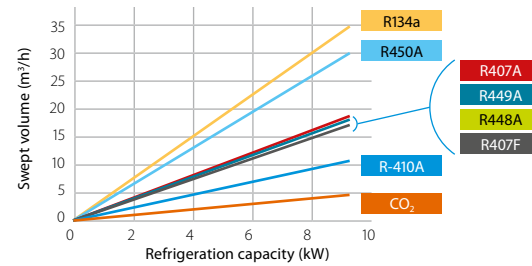


This means that for the same delivered refrigeration capacity we can use smaller components, thus reducing the installation cost and the amount of refrigerant charge in the system!

#### For a capacity of 8.4 kW (Te = -10°C / Tamb = 32°C)

Refrigerant	Suction piping diameter
R134a	1 1/8"
R407A	7/8"
R407F	7/8"
R448A	7/8"
R449A	7/8"
R450A	1 1/4"
R-410A	3/4"
CO <sub>2</sub>	1/2"

#### Refrigerant charge per used refrigerant (Te = -10°C / Tamb = 32°C)



### R-410A is also:

- > an easy to handle, common used refrigerant in the air conditioning world, therefore it is easy to find an installer which can work with this refrigerant, compared to CO<sub>2</sub>, Ammonia and Propane.
- > an A1 refrigerant, therefore no special safety measurements are required.



# Mini-ZEAS condensing unit

## Refrigeration solution for small food retailers

- › Inverter technology guarantees optimal food conservation by ensuring an accurate temperature and humidity control
- › The economized scroll contributes to a longer lifetime expectation of the refrigeration equipment and less maintenance requirement
- › The use of R-410A refrigerant allows the use of smaller piping diameters, thus reducing the refrigerant content in the system helping to lower our CO<sub>2</sub> footprint. R-410A is fully compliant with the latest F-Gas regulation and can be still used after 2020 and beyond
- › The DC economized compressor improves drastically the efficiency of the unit, thus helps lowering the energy bill!
- › Lowest sound level in the market down to 31 dBA. Sound level can be even further reduced thanks to the low noise modes
- › The weight of the unit is very low, therefore the unit can even be mounted on the wall
- › Up to 75% smaller than equivalent products in the market, ideal for those places where space is limited
- › Advanced software solution for easy system configuration and commissioning



More details and final information can be found by scanning or clicking the QR codes.



LRMEQ-BY1



LRLEQ-BY1

Medium Temperature Refrigeration				LRMEQ/LRLEQ	3BY1	4BY1	3BY1	4BY1
Connectable capacity	Minimum~Maximum		%	50~100				
Refrigerating capacity	Low	Nom.	kW	-	-	2.78 (1)	3.62 (1)	
	Medium	Nom.	kW	5.90	8.40	-	-	
Power input	Low	Nom.	kW	-	-	2.60 (1)	3.41 (1)	
	Medium	Nom.	kW	2.53	3.65	-	-	
COP	Medium	Nom.		2.33	2.30	-	-	
Seasonal energy performance ratio SEPR	R-410A	Te -10°C - Te -35°C		4.17	4.08	1.74	1.68	
Annual electricity consumption Q	R-410A	Te -10°C - Te -35°C	kWh/a	8,698	12,651	11,920	16,048	
Parameters at part load and ambient temp. 25°C (Point B)	R-410A	Te -10°C - Te -35°C	Declared COP (COPB)	2.93	2.87	1.26	1.23	
Parameters at full load and ambient temp. 32°C (Point A)	R-410A	Te -10°C	Rated COP (COPA)	2.33	2.30	-	-	
		Te -35°C	Rated COP (COPA)	-	-	1.07	1.06	
		Te -10°C - Te -35°C	Rated cooling capacity (PA)	5.90	8.40	2.78	3.62	
			Rated power input (DA)	2.53	3.65	2.60	3.41	
Parameters at full load and ambient temp. 43°C	R-410A	Te -10°C	Declared COP (COP3)	1.51	1.48	-	-	
		Te -35°C	Declared COP (COP3)	-	-	0.59	0.66	
		Te -10°C - Te -35°C	Cooling capacity (P3)	5.28	7.22	2.13	3.02	
			Power input (D3)	3.50	4.89	3.58	4.57	
Parameters at part load and ambient temp. 15°C (Point C)	R-410A		Declared COP (COPC)	4.12	3.92	1.63		
Parameters at part load and ambient temp. 5°C (Point D)	R-410A		Declared COP (COPD)	5.15	5.20	2.13	1.98	
Dimensions	Unit	HeightxWidthxDepth		mm	1,345x900x320			
Weight	Unit			kg	126		130	
Heat exchanger	Type	Cross fin coil						
Compressor	Type	Hermetically sealed scroll compressor						
	Starting method	Direct on line (inverter driven)						
Fan	Type	Propeller						
	Quantity	2						
Fan motor	Air flow rate Cooling	Nom.	m <sup>3</sup> /min	106				
	Output	70						
	Drive	Direct drive						
Sound pressure level	Nom.			dB(A)	51 (1)		51.0 (2)	
Piping connections	Liquid	OD	mm	9.52				
	Gas	OD	mm	19.1				
Refrigerant	Type/GWP	R-410A/2,087.5						
Refrigerant	Charge			kg/TCO <sub>2</sub> Eq	4.50/9.39		6.90/14.4	
	Control	Electronic expansion valve						
Power supply	Phase/Frequency/Voltage			Hz/V	3N~/50/380-415			

(1) Sound pressure data: measured at 1m in front of unit, at 1.5m height | (2)Cooling: evaporating temp. -35°C; outdoor temp. 32°C; suction SH10°C | Cooling: evaporating temp. -10°C; outdoor temp. 32°C; suction SH10°C

# ZEAS condensing unit for commercial refrigeration with scroll technology

Refrigeration solution for medium to large capacity applications featuring proven VRV technology

- › One model for all applications from -45°C to 10°C evaporating temperature
- › Perfect solution for all cooling and freezing applications with variable load conditions and high energy efficiency requirements. In particular used in supermarkets, cold storage, blast coolers and freezers etc.
- › DC inverter scroll compressor with economiser function results in high energy efficiency and reliable performance
- › Reduced CO<sub>2</sub> emissions thanks to the use of R-410A refrigerant and low energy consumption
- › Factory tested and pre-programmed for quick and easy installation and commissioning
- › VRV (Variable Refrigerant Volume) technology for flexible application range
- › Increased installation flexibility thanks to limited dimensions
- › Low sound level including „night mode“ operation
- › For small freezing capacity, single ZEAS units can be connected to a booster unit
- › Dedicated unit to allow multi combination of 2 x 15 HP or 2 x 20 HP resulting in less pipework or installation time



More details and final information can be found by scanning or clicking the QR codes.



LREQ-BY1

				LREQ-BY1		5	6	8	10	12	15	20			
Refrigerating capacity	Low temperature	Nom.	kW	5.51 (1)	6.51 (1)	8.33 (1)	10.0 (1)	10.7 (1)	13.9 (1)	15.4 (1)					
	Medium temperature	Nom.	kW	12.5 (2)	15.2 (2)	19.8 (2)	23.8 (2)	26.5 (2)	33.9 (2)	37.9 (2)					
Power input	Low temperature	Nom.	kW	4.65 (1)	5.88 (1)	7.72 (1)	9.27 (1)	9.89 (1)	12.8 (1)	14.1 (1)					
	Medium temperature	Nom.	kW	5.10 (2)	6.56 (2)	8.76 (2)	10.6 (2)	12.0 (2)	15.2 (2)	17.0 (2)					
Seasonal energy performance ratio SEPR	R-410A	Te -10°C		3.86	3.79	3.64	3.42	3.51	3.38	3.23					
		Te -35°C		1.80	1.77	1.84	1.88	1.80	1.70	1.70					
Annual electricity consumption Q	R-410A	Te -10°C	kWh/a	19,907	24,681	33,483	42,794	46,377	61,683	72,030					
		Te -35°C	kWh/a	22,805	27,453	33,817	39,747	44,363	61,090	67,325					
Parameters at full load and ambient temp. 32°C (Point A)	R-410A	Te -10°C	Rated COP (COPA)	2.45	2.32	2.26	2.25	2.21		2.23					
		Te -35°C	Rated COP (COPA)	1.18	1.11		1.08			1.09					
Parameters at full load and ambient temp. 43°C	R-410A	Te -10°C	Declared COP (COP3)	1.54	1.57	1.40	1.46	1.47		1.46	1.51				
		Te -35°C	Declared COP (COP3)	0.76	0.74	0.68	0.70		0.71		0.74				
Dimensions	Unit	Height	mm					1,680							
		Width	mm	635				930	1,240						
		Depth	mm					765							
Weight	Unit		kg	166				242	331						
Heat exchanger	Type	Cross fin coil													
Compressor	Type	Hermetically sealed scroll compressor													
Compressor 1	Output		W	2,600	3,200	2,100	3,000	3,400	2,600	3,400					
	Piston displacement		m <sup>3</sup> /h	11.18	13.85	19.68	23.36	25.27	32.24	35.8					
Compressor 2	Speed		rpm	5,280	6,540	4,320	6,060	6,960	5,280	6,960					
	Starting method	Direct on line (inverter driven)													
Compressor 3	Output		W	-	-	-	-	-	-	3,600					
	Speed		rpm	-	-	-	-	-	-	2,900					
Fan	Type	Propeller fan													
	Quantity	1													
Fan motor	Air flow rate	Cooling	Nom.	m <sup>3</sup> /min	95	102	171	179	191	230	240				
	Output		W		350		750		350	750					
Fan motor 2	Drive	Direct drive													
	Output		W		-		-		350	750					
Sound pressure level	Nom.		dBA	55.0 (3)	56.0 (3)	57.0 (3)	59.0 (3)	61.0 (3)	62.0 (3)	63.0 (3)					
Operation range	Evaporator	Cooling	Max.-Min.	°CDB	10~-45										
	Refrigerant	Type / GWP	R-410A / 2,087.5												
Charge			kg		5.2		7.9		11.5						
	Control		TCO <sub>2</sub> eq		10.9		16.5		24.0						
Power supply	Phase/Frequency/Voltage		Hz/V	Electronic expansion valve											
				3~/50/380-415											
				LREQ-BY1				30				40			
System	Outdoor unit module 1	LREQ15BY1R													
	Outdoor unit module 2	LREQ20BY1R													
Refrigerating capacity	Medium temperature	Nom.	kW	67.8 (1)				75.8 (1)							
	Low temperature	Nom.	kW	27.8				29.6							
Power input	Medium temperature	Nom.	kW	30.4				34.0							
	Low temperature	Nom.	kW	25.6				27.6							
Sound pressure level	Nom.		dBA	65.0				66.0							
Piping connections	Liquid	ø 19.05													
	Gas	ø 41.28													

(1) Cooling: evaporating temp. -10°C; outdoor temp. 32°C; suction SH10°C (2) Cooling: evaporating temp. -35°C; outdoor temp. 32°C; suction SH10°C (3) Sound pressure data: measured at 1m in front of unit, at 1.5m height | RLA is based on following conditions: outdoor temp. 32°CDB; suction SH 10°C; saturated temperature equivalent to suction pressure -10°C



CO<sub>2</sub> Condensing units



# CO<sub>2</sub> ZEAS refrigeration condensing unit

Refrigeration solution for various application featuring award winning swing technology with heat recovery to water possibility

- › Condensing units ideal for commercial and industrial applications with variable cooling capacity
- › Compressor controlled by inverter
- › Daikin swing compressor
- › Suitable for outdoor use in different climatic conditions
- › Wide range of capacities



CO<sub>2</sub> ZEAS 8-10-12 HP

More details and final information can be found by scanning or clicking the QR codes.



LREN-A

Low Temperature Refrigeration, Medium Temperature Refrigeration, Heat Recovery			LREN	8AY1	10AY1	12AY1	12AY1+LRNUN5AY1
Refrigerating capacity	Low temperature	Nom.	kW	11.2 (1)	13.5 (1)	15.5 (1)	17.3 (1)
	Medium temperature	Nom.	kW	19.8 (2)	23.1 (2)	26.3 (2)	31.7(2)
Power input	Low temperature	Nom.	kW	11.6 (1)	14.1 (1)	16.9 (1)	18.6 (1)
	Medium temperature	Nom.	kW	10.7 (2)	13.2 (2)	15.5 (2)	20.1 (2)
COP	Medium temperature	Nom.		1.86 (2)	1.75 (2)	1.69 (2)	1.58 (2)
Dimensions	Unit	HeightxWidthxDepth	mm	1,680x1,930x765			-
Weight	Unit		kg	547			-
Heat exchanger	Type			Cross fin coil (waffle louver fins and Hi-X tubes)			-
Compressor	Type			Hermetically sealed swing compressor			-
	Output		W	4,600.0			-
	Piston displacement		m <sup>3</sup> /h	6.16			-
	Starting method			Direct on line (inverter driven)			-
Fan	Type			Propeller fan			-
	Quantity			3			-
	Air flow rate	Cooling Nom.	m <sup>3</sup> /min	285 (3)		315 (3)	-
Fan motor	Output		W	750			-
	Drive			Direct drive			-
Sound pressure level	Nom.		dBA	61.0 (5)	62.0 (5)	64.0 (5)	65.0 (4)
	Low noise mode 1		dBA	59.0 (4)	59.0 (4)	61.0 (4)	
	Low noise mode 2		dBA	53.0 (4)	54.0 (4)	56.0 (4)	
Piping connections	Liquid	OD	mm	15.9			
	Gas	OD	mm	22.2			
Refrigerant	Type/GWP			R744 (CO2)/1.0			
	Charge		kg	0.00 (4)			
	Control			Electronic expansion valve			
Power supply	Phase/Frequency/Voltage		Hz/V	3N~/50/380-415			

(1)Rated conditions: saturation temperature equivalent to suction pressure: -35°C (LT),outdoor temp. 32°C, Suction SH 10K | (2)Rated conditions: saturation temperature equivalent to suction pressure: -10°C (MT), outdoor temp. 32°C, Suction SH 10K | (3)Outdoor Unit Total Airflow | (4)The unit is not pre-charged. A minimal rest charge is present related to factory quality inspection | (5)Sound pressure data: measured at 1m in front of unit, at 1.5m height. Nominal operation condition – Medium evaporation temperature (MT) | Minimum load of each individual refrigeration indoor unit: 3 kW (for Medium Temperature Operation) | Minimum load of each individual refrigeration indoor unit: 2 kW (for Low Temperature Operation). | Every compressor equipped with 1 accumulator of 0.909 liters. | Compressor 1 | Compressor 2 | Compressor 3 | Factory charge of unit | For MT (Medium Temperature) Operation | For LT (Low Temperature) Operation | Compressor 1: 2Y190CPCY1P#C, Compressor 2: 2Y190CPCY1P#C, Compressor 3: 2Y190CPDY1P#C | Only K65 (or equivalent) with D.P. 90 bar is allowed to use for refrigeration piping. | For all the LRNUN5A7Y1 specifications, please refer to the related MDM drawing



# Hubbard Condensing units with CO<sub>2</sub> refrigerant



- › Transcritical CO<sub>2</sub> Commercial Condensing Units for food retailers
- › Wide range of capacities: 2 to 10HP MT
- › Designed for quiet and energy-saving operation
- › Inverter technology reduces energy consumption by up to 30%
- › EC fans work efficiently and quietly
- › Easy and flexible installation
- › Designed as plug & play solutions



F-Gas Free



Protective Case



Plug&Play



Switchboard



Proportional Modulation



Electronic Control

More details and final information can be found by scanning or clicking the QR codes.



GCU-PXB1

Medium Temperature			GCU 2020 PXB1	GCU 2040 PXB1	GCU 4070PXB1
Capacity *		HP	2	4	10
	Min.	kW	1.80	3.25	6.25
	Max.		3.39	6.50	12.54
Power & Energy EcoDesign (2009/125/EC)		Ph./Hz./VAC	3PH/50Hz/400VAC		
	FLC	A	8.64	16.04	18.25
	COP/SEPR	kWh/a	1.87/3.57 SEPR	3.24 SEPR	2.92 SEPR
Compressor	Compression		2 Stage (Intercooler)		
	Type		Panasonic Hermetic Rotary		
	Cap Ctrl.		ABB Frequency Inverter		
	RPM		2,200 ~ 4,200	2,200 ~ 4,800	1,800 ~ 3,600
	Qty.		1		
	Oil		DAPHNE PZ68S		
Gas cooler fans	Type		0.7	1.15	1.80
	Qty.		Ebmpapst EC		
		m <sup>3</sup> /s	1		
Sound pressure (10 m)		mm	1.05		
		dB(A)	40.0	45.0	48.0
Refrigerant	Type/GWP		R744/1		
Receiver volume		l	12.50		20.00
Standard pipe run		m	25	35	40
Liquid connections	Inch/Type		3/8"/K65		
Suction connections	Inch/Type		1/2"/K65		
Oil separator	Standard		no		
Oil level control	Standard		yes/Turboil Cappillary		
Dimensions	Unit L x D x H	mm	1,452x574x799		
Surface area		m <sup>2</sup>	0.83		
Weight		kg	151	155	285
Colour	RAL		Light Grey RAL 7035 (Powder Coated & Baked)		
Controller	Type		CAREL pRack pR300 Electronic Controller		
High side PRV		Bar	N/A		
Intermediate PRV		Bar	90		
Compressor HP Switch	Standard		Yes x1		
PED 2014/68/EU	Category		Cat. III		

\* Nominal Tevap. -10°C | Tamb +32°C | 10K Superheat



# Hubbard Condensing units with CO<sub>2</sub> refrigerant



- › Transcritical CO<sub>2</sub> Commercial Condensing Units for food retailers
- › Wide range of capacities: 4 to 10HP LT
- › Designed for quiet and energy-saving operation
- › Inverter technology reduces energy consumption by up to 30%
- › EC fans work efficiently and quietly
- › Easy and flexible installation
- › Designed as plug & play solutions



F-Gas Free



Protective Case



Plug&Play



Switchboard



Proportional Modulation



Electronic Control

More details and final information can be found by scanning or clicking the QR codes.



HCU-PXB1

Low Temperature				HCU2040PXB1		HCU4070PXB1	
Capacity *		HP		4HP		10HP	
	Min.	kW		1.7		3.3	
	Max.			3.03		6.56	
Power & Energy EcoDesign (2009/125/EC)		Ph./Hz./VAC		3PH/50Hz/400VAC			
	FLC	A		16.04		18.25	
	COP/SEPR			1.5		1.55	
Compressor	Compression			2 Stage (Intercooler)			
	Type			Panasonic Hermetic Rotary			
	Cap Ctrl.			ABB Frequency Inverter			
	RPM			2,700 to 4,800		1,800 to 3,600	
	Qty.					1	
Gas cooler fans	Oil			Daphne PZ685			
	Type			1.15		2.3	
	Qty.					Ebmpapst EC	
Sound pressure (10 m)		m <sup>3</sup> /s		1.05		2.1	
	Ø (dia.)	mm				450	
		dB(A)		45		48	
Refrigerant	Type/GWP			R744/1			
Receiver volume		l		12.5		20	
Standard pipe run		m		35		40	
Liquid connections	Inch/Type			3/8" (K65)			1/2" (K65)
Suction connections	Inch/Type					1/2" (K65)	
Oil separator	Standard			Yes/Turbooil			
Oil level control	Standard			Capillary			
Dimensions	Unit	L x D x H	mm	1,452x574x799		1,684x773x1,438	
Surface area			m <sup>2</sup>	0.83		1.29	
Weight			kg	161		300	
Colour	RAL			Light Grey RAL7035 (Powder Coated & Baked)			
Controller	Type			CAREL pRack pR300 Electronic Controller & Ultracap			
High side PRV			Bar			120	
Intermediate PRV			Bar	90		80	
Compressor HP Switch	Standard					Yes x1	
PED 2014/68/EU	Category					Cat. III	

\* Nominal Tevap -35°C | Tamb +32°C | 10K Superheat

# Compact CO<sub>2</sub> transcritical


Compact compressor racks fully equipped with gas cooler (CO<sub>2</sub>) to generate cold both with CO<sub>2</sub> transcritical cycle

- › Double V battery (NV58 only).
- › Greater exchange surface that allows a lower refrigerant flow and charge.
- › A battery can act as an evaporator in case of heat demand and when cold generation is not required (optional rhx plus nv58).
- › Electrical panel with controller and disconnect switch with external control.
- › NV58 drivable EC fans.
- › Reduced footprint.
- › EPOXY resin treatment option for battery protection.
- › Two independent modules to contain the compressors and the gas cooler
- › Condenser with 5 mm tubes (high performance) and with low refrigerant charge.
- › VF on the first compressor of each group.
- › Gas cooler with EC fans and maximum pressure of 120 bar.
- › Optional: up to 1 exchanger (RHX or IHX).
- › It covers refrigeration services in one or two temperatures, working as a booster.
- › Design pressures:
  - MP (MT Suction): 52 bar.
  - LP (LT Suction): 30 bar.
  - IP (Receiv. and liquid line): 70 bar.
  - HP (Discharge): 120 bar.




	1 to 2 piston compressors		Low noise level [Optional]
	1 to 3 scroll compressors		Electrical panel
	Axial/Radial AC/EC versions		Electronic control [Optional]
	Outdoor unit [Axial]		Proportional Modul. [Optional]

## FNV42

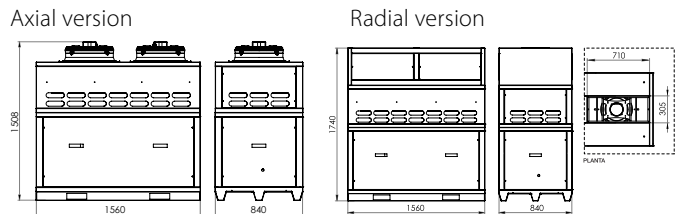

## FNV58

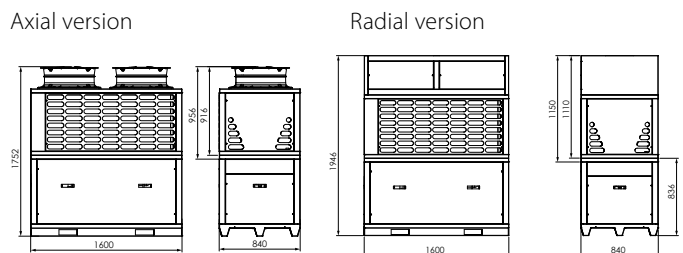

NV42 CO <sub>2</sub>				
Application		MT	MT + LT	
Cooling capacity	kW	12 kW	12 + 4 kW	18 + 4 kW
Number of compressors	nº	1	1 + 1	1 + 1
Inverter compressors	nº	1	1 + 0	1 + 0
Extra Equipment	Tipo	RHX	RHX	RHX
Recovery (max)	kW	13 kW	13 kW	13 kW

NV58 CO <sub>2</sub>					
Application		MT		MT + LT	
Cooling capacity	kW	32 kW	36 kW	28 + 4 kW	32 + 4 kW
Number of compressors	nº	1	2	1 + 1	2 + 1
Inverter compressors	nº	1	1	1 + 0	1 + 0
Extra Equipment	Tipo	RHX	RHX	RHX	RHX
Recovery (max)	kW	23 kW	25 kW	23 kW	25 kW

\* Calculation conditions: Tev MT -8°C, Tev LT -32°C, Tsgc +35°C.

# Compact CO<sub>2</sub> transcritical

Compact compressor racks fully equipped for cold generation with CO<sub>2</sub> in transcritical cycle

- › Double V battery.
- › Greater exchange surface, that allows a lower refrigerant flow and charge.
- › Possibility of installing a heat recovery unit.
- › Electrical panel with controller and disconnect switch with external control.
- › Two independent modules to contain the compressors and the gas cooler.
- › NV58 drivable EC fans.
- › EPOXY resin treatment option for battery protection.
- › Complete solution.
- › Plug & Play.
- › Indoor & outdoor.
- › Gas Cooler included.
- › 360° access.
- › Compact equipment.
- › Soundproofing.
- › Selectable electronic brand.
- › Condenser with 5 mm tubes (high performance) and with low refrigerant charge.
- › Optional: proportional compressor.




Selectable electronic brand

NOVA66: 360° accessibility

## AXIAL VERSION NV66

- Fans**  
› 3x Ø500 mm
- Air flow**  
› 24,000 m<sup>3</sup>/h
- Sound pressure at 10 m**  
› 46 up to 57 dB(A)

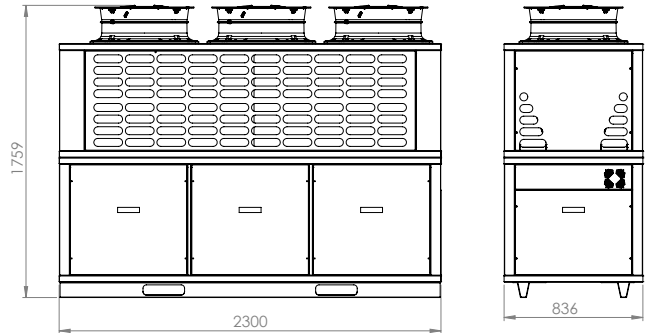

RHX



PS 120 / 70 / 52 / 30 Bar



Plug & Play




Emergency unit



Compact design

## RADIAL VERSION NV66

- Fans**  
› 3x Ø500 mm
- Air flow**  
› 22,500 m<sup>3</sup>/h
- Available pressure**  
› 100 Pa
- Sound pressure at 10 m**  
› 50 up to 56 dB(A)

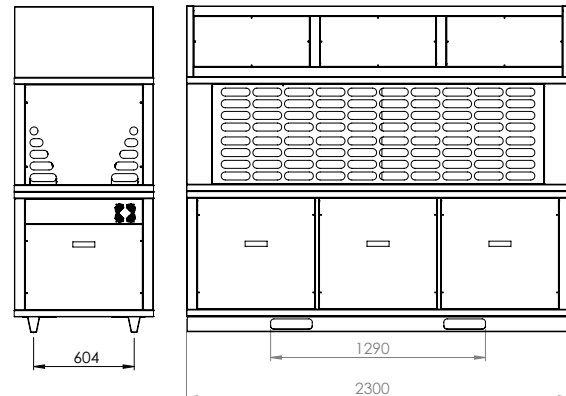

NV66 CO <sub>2</sub>		MT		MT + CP	
Application					
Cooling capacity	kW	44 kW	54 kW	63 kW	40 + 4 kW
Number of compressors	nº	2	3	2 + 1	2 + 1
Inverter compressors	nº	1	1	1 + 1	1 + 0 (opt.)
Extra equipment	Tipo	IHX / RHX	IHX / RHX	IHX / RHX	IHX / RHX
Recovery (max)	kW	30 kW	38 kW	40 kW	30 kW

\* Calculation conditions: T<sub>ev</sub> MT -8°C, T<sub>ev</sub> LT -32°C, T<sub>sgc</sub> +35°C.

# Compact transcritical CO<sub>2</sub> compressor racks

Compact compressor racks fully equipped for cold generation with CO<sub>2</sub> in transcritical cycle


- › Double V battery with great exchange surface and lower flow rate required.
- › Two independent modules to contain the compressors and the gas cooler.
- › 360° accessible.
- › Up to 5 compressors.
- › 3 air outlet configurations.
- › Electrical panel with controller.
- › Multiple possibilities of loading and transportation.
- › Complete solution.
- › Plug & Play.
- › Indoor & outdoor.
- › Gas Cooler included.
- › 360° access.
- › Compact equipment.
- › Soundproofing.
- › Selectable electronic brand.
- › Parallel compressor (option).
- › Oil separator accumulator.
- › 90 l liquid receiver with internal exchanger for connection to the emergency unit.
- › Two electronic refrigerant level sensors (high and low level).
- › Emergency unit on board.
- › Parallel compressor (option).
- › Copper pipes and connections.
- › Frequency inverter for the first MT compressor and optional for the LT compressor.
- › Selectable electronic brands: Tewis (EWCM9000pro), Danfoss (AK-PC 772) or Carel (pRack PR300T).
- › Axial/radial fans option.
- › RHX option.
- › Design pressures:
  - MP (MT Suction): 52 bar.
  - LP (LT Suction): 30 bar.
  - IP (Receiver and liquid line): 70 bar.
  - HP (Discharge): 120 bar.




Selectable electronic brand



## RADIAL VERSION

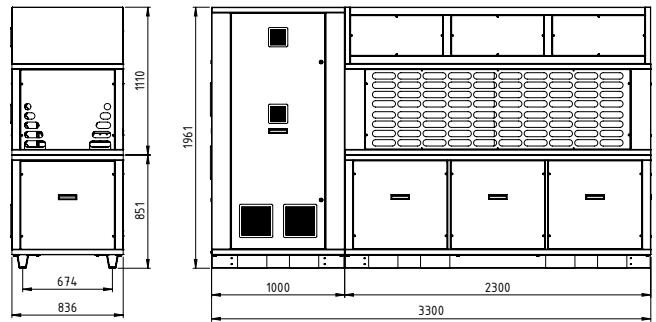

## AXIAL VERSION

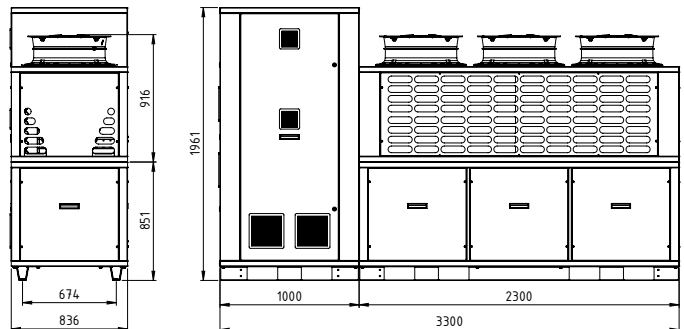

RHX



Emergency unit



PS 120 / 70 / 52 / 30 Bar




Compact design



Plug & Play

	GNV66**291YBX	GNV66**045YBX	TNV66**951YBX	TNV66**921YBX	TNV66**170YBX	TNV66**042YBX	TNV66**301YBX	TNV66**965YBX	TNV66**767YBX
Application	MT			MT + LT					
Compressor	Bitzer								
Capacity MT*	47.37	70.05	43.44	49.33	66.12	46.52	63.31	28.42	Dorin 37.27
Capacity LT*	-	-	3.9	3.9	3.9	6.68	6.68	6.68	7.27
MT compressors	1x 4JTC-15K (V.F.) + 1x 4HTC-15K	1x 4JTC-15K (V.F.) + 2x 4HTC-15K	1x 4JTC-15K (V.F.) + 1x 4HTC-15K	1x 4MTC-10K (V.F.) + 2x 4KTC-10K	1x 4JTC-15K (V.F.) + 2x 4HTC-15K	1x 4MTC-10K (V.F.) + 2x 4KTC-10K	1x 4JTC-15K (V.F.) + 2x 4HTC-15K	1x 4MTC-10K (V.F.) + 1x 4KTC-10K	1x CD4120-9.2H (V.F.) + 1x CD490-9.2M
LT compressors	-	-	1x 2MSL-07K	1x 2MSL-07K	1x 2MSL-07K	2x 2MSL-07K	2x 2MSL-07K	2x 2MSL-07K	2x CDS101B
	TNV66**919YBX	TNV66**762YBX	TNV66**768YBX	TNV66**310YBX	TNV66**322YBX	TNV66**966YBX	TNV66**769YBX	TNV66**775YBX	TNV66**323YBX
Application	MT + LT								
Compressor	Bitzer		Dorin		Bitzer		Dorin		Bitzer
Capacity MT*	44.96	26.44	34.8	42.09	58.88	23.99	30.85	41	55.82
Capacity LT*	8.26	9.68	9.68	11.1	11.1	11.1	13.54	13.54	14.16
MT compressors	1x 4MTC-10K (V.F.) + 2x 4KTC-10K	1x CD490-6.4H (V.F.) + 1x CD490-9.2M	1x CD4120-9.2H (V.F.) + 1x CD490-9.2M	1x 4MTC-10K (V.F.) + 2x 4KTC-10K	1x 4JTC-15K (V.F.) + 2x 4HTC-15K	1x 4MTC-10K (V.F.) + 1x 4KTC-10K	1x CD4120-9.2H (V.F.) + 1x CD490-9.2M	1x CD490-6.4H (V.F.) + 2x CD490-9.2M	1x 4JTC-15K (V.F.) + 2x 4HTC-15K
LT compressors	1x 2JSL-2K	2x CDS151B	2x CDS151B	2x 2KSL-1K	2x 2KSL-1K	2x 2KSL-1K	2x CDS181B	2x CDS181B	2x 2JSL-2K

\* Calculation conditions: Tev MT -8°C, Tev LT -32°C, Tsqc +35°C.

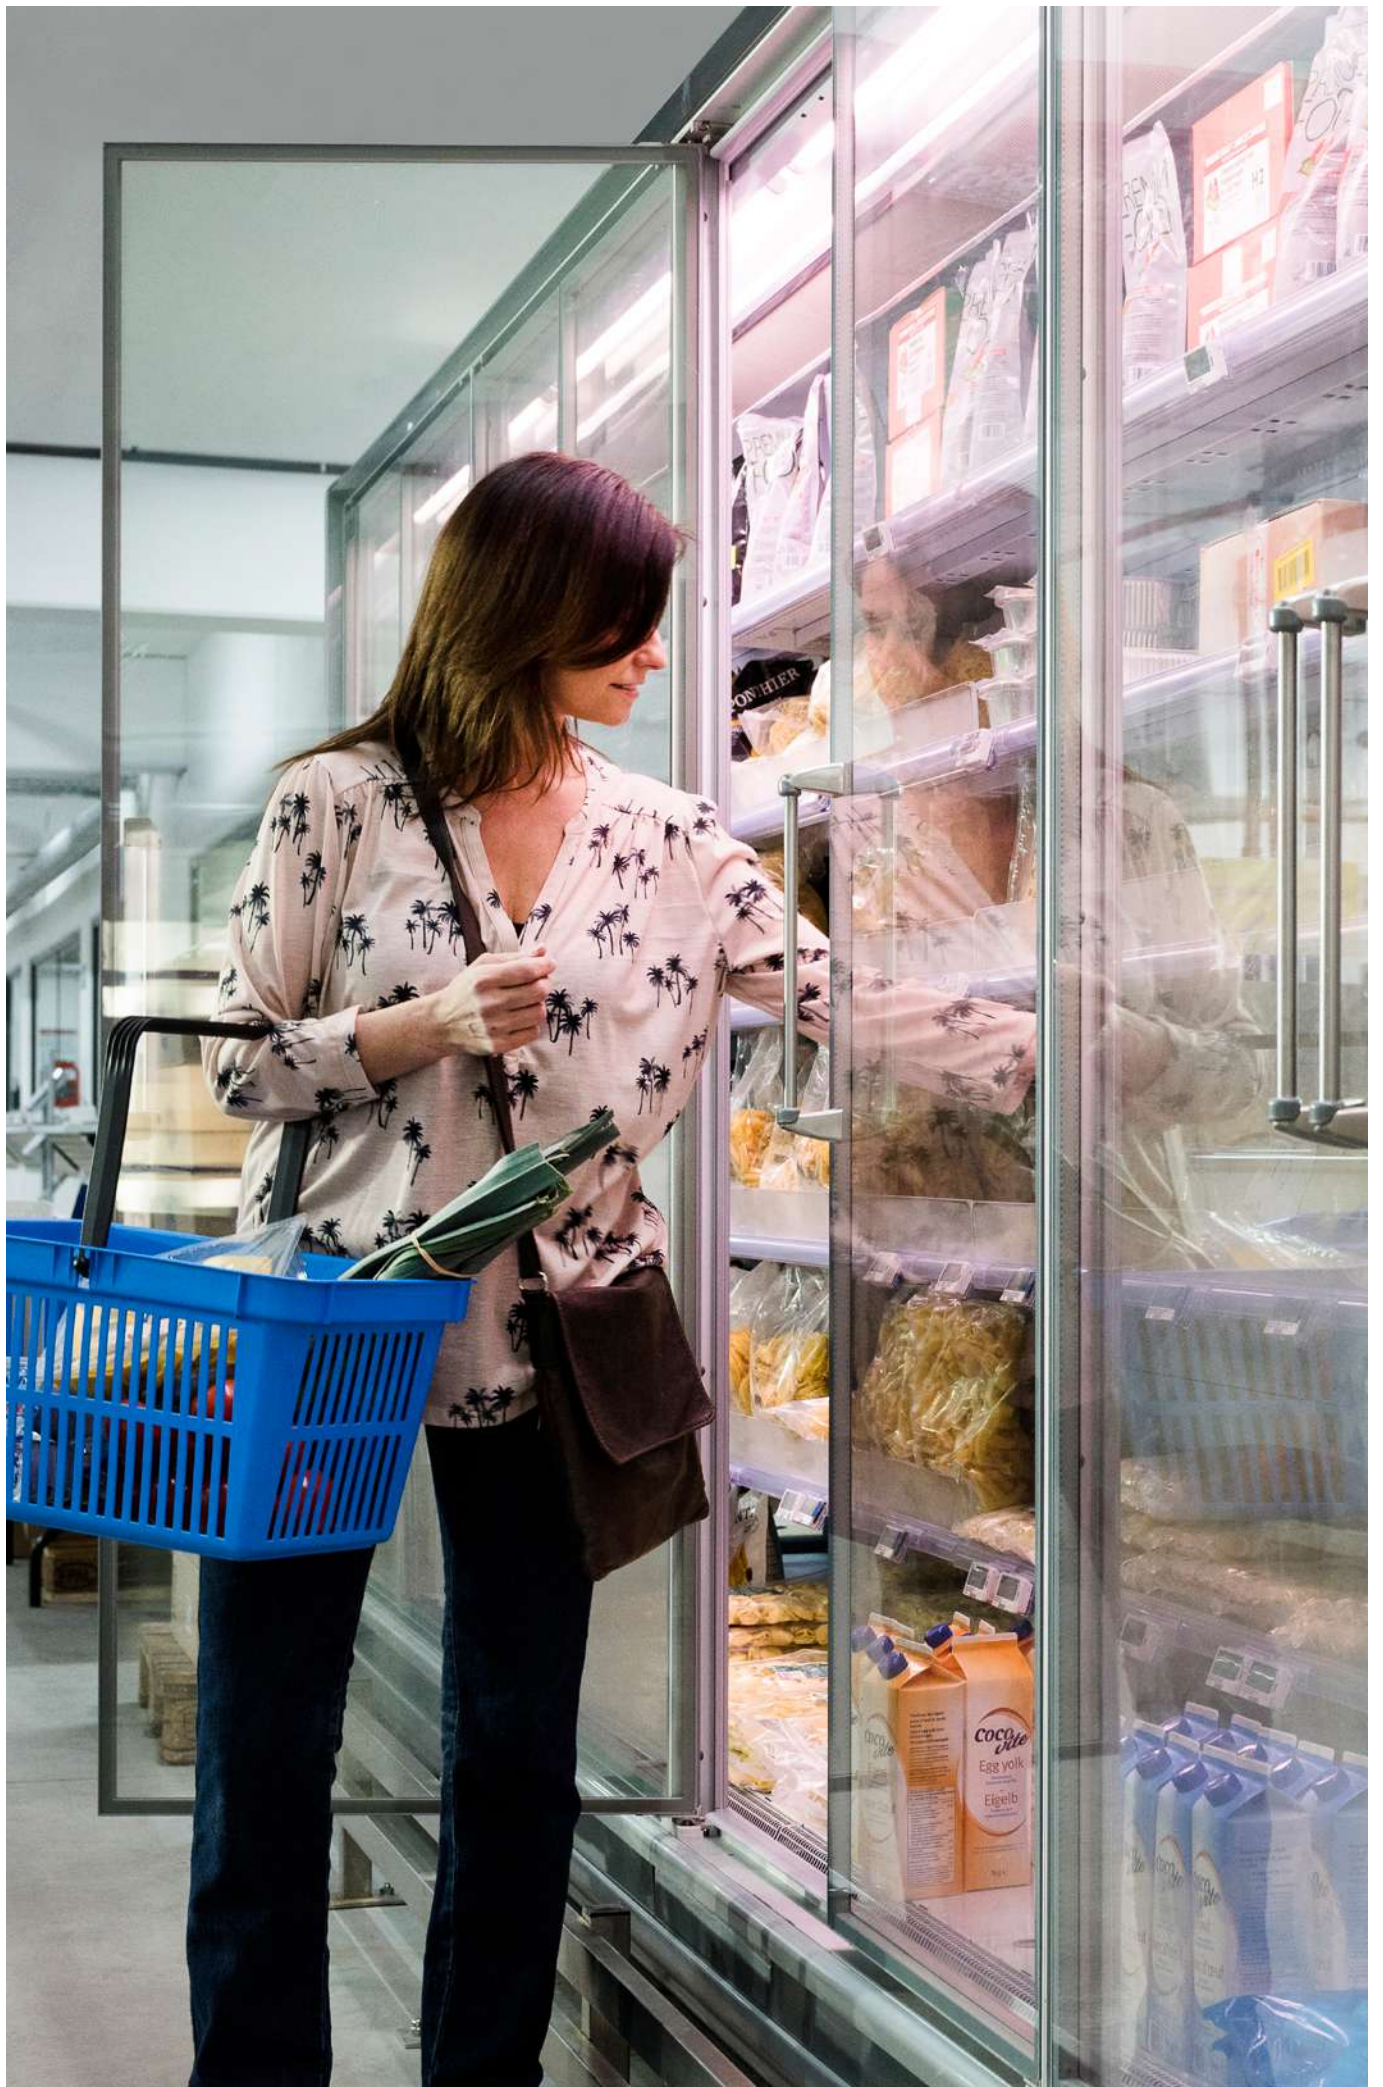



# Multi-compressor packs and racks

# Compressor packs & racks



## Multi compressor units

### Standard configuration

#### Basic frame version:

- › Basic frame made from folded and painted steel sheet, screwed with bolts to make a basic structure to fix the components on it

#### Basic refrigeration system:

- › Each compressor is fitted with shut-off valves on suction line and discharge line
- › The compressors are fixed to the frame through rubber anti vibration supports
- › The oil system is through a oil separator, oil equalization is through a header fitted in the compressors oil sight glasses
- › According to the number of compressors fitted, there are one or two oil level indicators, fitted into the equalization header
- › The refrigerating system is equipped with liquid receiver, if the receiver is more than one, the installation is made in parallel with a safety valve; a dehydration cartridge filter, interchangeable, liquid level alarm, liquid sight glass and shut off valves
- › On suction line there is a mechanical cartridge filter, interchangeable



### Options and accessories:

- › Mechanical oil equalization system
- › Electronic oil distribution system
- › Closed frame
- › Closed frame with simple sound proofing material
- › Closed frame with double layer sound proofing material
- › Anti-vibration supports
- › Oversized liquid receiver
- › Different voltage and/or frequency
- › EWCM 4180 Electronic card
- › XC1000D-EWCM9100 Electronic card

### Standard features

- › Metal open frame with electrical switchboard
- › Compressor parallel with discharge and suction header
- › Liquid receiver
- › Liquid line
- › High and low pressure switch
- › Electrical switchboard complete with electronic control

### Single Screw compressor

The single screw compressor consists of a main single screw and two gate rotors. They are designed for high capacities and optimal performances through the step less capacity control.








# Compact CO<sub>2</sub> mini compressor racks

Mini compact compressor racks with less than 1 m<sup>2</sup> footprint, highly competitive, with CO<sub>2</sub> in transcritical cycle for cold generation

- › Highly accessible front opening door with hinges.
- › Lateral practicable door.
- › Vertical liquid receiver with exchanger prepared for connection to the emergency unit.
- › Practicable electrical panel with controller and complete wiring.
- › Compatible with Tewis remote management systems.
- › Adapted design for proper loading and transportation.
- › Up to 2 MT compressors and 1 LT compressor.
- › 360° access for easy maintenance.
- › Oil separator accumulator.
- › Two refrigerant level electronic sensors (high and low level).
- › Frequency inverter for the first MT compressor and optional for the LT compressor.
- › Optional frame for outdoor use.
- › 48l liquid receiver, with internal exchanger for connection to the emergency unit.
- › Optional connection to an external RHX. RHX can be installed on MT models.
- › Emergency unit not included (junctions included). Required power: 280 W @R134a Tev +5°C.
- › Selectable electronic brands: Tewis (EWCM9000pro), Danfoss (AK-PC 772) or Carel (pRack PR300T Medium).
- › Bitzer & Dorin compressors.
- › Design pressures:
  - MP (MT suction): 52 bar.
  - LP (LT suction): 30 bar.
  - IP (Receiver and liquid line): 70 bar.
  - HP (Discharge): 120 bar.

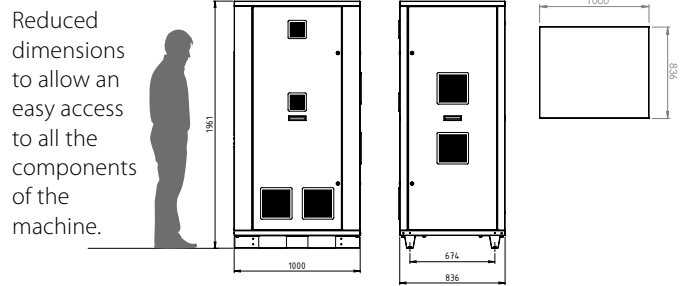

Reduced dimensions to allow an easy access to all the components of the machine.



360° access, with lateral practicable door.

- RHX
- Plug & Play
- Compact design
- PS 120 / 70 / 52 / 30 Bar
- Sound-proofing [Optional]
- < Maintan. costs

BITZER	GNS21JC302YBX	GNS21JC872YBX	GNS21JC882YBX	TNS21JC304YBX	TNS21JC881YBX	TNS21JC880YBX
Application	MT			MT+LT		
Capacity MT*	18.17	22.63	35.15	14.24	31.88	31.22
Capacity LT*	-			3.90	3.23	3.90
GC needed	32.08	39.96	62.08	32.08	62.08	62.08
MT Compressors	1x 2MTE-5K + 1x 2KTE-7K	1x 4PTC-7K + 1x 4MTC-7K	1x 4MTC-10K + 1x 4KTC-10K	1x 2MTE-5K + 1x 2KTE-7K	1x 4MTC-10K + 1x 4KTC-10K	1x 4MTC-10K + 1x 4KTC-10K
LT Compressors	-			1x 2MSL-07K	1x 2NSL-05K	1x 2MSL-07K
Lp**	38.7	46.7	47.3	39.4	47.4	47.4

DORIN	GNS21JC677YBX	GNS21JC684YBX	GNS21JC750YBX	TNS21JC670YBX	TNS21JC679YBX	TNS21JC678YBX	TNS21JC658YBX	TNS21JC753YBX	TNS21JC659YBX
Application	MT			MT+LT					
Capacity MT*	25.58	36.35	44.71	21.07	27.93	30.33	31.83	34.05	40.19
Capacity LT*	-			4.37	8.15	5.83	4.37	10.30	4.37
GC Capacity	45.17	64.18	78.95	45.17	64.18	78.95			
MT Compressors	1x CD475-4.7H + 1x CD475-6.4M	1x CD490-6.4H + 1x CD490-9.2M	1x CD4120-9.2H + 1x CD490-9.2M	1x CD475-4.7H + 1x CD475-6.4M	1x CD490-6.4H + 1x CD490-9.2M	1x CD490-6.4H + 1x CD490-9.2M	1x CD490-6.4H + 1x CD490-9.2M	1x CD4120-9.2H + 1x CD490-9.2M	1x CD4120-9.2H + 1x CD490-9.2M
LT Compressors	-			1x CDS101B	1x CDS181B	1x CDS151B	1x CDS101B	1x CDS301B	1x CDS101B
Lp**	39.6	41.2	42.1	39.7	41.3		42.2	42.1	

\* Calculation conditions: Tev MT -8°C, Tev LT -32°C, Tsge +35°C. | \*\*Sound pressure at 10m, considering a spherical surface, in open ground and with soundproofing. Tolerance ±2 dB.

AXIAL	GNV58PE	GNV58PE LPS	GNV66PE	GNV66PE LPS
Capacity	58.84	52.15	88.4	79.27
Air flow	16,400	12,800	24,000	19,200
Sound pressure 10m	52	46	53	45
Fans	2x Ø500 EC		3x Ø500 EC	

RAD.	GNV58NE	GNV66NE
Capacity	56.28	85.61
Air flow	15,000	22,500
Sound pressure 10m	49	50
Fans	2x Ø500 EC	

\* Calculation conditions: Air T. 35°C, GC outlet 37°C, Gas Inlet T. 115°C, Gas Pressure 92 bar. Available pressure radial models. 100 Pa



# CO<sub>2</sub> compact compressor rack

Compact compressor racks fully equipped for the generation of cold with CO<sub>2</sub> in transcritical cycle


- › Horizontal liquid receiver: 92/120/160 lit.
- › Tubular chassis.
- › Electrical panel located above the compressors.
- › Separator accumulator.
- › Up to 6 compressors.
- › Easy start-up and maintenance: all connections on the same side.
- › Reduced width of 790 mm that allows it to pass through any standard door.
- › Oil separator accumulator.
- › 92/120/160 l liquid receiver, with internal exchanger for connection to emergency unit.
- › Two electronic refrigerant level sensors (high and low levels).
- › Frequency inverter for the first MT compressor and optional for the LT compressor.
- › Selectable electronics brand: Tewis (EWCM9000pro), Danfoss (AK-PC 772 or 782) or Carel (pRack PR300T Medium or Large).
- › All copper connections.
- › Design pressures:
  - MP (MT suction): 52 bar.
  - LP (LT suction): 30 bar.
  - IP (Receiver and liquid line): 70 bar.
  - HP (Discharge): 120 bar.



Smart Rack

Three different frame sizes available:

- › 4 compressors: length 1,900 mm
- › 5 compressors: length 2,650 mm
- › 6 compressors: length 3,350 mm

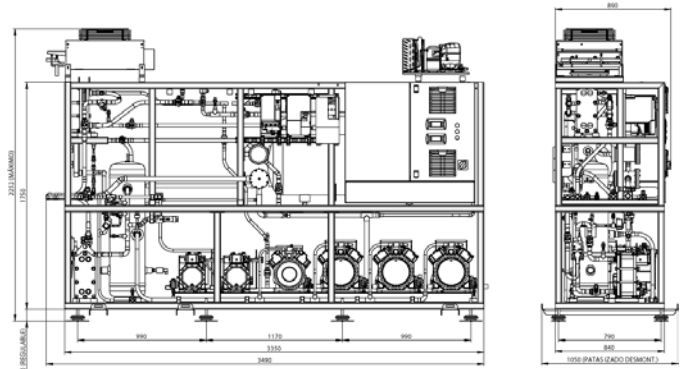

RHX

Emergency unit

Plug & Play

PS 120 / 70 / 52 / 30 Bar

Compact design

Receiver up to 160l

	GSR2FJ_093YBX	GSR2FJ_041YBX	TSR2EJ_585XBX	TSR2FJ_092YBX	TSR2FJ_086YBX	TSR2FJ_089YBX		
Application	MT			MT+LT				
Capacity MT*	70 Hz	kW	94.9	114.67	36.84	62.7	75.26	81.48
Capacity LT*	70 Hz	kW	-	-	5.79	6.48	6.48	6.48
MT Compressors	n°	1x 4JTE-15K (V.F.) + 2x 4JTE-15K	1x 4HTE-20K (V.F.) + 1x 4FTE-20K	1x 4JTE-15K (V.F.) + 1x 4JTE-15K	1x 4HTE-20K (V.F.) + 1x 4FTE-20K	1x 4HTE-20K (V.F.) + 2x 4HTE-20K	1x 4HTE-20K (V.F.) + 1x 4HTE-20K	
Parallel Compressors	n°	1x 4MTE-10K	1x 4JTE-15K	-	-	-	1x 4MTE-10K	
LT Compressors	n°	-	-	1x 2KSL-1K	1x 2KSL-1K	1x 2KSL-1K	1x 2KSL-1K	
	TSR2FJ_439YBX	TSR2FJ_090YBX	TSR2FJ_490YBX	TSR2FJ_489YBX	TSR2EJ_112XBX	TSR2FJ_128XBX		
Application	MT+LT							
Capacity MT*	70 Hz	kW	70.61	37.97	62.01	73.76	20.47	50.81
Capacity LT*	70 Hz	kW	11.1	12.7	14.16	14.16	18.5	18.33
MT Compressors	n°	1x 4HTE-20K (V.F.) + 2x 4HTE-20K	1x 4JTE-15K (V.F.) + 1x 4HTE-20K	1x 4JTE-15K (V.F.) + 1x 4JTE-15K	1x 4HTE-20K (V.F.) + 1x 4HTE-20K	1x 4JTE-15K (V.F.) + 1x 4JTE-15K	1x 4HTE-20K (V.F.) + 1x 4FTE-20K	
Parallel Compressors	n°	-	1x 4MTE-10K	1x 4MTE-10K	1x 4MTE-10K	-	-	
LT Compressors	n°	1x 2KSL-1K + 1x 2KSL-1K	1x 2GSL-3K	1x 2JSL-2K + 1x 2JSL-2K	1x 2JSL-2K + 1x 2JSL-2K	1x 2HSL-3K + 1x 2HSL-3K	1x 2HSL-3K + 1x 2HSL-3K	
	TSR2FJ_128XBX	TSR2EJ_893XBX	TSR2FJ_193YBX	TSR2EJ_895XBX	TSR2FJ_444YBX	TSR2FJ_088YBX		
Application	MT+LT							
Capacity MT*	70 Hz	kW	80.75	22.5	82.91	22.81	46.8	76.79
Capacity LT*	70 Hz	kW	18.5	21.06	21.77	28.07	27.82	27.82
MT Compressors	n°	1x 4HTE-20K (V.F.) + 2x 4FTE-20K	1x 4JTE-15K (V.F.) + 1x 4HTE-20K	1x 4HTE-20K (V.F.) + 2x 4FTE-20K	1x 4HTE-20K (V.F.) + 1x 4HTE-20K	1x 4JTE-15K (V.F.) + 2x 4HTE-20K	1x 4HTE-20K (V.F.) + 2x 4FTE-20K	
Parallel Compressors	n°	-	-	-	-	-	-	
LT Compressors	n°	2x 2HSL-3K	1x 2GSL-3K + 1x 2GSL-3K	1x 2GSL-3K + 1x 2GSL-3K	1x 2FSL-4K + 1x 2FSL-4K	1x 2FSL-4K + 1x 2FSL-4K	1x 2FSL-4K + 1x 2FSL-4K	
	TSR2GJ_001ZBX	TSR2GJ_002ZBX	TSR2GJ_003ZBX	TSR2GJ_004ZBX	TSR2GJ_995YBX	TSR2GJ_005ZBX		
Application	MT+LT							
Capacity MT*	70 Hz	kW	66.43	72.4	106.38	118.19	70	134.08
Capacity LT*	70 Hz	kW	6.68	11.1	14.16	21.77	25	27.82
MT Compressors	n°	1x 4MTE-10K (V.F.) + 2x 4MTE-10K	1x 4MTE-10K (V.F.) + 2x 4KTE-10K	1x 4JTE-15K (V.F.) + 2x 4HTE-15K	1x 4HTE-20K (V.F.) + 2x 4HTE-15K	1x 4JTE-15K (V.F.) + 2x 4HTE-20K	1x 4HTE-20K (V.F.) + 2x 4FTE-20K	
Parallel Compressors	n°	1x 4MTE-10K (V.F.)	1x 4MTE-10K (V.F.)	1x 4JTE-15K (V.F.)	1x 4HTE-20K (V.F.)	1x 4MTE-10K (V.F.)	1x 4HTE-20K (V.F.)	
LT Compressors	n°	1x 2MSL-07K (V.F.) + 1x 2MSL-07K	1x 2KSL-1K (V.F.) + 1x 2KSL-1K	1x 2JSL-2K (V.F.) + 1x 2JSL-2K	1x 2GSL-3K (V.F.) + 1x 2GSL-3K	1x 2FSL-4K (V.F.) + 1x 2FSL-4K	1x 2FSL-4K (V.F.) + 1x 2FSL-4K	

\* Calculation conditions: Tev MT -8°C, Tev LT -32°C, Tsgc +35°C. | Design pressures: MP (MT suction): 52 bar, LP (LT suction): 30 bar, IP (Container and liquid line): 70 bar, HP (Discharge): 120 bar | Temperature, LT = Low Temperature, pc = Parallel compressor


# CO<sub>2</sub> compact compressor rack

Smart Duplex compressor racks offer the highest powers for the commercial refrigeration range with CO<sub>2</sub> at 2 temperatures

- › Profitability and energy savings.
- › 100% CO<sub>2</sub> = low environmental impact.
- › Compact and simple design (only 1 m depth).
- › High capacity up to 9 compressors.
- › Vertical liquid receiver with high capacity (up to 2x250 l).
- › Extreme flexibility.
- › Remote control (accessible anywhere).
- › Easy commissioning and maintenance.
- › Possibility of 2 RHX, one for DHW and one for air conditioning.
- › Tubular chassis.
- › Oil separator accumulator.
- › High capacity liquid receiver (up to 2x250 l).
- › Up to 9 compressors.
- › Frequency inverter for MT & LT.
- › Two electronic sensors for refrigerant levels.
- › All copper connections.



Smart Duplex

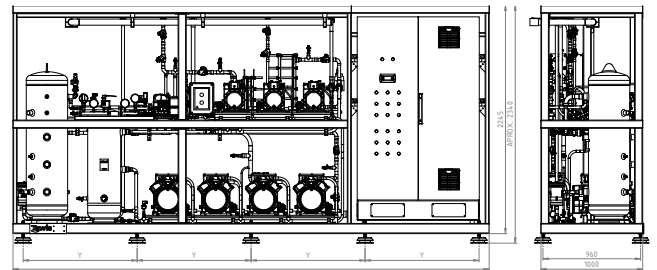

from 4.7 up to 6 m (depending on model)

DEPTH: JUST 1 m

RHX

Plug & Play

1,000 - 2,500 m<sup>2</sup>

PS 120 / 60 / 52 / 30 Bar

Emergency unit

Compact design

80 to 250KW

Liquid receiver up to 2x250

< Maintan. costs

		GSD3KJ_048ZBX		GSD3MJ_049ZBX	TSD3JJ_028ZBX	TSD3JJ_030ZBX	TSD3JJ_031ZBX	TSD3KJ_033ZBX	
Application		MT							
Capacity MT*	70 Hz	kW		179.56	266.6	52	64.41	77.52	105.43
Capacity LT*	70 Hz	kW		-	-	20.37	31.32	26.38	34.14
MT Compressors		n°	1x 4HTE-20K (V.F. @70 Hz) + 4x 4FTE-30K    1x 4HTE-30K (V.F. @70 Hz) + 4x 4CTE-30K    1x 4JTE-15K (V.F. @70 Hz) + 2x 4HTE-20K    1x 4JTE-15K (V.F. @70 Hz) + 3x 4HTE-20K    1x 4HTE-20K (V.F. @70 Hz) + 2x 4FTE-30K    1x 4HTE-20K (V.F. @70 Hz) + 3x 4FTE-30K						
Parallel Compressors		n°	-						
LT Compressors		n°	-						
		TSD3JJ_035ZBX		TSD3JJ_034ZBX	TSD3JJ_050ZBX	TSD3JJ_051ZBX	TSD3MJ_052ZBX	TSD3MJ_053ZBX	
Application		MT+LT							
Capacity MT*	70 Hz	kW		122.55	113.46	155.36	172.74	184.04	213.73
Capacity LT*	70 Hz	kW		18.62	26.81	36.44	36.44	75.88	48.21
MT Compressors		n°	1x 4HTE-20K (V.F. @70 Hz) + 3x 4FTE-30K    1x 4HTE-20K (V.F. @70 Hz) + 3x 4FTE-30K    1x 4HTE-20K (V.F. @70 Hz) + 3x 4CTE-30K    1x 4FTE-30K (V.F. @70 Hz) + 3x 4CTE-30K    1x 4FTE-30K (V.F. @70 Hz) + 4x 4CTE-30K    1x 4FTE-30K (V.F. @70 Hz) + 4x 4CTE-30K						
Parallel Compressors		n°	-						
LT Compressors		n°	1x 2HSL-3K (V.F. @70 Hz) + 1x 2HSL-3K    1x 2JSL-2K (V.F. @70 Hz) + 2x 2GSL-3K    1x 2GSL-3K (V.F. @70 Hz) + 2x 2FSL-4K    1x 2GSL-3K (V.F. @70 Hz) + 2x 2FSL-4K    1x 2DSL-5K (V.F. @70 Hz) + 3x 2DSL-5K    1x 2GSL-3K (V.F. @70 Hz) + 3x 2FSL-4K						
		TSD3JJ_037ZBX		TSD3JJ_039ZBX	TSD3JJ_042ZBX	TSD3JJ_040ZBX	TSD3JJ_044ZBX	TSD3KJ_041ZBX	
Application		MT+LT							
Capacity MT*	70 Hz	kW		85.97	110.01	123.56	119.33	130.4	123.71
Capacity LT*	70 Hz	kW		31.32	26.81	14.38	35.02	24.67	36.44
MT Compressors		n°	1x 4JTE-15K (V.F. @70 Hz) + 2x 4HTE-20K    1x 4HTE-20K (V.F. @70 Hz) + 2x 4HTE-20K    1x 4HTE-20K (V.F. @70 Hz) + 2x 4HTE-20K    1x 4JTE-15K (V.F. @70 Hz) + 2x 4FTE-30K    1x 4JTE-15K (V.F. @70 Hz) + 2x 4FTE-30K    1x 4HTE-20K (V.F. @70 Hz) + 3x 4FTE-30K    1x 4HTE-20K (V.F. @70 Hz) + 1x 4HTE-20K						
Parallel Compressors		n°	1x 4JTE-15K (V.F.)    1x 4HTE-20K (V.F.)    1x 4HTE-20K (V.F.)    1x 4HTE-20K (V.F.)    1x 4HTE-20K (V.F.)    1x 4HTE-20K (V.F.)    1x 4HTE-20K (V.F.)    1x 4HTE-20K (V.F.)						
LT Compressors		n°	1x 2GSL-3K (V.F. @70 Hz) + 2x 2GSL-3K    1x 2JSL-2K (V.F. @70 Hz) + 2x 2GSL-3K    1x 2JSL-2K (V.F. @70 Hz) + 1x 2JSL-2K    1x 2ESL-4K (V.F. @70 Hz) + 1x 2ESL-4K    1x 2GSL-3K (V.F. @70 Hz) + 1x 2FSL-4K    1x 2GSL-3K (V.F. @70 Hz) + 2x 2FSL-4K						
		TSD3KJ_041ZBX		TSD3JJ_045ZBX	TSD3KJ_046ZBX	TSD3KJ_047ZBX	TSD3KJ_096ZBX		
Application		MT+LT							
Capacity MT*	70 Hz	kW		123.71	130.05	174.7	188.76	204.69	
Capacity LT*	70 Hz	kW		36.44	31.32	49.61	36.44	26.38	
MT Compressors		n°	1x 4HTE-20K (V.F. @70 Hz) + 3x 4HTE-20K    1x 4HTE-20K (V.F. @70 Hz) + 2x 4FTE-30K    1x 4HTE-20K (V.F. @70 Hz) + 3x 4FTE-30K    1x 4HTE-20K (V.F. @70 Hz) + 3x 4FTE-30K    1x 4HTE-20K (V.F. @70 Hz) + 3x 4FTE-30K    1x 4GTE-30K (V.F. @70 Hz) + 2x 4DTE-25K    1x 4HTE-20K (V.F.) + 1x 4HTE-20K						
Parallel Compressors		n°	1x 4HTE-20K (V.F.)    1x 4HTE-20K (V.F.)    1x 4FTE-30K (V.F.)    1x 4FTE-30K (V.F.)    1x 4HTE-20K (V.F.) + 1x 4HTE-20K						
LT Compressors		n°	1x 2GSL-3K (V.F. @70 Hz) + 2x 2FSL-4K    1x 2GSL-3K (V.F. @70 Hz) + 2x 2GSL-3K    1x 2ESL-4K (V.F. @70 Hz) + 2x 2ESL-4K    1x 2GSL-3K (V.F. @70 Hz) + 2x 2FSL-4K    1x 2HSL-3K (V.F. @70 Hz) + 1x 2HSL-3K						

\*Calculation conditions: Tev MT -8°C, Tev LT -32°C, Tsgc +35°C.

# Switchboard & electronic control




## Switchboard

- › Bench-mounted switchboard, including complete wiring.
- › Power supply at 400V / 3F + N / 50Hz
- › Frequency inverter in the first compressor in sections BT, MT and parallel
- › Booster components and remote gas coolers electrically protected against overcurrents and short circuits.
- › Option: electrical connections of power supply to the auxiliary unit



## Electronic control

- › It represents the best option for transcritical and subcritical CO<sub>2</sub> solutions with Booster circuit and allows to manage up to two circuits for the recovery of heat.
- › Tevis System compatible and open for the integration of Modbus RTU / TCP or BACnet MS / TP (optional) systems.
- › Touch screen with synoptic and real-time data.
- › Data logging and alarms.
- › Historical charts and data tables.
- › Parameter management.

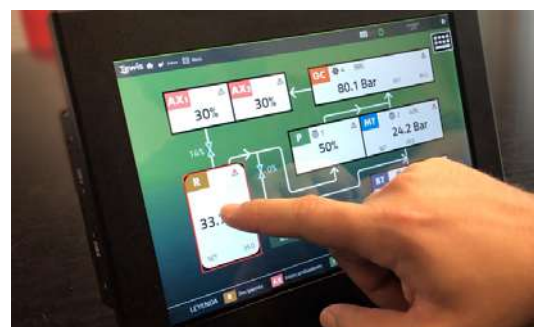




# Fresh ideas for reliable performance

## Choose the better solution – with Tewis Full CO<sub>2</sub> refrigeration systems



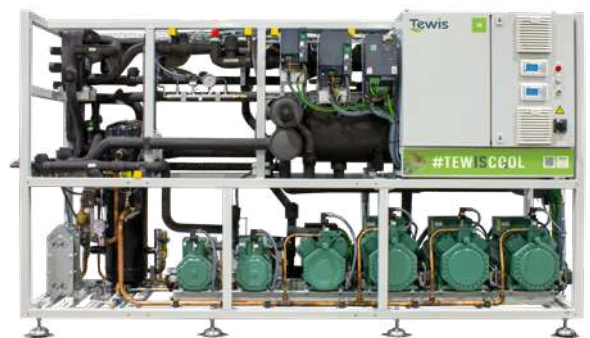

Why do so many widely-known retail chains count on Tewis? Because Tewis offers a well-thought-out, complete range of efficient refrigeration systems. Especially when working with R-744 under high pressure, best quality solutions count double. Avoid problems – with Tewis features like full stainless steel piping or surprisingly intuitive control systems.





Integrated solutions

■ Freezing (Low temperature) (-20°C / +35°C)
 ■ Chilling (Medium temperature) (0°C / +35°C)
 ■ Cooling/AC (High Temperature) (+20°C / +10°C)
 ■ Heating


Model	Product name	Capacity (kW)	0	2	5	10	25	50	100	150	300	450	
Integrated solution for chilling, freezing, comfort cooling and heating 	Conveni-Pack LRYEQ-AY 	LT											
		MT											
		A/C											
		HR + HP											
CO <sub>2</sub> Conveni-Pack LRNUN-AY1, LRYEN-AY1 		MT											
		AC											
		HR											

## Indoor units compatible with CO<sub>2</sub> Conveni-Pack

NEW



CO<sub>2</sub> Round Flow Cassette  
FXFN-A

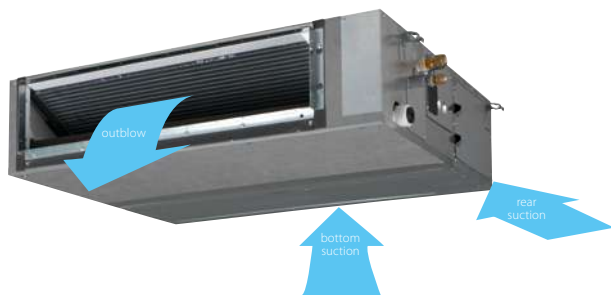

Concealed Ceiling Unit  
FXSN-A2

### Service station (Ranst, Belgium) Conveni-Pack

Discover why a Belgian petrol station owner chose Daikin for its shop comfort and refrigeration needs.  
[www.youtube.com/DaikinEurope](http://www.youtube.com/DaikinEurope)




# Conveni-Pack, integrated solution for commercial refrigeration, heating and air conditioning

## Why choose Conveni-Pack?

Competition in the retail food sector is fierce. This does not just affect the income you can earn from sales - operating costs are also a determining factor for success.

### Energy efficient heat recovery system


- › Conveni-Pack recovers up to 100% of the heat extracted from supermarket refrigeration cases and re-uses it to heat the retail space and improve shop comfort at no additional cost (heat recovery system)
- › Savings of up to 50% on energy costs
- › Daikin inverter scroll compressor with economizer technology

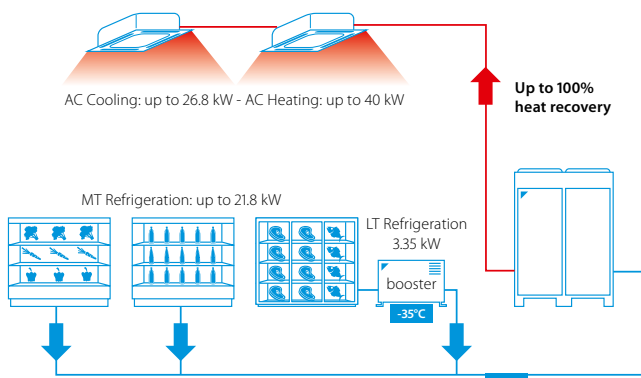

Above-mentioned scheme is an example of what can be delivered depending on predefined conditions. For more detailed information, please consult the technical specifications in this catalogue.

### Installing a compact solution

- › Easy to install, even in small spaces
- › Small footprint (up to 60% smaller footprint than conventional systems) and low weight
- › Reduced piping requirements
- › Minimal planning groundwork and lower assembly costs

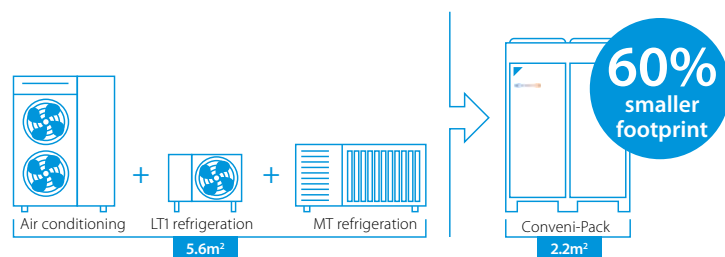

### Unique combination




- › First mass-produced, whole-building system to combine medium and low refrigeration, heating, air conditioning in one circuit

### Reliable operation

- › Error-proof component selection
- › Factory leak-tested and pre-charged

### Year-round climate comfort

- › Quiet operation: Improved acoustics thanks to night operation mode, inverter control and inverter driven fans with optimised blades and grills
- › High grade sound insulation on both panels and compressors
- › Specially designed fan blades to limit sound emissions
- › 4 low sound operation settings including night mode
- › The heat recovered from refrigerated and freezer display cabinets can be used to provide heating for the shop.

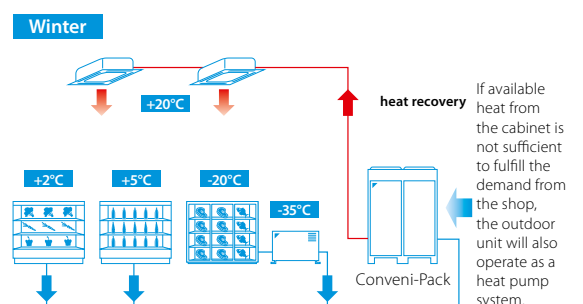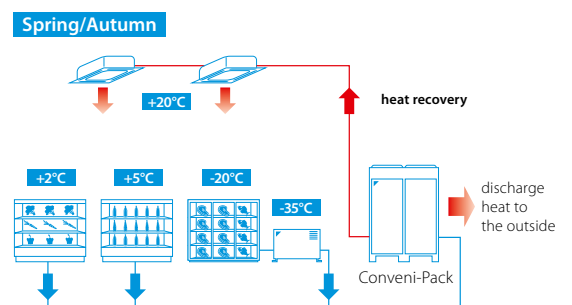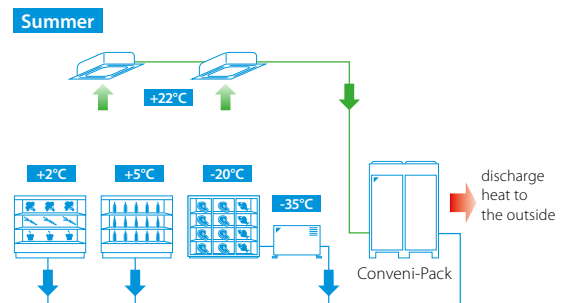



## Internationally awarded

Winner of several awards\* thanks to the innovating technology used and environmental friendly solution offered:



- › Winner of UK Environmental Product of the Year, Cooling Industry Awards - 2006
- › Winner of Incentive Prize, German Environment Ministry - 2007
- › Winner of the Innovation Trophy, equipmag (exhibition in France) - 2008
- › Winner of 2014 Institute of Refrigeration Ireland (IRI) Environmental award
- › Environmental Friendliness category of the Top Retail Product Awards 2014 in Germany

## Reference

### Edeka Buschkühle supermarket (Germany)

2 Conveni-Pack systems supply 32 meters of service counters, 12.5 meters of convenience fridges, one cooling storage room for fruit, an air curtain and 5 indoor units; the ZEAS system supplies two deep-freeze cabinets with a total capacity of 5 kW.



Discover more references on [www.daikineurope.com/references](http://www.daikineurope.com/references)

## Benefits for installers/consultants

- › Integrated electrical & control box
- › Unit already pre-charged with refrigerant
- › Established VRV technology ensuring optimised installation and maintenance
- › Reduced delivery time thanks to European manufacturing plant
- › Flexible system for multiple applications
- › Connectable to all grocery refrigeration applications and supplied with a wide range of air conditioning indoor units to meet shop requirements
- › Outdoor units can be positioned up to 35m above or 10m below the indoor units
- › Piping length possible up to 130m
- › Suitable for indoor installation through the use of high ESP fans


## Benefits for shop owners

- › Thought design for supermarkets and smaller retail outlets
- › Maximised retail sales space available as Conveni-Pack has a footprint up to 60% smaller than conventional grocery refrigeration systems
- › Reduced energy consumption by up to 50% through heat recovery
- › Quiet operation, thus ideal for densely populated urban areas

## Marketing tools

### Refrigeration Xpress

User-friendly design software for Conveni-Pack, CCU, SCU and ZEAS condensing units. Its detailed report includes a list of materials, piping and wiring diagrams, and device options.

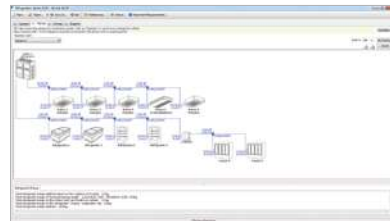

### Short videos

- › Watch a short animation on the unique refrigeration solution Conveni-Pack

# CO<sub>2</sub> Conveni-Pack



## Why choose CO<sub>2</sub> Conveni-pack?

- ✓ DX Refrigeration, Heating & Space cooling by CO<sub>2</sub>, for those whom demand a totally natural solution
- ✓ Heat recovery, and for those colder days automatic heat pump operation
- ✓ Fully assembled & packaged unit, providing low noise levels
- ✓ Mass produced in Daikin Europe's award winning factory
- ✓ Each unit is fully factory & run tested
- ✓ All units in stock, fast delivery
- ✓ Reduces annual energy consumption by up to 50%, compared to other manufacturers solutions.
- ✓ Hermetic swing compressor, complete with two stage compression, for lower running temperatures
- ✓ Oversized DC Brushless motor technology for improved reliability & efficiency
- ✓ Automatically balances refrigeration & space heating / cooling loads
- ✓ "Plug and Play" technology, reduced "On site" commissioning
- ✓ Optimized control logic for reliability and efficiencies
- ✓ Adaptable evaporation temperature control

# Natural HVACR 4 life



## Project for demonstration of innovative, integrated HVACR installations with natural refrigerant.

### OBJECTIVES

- **Remove barriers** in the market for introducing integrated refrigeration and air conditioning systems that use natural refrigerants which have a lower Global Warming Potential.
- **Raise awareness** among installers, engineers, customers and general public on the potential of a combined air conditioning and refrigeration system that uses CO<sub>2</sub> as a natural refrigerant.
- **Contribute** to the implementation of the EU F-gas Directive.

### ACTIONS

#### 1. Demonstrate viability


- test prototype in **Belgium** that integrates air conditioning and refrigeration with heat recovery in real life settings;
- install, operate and monitor the new concept in European supermarkets, located in both temperate and warm climate zones (**Germany** and **Spain, respectively**)

#### 2. Organise training sessions for installers and customers

#### 3. Help update the definitions of standards and energy labelling schemes for multi-functional products by providing information on tested risk management, procedures regarding flammability and toxicity of natural refrigerants

#### 4. Develop a cassette-type indoor unit using CO<sub>2</sub> that best provides comfort cooling and heating

#### 5. Research the potential of cold storage for improving the Total Equivalent Warming Impact

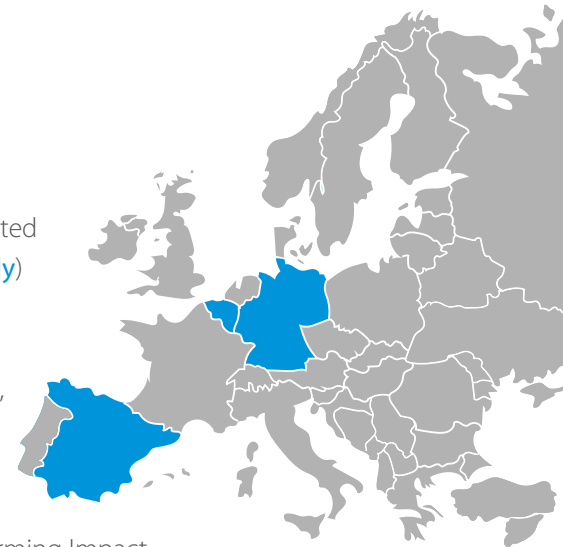


For more information refer to the website: [naturalhvacr4life.eu](http://naturalhvacr4life.eu)

## Low Temperature Showcases

Optional CO<sub>2</sub> CCU's are also available for Remote LT applications (not connected to Conveni-pack)




Plugin LT showcases with propane or LT condensing units with CO<sub>2</sub> are available to satisfy also freezer capacity needs.

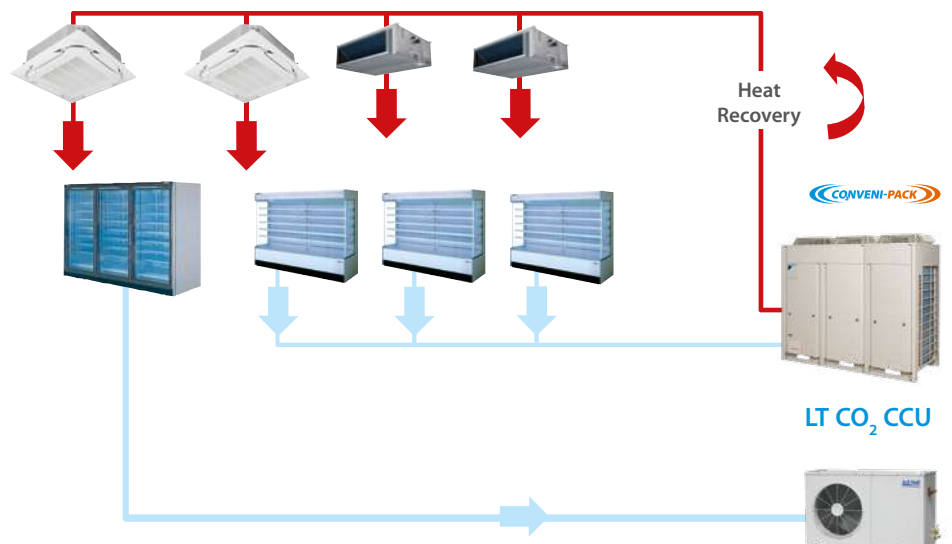

# CO<sub>2</sub> Conveni-Pack refrigeration system with heat recovery

Refrigeration solution for food retailers featuring award winning technology for heat recovery

- › Integrates high and low temperature refrigeration and air conditioning (including heating) into one system
- › By using heat recovery, optimised controls and state of the art compressor technology, Conveni-pack can reduce annual energy consumption up to 50% or more, compared to conventional systems
- › Lower associated CO<sub>2</sub> emissions thanks to the heat pump technology
- › Conveni-pack's modular design allows it to be used for smaller as well as larger shops
- › The modularity of the Conveni-pack system maximises installation flexibility. Outdoor units can be grouped into blocks or rows, or distributed around the building, to meet individual installation constraints
- › The heat extracted from the refrigeration showcases or evaporators can be re-used for comfort heating of the shop at no extra cost
- › Low sound level including „night mode“ operation

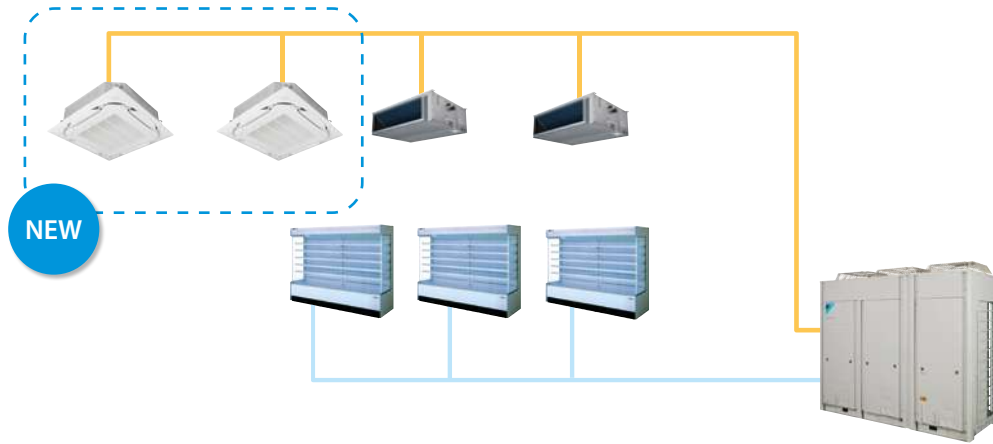

More details and final information can be found by scanning or clicking the QR codes.



LRYEN-AY1

Medium Temperature Refrigeration, Cooling Only, Heating Only				LRYEN	10AY1
Parameters at part load and ambient temp. 25°C (Point B)					-
Parameters at part load and ambient temp. 25°C (Point B)					-
Dimensions	Unit	HeightxWidthxDepth		mm	1,680x1,930x765
Weight	Unit			kg	563
Heat exchanger	Type				Cross fin coil
Compressor	Type				Hermetically sealed swing compressor
	Output			W	4,600.0
	Piston displacement			m <sup>3</sup> /h	6.16
	Starting method				Direct on line (inverter driven)
Fan	Type				Propeller fan
	Quantity				3
	Air flow rate	Cooling	Nom.	m <sup>3</sup> /min	300
Fan motor	Output			W	750
Sound pressure level	Nom.			dBA	64.0
Refrigerant	GWP				1.0
	Type 2				R-744
	Charge			kg	6.30
	Control				Electronic expansion valve
Power supply	Phase/Frequency/Voltage		Hz/V		3N~/50/380-415


LRYEN10A7Y1+LRNUN5A7Y1 | Compressor 1 | Compressor 2 | Compressor 3 | Factory charge of unit | Only K65 with D.P. 120 bar is allowed to use for AC piping connections. | The safety valve pressure is indicated as gauge pressure. | Only K65 with D.P. 90 bar is allowed to use for refrigeration piping.

# Capacity-up module for CO<sub>2</sub> Conveni-Pack

- › Integrates high and low temperature refrigeration and air conditioning (including heating) into one system
- › By using heat recovery, optimised controls and state of the art compressor technology, Conveni-pack can reduce annual energy consumption up to 50% or more, compared to conventional systems
- › Lower associated CO<sub>2</sub> emissions thanks to the heat pump technology
- › Conveni-pack's modular design allows it to be used for smaller as well as larger shops
- › The modularity of the Conveni-pack system maximises installation flexibility. Outdoor units can be grouped into blocks or rows, or distributed around the building, to meet individual installation constraints
- › The heat extracted from the refrigeration showcases or evaporators can be re-used for comfort heating of the shop at no extra cost
- › Low sound level including „night mode“ operation



LRNUN-AY1

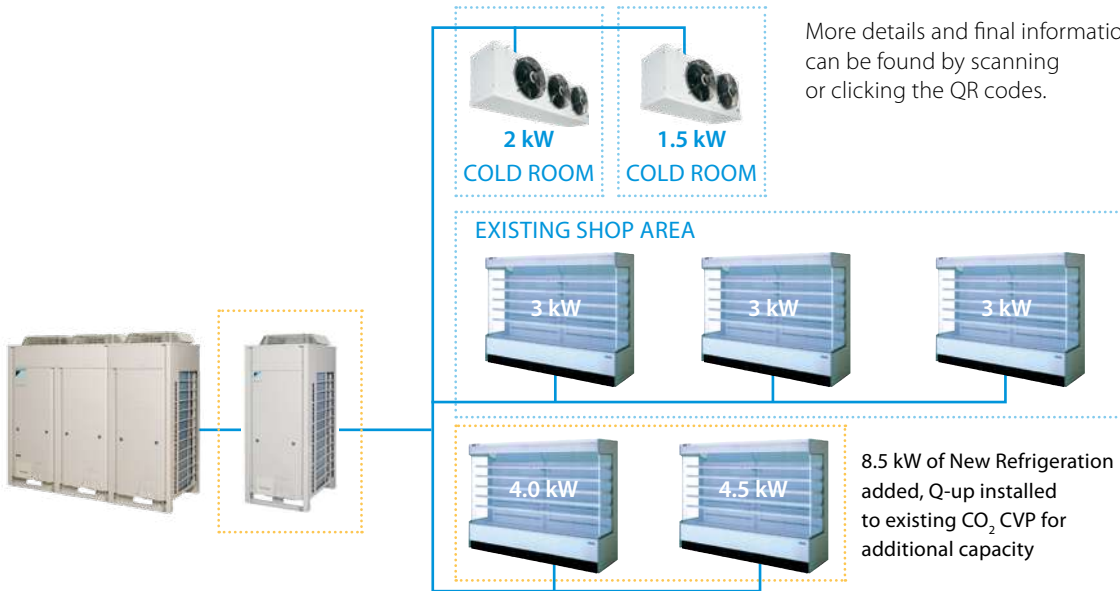

More details and final information can be found by scanning or clicking the QR codes.



LRNUN-AY1

Model	Refrigeration Capacity*	HR Capacity
DAIKIN CO <sub>2</sub> CVP AC10	3 - 14.5 kW	22 kW

Q-up can also easily be added later, as part of a system upgrade

Model	Refrigeration Capacity*	HR Capacity
DAIKIN CO <sub>2</sub> CVP AC10 + Q-up	3- 21 kW	22 kW

\* Refrigeration capacity given under following conditions: Te = -10°C, 10 K SH and ambient = 32°C


Medium Temperature Refrigeration				LRNUN	5AY1
Parameters at part load and ambient temp. 25°C (Point B)					-
Parameters at part load and ambient temp. 25°C (Point B)					-
Dimensions	Unit	HeightxWidthxDepth		mm	1,680x635x765
Weight	Unit			kg	173
Heat exchanger	Type				Cross fin coil
Compressor	Type				Hermetically sealed swing compressor
	Output			W	4,600.0
	Piston displacement			m <sup>3</sup> /h	6.16
	Starting method				Direct on line (inverter driven)
Fan	Type				Propeller fan
	Quantity				1
	Air flow rate	Cooling	Nom.	m <sup>3</sup> /min	102
Fan motor	Output			W	350
Sound pressure level	Nom.			dBA	65.0 (1)
Refrigerant	GWP				1.0
	Type 2				R-744
	Charge			kg	3.20
	Control				Electronic expansion valve
Power supply	Phase/Frequency/Voltage		Hz/V		3N~/50/380-415

(1)LRNUN5AY1+LRNUN5AY1 | Compressor 1 | Compressor 2 | Compressor 3 | Factory charge of unit | Only K65 with D.P. 120 bar is allowed to use for AC piping connections. | The safety valve pressure is indicated as gauge pressure. | Only K65 with D.P. 90 bar is allowed to use for refrigeration piping.


# CO<sub>2</sub> Round Flow Cassette

360° air discharge for optimum efficiency and comfort

- › Automatic filter cleaning results in higher efficiency & comfort and lower maintenance costs.
- › Two optional intelligent sensors improve energy efficiency and comfort
- › Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- › Bigger flaps and unique swing pattern improve equal air distribution
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- › Lowest installation height in the market: 214mm for class 20-63
- › Optional fresh air intake
- › Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms



- › Standard drain pump with 675mm lift increases flexibility and installation speed



Round flow cassette panel (7 types)  
Daikin Round Flow Cassette with 360° airflow, wide flaps and optional intelligent sensors

## 1) Standard Panel (White & Black)



## 2) Auto-cleaning Panel (White & Black)



## 3) Designer Panel (White & Black)



More details and final information can be found by scanning or clicking the QR codes.



FXFN-A

				FXFN-A	50	71	112
Capacity (H tap)	Cooling	Nom.	kW		5.6	8.0	12.5
	Heating	Nom.	kW		6.3	9.0	14.0
Dimensions	Unit	HeightxWidthxDepth		mm	246x840x840		288x840x840
Weight	Unit	gross	kg		29		32
		net	kg		26		29
Fan	Type	Turbo fan					
	Quantity	1					
Air flow rate	Cooling/heating	high/medium/low	m <sup>3</sup> /h		15.5/12.8/10.7	23.2/19.4/13.8	32.7/27.6/20.6
Fan motor	Output	W					
Sound power level	Cooling	dBA					
Sound pressure level	Cooling	high/medium/low	dBA		35/33/31 (4)	40/36/33 (4)	46/43/38 (4)
	Heating	high/medium/low	dBA		36/34/31 (1)(4)	41/37/33 (1)(4)	47/44/39 (1)(4)
Piping connection	Brazing type	Liquid	mm		9.52		
		Gas	mm		12.7		
Operation range	Indoor	Cooling	°C(WB)		14~24 (2)		
		Heating	°C(WB)		15~27		
Refrigerant	Type	R744					
Power supply	Phase/Frequency/Voltage	Hz/V					
					1~50/60Hz 220~240/220V		

(1) Update of sound pressure level in heating on 2.3.2020 bases on test results (for 71 and 112 class) | (2) update of Cooling max (25 -> 24°C) operation range on 2.3.2020 based on test result | (3) The panel lineup is the same as the existing machine lineup | (4) Sound of designer panel: +3dB


# Expansion valve box

## EV Box

- > EV Box is the unit which include EV & Control
- > 1 unit of EV box must be used together with 1 unit of CO<sub>2</sub> Cassette.



EV Box

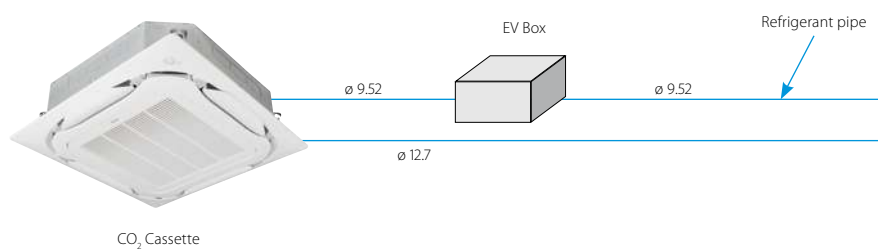

## Combination with Cassette Indoor unit

Cassette indoor unit	FXFN50A2VEB	FXFN71A2VEB	FXFN112A2VEB
<b>EV Box</b> BEV2N112A7V1B	✓	✓	✓

Specifications		BEV2N-A	BEV2N112A7V1B
Power supply			1~, 50/60Hz, 220~240/220V
Dimension	Height	mm	207
	Wide	mm	388
	Depth	mm	326
Mass	Unit	kg	12 (Tentative)
Refrigerant Type			R744 (CO <sub>2</sub> )
Piping connections Liquid	Type		Brazing
	OD	mm	ø 9.52

# Concealed ceiling unit with medium ESP for CO<sub>2</sub> Conveni-pack

To respond to all shop requirements for comfort cooling and heating, a wide range of air conditioning indoor units are available

- > Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge




- > Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths
- > Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- > Discretely concealed in the wall: only the suction and discharge grilles are visible
- > Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit
- > Reduced energy consumption thanks to specially developed DC fan motor and drain pump
- > Optional fresh air intake

Fresh air intake opening in casing




Optional fresh air intake kit




\* Brings in up to 10% of fresh air into the room

\* Allow larger quantities of fresh air to be brought in


- > Flexible installation: air suction direction can be altered from rear to bottom suction and choice between free use or connection to optional suction grilles




For free use into a false ceiling



For connecting onto a suction canvas (not supplied by Daikin)

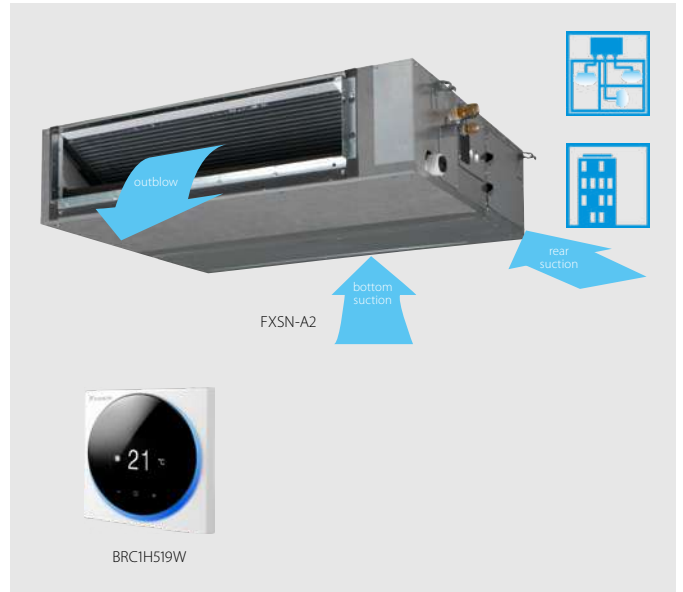

- > Standard built-in drain pump with 625mm lift increases flexibility and installation speed




### Automatic Airflow Adjustment function

Automatically selects the most appropriate fan curve to achieve the units' nominal air flow within ±10%

#### Why?

After installation the real ducting will frequently differ from the initially calculated air flow resistance \* the real air flow may be much lower or higher than nominal, leading to a lack of capacity or uncomfortable air temperature  
Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically (10 or more fan curves are available on every model), making installation much faster

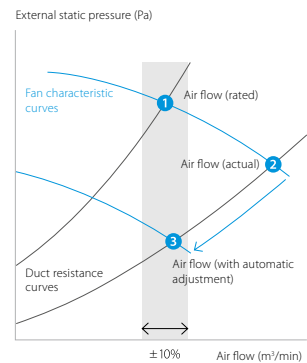

More details and final information can be found by scanning or clicking the QR codes.



FXSN-A2



Indoor unit		FXSN	50A2	71A2	112A2
Cooling capacity	Total capacity Nom.	kW	5.60	8.00	12.50
Heating capacity	Total capacity Nom.	kW	6.30	9.00	14.0
Power input - 50Hz	Cooling Nom.	kW	0.186	0.258	0.388
	Heating Nom.	kW	0.181	0.253	0.383
Dimensions	Unit HeightxWidthxDepth	mm	245x700x800	245x1,000x800	245x1,400x800
Weight	Unit	kg	31.0	40.0	50.0
Casing	Material		Galvanised steel plate		
Fan	Air flow rate Cooling	High / Medium / Low m <sup>3</sup> /min	15.2/13.0/11.0	23.0/19.5/16.0	36.0/31.5/26.0
	-50Hz Heating	High / Medium / Low m <sup>3</sup> /min	15.2/13.0/11.0	23.0/19.5/16.0	36.0/31.5/26.0
	External static pressure -50Hz	Factory set / High Pa	30/150	40/150	50/150
Air filter	Type		Resinnet		
Sound power level	Cooling	At high fan speed dBA	61	63	66
	Heating	High / Medium / Low dBA	36.0/33.0/31.0	37.0/34.0/32.0	40.0/38.0/34.0
Sound pressure level	Cooling	High / Medium / Low dBA	38.0/35.0/32.0	39.0/36.0/33.0	42.0/40.0/38.0
	Heating	High / Medium / Low dBA			
Refrigerant	Type/GWP		R-744/1.0		
Piping connections	Liquid	OD mm	9.52		
	Gas	OD mm	12.7		
	Drain		VP20 (I.D. 20/O.D. 26), drain height 625 mm		
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/60/220-240/220		
Current - 50Hz	Maximum fuse amps (MFA)	A	16		
Control systems	Infrared remote control		BRC4C65 / BRC4C66		
	Wired remote control		BRC1H52W/S/K		

Contains fluorinated greenhouse gases



# Acoustic solution for Conveni-pack

- › Complete & professional housing solution, series KVD specially designed for Daikin CVP units
- › Stable and storm proof construction, tested and verified by TÜV Austria
- › Extremely low static pressure drop, measured by TÜV Austria
- › Highest soundproofing values thanks to multi-layered sound insulation
- › Already assembled ex works -> ensures very quick installation of the outdoor unit
- › Base frame made of steel-profiles, insulated bottom and drain pan are standard
- › Housing can be modified for an even higher dampening with additional deflection plates and hoods

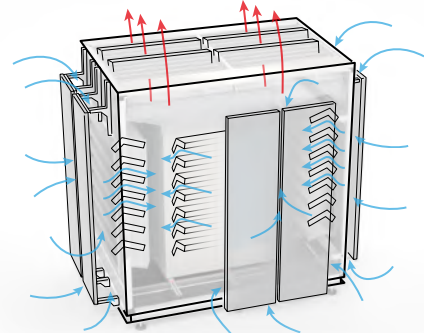

**Please contact:**

**Kellner Engineering GmbH**

kellner.r@kellner-engineering.com

www.kellner-engineering.com

Office: +43-2236-660048



suitable for 1x Daikin LRYEN10AY1 (10 HP)

acoustic housing type	external dimensions (HxWxD)	sound dampening <sup>1</sup>		pressure drop <sup>2</sup>	weight
		on average Ø	vertically		
<b>Kellner KVD300-PV Standard</b>	2,350 x 3,071 x 1,461 mm	-18 dB(A)	-13 dB(A)	< 20 Pa	850 kg
+ deflection plates (8 pc.)	2,350 x 3,671 x 1,761 mm	-21 dB(A)	-13 dB(A)	< 25 Pa	320 kg
+ redirection hood (exhaust front)	3,100 x 3,671 x 1,761 mm	-24 dB(A)	-24 dB(A)	< 32 Pa	300 kg
<b>Kellner KVD300-PV-UL Ultra</b>	2,550 x 3,071 x 1,461 mm	-20 dB(A)	-18 dB(A)	< 25 Pa	875 kg
+ deflection plates (8 pc.)	2,550 x 3,671 x 1,761 mm	-23 dB(A)	-18 dB(A)	< 30 Pa	320 kg
+ redirection hood (exhaust front)	3,300 x 3,671 x 1,761 mm	-25 dB(A)	-26 dB(A)	< 37 Pa	300 kg

suitable for 1x Daikin LRYEN10AY1 (10 HP) + 1x Daikin LRNUN5AY1 (5 HP)


acoustic housing type	external dimensions (HxWxD)	sound dampening <sup>1</sup>		pressure drop <sup>2</sup>	weight
		on average Ø	vertically		
<b>Kellner KVD310-PV Standard</b>	2,350 x 3,871 x 1,461 mm	-18 dB(A)	-13 dB(A)	< 20 Pa	975 kg
+ deflection plates (10 pc.)	2,350 x 4,471 x 1,761 mm	-21 dB(A)	-13 dB(A)	< 25 Pa	400 kg
+ redirection hood (exhaust front)	3,100 x 4,471 x 1,761 mm	-24 dB(A)	-24 dB(A)	< 32 Pa	350 kg
<b>Kellner KVD310-PV-UL Ultra</b>	2,550 x 3,871 x 1,461 mm	-20 dB(A)	-18 dB(A)	< 25 Pa	1,000 kg
+ deflection plates (10 pc.)	2,550 x 4,471 x 1,761 mm	-23 dB(A)	-18 dB(A)	< 30 Pa	400 kg
+ redirection hood (exhaust front)	3,300 x 4,471 x 1,761 mm	-25 dB(A)	-26 dB(A)	< 37 Pa	350 kg

(1) NORM EN ISO 9614-2:1997 - Determination of the sound power level of noise sources from sound intensity measurements  
EN ISO 11546-1:2010 - Determination of the sound insulation of soundproofing capsules  
EN ISO 717-1:2013 - Assessment of sound insulation in buildings and building components

(2) total pressure drop at maximum air-flow

# Acoustic solution for Conveni-Pack

- › Solflex acoustic solutions have been developed to reduce the sound emissions of outdoor units without limiting functionality.
- › Nominal sound reduction measured according to DIN EN ISO 3744 by a renomated and independent laboratory.
- › Exterior surfaces are standard available in RAL7016 anthracite grey, RAL9006 white aluminium, RAL9010 pure white or in galvanised steel.
- › Online technical data and configuration including sound evaluation to norm accepted by many authorities to obtain building permission.
- › On demand custom made acoustic solutions with site assistance including installation for large scale projects.
- › Very large variety of standard acoustic solutions available for all type of HVACR units.

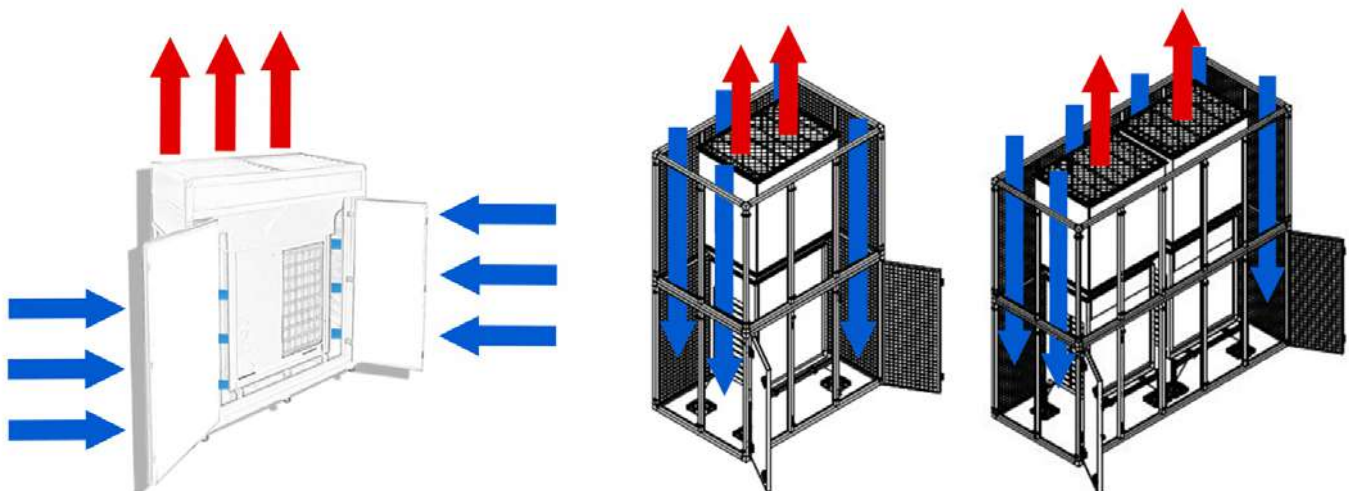

## For more info, please contact:

**Solflex GmbH**

office@solflex.eu

www.solflex.eu



suitable for 1x Daikin LRYEN10AY1 (10 HP)

acoustic housing type	external dimensions (HxWxD)	Nominal Sound Insulation <sup>1</sup>	pressure drop <sup>2</sup>	weight
SDW 211763-1 A	2,450 x 3,150 x 1,600 mm	Rw(Ctr, 50-5,000): 20 dB	< 5 Pa	550 kg
V 211763-2 A	2,600 x 3,100 x 1,650 mm	D(e): 19 dB(A)	<15 Pa	1,250 kg
XV 211763-3 A	2,600 x 3,500 x 1,900 mm	D(e): 23 dB(A)	<25 Pa	1,450 kg
SQVY 211763-4 A	3,800 x 3,150 x 1,600 mm	D(e): 25 dB(A)	<25 Pa	950 kg

suitable for 1x Daikin LRYEN10AY1 (10 HP) + 1x Daikin LRNUN5AY1 (5 HP)

acoustic housing type	external dimensions (HxWxD)	Nominal Sound Insulation <sup>1</sup>	pressure drop <sup>2</sup>	weight
SDW 211763-1 B	2,450 x 3,925 x 1,600 mm	Rw(Ctr, 50-5,000): 20 dB	< 5 Pa	630 kg
V 211763-2 B	2,600 x 3,800 x 1,650 mm	D(e): 19 dB(A)	<15 Pa	1,350 kg
XV 211763-3 B	2,600 x 4,200 x 1,900 mm	D(e): 23 dB(A)	<25 Pa	1,600 kg
SQVY 211763-4 B	3,800 x 3,925 x 1,600 mm	D(e): 25 dB(A)	<25 Pa	1,140 kg

(1) NORM DIN EN ISO 10140-2 - Specifies a laboratory method for measuring the airborne sound insulation of building products  
DIN EN ISO 3744 - Specifies methods for determining the sound power level or sound energy level of a noise source

(2) total pressure drop at maximum air-flow

# R-410A Conveni-Pack refrigeration system with heat recovery

Refrigeration solution for food retailers featuring award winning technology for heat recovery

- › Integrates high and low temperature refrigeration and air conditioning (including heating) into one system
- › By using heat recovery, optimised controls and state of the art compressor technology, Conveni-pack can reduce annual energy consumption up to 50% or more, compared to conventional systems
- › Lower associated CO<sub>2</sub> emissions thanks to the heat pump technology
- › Conveni-pack's modular design allows it to be used for smaller as well as larger shops
- › The modularity of the Conveni-pack system maximises installation flexibility. Outdoor units can be grouped into blocks or rows, or distributed around the building, to meet individual installation constraints
- › The heat extracted from the refrigeration showcases or evaporators can be re-used for comfort heating of the shop at no extra cost
- › Low sound level including „night mode“ operation



## Conveni pack, in combination with a ZEAS unit.

This store was nominated by spar as its 'local supermarket of the year', thanks in part to its owner's strategic investment in a key department: Refrigeration.

By installing a Conveni pack in combination with Zeas, it was possible to **save around €10,000 on energy costs each year**, from money that would otherwise have spent on heating. **SPAR, Supermarket.**

More details and final information can be found by scanning or clicking the QR codes.



LRYEQ-AY




Medium Temperature Refrigeration				LRYEQ-AY	16
Cooling capacity	Air conditioning	Nom.		kW	14.0 (1)
	Refrigeration	Nom.		kW	21.8 (2)
Heating capacity	Air conditioning	Nom.		kW	27.0 (3)
	Refrigeration	Nom.		kW	21.8 (4)
Dimensions	Unit	Height		mm	1,680
		Width		mm	1,240
		Depth		mm	765
Weight	Unit			kg	370
Heat exchanger	Type				Cross fin coil
Compressor	Type				Hermetically sealed scroll compressor
	Piston displacement			m <sup>3</sup> /h	13.34
	Speed			rpm	6,300
	Output			W	2,500
	Starting method				
Compressor 2	Frequency ON/OFF				Less than 6 times/hour
	Speed			rpm	2,900
Compressor 3	Output			W	3,600
	Speed			rpm	2,900
Fan	Output			W	4,500
	Type				Propeller fan
Fan motor	Quantity				2
	Air flow rate	Cooling	Nom.	m <sup>3</sup> /min	230
Sound pressure level	Output			W	750
	Drive				Direct drive
Operation range	Nom.			dBA	62.0
Refrigerant	Evaporator	Cooling	Min.-Max.	°CDB	-20~10
	Cooling	Ambient	Min.-Max.	°CDB	-5~43
	Heating	Ambient	Min.-Max.	°CDB	-15~21
Power supply	Type				R-410A
	GWP				2,087.5
	Charge			kg	11.5
	TCO <sub>2</sub> eq				24.0
Control	Electronic expansion valve				
	Phase/Frequency/Voltage			Hz/V	3~/50/380-415

(1) Cooling priority mode: indoor temp. 27°CDB, 19°CWB; outdoor temp. 32°CDB; piping length: 7.5m; level difference: 0m (2) Cooling priority mode: evaporating temp. -10°C; outdoor temp. 32°CDB; Suction SH: 10°C (3) Heat recovery 100% mode: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; refrigeration load 18kW; piping length: 7.5m; level difference: 0m (4) Saturated temperature equivalent to suction pressure (refrigeration side): -10°C (under chilled condition); connection capacity for indoor air conditioner: 10HP, when heat recovery is 100%

# Indoor units and Biddle air curtains for connection to R-410A Conveni-Pack

To respond to all shop requirements for comfort cooling and heating, a wide range of air conditioning indoor units and Biddle air curtains are available.

		Capacity class (kW)								
Model	Product name	50	63	71	80	100	125	140	200	250
Cooling capacity (kW) <sup>1</sup>		5.6	7.1	8.0	9.0	11.2	14.0	16.0	22.4	28.0
Heating capacity (kW) <sup>2</sup>		6.3	8.0	9.0	10.0	12.5	16.0	18.0	25.0	31.5
Round flow cassette	FXFQ-A 	•	•		•	•	•			
2-way blow ceiling mounted cassette	FXCQ-A 	•	•		•		•			
Ceiling mounted corner cassette	FXKQ-MA 		•							
Concealed ceiling unit with inverter driven fan	FXSQ-A 	•	•		•	•	•			
Concealed ceiling unit with inverter driven fan	FXMQ-P7 	•	•		•	•	•			
Large concealed ceiling unit	FXMQ-MB 								•	•
Ceiling suspended unit	FXHQ-A 		•			•				
4-way blow ceiling suspended unit	FXUQ-A 			•		•				
Floor standing unit	FXLQ-P 	•	•							
Concealed floor standing unit	FXNQ-A 	•	•							

		Capacity class (kW)					
Model	Product Name	80	100	125	140	200	250
Heating capacity (kW) <sup>2</sup>		7.4 - 9.2	11.6 - 13.4	15.6	16.2 - 19.9	29.4	29.4 - 31.1
Biddle air curtain free hanging	CYVS-DK 	•	•	•	•	•	•
Biddle air curtain cassette	CYVM-DK 	•	•	•	•	•	•
Biddle air curtain recessed	CYVL-DK 	•	•	•	•	•	•

<sup>1</sup> Nominal cooling capacities are based on: indoor temperature: 27°CDB / 19°CWB, outdoor temperature: 35°CDB, piping length: 7.5m, level difference: 0m

<sup>2</sup> Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB / 6°CWB, piping length: 7.5m, level difference: 0m

# Booster unit for R-410A

- > A booster unit allows to connect freezer showcases / rooms to ZEAS and Conveni-Pack outdoor units
- > Reduced piping requirements, from 4 to 2 pipes, compared to a conventional system
- > Low sound mode available reducing sound emissions significantly without giving in on Refrigerating capacity




More details and final information can be found by scanning or clicking the QR codes.



LCBKQ-AV1


## Booster with ZEAS:

**MEDIUM + LOW TEMPERATURE** refrigeration

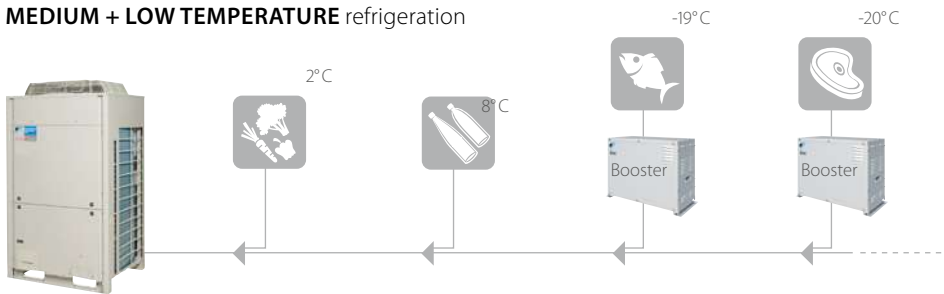

## Booster with R-410A Conveni-Pack:

**MEDIUM + LOW TEMPERATURE** refrigeration + space air conditioning + Biddle air curtain

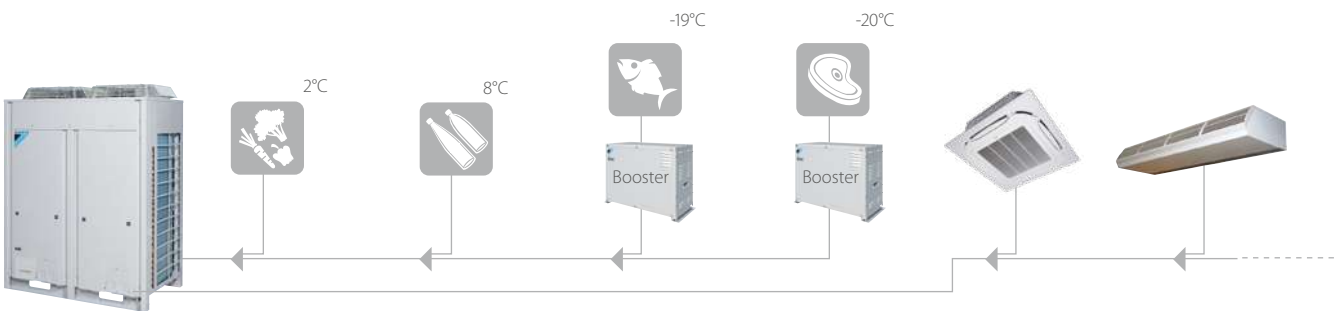

Low Temperature Refrigeration			LCBKQ-AV1		3
Refrigerating capacity	Low temperature	Nom.	kW		3.35 (1)
Dimensions	Unit	Height	mm		480
		Width	mm		680
		Depth	mm		310
Weight	Unit	kg			47
Compressor	Type	Hermetically sealed swing compressor			
	Piston displacement	m <sup>3</sup> /h		10.16	
	Number of revolutions	rpm		6,540	
	Output	W		1,300	
	Starting method	Direct on line (inverter driven)			
Fan	Frequency ON/OFF	Less than 6 times/hour			
	Type	Propeller fan			
Operation range	Air flow rate	Cooling	Nom.	m <sup>3</sup> /min	1.6
	Evaporator	Cooling	Min.~Max.	°CDB	-45~-20
	Ambient temperature	Min.~Max.	°C		-15~43
Refrigerant	Type	R-410A			
	GWP	2,087.5			
	Control	Electronic expansion valve			
Piping connections	For outdoor unit	Liquid	OD	mm	6.35
	To indoor unit	Liquid	OD	mm	6.35
	For indoor unit	Gas	OD	mm	15.9
	To outdoor unit	Gas	OD	mm	9.5
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50/220-240	

(1) Evaporating temp. -35°C; outdoor temp. 32°C; suction SH 10K; saturated temp. to discharge pressure of booster unit -10°C



# Evaporators

# Evaporators with or without TEV for different operations and refrigerants

## General features:

- › Capacity for LT/MT cooling: 0.5 to 213 kW
- › Ambient/cooling room temperature range: - 40°C - +25°C
- › Refrigerants: R134A a, R 449A, R448A, R452A R407F, R 407A
- › Fin distance: from 3 mm to 11 mm
- › Fin materials: Al
- › Tube materials: Cu
- › Conditions:
  - MT: Ambient temperature: 35°C Evp. Temperature: -10°C
  - LT: Ambient temperature: 35°C Evp. Temperature: -35°C

## Options:

- › Electric defrost heating
- › Hot gas defrost
- › Drain pan heating
- › Fan ring heater
- › High efficient EC fans
- › Wiring on terminal box
- › Included valves and regulation
- › Fin materials AISI 304, AISI 316
- › Tube materials AISI 304, AISI 316
- › Casing in stainless steel (Inox)




## Types:

- › flat evaporator
- › double flow
- › cubic design
- › Evaporator only
- › Evaporator + EEV/TEV
- › Evaporator + EEV/TEV + electronic controller


For technical selection, prices, accessories and delivery time please use the Zanotti software and contact our technical department. We are happy to help you.

## Dimensions


Flat

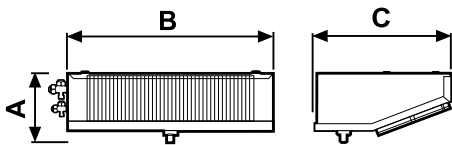


mm	A	B	C
201	215	614	410
202	215	1,034	410
203	215	1,614	410
232	150	713	455
301	300	910	690
302	300	1,530	690
303	300	2,150	690
304	300	2,770	690
305	300	3,390	690




Double flow

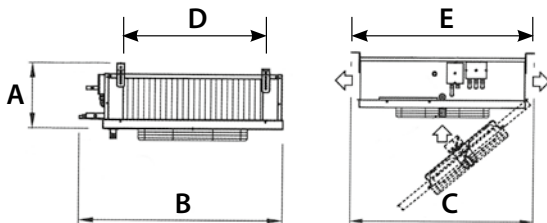


mm	A	B	C	D	E
231	171	579	585	293	600
232	171	889	585	603	600
233	171	1,199	585	913	600
234	171	1,509	585	1,223	600
352	300	1,671	995	1,214	1,065
353	300	2,291	995	1,834	1,065
354	300	2,911	995	2,454	1,065
355	300	3,531	995	3,074	1,065

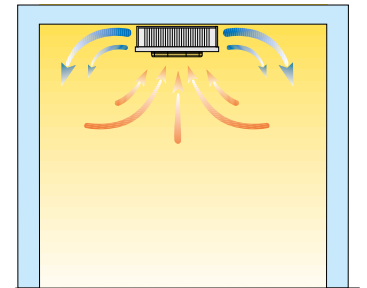

Cubic

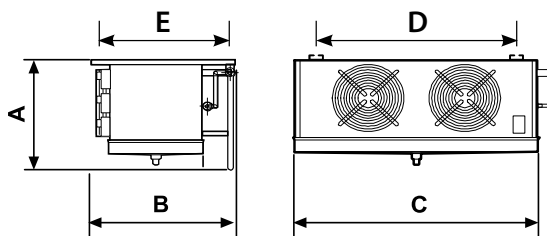

mm	A	B	C	D	E
301	420	480	789	495	345
302	420	480	1,254	960	345
303	420	480	1,719	1,425	345
HEU351	545	690	805	605	540
HEU352	530	690	1,220	965	540
HEU353	600	690	1,690	1,370	540
HEU403	620	700	1,840	1,520	545
HEU502	844	992	1,829	1,526	740
SKC352	490	606	1,614	1,270	450
SKC353	490	606	2,234	1,890	450
SKC452	610	650	2,032	1,680	510
SKC503	800	830	3,350	2,760	675

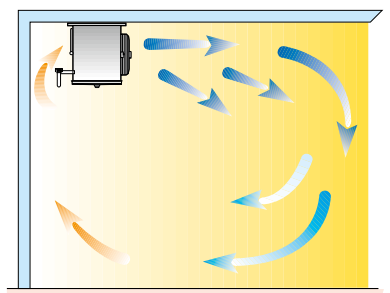







# Options

## Options for ZEAS and Conveni-Pack

	CO <sub>2</sub> Conveni-Pack		Conveni-Pack	ZEAS					Multi-ZEAS		
	LRYN10AY1	LRNUN5AY1	LRYEQ16AY	LRQ5BY1	LRQ6BY1	LRQ8BY1	LRQ10BY1	LRQ12BY1	LRQ15BY1	LRQ20BY1	LRQ15BY1Rx2
Digital pressure gauge kit	-		BHGP26A1								
Pressure gauge kit	-		KHGP26B140								
Pressure Reduction Kit	EKPRV1		-								
(a+b+c+d) kit	KPS26C504	KPS26C160	KPS26C504	KPS26C160	KPS26C280				KPS26C504		
a. Air outlet	KPS26C504T (left side)	KPS26C160T	KPS26C504T	KPS26C160T	KPS26C280T				KPS26C504T		
b. Air inlet (left)	KPS26C504B	-	KPS26C504L	KPS26C504L				-			
c. Air inlet (right)	KPS26C504R	KPS26C160L	KPS26C504R	KPS26C504R				-			
d. Air inlet (rear)	KPS26C504R	KPS26C160R	KPS26C504B	KPS26C160B	KPS26C280B				KPS26C504B		
Air outlet (right side)	KPS26C160T	-	-								
Air inlet (rear)	KPS26C160B	-	-								
Central drain pan kit	-		KWC26C450**	KWC26C160	KPS26C280			KPS26C450	KPS26C450*** x2		
Modbus communication kit	BRR9B1V1		BRR9A1V1				BRR9A1V1****		BRR9A1V1****		
Booster unit	-		LCBKQ3AV19				-		-		
Suction branch pipe for multi	-		-				EKHRQZM*****		-		
Refnet header	-		-				KHRQM22M29H8		-		
	-		-				KHRQ22M64H8		-		
	-		-				KHRQM22M75H8		-		
	-		-				KHRQ22M20TA8		-		
Refnet joint	-		-				KHRQ22M29T9		-		
	-		-				KHRQ22M64T8		-		
	-		-				KHRQ22M75T8		-		
	-		-				-		-		
Intelligent Controller	DSC601C51		-								
Intelligent Manager	DCM601A51		-								

\* Snowbreak hoods are field-supplied. For technical drawings and more information, contact your dealer. It is recommended to install a snowbreak hood when regular snowfall occurs.

\*\* In cold areas, provide a drain pan heater (field supply) to prevent drained water from freezing up in the drain pan \*\*\* required for each module


\*\*\*\* software update required (to be executed during commissioning) \*\*\*\*\* mandatory

# Digital pressure gauge kit

## BHGP26A1

The digital measurement display allows you to diagnose a unit at a glance and it can be used with all ZEAS and R-410A Conveni-Pack systems.

- › Digital measurement display for fixed installation or service applications.
- › Displays high and low pressure.
- › Displays error codes in the event of a fault.
- › Displays up to 32 operating parameters.
- › Displays error code history (last three).
- › Scrolls and stores output values.
- › Automatically returns to normal operating display mode.

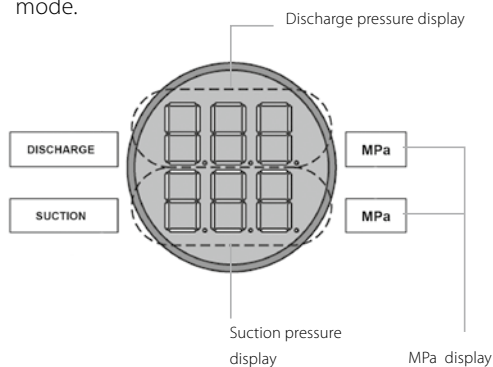

# Modbus communication kit

## BRR9A1V1


The Daikin Modbus Communication Interface lets you fully integrate Daikin ZEAS and Daikin R-410A Conveni-Pack systems with building control automation networks and other monitoring systems.

The interface allows you to read all the operational parameters and control important values using the Modbus protocol. This unifying component transforms ZEAS and Conveni-Pack into a transparent, customisable refrigeration unit and means that you can create object-specific and energy-optimised shop concepts, including remote monitoring application.

Pro interfaces can be used to connect up to 32 ZEAS units, and are also suitable for use with R-410A Conveni-Pack systems and the Booster.

### Control values

- › Target evaporation temperature
- › Low pressure level for on and off points
- › Forced stop
- › Error messages can be cancelled remotely

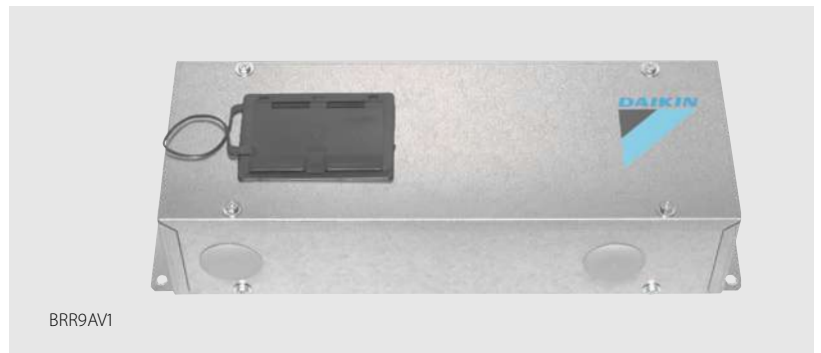

### Display values

- › Model information and operating status
- › Refrigerant operating pressure and temperatures
- › Electrical operating data and temperatures for components
- › Target values
- › Fan stage and compressor frequency, operating hours
- › Warning and error messages as well as system safety functions


## Modbus communication kit

The Daikin Modbus Communication Interface lets you fully integrate Daikin ZEAS and Daikin CO<sub>2</sub> Conveni-Pack systems with building control automation networks and other monitoring systems.

The interface allows you to read all the operational parameters and control important values using the Modbus protocol on refrigeration and comfort side. This unifying component transforms CO<sub>2</sub> Conveni-Pack into a transparent, customisable refrigeration unit and means that you can create object-specific and energy-optimised shop concepts, including remote monitoring application.

Pro interfaces can be used to connect up to 7 CO<sub>2</sub> Conveni-Pack units.

More details and final information can be found by scanning or clicking the QR codes.

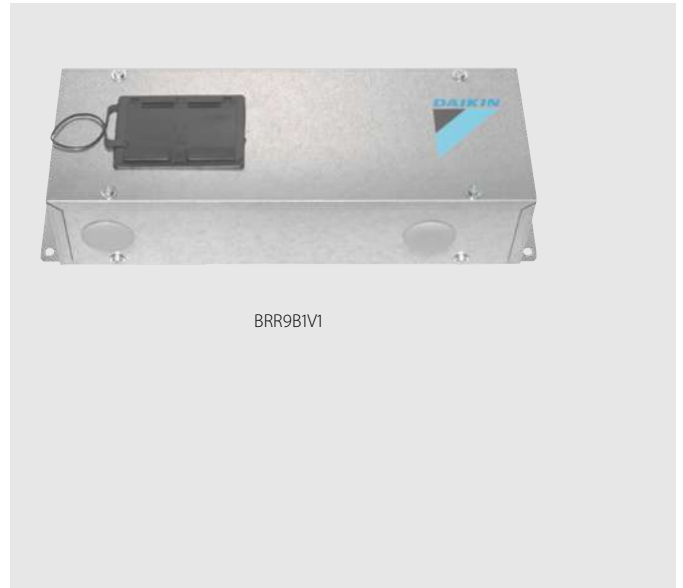

BRR9B1V1



# Round Flow CO<sub>2</sub> Cassette

## Indoor unit for CO<sub>2</sub> Conveni-Pack



To respond to all shop requirements for  
comfort cooling and heating



360° AIR DISCHARGE  
FOR OPTIMUM  
EFFICIENCY & COMFORT





Transport Refrigeration

# Transport Refrigeration















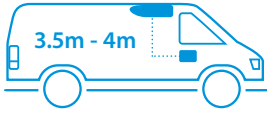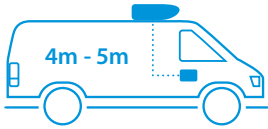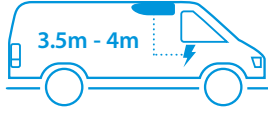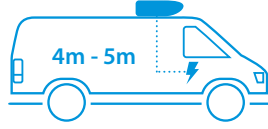














# Product Portfolio

Our transport refrigeration unit range offers reliable and efficient solutions for a wide range of applications and vehicle types. Each unit is designed to minimize your total cost of ownership, configured to your exact needs, manufactured to Daikin's rigorous quality standards, and supported with a service network available 24/7.

VAN			
Direct-Drive		Electric	
Invisible Direct-Drive	Zero Direct-Drive	Invisible Electric	Zero Electric
			
			
SFZ007 SFZ008 SFZ009	Z200 Z250 Z350 Z380	SFZ009e	Z120b Z200e Z250e Z350e
			
SFZ009 Multi	Z380 Multi	SFZ009e Multi	Z350e Multi



LIGHT TRUCK	TRUCK		TRAILER
SFZ	Uno	Uno Undermount	Exigo
 <p>4.5m - 6.5m</p>	 <p>5m - 8.5m</p>	 <p>7m - 8.5m</p>	 <p>9m - 15m</p>
			
SFZ238 SFZ248	U600 U800 U1000	UN120	E1500
			
SFZ238 Multi SFZ248 Multi	U800 Multi U1000 Multi	UN120 Multi	



# Van

Direct-Drive





## Invisible Direct-Drive

### SFZ007 | SFZ008 | SFZ009 | SFZ009 Multi



Our Invisible range is designed for discreet and efficient transportation of refrigerated products in vans. These units are installed underneath the vehicle chassis, completely invisible from the outside, preserving the aesthetics, original height and aerodynamics of the vehicle, while reducing bodywork. SFZ007, SFZ008 and SFZ009 offer varying refrigeration capacities and volume ratings tuned for different applications. SFZ009 Multi features dual evaporators to enable products with different temperature requirements to be transported in two separate zones.

The Invisible range, with its ultra-thin dimensions make it the ideal choice for customers who need a space-saving solution. A driver-friendly interface in the cabin allows real-time monitoring and control of the unit performance to ensure the cargo is maintained at precisely the right temperature throughout the trip.

#### Key Features:

- ✓ Multiple temperature zones in the same vehicle (Multi model only)
- ✓ Powered by direct-drive on road, electric grid on stand-by
- ✓ Vehicle access to tight underground areas
- ✓ Under-chassis mounting preserves vehicle aesthetics and aerodynamics
- ✓ Invisible from the outside
- ✓ Low noise
- ✓ User-friendly cabin driver interface
- ✓ Telematics-compatible
- ✓ 2-year standard warranty



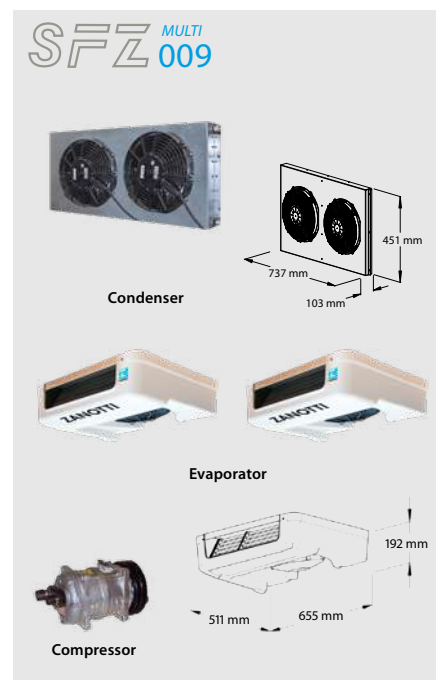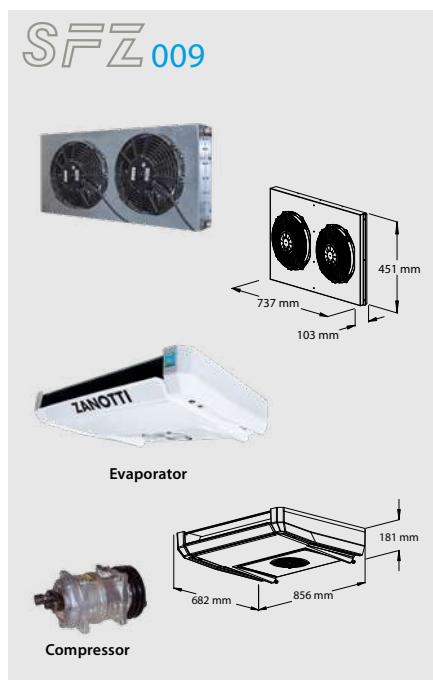

	SFZ007	SFZ008	SFZ009	SFZ009 Multi					
<b>General</b>									
Refrigerant	[ - ]	R134a	R452A						
<b>System net cooling capacity under ATP conditions (30°C ambient temperature)</b>									
	[°C]	0°C	-20°C	0°C	-20°C	0°C	-20°C	0°C	-20°C
Road mode	[W]	1,790	N/A	2,180	1,090	3,160	1,828	2,990	1,580
Stand-by mode	[W]	1,130	N/A	1,580	800	2,030	1,124	1,760	970
<b>Heating capacity</b>									
Road mode	[W]	N/A		1,890		2,790		2,640	
Stand-by mode	[W]	N/A		1,380		1,630		1,580	
<b>Airflow rate</b>									
Airflow rate at 100kPa static pressure	[m³/h]	620		910		840		2x 620	
<b>Weight</b>									
Condenser without electric stand-by	[kg]	25		38		45		45	
Condenser with electric stand-by	[kg]	50		65		75		75	
Evaporator	[kg]	10		14		20.5		2x 10.2	
<b>Road compressor</b>									
Displacement	[cc]	146		146		163		163	

These products contain fluorinated greenhouse gases (R134a GWP=1,430 / R452A GWP=2,140.5).  
 Stand-by voltages available: 230/1/50 or 400/3/50  
 Vehicle voltages available: 12VDC or 24VDC



## Zero Direct-Drive

### Z200 | Z250 | Z350 | Z380


The Zero range meets the needs of the distribution industry by offering the utmost flexibility in the temperature management of refrigerated products. The extensive direct-drive Zero line-up including Z200, Z250, Z350, and Z380 is designed to meet a wide range of applications in light commercial vehicles.

All Zero models provide easy installation and serviceability. The condensing unit can be mounted on the roof or the front wall of the box, and the ultra-thin evaporator installed in the cargo compartment maximizes cargo volume. A driver-friendly interface in the cabin allows real-time monitoring and control of unit performance to ensure goods are maintained at precisely the right temperature throughout the trip. Our Zero units are setting new standards with their attractive design.

#### Key Features:

- ✓ Proven reliability and performance
- ✓ Powered by direct-drive on road, electric grid on stand-by
- ✓ Easy to install and service with removable side panels
- ✓ Configurable for a wide range of refrigerated applications in light commercial vehicles
- ✓ Low noise
- ✓ User-friendly cabin driver interface
- ✓ Reduced refrigerant charge and maintenance costs
- ✓ Telematics-compatible
- ✓ 2-year standard warranty



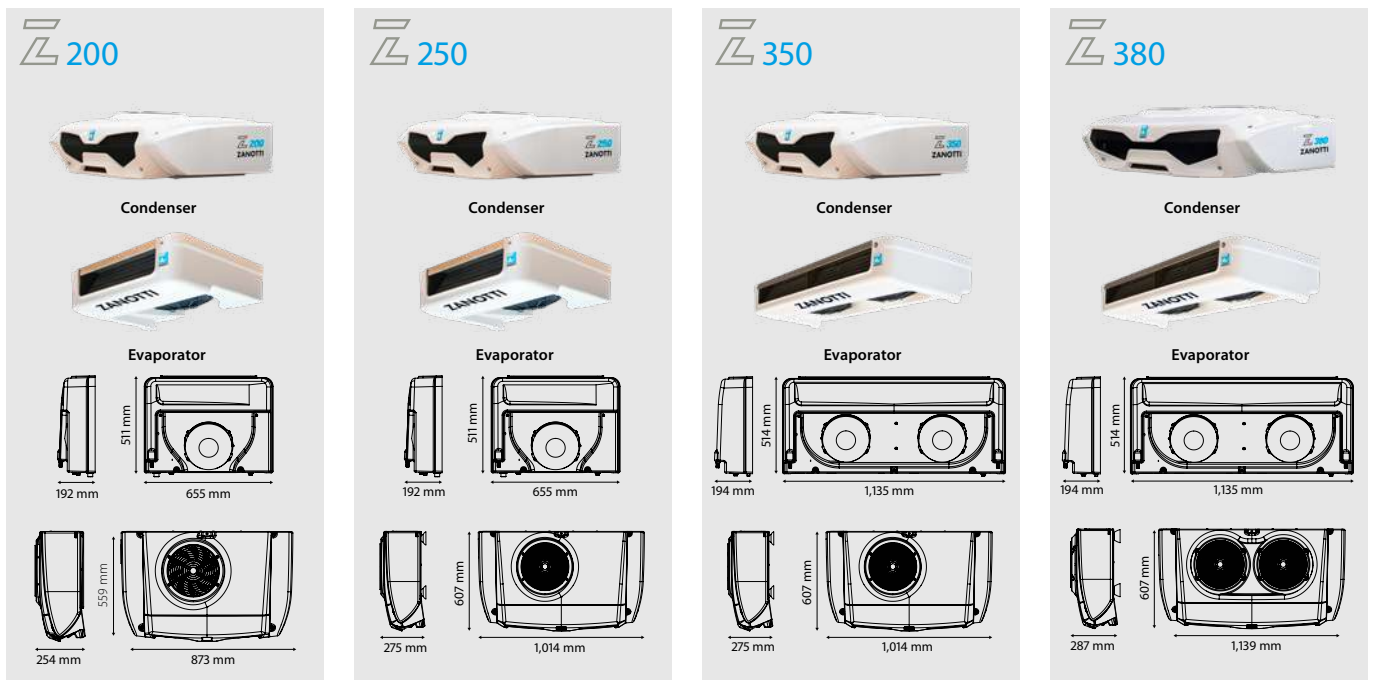

		Z250	Z380	Z200	Z250	Z350	Z380						
<b>General</b>													
Refrigerant	[-]	R134a			R452A								
<b>System net cooling capacity under ATP conditions (30°C ambient temperature)</b>													
	[°C]	0°C	-20°C	0°C	-20°C	0°C	-20°C	0°C	-20°C	0°C	-20°C	0°C	-20°C
Road mode	[W]	2,140	N/A	2,920	N/A	2,220	1,170	2,680	1,470	3,350	1,840	3,800	2,020
Stand-by mode	[W]	1,130	N/A	1,900	N/A	1,500	700	2,120	820	2,240	890	2,450	970
<b>Heating capacity</b>													
Road mode	[W]	1,930		2,620		2,100		2,500		3,100		3,300	
Stand-by mode	[W]	1,020		1,710		1,300		1,900		2,000		2,200	
<b>Airflow rate</b>													
Airflow rate at 100kPa static pressure	[m³/h]	650		1,300		622		650		1,300		1,300	
<b>Weight</b>													
Condenser without electric stand-by	[kg]	34		40		30		36		36		42	
Condenser with electric stand-by	[kg]	70		78		56		72		72		80	
Evaporator	[kg]	9		18		10.2		10.5		19.6		19.6	
<b>Road compressor</b>													
Displacement	[cc]	146		163		131		131		146		146	

These products contain fluorinated greenhouse gases (R134a GWP=1,430 / R452A GWP=2,140.5).  
 Stand-by voltages available: 230/1/50 or 400/3/50  
 Vehicle voltages available: 12VDC

# Zero Direct-Drive Multi-Temp


## Z380 Multi

Z380 Multi and Z380 Multi (Narrow Evap) models are designed to meet the modern needs of low environmental impact refrigeration for light commercial vehicles. These units feature additional evaporators to enable transport of products with different temperature requirements in separate zones, available in multiple configurations to adapt to a wide range of applications.

All Zero models provide easy installation and serviceability. The condensing unit can be mounted on the roof or the front wall of the box, and the ultra-thin evaporator installed in the cargo compartment maximizes cargo volume. A driver-friendly interface in the cabin allows real-time monitoring and control of unit performance to ensure goods are maintained at precisely the right temperature throughout the trip. Our Zero units are setting new standards with their attractive design.

### Key Features:

- ✓ Multiple temperature zones in the same vehicle
- ✓ Proven reliability and performance
- ✓ Powered by direct-drive on road, electric grid on stand-by
- ✓ Easy to install and service with removable side panels
- ✓ Configurable for a wide range of refrigerated applications in light commercial vehicles
- ✓ Low noise
- ✓ User-friendly cabin driver interface
- ✓ Reduced refrigerant charge and maintenance costs
- ✓ Telematics-compatible
- ✓ 2-year standard warranty

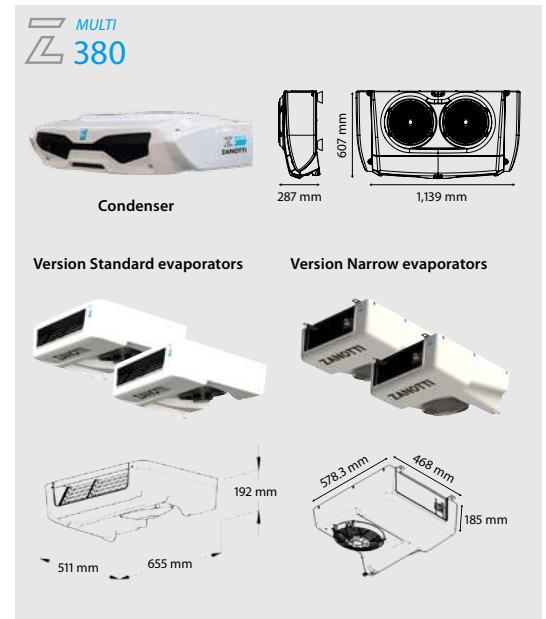

		Z380 Multi	Z380 Multi (Narrow Evap)		
<b>General</b>					
Refrigerant	[ - ]	R452A			
<b>System net cooling capacity under ATP conditions (30°C ambient temperature)</b>					
	[°C]	0°C	-20°C	0°C	-20°C
Road mode	[W]	3,265	1,655	3,250	1,310
Stand-by mode	[W]	2,030	640	2,420	1,030
<b>Heating capacity</b>					
Road mode	[W]	3,010		2,630	
Stand-by mode	[W]	1,770		1,520	
<b>Airflow rate</b>					
Airflow rate at 100kPa static pressure	[m <sup>3</sup> /h]	2x 620		2x 830	
<b>Weight</b>					
Condenser without electric stand-by	[kg]	42		42	
Condenser with electric stand-by	[kg]	80		80	
Evaporator	[kg]	2x 10.2		2x 16	
<b>Road compressor</b>					
Displacement	[cc]	146		146	

These products contain fluorinated greenhouse gases (R452A GWP=2,140.5).  
 Stand-by voltages available: 230/1/50 or 400/3/50  
 Vehicle voltages available: 12VDC



# Van Electric





## Invisible Electric

### SFZ009e | SFZ009e Multi

The Invisible Electric range is designed for discreet and efficient transportation of refrigerated products in vans on electric power, both on road and during stand-by. A highly reliable battery-inverter package supplies the power, making the Invisible Electric an ideal choice for full-electric, hybrid, or conventional vehicles.

These units are installed underneath the vehicle chassis, completely invisible from the outside, preserving the aesthetics, original height and aerodynamics of the vehicle, while reducing bodywork. SFZ009e offers varying refrigeration capacities and volume ratings tuned for different applications. SFZ009e Multi features dual evaporators to enable products with different temperature requirements to be transported in two separate zones.

The Invisible range, with its ultra-thin dimensions make it the ideal choice for customers who need a space-saving solution. A driver-friendly interface in the cabin allows real-time monitoring and control of the unit performance to ensure the cargo is maintained at precisely the right temperature throughout the trip.

#### Key Features:

- ✓ Zero emissions
- ✓ Powered by reliable battery-inverter pack on road, chargeable on electric grid
- ✓ Compatible with full-electric, hybrid or conventional vehicles
- ✓ Multiple temperature zones in the same vehicle (Multi model only)
- ✓ Vehicle access to tight underground areas
- ✓ Under-chassis mounting preserves vehicle aesthetics and aerodynamics
- ✓ Invisible from the outside
- ✓ Low noise
- ✓ User-friendly cabin driver interface
- ✓ Telematics-compatible
- ✓ 2-year standard warranty



		SFZ009e		SFZ009e Multi	
<b>General</b>					
Refrigerant	[-]	R452A			
<b>System net cooling capacity under ATP conditions (30°C ambient temperature)</b>					
	[°C]	0°C	-20°C	0°C	-20°C
Battery mode	[W]	2,030	1,124	1,760	970
<b>Heating capacity</b>					
Battery mode	[W]	1,650		1,580	
<b>Airflow rate</b>					
Airflow rate at 100kPa static pressure	[m³/h]	840		2x 620	
<b>Weight</b>					
Condenser with electric stand-by	[kg]	75		75	
Evaporator	[kg]	20.5		2x 10.2	
<b>Max current</b>					
	[A]	165		170	

These products contain fluorinated greenhouse gases (R452A GWP=2,140.5).  
 Stand-by voltages available: 230/1/50 or 400/3/50  
 Vehicle voltages available: 12VDC or 24VDC

# Zero Electric


## Z120b

Z120b is powered by the vehicle battery, with minimal environmental impact and maximum cooling effectiveness ideal for refrigerated transport in vans. The unit can be installed quickly without any mechanical couplings with the vehicle engine, which also minimises power draw and thus emissions.

All Zero models provide easy installation and serviceability. The condensing unit can be mounted on the roof or the front wall of the box, and the ultra-thin evaporator installed in the cargo compartment maximizes cargo volume. A driver-friendly interface in the cabin allows real-time monitoring and control of unit performance to ensure goods are maintained at precisely the right temperature throughout the trip.

### Key Features:

- ✓ Low emissions
- ✓ Proven reliability and performance
- ✓ Powered by vehicle battery on road, electric grid on stand-by
- ✓ Compatible with full-electric, hybrid or conventional vehicles
- ✓ Easy to install and service with removable side panels
- ✓ Low noise
- ✓ User-friendly cabin driver interface
- ✓ Reduced refrigerant charge and maintenance costs
- ✓ Telematics-compatible
- ✓ 2-year standard warranty, extendable up to 5 years

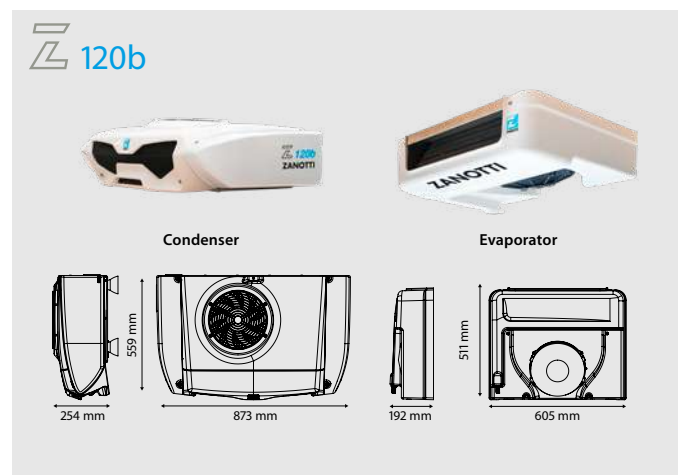


Z120b			
<b>General</b>			
Refrigerant	[ ]	R452A	
<b>System net cooling capacity under ATP conditions (30°C ambient temperature)</b>			
	[°C]	0°C	-20°C
Battery mode	[W]	1,300	550
<b>Heating capacity</b>			
Battery mode	[W]	1,100	
<b>Airflow rate</b>			
Airflow rate at 100kPa static pressure	[m³/h]	560	
<b>Weight</b>			
Condenser with electric stand-by	[kg]	64	
Evaporator	[kg]	10.2	
<b>Max current</b>			
	[A]	75	

This product contains fluorinated greenhouse gases (R452A GWP=2,140.5).

Stand-by voltages available: 230/1/50 or 400/3/50

Vehicle voltages available: 12VDC

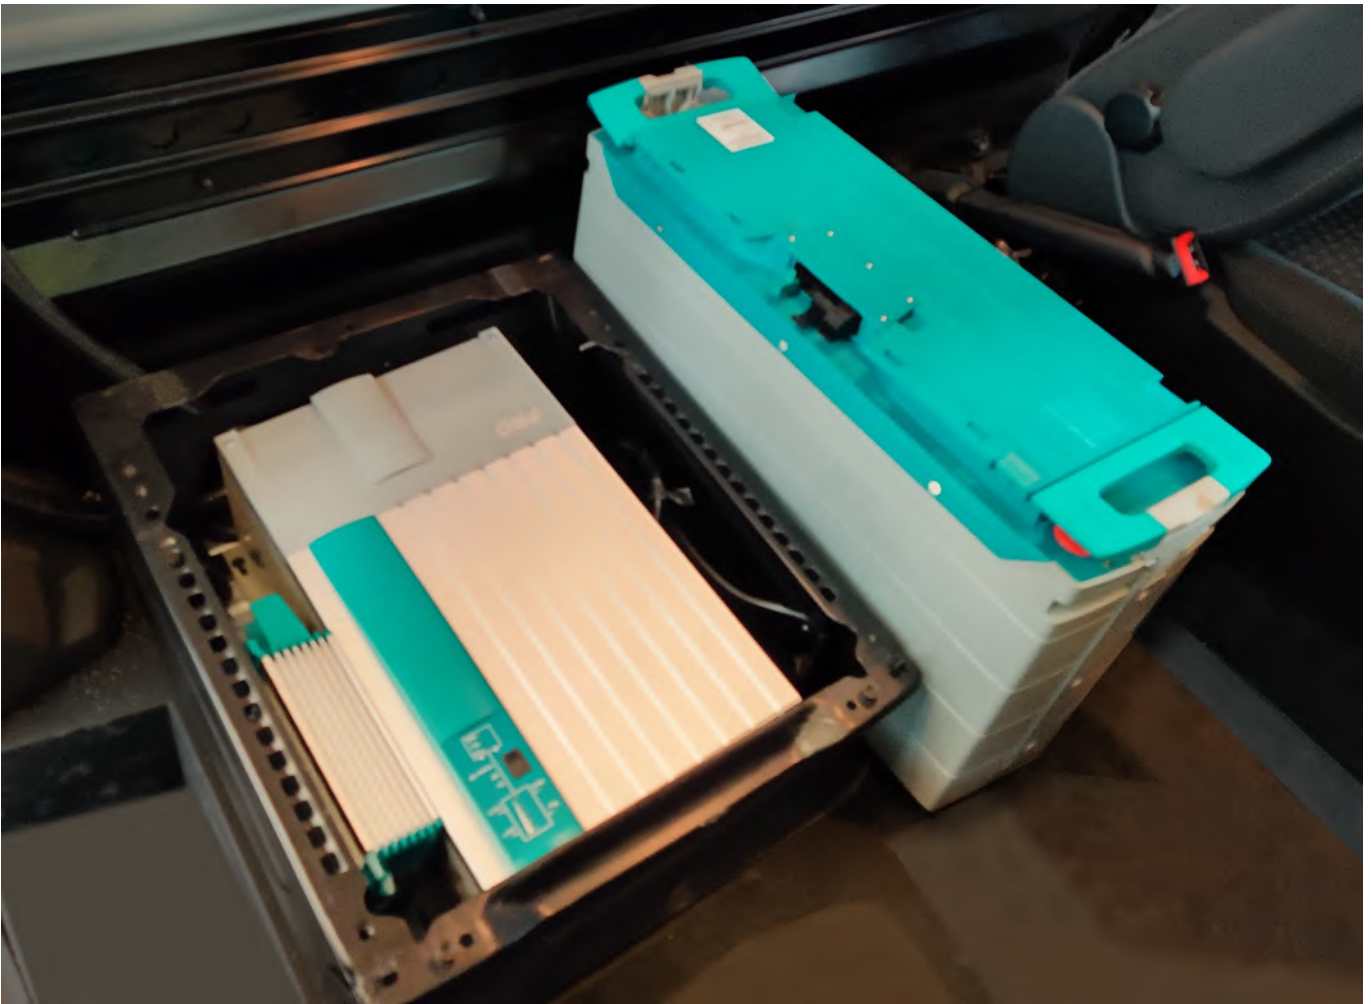

# Electric Power Supply

Our power supply packages are designed to match our Invisible Electric and Zero Electric ranges, providing a high level of reliability and customization for the specific vehicle and application needs.

The power supply can be configured as one or two DC lithium-ion batteries, each providing 1.25 to 5.5kW, up to 11kW total; and comes with a robust inverter battery charger.

## Key Features:

- ✓ Zero emissions
- ✓ Zero maintenance
- ✓ Automotive-grade design with high reliability
- ✓ Long life with 3,500 cycles
- ✓ Fast charging
- ✓ 230VAC power for charging and stand-by operation
- ✓ Bluetooth connection with smartphone app
- ✓ Compatible with telematics, for remote battery monitoring
- ✓ Optional connection to vehicle DC battery for supplementary power supply
- ✓ Optional auxiliary input for external power supply



Battery Charger  
Z120b only



Inverter Battery Charger  
SFZ009e / Z200e / Z250e /  
Z350e / Z350e Multi



## Zero Electric

### Z200e | Z250e | Z350e | Z350e Multi

The Zero range meets the needs of the distribution industry by offering the utmost flexibility in the temperature management of refrigerated products. Zero Electric is designed to meet a wide range of applications in light commercial vehicles on electric power, both on road and during stand-by. A highly reliable battery-inverter package supplies the power, making Zero Electric an ideal choice for full-electric, hybrid, or conventional vehicles.


Z200e, Z250e and Z350e offer varying refrigeration capacities and volume ratings tuned for different applications. Z350e Multi features additional evaporators to enable transport of products with different temperature requirements in separate zones.

All Zero models provide easy installation and serviceability. The condensing unit can be installed as top-mount on the roof of the box or nose-mount on the front wall of the box, and the ultra-thin evaporator installed in the cargo compartment maximizes cargo volume. A driver-friendly interface in the cabin allows real-time monitoring and control of unit performance to ensure goods are maintained at precisely the right temperature throughout the trip. Our Zero units are setting new standards with their attractive design.

#### Key Features:

- ✓ Zero emissions
- ✓ Powered by reliable battery-inverter pack on road, chargeable on electric grid
- ✓ Compatible with full-electric, hybrid or conventional vehicles
- ✓ Multiple temperature zones in the same vehicle (Multi model only)
- ✓ Proven reliability and performance
- ✓ Easy to install and service with removable side panels
- ✓ Low noise
- ✓ Configurable for a wide range of refrigerated applications in light commercial vehicles
- ✓ User-friendly cabin driver interface
- ✓ Reduced refrigerant charge and maintenance costs
- ✓ Telematics-compatible
- ✓ 2-year standard warranty



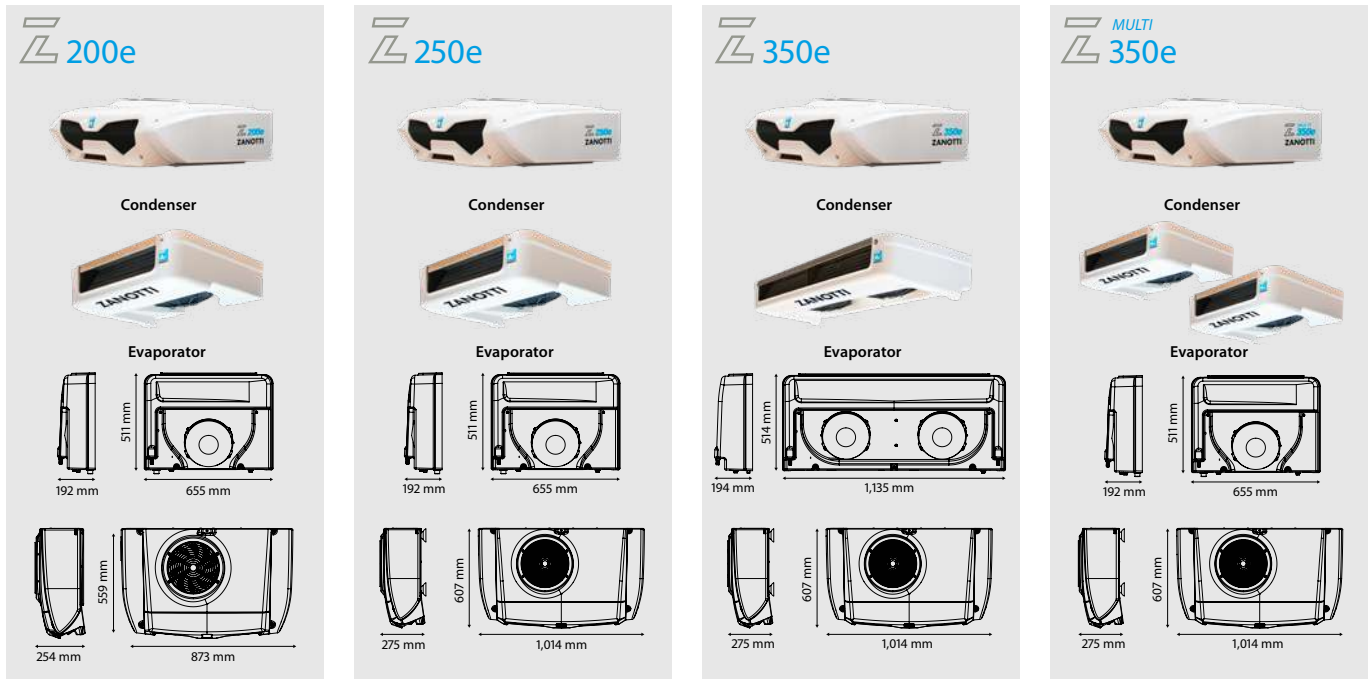

	Z200e	Z250e	Z350e	Z350e Multi					
<b>General</b>									
Refrigerant	[-] R452A								
<b>System net cooling capacity under ATP conditions (30°C ambient temperature)</b>									
	[°C]	0°C	-20°C	0°C	-20°C	0°C	-20°C	0°C	-20°C
Battery mode	[W]	1,495	695	1,735	955	1,880	1,045	1,940	830
<b>Heating capacity</b>									
Battery mode	[W]	1,200	1,500	1,650	1,600				
<b>Airflow rate</b>									
Airflow rate at 100kPa static pressure	[m³/h]	620	650	1,300	2x 620				
<b>Weight</b>									
Condenser with electric stand-by	[kg]	54	70	70	70				
Evaporator	[kg]	10.2	10.5	19.6	2X 10.2				
<b>Max current</b>									
	[A]	100	159	166	171				

These products contain fluorinated greenhouse gases (R452A GWP=2,140.5).  
 Stand-by voltages available: 230/1/50 or 400/3/50  
 Vehicle voltages available: 12VDC or 24VDC





# Light Truck





## SFZ

### SFZ238 | SFZ248

SFZ is a robust direct-drive solution for refrigerated transport on light to medium trucks. It is a proven design optimized for energy-efficiency, low noise, and easy-to-service transport of temperature-controlled goods in medium sized boxes.

SFZ238 and SFZ248 are designed as nose-mount, installed on the front wall of the box, with multiple configurations of evaporators and fans to meet the requirements of a wide range of vehicle types and applications. A driver-friendly interface in the cabin allows real-time monitoring and control of unit performance to ensure goods are maintained at precisely the right temperature throughout the trip.

#### Key Features:

- ✓ Proven reliability and performance
- ✓ Powered by direct-drive on road, electric grid on stand-by
- ✓ Easy to install and service, light weight
- ✓ Low noise
- ✓ Configurable for a wide range of refrigerated applications in light to medium trucks
- ✓ User-friendly cabin driver interface
- ✓ Telematics-compatible
- ✓ 2-year standard warranty





		SFZ238	SFZ248		
<b>General</b>					
Refrigerant	[-]	R452A			
<b>System net cooling capacity under ATP conditions (30°C ambient temperature)</b>					
	[°C]	0°C	-20°C	0°C	-20°C
Road mode	[W]	4,700	2,470	5,100	2,570
Stand-by mode	[W]	3,830	2,010	4,405	2,005
<b>Heating capacity</b>					
Road mode	[W]	3,990		4,540	
Stand-by mode	[W]	3,310		2,800	
<b>Airflow rate</b>					
Airflow rate at 100kPa static pressure	[m³/h]	1,670		3,340	
<b>Weight</b>					
Condenser without electric stand-by	[kg]	70		77	
Condenser with electric stand-by	[kg]	128		143	
Evaporator	[kg]	26.5		42.5	
<b>Road compressor</b>					
Displacement	[cc]	163		215	

These products contain fluorinated greenhouse gases (R452A GWP=2,140.5).  
 Stand-by voltages available: 230/1/50 or 400/3/50  
 Vehicle voltages available: 12VDC or 24VDC

# SFZ Multi-Temp


## SFZ238 Multi | SFZ248 Multi

Our SFZ Multi-Temp range is designed to meet the modern needs of refrigeration for light to medium trucks. These units feature additional evaporators to enable transport of products with different temperature requirements in separate zones, available in multiple configurations to adapt to a wide range of applications. It is a proven design optimized for energy-efficiency, low noise, and easy-to-service transport of temperature-controlled goods in medium-sized boxes.

SFZ238 Multi and SFZ248 Multi are designed as nose-mount, installed on the front wall of the box. A driver-friendly interface in the cabin allows real-time monitoring and control of unit performance to ensure goods are maintained at precisely the right temperature throughout the trip.

### Key Features:

- ✓ Multiple temperature zones in the same vehicle
- ✓ Proven reliability and performance
- ✓ Powered by direct-drive on road, electric grid on stand-by
- ✓ Easy to install and service, lightweight
- ✓ Low noise
- ✓ Configurable for a wide range of refrigerated applications in light to medium trucks
- ✓ User-friendly cabin driver interface
- ✓ Telematics-compatible
- ✓ 2-year standard warranty

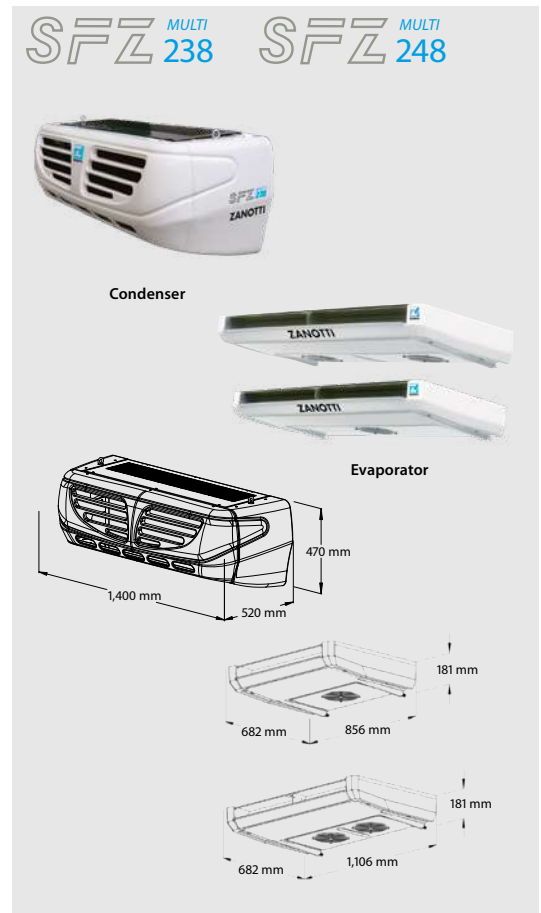

		SFZ238 Multi		SFZ248 Multi	
<b>General</b>					
Refrigerant	[ - ]	R452A			
<b>System net cooling capacity under ATP conditions (30°C ambient temperature)</b>					
	[°C]	0°C	-20°C	0°C	-20°C
Road mode	[W]	4,240	2,135	5,080	2,560
Stand-by mode	[W]	3,570	1,635	4,130	2,020
<b>Heating capacity</b>					
Road mode	[W]	3,850		4,430	
Stand-by mode	[W]	3,230		3,610	
<b>Airflow rate</b>					
Airflow rate at 100kPa static pressure	[m <sup>3</sup> /h]	2x 835		2x 1,670	
<b>Weight</b>					
Condenser without electric stand-by	[kg]	70		77	
Condenser with electric stand-by	[kg]	128		143	
Evaporator	[kg]	2x		2x	
<b>Road compressor</b>					
Displacement	[cc]	163		215	

These products contain fluorinated greenhouse gases (R452A GWP=2,140.5).  
Stand-by voltages available: 230/1/50 or 400/3/50  
Vehicle voltages available: 12VDC or 24VDC

# Truck





## Uno

### U600 | U800 | U1000




The redesigned Uno range of units are independently powered with a diesel engine, and available in various capacities to efficiently transport temperature-controlled products in medium to heavy trucks. The Uno features Zanotti's innovative direct coupling design between the engine and the compressor, and utilize Daikin's expertise in design for reliability and performance. Their high cooling performance, energy efficiency and extended maintenance intervals minimise the total cost of ownership, while meeting the most stringent emission, material waste, and noise pollution regulations.

U600, U800, and U1000 are designed as nose-mount, installed on the front wall of the box. The electronics enabled advanced diagnostics and two-way telematics including remote monitoring and control. A robust interface in the cabin can be installed in the vehicle DIN slot or mounted on the dash, allowing real-time monitoring and control of unit performance to ensure goods are maintained at precisely the right temperature throughout the trip.

#### Key Features:

- ✓ Designed for high reliability with a custom Yanmar engine
- ✓ Innovative powertrain design enabling high performance and energy efficiency
- ✓ Reduced fuel consumption and noise
- ✓ Extended maintenance intervals
- ✓ All-new electronics compatible with two-way telematics
- ✓ 2-year standard warranty



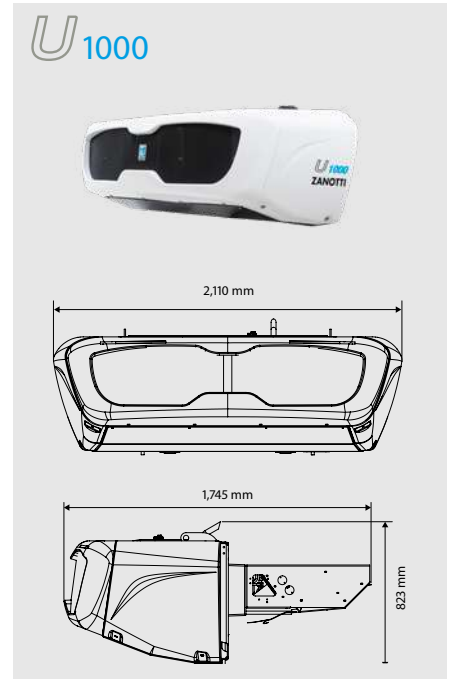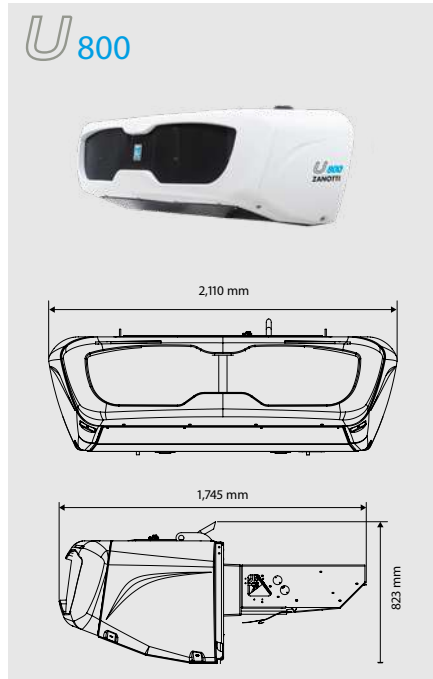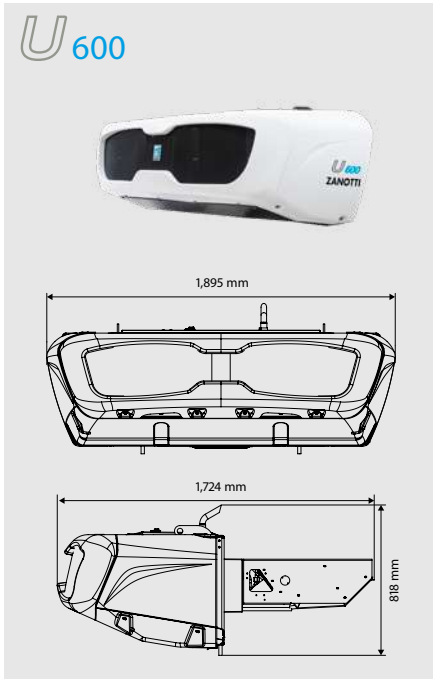

	U600	U800	U1000
--	------	------	-------

General			
Refrigerant	[-]	R452A	
Defrost	[-]	Hot gas defrost	

System net cooling capacity under ATP conditions (30°C ambient temperature)							
	[°C]	0°C	-20°C	0°C	-20°C	0°C	-20°C
Road mode	[W]	6,200	3,200	8,600	4,700	10,000	5,700
Stand-by mode	[W]	3,700	1,700	6,500	3,500	8,300	4,500

Heating capacity				
Road mode	[W]	5,400	7,500	8,700
Stand-by mode	[W]	3,200	5,700	7,200

Airflow rate			
Airflow rate at 100kPa static pressure	[m³/h]	1,500	2,610

Weight				
Monoblock road and stand-by	[kg]	485	500	549
Monoblock road-only	[kg]	435	455	504

Diesel engine				
Displacement	[cc]	854	1,116	1,116
Rated power output	[kW]	11.5	15.1	15.1
Maintenance interval	[hrs]	2,000	2,000	2,000

Road compressor				
Displacement	[cc]	235	325	390

Stand-by compressor				
Displacement	[m³/h]	11.3	14.4	21.4

These products contain fluorinated greenhouse gases (R452A GWP=2,140.5).  
Stand-by voltages available: 400/3/50



## Uno

### U800 Multi | U1000 Multi

The redesigned Uno range of units are independently powered with a diesel engine, and available in various capacities to efficiently transport temperature-controlled products in medium to heavy trucks. The Uno features Zanotti's innovative direct coupling design between the engine and the compressor, and utilise Daikin's expertise in design for reliability and performance. Their high cooling performance, energy efficiency and extended maintenance intervals minimise the total cost of ownership, while meeting the most stringent emission, material waste, and noise pollution regulations.

U800 Multi and U1000 Multi are designed as nose-mount, installed on the front wall of the box, with multiple configurations of evaporators and fans to meet the requirements of a wide range of vehicle types and applications. The electronics enabled advanced diagnostics and two-way telematics including remote monitoring and control. A robust interface in the cabin can be installed in the vehicle DIN slot or mounted on the dash, allowing real-time monitoring and control of unit performance to ensure goods are maintained at precisely the right temperature throughout the trip.



#### Key Features:

- ✓ Multiple temperature zones in the same vehicle
- ✓ Designed for high reliability with a custom Yanmar engine
- ✓ Innovative powertrain design enabling high performance and energy efficiency
- ✓ Reduced fuel consumption and noise
- ✓ Extended maintenance intervals
- ✓ All-new electronics compatible with two-way telematics
- ✓ 2-year standard warranty, extendable up to 5 years



The all-new Uno cabin controller is modern technology in a robust build.



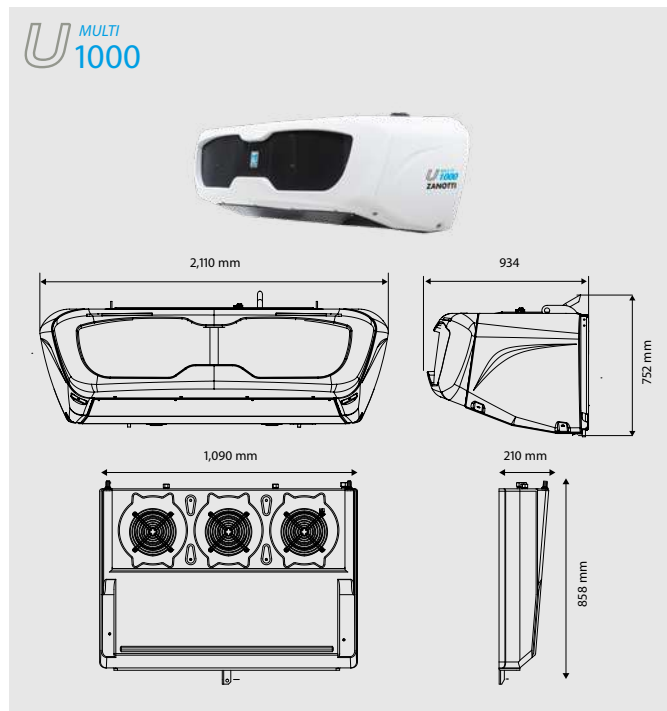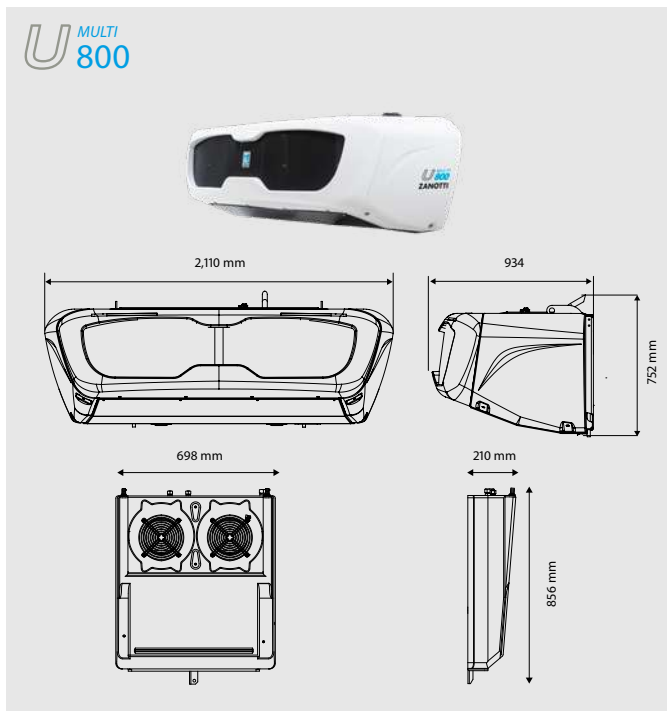

	U800 Multi		U1000 Multi
--	------------	--	-------------

General			
---------	--	--	--

Refrigerant	[-]	R452A	
Defrost	[-]	Hot gas defrost	

System net cooling capacity under ATP conditions (30°C ambient temperature)					
---	--	--	--	--	--

	[°C]	0°C	-20°C	0°C	-20°C
Road mode	[W]	7,970	4,140	9,800	5,400
Stand-by mode	[W]	6,050	3,075	8,700	4,500

Heating capacity			
------------------	--	--	--

Road mode	[W]	7,300	8,500
Stand-by mode	[W]	4,900	7,600

Airflow rate			
--------------	--	--	--

Airflow rate at 100kPa static pressure	[m³/h]	2x 1,680	2x 2,520
--	--------	----------	----------

Weight			
--------	--	--	--

Split road and stand-by	[kg]	500	505
Monoblock road-only	[kg]	460	465
Evaporator	[kg]	35 x 2	40 x 2

Diesel engine			
---------------	--	--	--

Displacement	[cc]	1,116	1,116
Rated power output	[kW]	13.2	13.2
Maintenance interval	[hrs]	2,000	2,000

Road compressor			
-----------------	--	--	--

Displacement	[cc]	325	390
--------------	------	-----	-----

Stand-by compressor			
---------------------	--	--	--

Displacement	[m³/h]	14.4	21.4
--------------	--------	------	------

These products contain fluorinated greenhouse gases (R452A GWP=2,140.5).  
Stand-by voltages available: 400/3/50

# Uno Undermount


## UN120 | UN120 Multi

Uno Undermount models are independently powered with a diesel engine, and available in various capacities to efficiently transport temperature-controlled products in heavy trucks. The units feature Zanotti's innovative direct coupling design between the engine and the compressor.

UN120 and UN120 Multi are undermount units designed to be installed under the box. UN120 Multi features additional evaporators to enable transport of products with different temperature requirements in separate zones. A driver-friendly interface in the cabin enables them to monitor and modify performance to ensure it is kept at precisely the right temperature throughout the trip.

### Key Features:

- ✓ Multiple temperature zones in the same vehicle (Multi model only)
- ✓ Designed for high reliability with a custom Yanmar engine
- ✓ Innovative powertrain design enabling high performance and energy efficiency
- ✓ Reduced fuel consumption and noise
- ✓ Telematics-compatible
- ✓ 2-year standard warranty

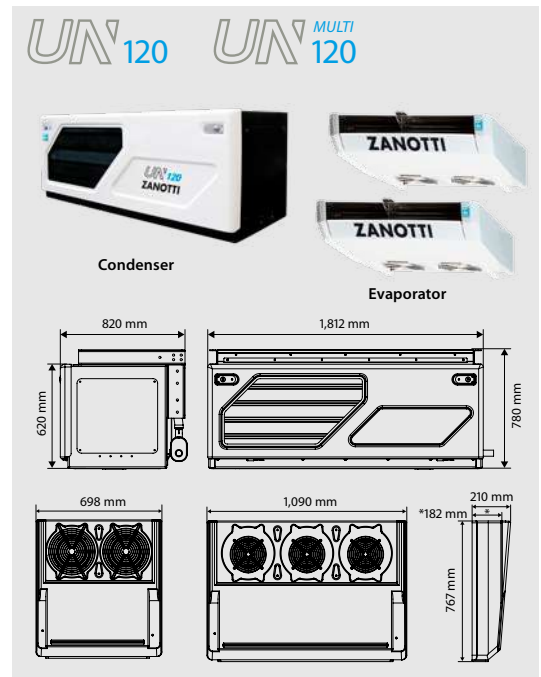

		UN120	UN120 Multi		
<b>General</b>					
Refrigerant	[-]	R452A			
Defrost	[-]	Hot gas defrost			
<b>System net cooling capacity under ATP conditions (30°C ambient temperature)</b>					
	[°C]	0°C	-20°C	0°C	-20°C
Road mode	[W]	11,500	6,200	10,600	5,700
Stand-by mode	[W]	8,200	4,200	7,500	3,900
<b>Heating capacity</b>					
Road mode	[W]	10,000		9,500	
Stand-by mode	[W]	7,100		6,700	
<b>Airflow rate</b>					
Airflow rate at 100kPa static pressure	[m³/h]	4,500		2x 2,520	
<b>Weight</b>					
Condensing unit road and stand-by	[kg]	510		510	
Condensing unit road-only	[kg]	475		475	
Evaporators	[kg]	40		40 x 2	
<b>Diesel engine</b>					
Displacement	[cc]	1,116		1,116	
Rated power output	[kW]	13.2		13.2	
Maintenance interval	[hrs]	2,000		2,000	
<b>Road compressor</b>					
Displacement	[cc]	390		390	
<b>Stand-by compressor</b>					
Displacement	[m³/h]	21.4		21.4	

These products contain fluorinated greenhouse gases (R452A GWP=2,140.5).  
Stand-By voltages available: 400/3/50





# Trailer





## Exigo E1500

Daikin Exigo E1500 is the reflection of our legacy in innovation, reliability, and transport refrigeration expertise. E1500 is the pinnacle of diesel-powered refrigeration, built on an electric-ready platform.

Exigo offers minimum total cost of ownership and maximum peace of mind

- › Full variable speed achieving lower fuel consumption than fixed speed units
- › Electric architecture providing 15kW true capacity both on the road and the grid
- › Highest cooling power of the category in frozen applications
- › Ease of unit operation with high resolution graphical user interface
- › Ease of fleet management via advanced telematics, compatible across platforms
- › Daikin components with proven reliability and lightweight design (over 100kg lighter)
- › Low-noise as standard, PIEK available
- › Reduced maintenance downtime with 3,000h service interval as standard
- › 2-year warranty, telematics and maintenance coverage included as standard
- › EMEA sales and service network backed by Daikin



High resolution graphical user interface




Advanced telematics included as standard



**INVERTER**



**Non-Inverter**

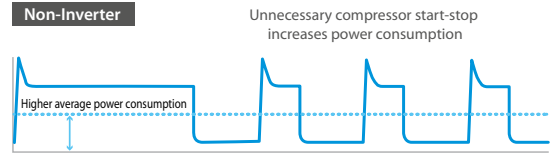

Inverter reduces power and fuel consumption by eliminating unnecessary compressor start-stop

Specifications	
Cooling capacity 30/0°C (W) - Road & Grid	14,900
Cooling capacity 30/-20°C (W) - Road & Grid	9,200
Heating capacity -20/+2°C (W) - Road & Grid	10,500
Air Flow rate evaporator at max pulldown (m³/h)	5,500
Compressor	Custom scroll compressor   economizer   inverter Variable speed
Variable speed components	Compressor   Evaporator fans   Condenser Fans
PCB	Daikin
Temperature zones	Single
Refrigerant	R-452A
Total net weight (kg)*	730
Unit Dimensions W x H x D (mm)	2,072 x 2,227 x 440
Sound Pressure Level dB(A) at PIEK condition*	65
Connectivity	Telematics as Standard with 2-Year Contract Included
Maintenance	Maintenance as Standard with 2-Year Contract Included
Pharma	Certicold GDP certification
Connectivity	Telematics with 2-year contract included
Maintenance	Maintenance with 2-year contract included

\* provisional data








# Services

# Service Network

Our continuously growing European service network, extending to over 200 authorized service partners, enabled by Daikin to provide repair and maintenance services for our van, truck, and trailer units. Our service partners always apply our genuine spare parts, engineered to ensure maximum performance and reliability. Utilising the authorized service partners and genuine parts is the only way to protect your investment under Daikin warranty and minimise total cost of ownership.

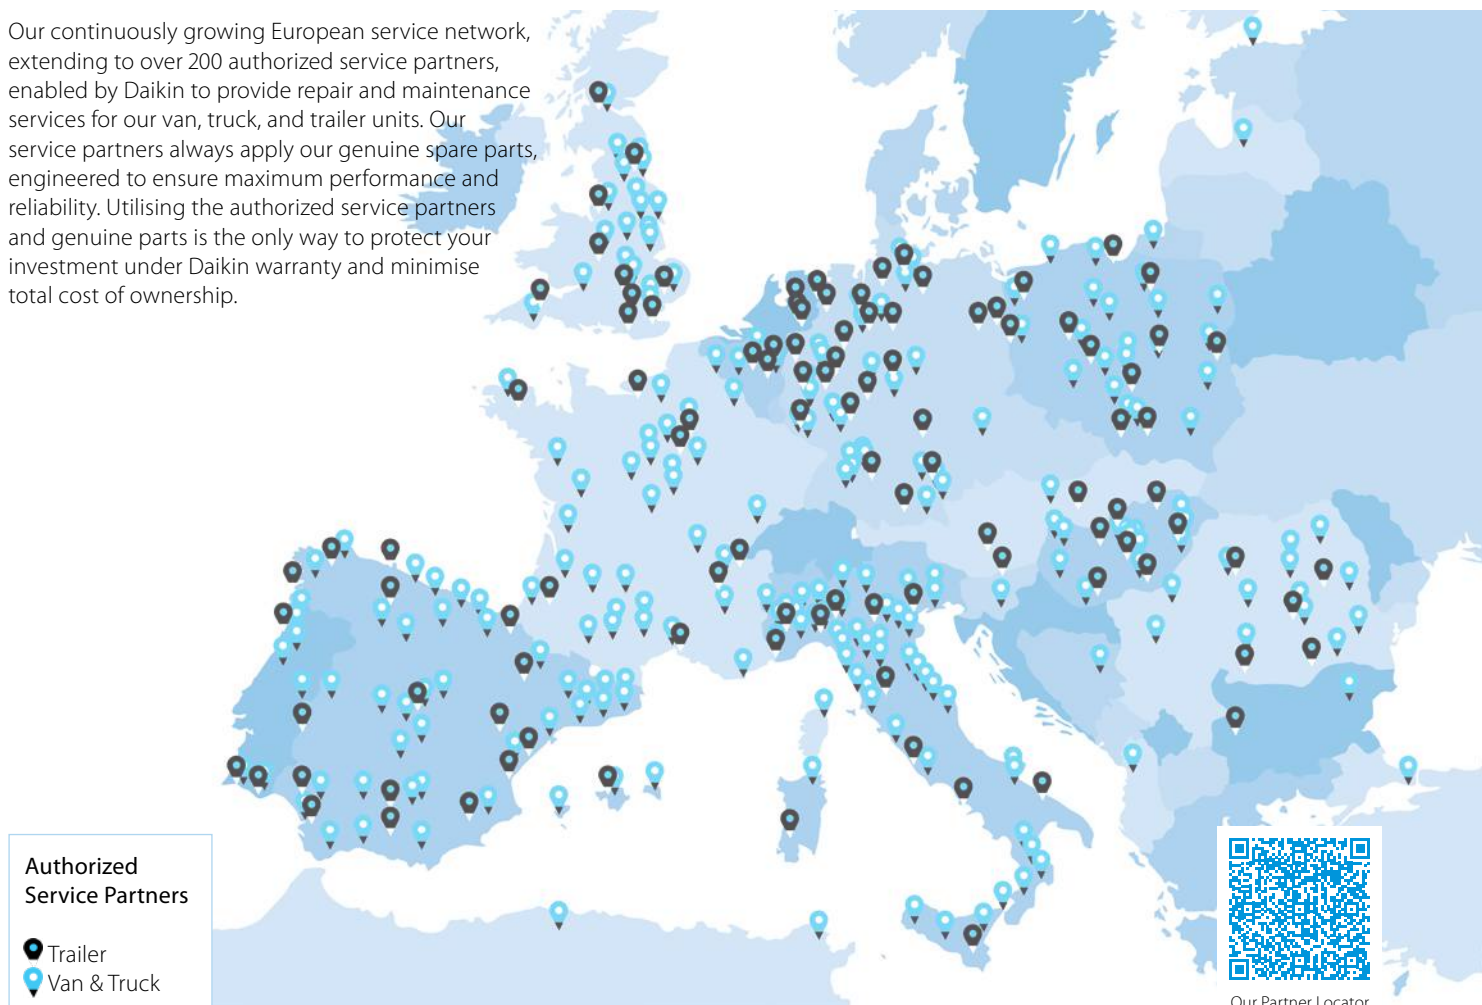

## Service Contracts

Our vision in Daikin Transport Refrigeration is to support the entire lifecycle of our customers' products. All our transport refrigeration units come standard with a two-year warranty. With the launch of Daikin Exigo trailer refrigeration unit, we are introducing the following additional service contracts.

### Maintenance Plan

Exigo comes standard with a two-year maintenance plan, covering the scheduled service intervals at national service providers. After the first two years, the contract is renewable on an annual basis.

### Extended Warranty

Exigo international parts & labor warranty can be extended on an annual basis after the first two years of standard warranty. The Extended Warranty contract requires Telematics and Maintenance Plan to be also selected.

### 24/7 Breakdown Support

Our European call center will help arrange breakdown service regardless of time, location or language. This service is also included as standard for the first two years, renewable annually.

### Stand By Me

Exigo customers will have access to the Daikin Stand By Me portal which simplifies contract management and renewal for fleet managers.



# Telematics

Daikin Telematics help trailer fleet managers gain greater insight and control over their fleet remotely. The back-end of our system is supported by an EU-based provider highly experienced in commercial vehicle telematics providing connectivity across EMEA. Exigo comes standard with two-year telematics and renewable annually afterwards.

The telematics framework is designed with the customer in mind, providing utmost flexibility by being configurable for third-party fleet management software. The included telematics portal provides state-of-the-art visibility and control of each unit in the fleet.

- ✓ Live location monitoring on map
- ✓ Remote HMI display and control
- ✓ Error messages with push notification
- ✓ Geofence alarm and low-noise programming
- ✓ Remote unit diagnostics
- ✓ Over-the-air software update
- ✓ Intuitive online fleet management portal
- ✓ Configurable for existing fleet management software



Service Contracts	Zanotti Van & Truck Range (First 2 years)	Daikin Exigo (First 2 years)	Daikin Exigo (Annual Renewal)
<b>Warranty</b> EMEA parts and labor warranty coverage	Included	Included	Optional Extended Warranty (requires) Telematics and Maintenance Plan)
<b>Telematics</b> EMEA coverage and fleet management portal access		Included	Optional
<b>Maintenance Plan</b> National scheduled preventative maintenance		Included	Optional
<b>24/7 Breakdown Support</b> Call center support in main European languages		Included	Optional

# Connect with Daikin



If you are a user or installer it is important you can **interact with our systems** in the easiest way, from **anywhere you are**. For any user our interfaces create **peace of mind** that their system is running in the best possible way.

Depending on the type of user and application Daikin develops controls and cloud services to ensure the best experience.


- > For home owners it means **app and voice control** of their home comfort.
- > For hotel owners it means easy and stylish **personal control for guests**, with an integration in hotel booking software for central control
- > For technical managers it means **cloud access** to all sites, with the possibility to benchmark, optimize performance
- > For installers it means **easy transfer of settings during commissioning**, remote retrieval of errors and preventive alerts to save time on maintenance or interventions

Our controls enable you to **connect with your customer**, save time, improve your comfort intelligently and reduce energy bills.







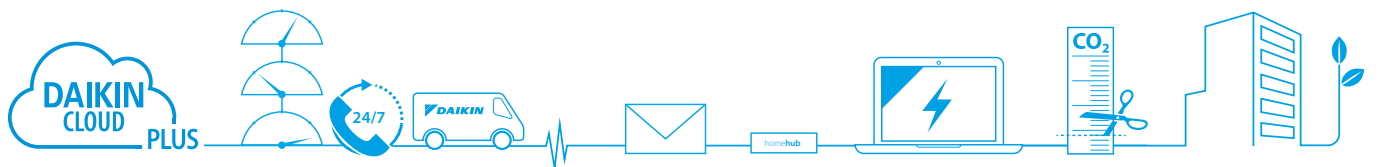

homehub

## Remote monitoring



# Control Systems


Application overview	914
Individual control systems	916
Onecta App	916
<b>NEW</b> Daikin HomeHub- Home Energy Management	920
DCS residential	922
Madoka wired remote controller	924
Wired / infrared remote controllers	928
Individual wireless room controllers	930
Multi zone controller	932
Daikin mAP	934
Centralised control systems	936
Centralised remote controller / Unified ON/OFF controller	936
 Intelligent Controller	937
 Intelligent Controller	938
 Intelligent Manager	940
<b>NEW</b> Daikin Cloud Plus 	944
 Intelligent Manager	954
Standard protocol interfaces	958
<b>NEW</b> Individual Modbus Interface	958
KNX Interface	962
<b>PMS Interface</b> for hotels	963
<b>BACnet Interface</b>	964
<b>LonWorks Interface</b>	965
Daikin on Site (DoS) 	966
Indoor Environmental Sensor	972
Daikin Configurator Software	976
EKPCCAB4	976
Other devices	977
Wireless room temperature sensor	977
Wired room temperature sensor	977
Other integration devices	978
Options & Accessories	979

# Control solutions summary

Daikin offers various control solutions adapted to the requirements of even the most demanding commercial application.

- › Basic control solutions for those customers with few requirements and limited budget
- › Integrating control solutions for those customers who would like to integrate Daikin units into their existing BMS system
- › Advanced control solutions for those customers who expect Daikin to deliver a mini BMS solution, including advanced energy management


## Shop



	Unit control		Integrating control				Advanced control			
	BRP069*	BRC1H52 W/S/K	RTD-20	EKMBPP1	KLIC DI V2	EKMBDXB	DCC601A51	DCM601B51	DGE601A51	DGE602A51
	Smartphone control for up to 50 indoor units	1 remote controller for 1 indoor unit (group)	1 gateway for 1 indoor unit (group)	1 gateway for 1 indoor unit (group)	Two additional probes can be connected	1 gateway for max. 64 indoor unit(s) (groups) & 10 outdoors	1 unit for 32 indoor unit(s)	1 iTM for 64 indoor unit(s) (groups) (1)	Up to 512 units with extension modules via Daikin Cloud Plus	Max 64 units via Daikin Cloud Plus
Automatic control of A/C	•	•	•	•	•	•	•	•	•	•
Limit control possibilities for shop staff	•	•	•	•	•	•	•	•	•	•
Create zones within the shop			•	•			•	•	•	•
Interlock with eg. Alarm, PIR sensor			•				• (limited)	•	•	•
Integration into smart home systems	• (5)									
Integrate Daikin units into existing BMS via Modbus			•	•		•				
Integrate Daikin units into existing BMS via KNX					•					
Integrate Daikin units into existing BMS via HTTP							•			
Monitor energy consumption	• (3)	• (3)					•	•	•	•
Advanced energy management							•	•	•	•
Allows free cooling							•			
Voice control	• (4)									
Integrate Daikin products cross pillars into Daikin BMS							•			
Integrate third party products into Daikin BMS							•	•	•	•
Online control	•						• (2)	•	•	•
Manage multiple sites								•	•	•

(1) 7 iTM plus adapters (DGE601A52 and DGE601A53) can be added to have 512 indoor groups and 80 outdoor (systems) | (2) Through own IT set-up (not Daikin cloud server) | (3) Not available on all indoors | (4) Only for BRP069C51, connection to Google Assistant and Amazon Alexa | (5) Only for BRP069C51, contact your local sales representative for an overview of available services.

## Hotel



	Unit control	Integrating control			Advanced control			
	BRC1H52 W/S/K	RTD-20	KLIC DI V2	DCM010A51	DCM601B51	DGE601A51	DGE602A51	
	1 remote controller for 1 indoor unit (group)	1 gateway for 1 indoor unit (group)	Two additional probes can be connected	1 interface for up to 2,500 indoor units	1 iTM for 64 indoor unit(s) (groups) (1)	Up to 512 units with extension modules via Daikin Cloud Plus	Max 64 units via Daikin Cloud Plus	
Hotel guest can control & monitor basic functionalities from his room	•							
Limit control possibilities for hotel guests	•	•	•	•	•	•	•	
Interlock with window contact		•			•	•	•	
Interlock with key-card		•			•	•	•	
Integrate Daikin units into existing BMS via Modbus		•						
Integrate Daikin units into existing BMS via KNX			•					
Integrate Daikin units into existing BMS via HTTP				•				
Integrate Daikin unit control in hotel booking software				•				
Oracle Opera PMS				•				
Monitor energy consumption					•	•	•	
Advanced energy management					•	•	•	
Integrate Daikin products cross pillars into Daikin BMS					•			
Integrate third party products into Daikin BMS					•	•	•	
Online control					•	•	•	

(1) 7 iTM plus adapters (DGE601A52 and DGE601A53) can be added to have 512 indoor groups and 80 outdoor (systems)

Office



	Unit control	Integrating control			Advanced control			
	BRC1H52 W/S/K	EKMBDXB	DMS504B51	DMS502A51	DCC601A51	DCM601B51	DGE601A51	DGE602A51
	1 remote controller for 1 indoor unit (group)	1 gateway for max. 64 indoor unit(s) (groups) & 10 outdoors	1 gateway for 64 indoor unit(s) (groups)	1 gateway for 128 indoor unit(s) (groups), 20 outdoors (2)	1 unit for 32 indoor unit(s) (groups)	1 iTM for 64 indoor unit(s) (groups) (1)	Up to 512 units with extension modules via Daikin Cloud Plus	Max 64 units via Daikin Cloud Plus
Automatic control of A/C	•	•	•	•	•	•	•	•
Centralised control for management		•	•	•	•	•	•	•
Local control for office staff	•				•	• Through web	•	•
Limit control possibilities for office staff	•	•	•	•	•	•	•	•
Integrate Daikin units into existing BMS via Modbus		•						
Integrate Daikin units into existing BMS via HTTP						•		
Integrate Daikin units into existing BMS via LonTalk			•					
Integrate Daikin units into existing BMS via BACnet				•				
Energy consumption read out	• (3)					•	•	•
Monitor energy consumption						•	•	•
Advanced energy management						• (5)	•	•
PPD software to distribute used kWh/indoor unit				• (4)		•	•	•
Integrate Daikin cross pillar products into Daikin BMS						•		
Integrate third party products into Daikin BMS						•	•	•
Online control							•	•
Manage multiple sites							•	•

(1) 7 iTM plus adapters (DGE601A52 and DGE601A53) can be added to have 512 indoor groups and 80 outdoor (systems) | (2) Extension (DAM411B51) needed to have up to 256 indoor unit(s) (groups), 40 outdoors | (3) Not available on all indoor units | (4) via DAM412B51 option | (5) via DCM002A51 option

Infrastructure cooling



	Unit	Integrating	Advanced
	BRC1H52W/S/K	RTD-10	DCM601B51
	1 remote controller for 1 indoor unit (group) (2)	1 gateway for 1 indoor unit (group) Up to 8 gateways can be linked together	1 iTM for 64 indoor unit(s) (groups) (1)
Automatic control of A/C	•	•	•
Back-up operation	•	•	•
Duty rotation	•	•	•
Limit control possibilities in the technical cooling room	•	•	•
If room temperature above max., then show alarm & start standby unit.		•	•
If an error occurs, an alarm will be shown.	•	•	•
If an error occurs, activate an alarm output	Via KRP2/4A option (3)	•	Via WAGO I/O

(1) 7 iTM plus adapters (DGE601A52 and DGE601A53) can be added to have 512 indoor groups and 80 outdoor (systems) | (2) Infrastructure cooling functions only compatible with indoor units connected to RZQG\*/RZAG\* outdoor units. | (3) See option list of indoor unit

# Onecta App

Now available with voice control

The Onecta App is for those who live their life on the go and who want to manage their Daikin system from their smartphone.




## onecta


### Voice control

To provide users with even more comfort and ease, the Onecta App now offers voice control. This hands-free feature cuts down on clicks to manage units faster than ever before.

Cross-functional and multilingual, voice control pairs well with any smart device, including Google Assistant and Amazon Alexa.

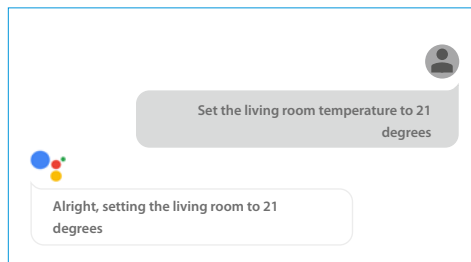


Example of using the voice control via Google Assistant

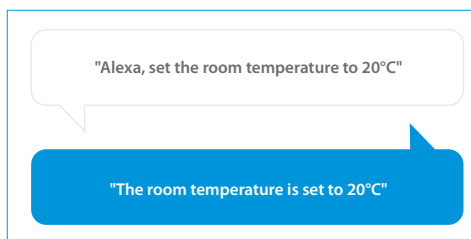

Scan the QR code to download the app now






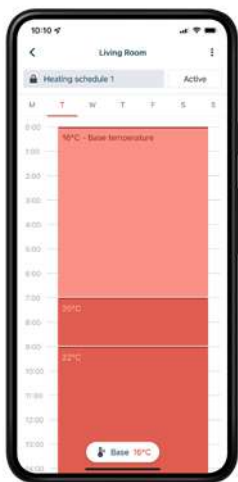

## Schedule

Set up a programme outlining when the system should operate, and create up to six actions per day.

- Schedule room temperature and operation mode
- Enable holiday mode to save costs

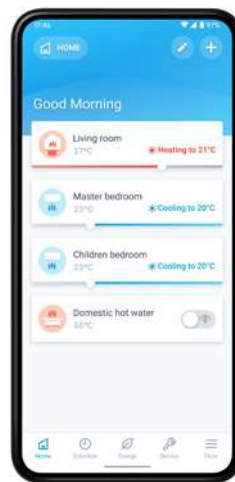

## Control

Customise the system to fit your lifestyle and year-round comfort levels.

- Change room and domestic hot water temperature
- Turn on powerful mode to boost hot water production




## Monitor

Receive a thorough overview of how the system is performing and how much energy it consumes.

- Check the status of the heating system
- Access energy consumption graphs (day, week, month)

Function availability depends on the system type, configuration and operation mode. The app functionality is only available if both the Daikin system and the app have a reliable internet connection.

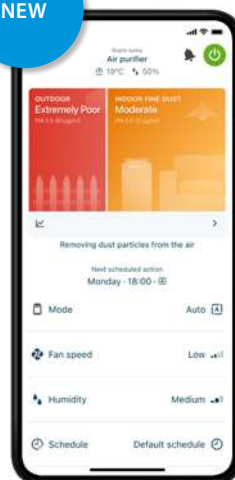

## Now with Indoor & Outdoor Air Quality Information on fingertips

The new Daikin Air Purifiers MCK70Z & MC80Z are now integrated with Daikin Onecta App. In our mission to inform consumers everything related to their indoor and outdoor air quality, the app now also lets consumers monitor the outdoor air quality. This means that control of good indoor air quality is available easily on the fingertips through the smartphones.

For more information on our new Onecta App Integrated Daikin Air Purifiers, please refer to the Residential Air Quality Chapter



## Individual control systems



## Possible Onecta Connections

### For heating

	OUTDOOR		INDOOR		connection to Onecta	
					WLAN	LAN
ASHP	Daikin Altherma 3 H HT	EPRA14/16/18D*	F	ETVH/X/Z16-E7	standard	optional: BRP069A62
			ECH <sub>2</sub> O	ETSH(B)/X(B)16-E7		
			W	ETBH/X16-E7		
	Daikin Altherma 3 H MT	EPRA08/10/12E*	F	ETVH/X/Z12-E	standard	optional: BRP069A62
			ECH <sub>2</sub> O	ETSH(B)/X(B)12-P-E		
			W	ETBH/X12-E		
	Daikin Altherma 3 R MT	ERRA-EV*	F	ELVH/X/Z-E	standard	optional: BRP069A62
			ECH <sub>2</sub> O	ELSH/X(B)-E		
			W	ELBH/X-E		
	Daikin Altherma 3 R	ERGA-E*	F	EHVH/X/Z-E	standard	optional: BRP069A62
			ECH <sub>2</sub> O	EHSB(B)/X(B)-P-E		
			W	EBBH/X-E		
	Daikin Altherma 3 R	ERLA11/14/16D*	F	EBVH/X/Z-D	optional: BRP069A78 or BRP069A71	optional: BRP069A62
			ECH <sub>2</sub> O	EBSB(B)/X(B)-D		
W			EBBH/EBBX-D			
Daikin Altherma 3 R	ERLA03DV	F	EHFH/Z03-S18D3V	×	optional: BRP069A62 or BRP069A61	
Daikin Altherma 3 H	EPGA-DV7	F	EAVH/X/Z-D7	×	optional: BRP069A62 or BRP069A61	
		W	EABH/X-D7			
Daikin Altherma 3 M	EBLA09/11/14/16D(7)			optional: BRP069A78	optional: BRP069A62	
Daikin Altherma 3 M	EDLA09/11/14/16D					
		EBLA04/06/08E				
Daikin Altherma 3 M	EDLA04/06/08E			standard	optional: BRP069A62	
Daikin Altherma R HT	ERR/SQ-AV1/Y1		EKHBRD-DV/Y17	×	×	
HYBRID	Daikin Altherma R Hybrid	EVLQ-CV3		EHYHBBH-AV32	×	optional: BRP069A62 or BRP069A61
			Boiler	EHYKOMB33AA2/3		
Daikin Altherma H Hybrid	EJHA-AV3	Boiler	EHY2KOMB28/32A A	×	optional: BRP069A62 or BRP069A61	
GS/WS	Daikin Altherma 3 GEO			EGSAH/X-(U)D9W	×	standard
	Daikin Altherma 3 WS			EWSA-D	×	standard
COMB.	Daikin Altherma 3 C Gas W			D2CND-A1/A4		optional: DRGATEWAYAA
				D2TND-A4		

In case both WLAN and LAN options are possible, we advice to choose WLAN if possible as the WLAN adaptors offer more possibilities (e.g. remote MMI update, more remote installer settings)

### For RA

	Model #	WLAN	User settings	Field settings
Ururu Sarara	FTXZ-N	optional - BRP069B42	basic	no
Daikin Emura	FTXJ-M*	standard - included in the box	basic	no
	FTXJ-A*	integrated	all	yes
	FTXTJ-A*	integrated	all	yes
Stylish	FTXA-A/B*	integrated	basic	no
	FTXTA-C*	integrated	all	yes
	FTXA-C*	integrated	all	yes
Perfera	FTXM-R	integrated	basic	no
	FTXTM-S	integrated	all	yes
	FTXM-A	integrated	all	yes
	FTXTM-S	integrated	all	yes
Comfora	FTXP-M*	optional - BRP069B45	basic	no
	FTXP-N*	integrated	all	yes
Sensira	FTXF-D	optional - BRP069B45	basic	no
	FTXF-E	optional - BRP069C47	all	yes

For Daikin Air Purifiers

Model #	WLAN
MCK80Z/ZB	integrated
MCK70W/BFW & MCKZOH/BFH	integrated

For VRV

	Model #	WLAN
VRV 5 indoor units	FXFA-A	Optional: BRP069C51 (1)
	FXZA-A	
	FXDA-A	
	FXSA-A	
	FXMA-A	
	FXHA-A	
	FXUA-A	
	FXAA-A	


(1) Must be combined with BRC1H52W/S/K

For Sky Air

	Model #	WLAN
Sky Air	FDXM-F9	Optional BRP069C81 (1)
	FFA-A9	
	FBA-A(9)	
	FDA125A	
	ADEA-A	
	FAA-B	
	FHA-A(9)	
	FUA-A	
	FVA-A	
	FNA-A9	
	FCAG-B	Optional BRP069C82 (2)
	FCAHG-H	
	FDA200-250A	Optional BRP069C82 (3)

(1) Only possible in combination with wired or wireless remote control |

(2) EWHAR1 is required if autocleaning panel & Onecta is connected; Cannot be combined with KRP4A53; Only possible in combination with wired or wireless remote control | (3) Cannot be combined with KRP4A51 and KRP2A51

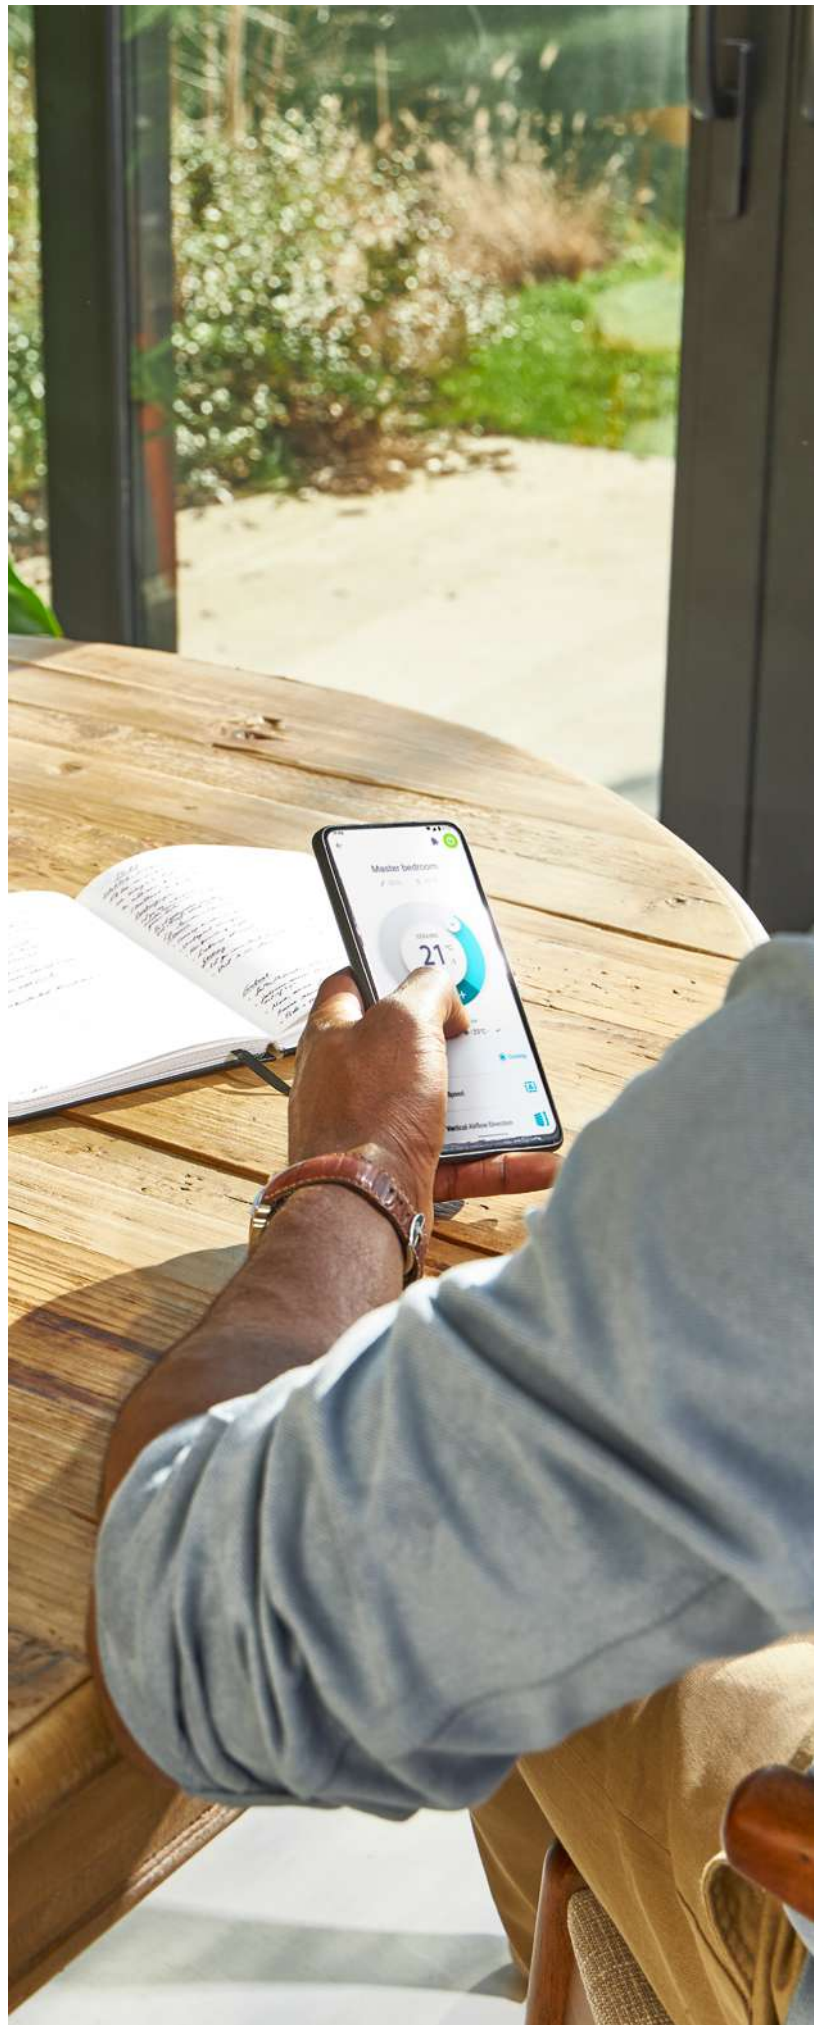



## Daikin Home Energy Management Introducing HomeHub

### Daikin HomeHub (reference EKRHH)

is a centralised controller for residential applications.



NEW

Daikin HomeHub can, depending on the user's needs, support two different modes:

✓ **As a controller:**

- › HomeHub is the main controller intended to optimize the energy consumption of a Daikin Altherma or Multi+ (DHW) heat pump in combination with a PV system.

✓ **As an interface:**

- › HomeHub is used to control our Daikin Altherma heat pump from a home automation or energy management system through a local interface

**Basic specifications:**

- › Daikin P1-P2 connectivity
- › LAN connectivity for features upgrades and Modbus IP
- › Modbus RTU connectivity
- › Configuration, control and feedback through the MMI of the Daikin Altherma or Multi+ (DHW) tank

With this first release, **three use cases** are launched:


- › Use Case 1: PV self-consumption for Daikin Altherma
- › Use Case 2: PV self-consumption for Multi+ (DHW)
- › Use Case 3: Modbus RTU/IP for Daikin Altherma

## Use Case 1: PV self-consumption for Daikin Altherma

PV self-consumption for Daikin Altherma is optimizing the energy consumption of the heat pump by using the energy generated by the PV panels. This is achieved by using the solar energy, which would normally be injected into the grid, **to heat up the domestic hot water or to buffer energy in space pre-heating or pre-cooling.**

## Use Case 2: PV self-consumption for Multi+ (DHW)

This use case shows similarity with use case 1 for Daikin Altherma. However, the excess of energy is in this case directly supplied to the emerged booster heater of the DHW tank. This will accelerate **the generation of DHW at a low cost.**

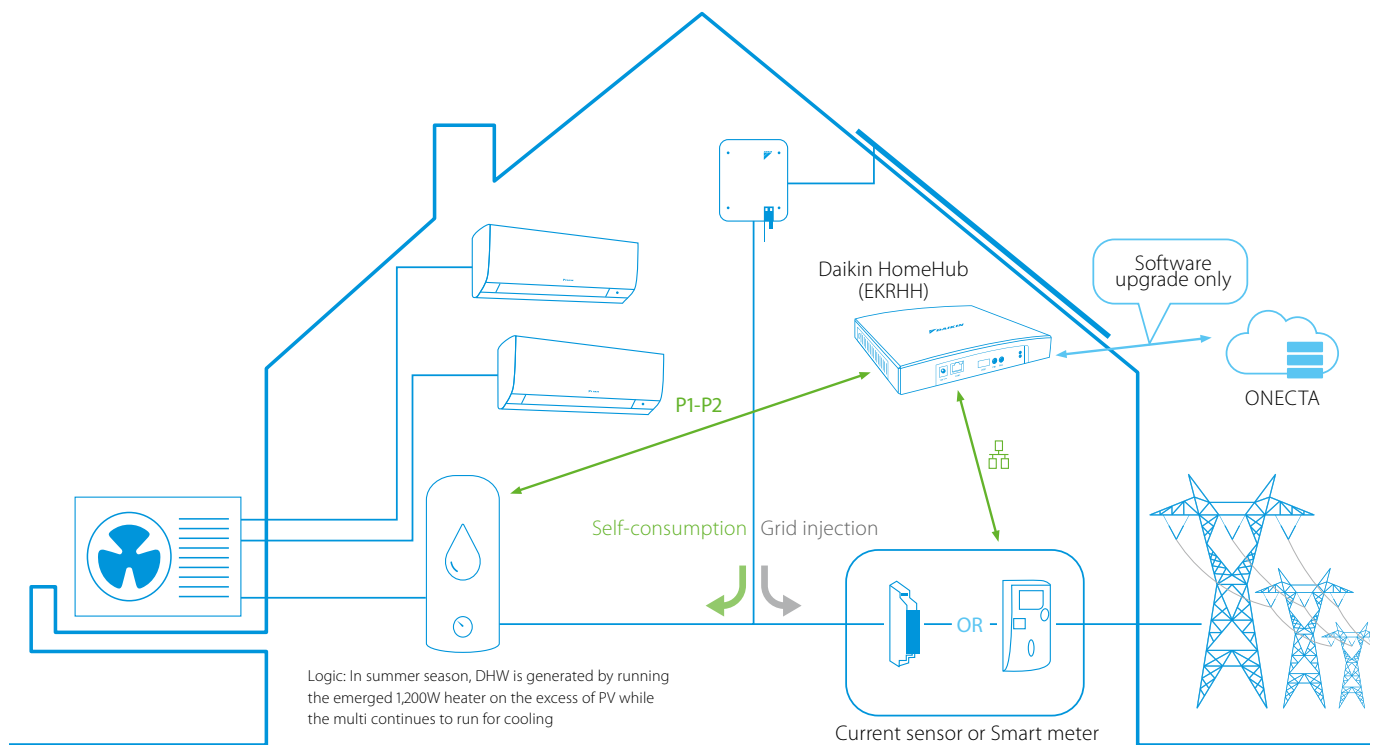


## Use Case 3: Modbus RTU/IP for Daikin Altherma

This use case integrates Daikin Altherma units in a home automation or energy management system through Modbus IP/RTU. The interface provides comfort and energy features.

For a full list of the interface features, please consult the installation manual of the HomeHub.



We are just starting in 2023, more to follow soon!

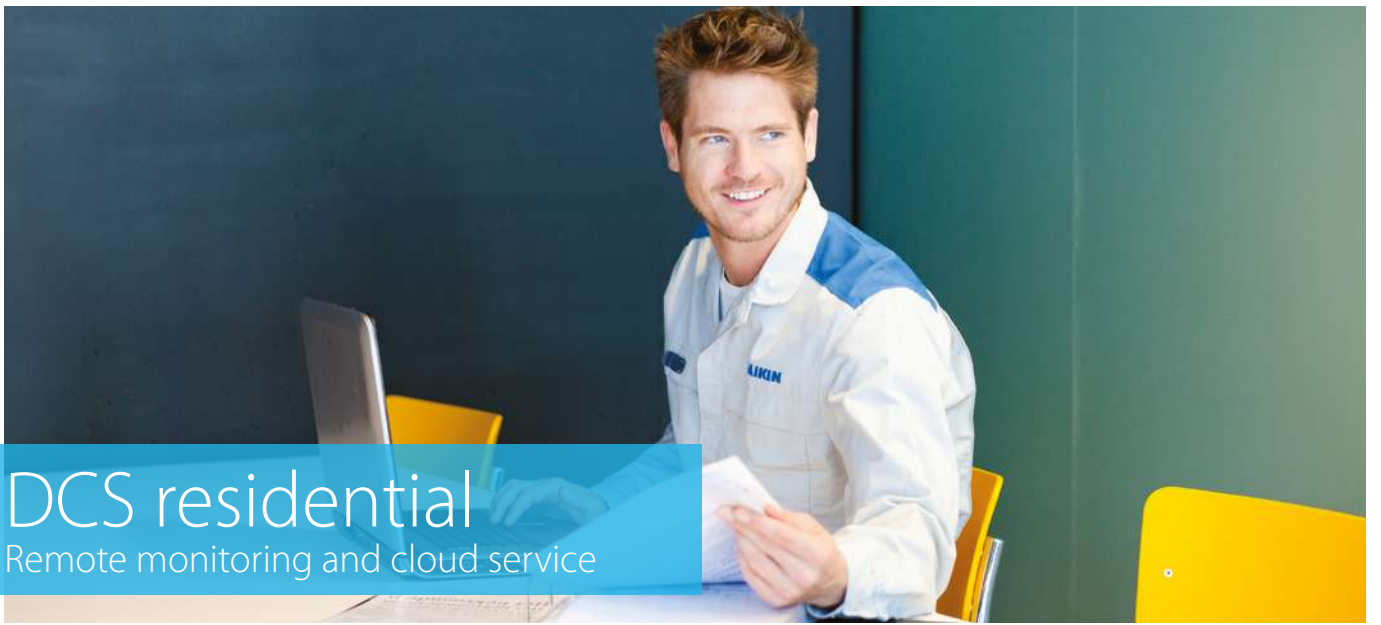

# DCS residential

## Remote monitoring and cloud service

From the professional portal, installers can activate the remote monitoring allowing them to supervise your installation on multiple parameters, from their location. They will get an automatic notification in case there is something wrong with the installation. By changing certain settings, they can improve your comfort immediately. Save time and get a better support, thanks to these new features.


### How to access?

Through Stand By Me Pro portal.

### What to expect

Remote monitoring and servicing of split products, after consent from the end user.

- > Control your customer's unit and change settings.
- > Read out temperature, energy consumption and error code.

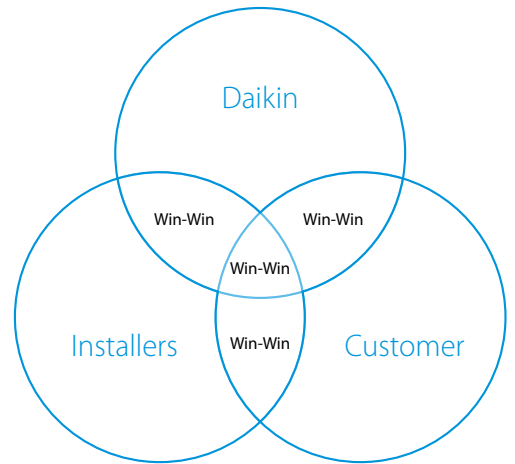

## Solving a simple issue without broken parts

### Without DCS



### With DCS



## Solving a complex issue which needs ordering and replacing broken parts

### Without DCS




### With DCS



# Visualization

Overview per product, showing the selected parameters

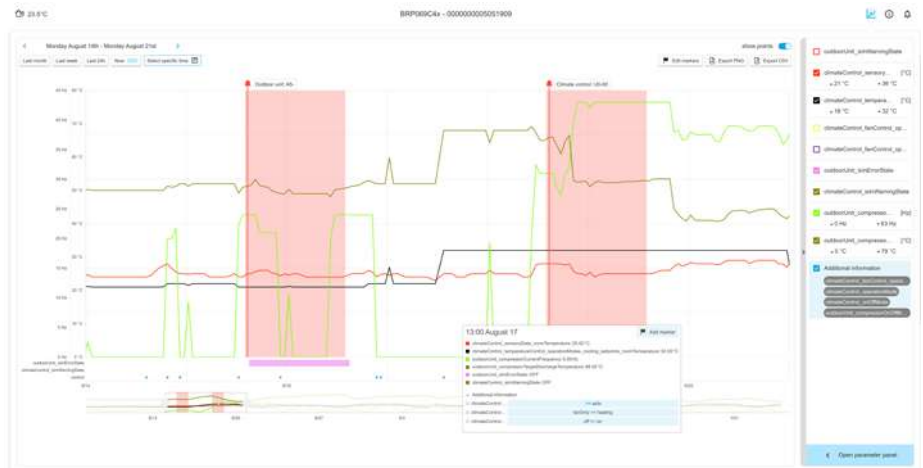

# Adding Markers

Up to 5 markers can be placed and customized



# Parameter Panel

Easily select the required parameters and change colours



# Exporting (Image/CSV)

Export the data of a selected period in CSV or as an image



## Madoka wired remote controller

# Madoka

# The beauty of simplicity.



Silver  
RAL 9006 (metallic)  
BRC1H52S



Black  
RAL 9005 (matte)  
BRC1H52K



White  
RAL9003 (glossy)  
BRC1H52W

## User-friendly wired remote controller with premium design

Madoka combines refinement and simplicity

- › Sleek and elegant design
- › Intuitive touch-button control
- › Three display options: standard, detailed and **new symbolic view**
- › Three colours to match any interior
- › Compact, measures only 85 x 85 mm
- › Advanced settings **copy function** and commissioning via smartphone
- › CO<sub>2</sub> concentration visualisation



reddot award 2018  
winner







# Madoka Assistant




Simplifies the advanced settings such as schedule or set point limitation

- Visual interface simplifies advanced settings such as schedule setting, energy saving activation, setting restrictions, etc.
- Save field settings and schedules on your phone and upload to multiple controllers, saving time and cost
- Easy and quick commissioning
- Featuring Bluetooth® low energy technology


Easy setting of schedules




Advanced user settings

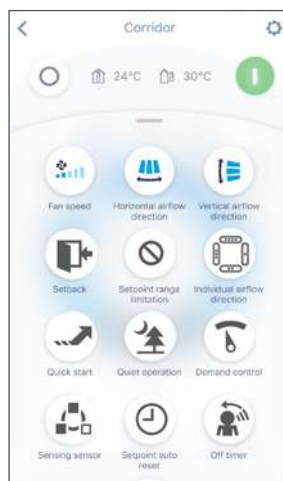

Bluetooth strength indication

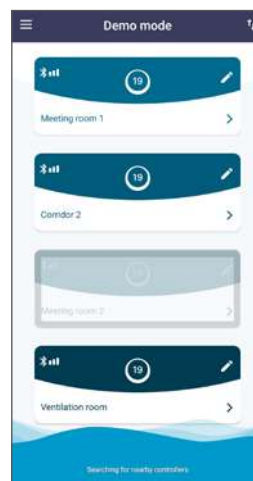

Field settings

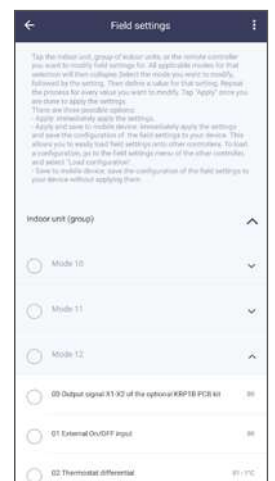

BRC1H52W / BRC1H52S / BRC1H52K

# Madoka wired remote controller for Sky Air and VRV



BRC1H52W  
Symbolic view



BRC1H52S  
Standard view



BRC1H52K  
CO<sub>2</sub> visualisation


## A complete redesigned controller focussed to enhance user experience

- › Sleek and elegant design
- › Intuitive touch-button control
- › Three display options: standard, detailed and **symbolic view**
- › Direct access to basic functions (on/off, set point, mode, target values, fan speed, louvres, filter icon & reset, error & code)
- › Three colours to match any interior
- › Compact, measures only 85 x 85 mm
- › Real time clock with auto update to daylight saving time

### Hotel application features

- › Energy saving through key card, window contact integration and set point limitation (BRP7A\*)
- › Flexible setback function ensures room temperature remains within comfortable limits to ensure guest comfort

### Key card and window contact integration

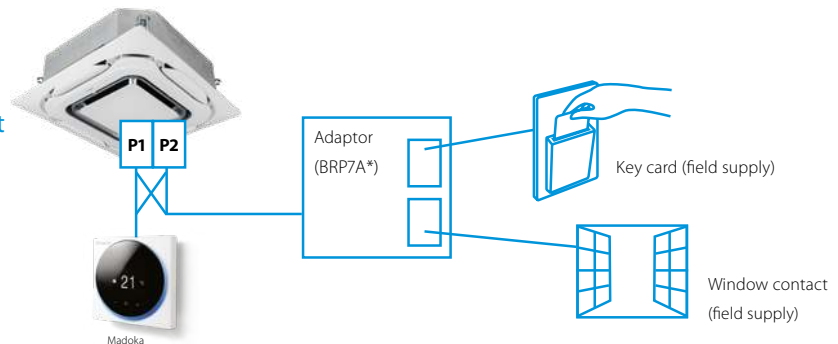

## Madoka Assistant: Advanced settings can be easily done via your smartphone

### A range of energy-saving functions that can be selected individually

- › Temperature range restriction: Save on energy by setting the low temperature limit in cooling mode and the high temperature limit in heating mode (1)
- › Setback function
- › Adjustable presence detector and floor sensor (available on the Round Flow and Fully Flat Cassettes)
- › Automatic temperature reset
- › Auto off timer

### Kilowatt-hour consumption tracking (2)

The kWh indicator displays indicative power consumption for the last day/month/year.

### Other functions

- › Three user access levels: Basic user, Advanced and Installer to match user requirements and prevent improper use.
- › Save field settings and schedules on your phone and upload to multiple controllers, saving time and cost
- › Mark frequently used menu's as favourites for direct access
- › Up to three independent schedules can be programmed, allowing you to switch easily between them throughout the year (e.g. summer/winter/mid-season)
- › Menu settings can be individually locked or restricted
- › The outdoor unit can be set to quiet mode and power consumption limit control by schedule (3)
- › Real-time clock that updates automatically for daylight saving



### Cost-effective solution for infrastructure cooling applications

- › Only in combination with RZAG\* / RZQG\*
- › Duty rotation

After a certain period of time, the operating unit will go into standby and the standby unit will take over, extending the system lifetime. Rotation interval can be set for 6, 12, 24, 72 or 96 hours, as well as weekly.

- › Back-up operation: if one unit fails, the other unit will start automatically

(1) Also available in auto cooling/heating changeover mode  
(2) For Sky Air FBA, FCAG and FCAHG pair combinations only

(3) Only available on RZAG\*, RZASG\*, RZQG\*, RZQSG\*

BRC1HHDW / BRC1HHDS / BRC1HHDK

## Madoka wired remote controller for Daikin Altherma 3 heat pumps

A new generation of user interface, redesigned and intuitive



BRC1HHDW



BRC1HHDS



BRC1HHDK



### Intuitive control with a premium design:

The smooth curves of the Madoka controller offer a sleek, refined shape which is distinguished by its striking blue circular display. Presenting a clear visual reference with large easy to read numbers, the controller features are accessed through three touch buttons, which combine intuitive control with easy adjustability for an enhanced user experience.

### Three colours to match any interior design:

No matter your interior design, Madoka will match it. Silver gives an additional touch to stand out in any interior or application, while Black is an ideal match for darker, stylish interiors. White offers a sleek, modern look.

### Easily set operation parameters:

Setting and finetuning your controller is simple and helps you attain higher energy savings and more comfort. The system enables you to select the space operation mode (heating, cooling or automatic), set the desired room temperature and control the domestic hot water temperature.

### Easy Update via Bluetooth:

It is strongly recommended that the user interface has the latest software version. To update the software or check if updates are available, you need a mobile device and the Madoka Assistant app. This app is available from Google Play and the Apple Store.

[www.daikin.eu/madoka](http://www.daikin.eu/madoka)

EKRUCB\*

# Wired remote control for Heating

### Control

- › Manage space heating, cooling, domestic hot water and among others, booster mode
- › User-friendly remote control with contemporary design
- › Easy to use with direct accessibility to all main functions

### Comfort

- › An additional user interface can include a room thermostat in the space to be heated
- › Easy commissioning; intuitive interface for advanced menu settings


\* only in combination with EKRTETS

### General features

Several languages possible depending on the model, including: English, German, Dutch, Spanish, Italian, French, Greek, Russian, etc.

### Applicable Daikin units

- › Daikin Altherma R (F/W)
  - Daikin Altherma M
- › Daikin Altherma R Hybrid
- › Daikin Altherma GEO
- › Domestic hot water heat pump

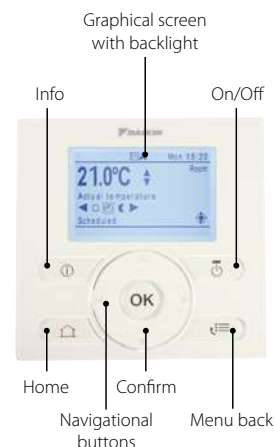

## Applicable Daikin units



			BRC1HHDW/S/K	EKRUCB*	EKRUHML*	DOTROOMTHEAA
Daikin Altherma 3 H HT (F/W)	14-16-18 kW	EPRA14-18D7 + ETV/B*-E7	•			
Daikin Altherma 3 H HT ECH2O	14-16-18 kW	EPRA14-18E + ETS*-E7	•			
Daikin Altherma 3 H MT (F/W)	8-10-12 kW	EPRA08-12E + ETV/B*-E	•			
Daikin Altherma 3 H MT (ECH2O)	8-10-12 kW	EPRA08-12E + ETS*-E	•			
Daikin Altherma 3 R (F/W)	4-6-8kW	ERGA-E* + EHV/B*-E	•			
Daikin Altherma 3 R ECH2O	4-6-8kW	ERGA-E* + EHS*-E	•			
Daikin Altherma 3 R (F/W)	11-14-16 kW	ERLA-D* + EBV/B*-D	•			
Daikin Altherma 3 R ECH2O	11-14-16 kW	ERLA-D* + EBS*-D	•			
Daikin Altherma 3 M	4-6-8-9-11-14-16 kW	E(B/D)LA-E/D*	•			
Daikin Altherma R Hybrid	5-8 kW	EVLQ-CV3		•		
Daikin Altherma H Hybrid	4 kW	EJHA-AV3			•	
Daikin Altherma 3 GEO	6-10 kW	EGSA(H/X)-D9W	•			
Daikin Altherma 3 C Gas W	12-35 kW	D2CND-A1A/A4A				•

# Individual room control system for temperature adjustment of heating and cooling systems



## General features

- › Improve energy efficiency of the home
- › Universally deployable and scalable
- › Easy and intuitive installation, operation and maintenance
- › Cost effective and convenient for the end-user

## Comfort

With the help of an electronic room-by-room control system, users can regulate the temperature individually in each room.

In addition to the warmth output of the actual heating surfaces, the room temperature control system also takes all other heat sources into account, such as sunshine, warmth from lights or people, and other sources of warmth, such as a fireplace or a tiled stove. On the basis of a continuous comparison of the target and current temperatures, the room temperature control system opens and closes the individual heating circuits by way of electrical valve actuators.

## System components



### Base station EKWUFHTA1V3

The Daikin Wired Base Station is the central connection unit of a room-by-room temperature control for the surface temperature adjustment of heating and cooling systems.



### Wired digital thermostat EKWCTRDI1V3

The setting of the desired room temperature and the operation, can be performed comfortably via a rotary control with rotary-push action and soft ratchet. The well-structured and language-neutral symbols of the display always clearly indicate all settings.



### Wired analog thermostat EKWCTTRAN1V3

An optimum price-performance ratio is offered for rooms where only a very good temperature control is desired, without the comfort function of the display variant.



### Valve actuator EKWCVATR1V3


The Daikin Valve Actuator is a thermoelectric valve drive for opening and closing valves on heating circuit distributors of concealed heating and cooling systems.

## Applicable Daikin units

- › Combinable to all Daikin Altherma units

# Individual wireless room controllers

Our individual wireless room controllers allow for a total flexibility in heating your home.

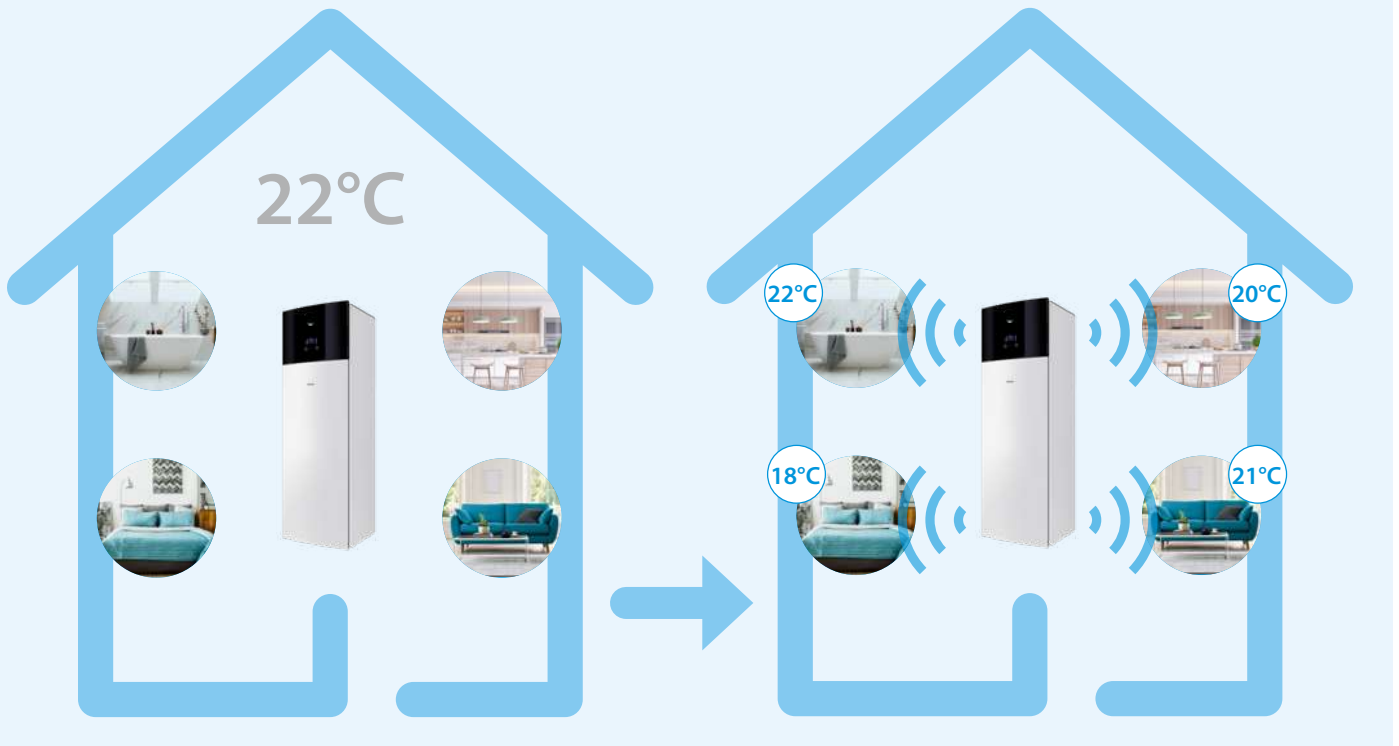

## ✓ Personalize your heating schedule

A traditional heating system allows you to control the temperature in only one room. With Daikin Home Controls you can choose the perfect temperature for each area separately.

## ✓ Wireless control for a better flexibility

**Get rid of cables and have control from anywhere you are, thanks to the Onecta app.**

Our wireless range of controllers makes your life easier. As soon as they are installed, you can program or control each room temperature from the intuitive app.



## BRC1E53A

## User friendly remote control for Sky Air and VRV



Graphical display of indicative electricity consumption (Function available in combination with FBA-A, FCAG and FCAHG)

## A series of energy saving functions that can be individually selected

- › Demand control (1)
- › Temperature range limit
- › Setback function
- › Presence & floor sensor connection (available on round flow and fully flat cassette)
- › kWh indication (2)
- › Set temperature auto reset
- › Off timer

## Other functions

- › Up to 3 independent schedules
- › Possibility to individually restrict menu functions
- › Choice of display between symbol or text
- › Real time clock with auto update to daylight saving time
- › Built-in backup power for clock (up to 48 hours). Settings are always kept in case of power loss.
- › Supports multiple languages: BRC1E53A: English, German, French, Dutch, Spanish, Italian, Portuguese



## Cost-effective solution for infrastructure cooling applications

- › Only in combination with RZAG\* / RZQG\*

(1) Only available on RZAG\*, RZASG\*, RZQG\*, RZQSG\* | (2) For Sky Air FBA, FCAG and FCAHG pair combinations only

## BRC1D52

## Wired remote control for Sky Air and VRV



BRC1D52

- › Schedule timer: Five day actions can be set
- › Home leave (frost protection): during absence, the indoor temperature can be maintained at a certain level. This function can also switch the unit ON/OFF
- › User friendly HRV function, thanks to the introduction of a button for ventilation mode and fan speed
- › Immediate display of fault location and condition
- › Reduction of maintenance time and costs

## BRC4\*/BRC7\*

## Infrared remote control



BRC4\*/BRC7\*

Operation buttons: ON/OFF, timer mode start/stop, timer mode on/off, programme time, temperature setting, air flow direction (1), operating mode, fan speed control, filter sign reset (2), inspection (2)/test indication (2)

Display: Operating mode, battery change, set temperature, air flow direction (1), programmed time, fan speed, inspection/test operation (2)

1. Not applicable for FXDQ, FXSQ, FXNQ, FBDQ, FDXM, FBA
2. For FX\*\* units only
3. For all features of the remote control, refer to the operation manual





## Controls

3 controller versions are available to choose from: Colour, touch or simplified



AZCE6BLUEZEROCB (Wired)

### Bluezero - main thermostat

- › Intuitive graphical, colour touch screen for controlling multiple zones



AZCE6LITECB (Wired)  
AZCE6LITERB (Wireless)

### Lite - zone thermostat

- › Simplified thermostat with touch buttons for temperature control



AZCE6THINKRB (Wireless)

### Think - zone thermostat

- › Graphic touch button with low-energy e-ink screen for controlling single zones



AZX6WSPHUB

### Webserver for remote control

- › Cloud based remote control of multizoning kit(s)
- › Configuration and control of zones (temperature, operation mode, ...)
- › Access via webportal, or Android/IOS application
- › Supports Ethernet and WIFI
- › AZX6WSPHUB:
  - › For installation on DIN rail
  - › 32 zoning boxes can be controlled
- › AZX6WSC5GER:
  - › For installation in the unit
  - › Controls one zoning box



AZX6WSC5GER



AZX6WSPBAC

### BACnet or KNX gateway

- › Allows ON/OFF control of each zone
- › Control of temperature for each zone
- › Status indication of operation mode
- › One gateway needed per system



AZX6KNXGTWAY

## Options and modules



AZX6CABLEBUS15 (15 m)  
AZX6CABLEBUS100 (100 m)

### Optional bus cable (2 x 0.5 mm<sup>2</sup> | 2 x 0.22 mm<sup>2</sup>)



AZX6MCS

### Heating only module

- › Locks medium reversible multizoning kit to heating only



AZCE8ACCOFF

### ON/OFF zone module

- › On/Off of the zone through voltage free contact

## Grilles and plenums

### Supply air grilles and plenums



RDHV040015BKX

### Wall type supply grille

- › With horizontal and vertical adjustable flaps



RLQV040015BKX

### Ceiling type supply grille

- › With horizontal flaps angled at 15°
- › Vertical flaps can be adjusted manually



PREJ040015T

### Plenum for supply grille

- › To connect circular ducts to discharge grille
- › Insulated, galvanised steel
- › Diameter 250mm

### Return air grilles and plenums



RRFR050050BTX

### Return air grille with integrated filter

- › Filters particles from the air



BR500

### Plenum for return grille

- › To connect 1 up to 4 circular ducts to the return air grille
- › Diameter 250mm



AZCEZDAPR07\*

### Plenum for return air

- › To connect 1 up to 4 circular ducts to the Daikin concealed ceiling units
- › Diameter 250mm
- › Different sizes (XS, S, M, L, XL) to fit the indoor unit

# Daikin mAP

Digital interface for your HVAC equipment

The Daikin mAP is the brand-new Digital HMI solution for all Daikin Applied products, designed to let end-users and technician operate easily and effectively from their smartphone or tablet while performing field activities.





## Daikin mAP

NEW

### Digital Interface

The Daikin mAP is the brand-new Digital HMI solution for all Daikin Applied products, designed to let end-users and technician operate easily and effectively from their smartphone or tablet while performing field activities.

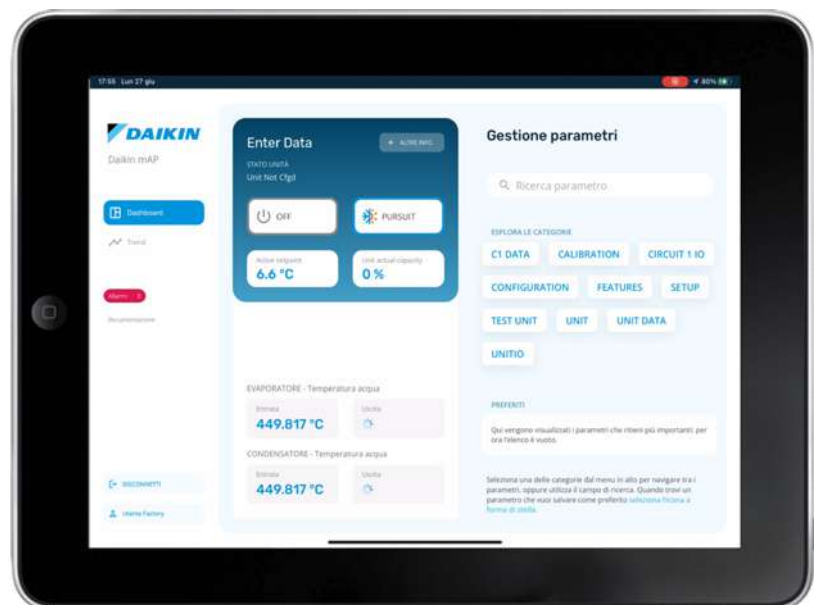


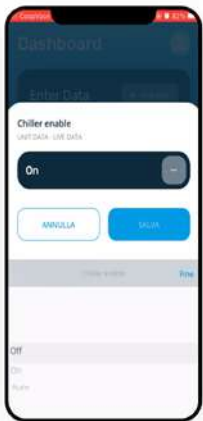

## Control

Change settings and control parameters with more flexibility.

- ✓ Up to 4 user levels with different privileges
- ✓ Improved unit access security

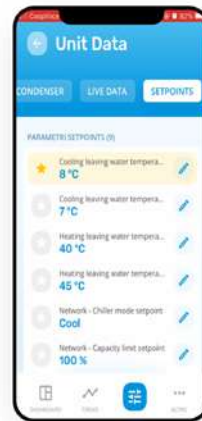


## Select

Explore and search for a specific unit parameter.

- ✓ Search bar to easily find the desired parameter
- ✓ Select & change and pin in the dashboard your preferred parameters

## Monitor

Start a live monitoring and trending of your preferred parameters

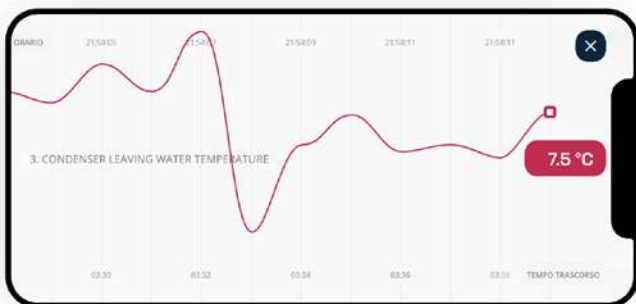

- ✓ Background monitoring for a non-stop operations
- ✓ Export and share monitoring data in .CSV file
- ✓ Up to 20 live trends and monitoring

## Centralised remote controller

Centralised control of the Sky Air and VRV system can be achieved via 2 user friendly compact remote controllers. These controls may be used independently or in combination with:

1 group = several (up to 16) indoor units in combination

1 zone = several groups in combination.

A centralised remote control is ideal for use in tenanted commercial buildings subject to random occupation, enabling indoor units to be classified in groups per tenant (zoning).

### DCS302C51

## Centralised remote control



Providing individual control of 64 groups (zones) of indoor units.

- > a maximum of 64 groups (128 indoor units, max. 10 outdoor units) can be controlled
- > a maximum of 128 groups (128 indoor units, max. 10 outdoor units) can be controlled via 2 centralised remote controls in separate locations
- > zone control
- > group control
- > malfunction code display
- > maximum wiring length of 1,000m (total: 2,000m)
- > air flow direction and air flow rate of HRV can be controlled
- > expanded timer function

### DCS301B51

## Unified ON/OFF control




Providing simultaneous and individual control of 16 groups of indoor units.

- > a maximum of 16 groups (128 indoor units) can be controlled
- > 2 remote controls in separate locations can be used
- > operating status indication (normal operation, alarm)
- > centralised control indication
- > maximum wiring length of 1,000m (total: 2,000m)

## DCS601C51



Detailed & easy monitoring and operation of VRV systems (max. 64 indoor units groups).

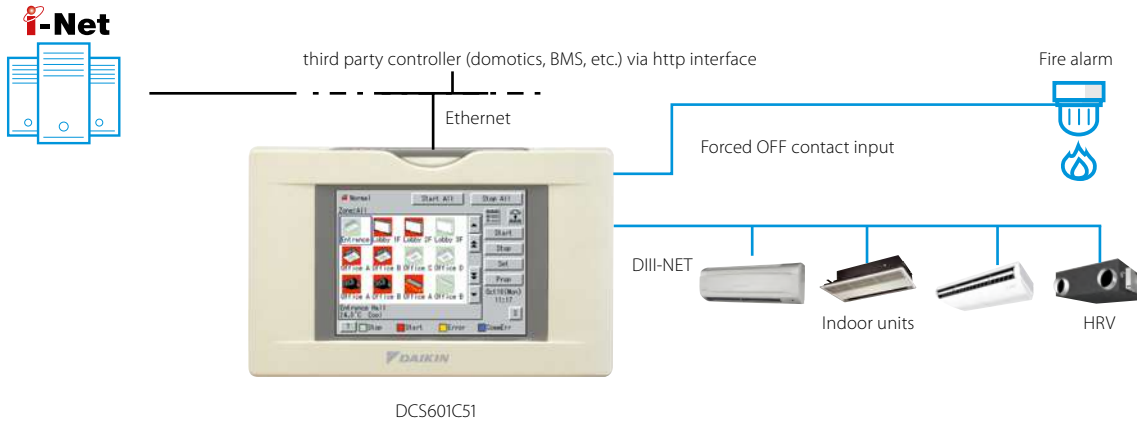

### Languages

- › English
- › French
- › German
- › Italian
- › Spanish
- › Dutch
- › Portuguese

### System layout

- › Up to 64 indoor units can be controlled
- › Touch panel (full colour LCD via icon display)

### Control

- › Individual control (set point, start/stop, fan speed) (max. 64 groups/indoor units)
- › Set back schedule
- › Enhanced scheduling function (8 schedules, 17 patterns)
- › Flexible grouping in zones
- › Yearly schedule
- › Fire emergency stop control
- › Interlocking control
- › Increased HRV monitoring and control function
- › Automatic cooling / heating change-over
- › Heating optimization
- › Temperature limit
- › Password security: 3 levels (general, administration & service)
- › Quick selection and full control
- › Simple navigation

### Monitoring

- › Visualisation via Graphical User Interface (GUI)
- › Icon colour display change function
- › Indoor units operation mode
- › Indication filter replacement

### Cost performance

- › Free cooling function
- › Labour saving
- › Easy installation
- › Compact design: limited installation space
- › Overall energy saving

### Open interface

- › Communication to any third party controller (domotics, BMS, etc.) is possible via open interface (http option DCS007A51)

### Connectable to

- › VRV
- › HRV
- › Sky Air
- › Split (via interface adapter)

DCC601A51

**Tablet Intelligent Controller**


# Advanced centralised controller

- Intuitive and user-friendly interface
- Flexible concept for stand alone applications
- Total solution thanks to integration of 3rd party equipment

## Local solution

- > Offline centralised control
- > Stylish optional screen fits any interior

## System layout

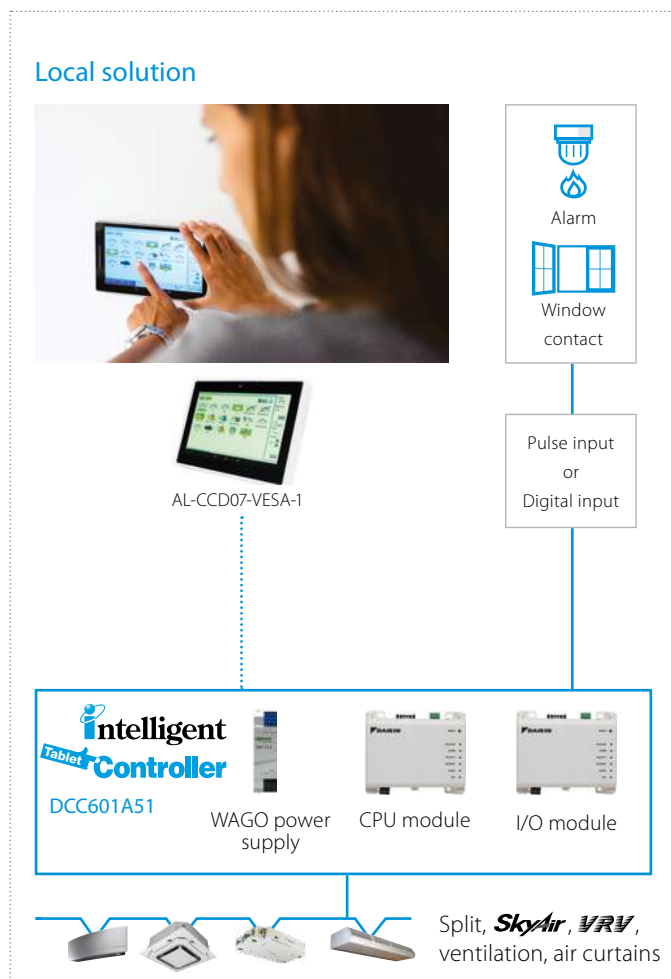

### Total solution

- › Total solution thanks to a large integration of Daikin products and 3rd party equipment
- › Connect a wide range of units (Split, Sky Air, VRV, Ventilation, Biddle air curtains)
- › Simply control your entire building centrally
- › Increased customer shopping experience by better management of your shop comfort level


### User friendly touch control

- › Stylish Daikin supplied optional screen for local control fits any interior
- › Intuitive and user-friendly interface
- › Full solution with simple control
- › Easy commissioning

### Flexible

- › Pulse/digital inputs for 3rd party equipment such as kWh meters, emergency input, window contact, ...
- › Control up to 32 indoor units per controller and 320 units per site

(1) only available in combination with certain indoor units

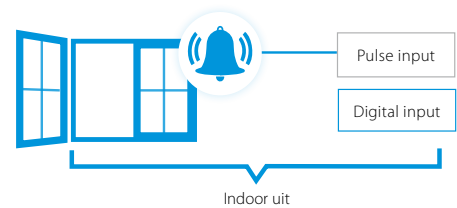

### Functions overview

		Local solution
<b>Languages</b>		Depends on local device
<b>System layout</b>	N° of connectable indoor units Multiple sites control	32
<b>Monitoring &amp; control</b>	Basic control functions (ON/OFF, mode, filter sign, setpoint, fan speed, ventilation mode, room temperature, ...)	●
	Remote control prohibition	●
	All devices ON/OFF	●
	Zone control	
	Group control	●
	Weekly schedule	●
	Yearly schedule	
	Interlock control	●
	Set point limitation	
	Visualisation of energy use per operation mode	
<b>Connectable to</b>	DX split, Sky Air, VRV	●
	Modular L Smart, VAM, VKM ventilation	●
	Air curtains	●

For available Daikin Cloud Service options refer to the option list



# Mini BMS

with full integration  
across all product pillars

DCM601B51



- Price competitive mini BMS
- Cross-pillar integration of Daikin products
- Integration of third party equipment



Download the WAGO  
selection tool from  
[my.daikin.eu](http://my.daikin.eu)

- › Easy selection of WAGO materials
- › Material list creation
- › Time saving
  - Includes wiring schemes
  - Contains commissioning/preset data for iTM




Check on  
**YouTube**

<https://www.youtube.com/DaikinEurope>



# System overview

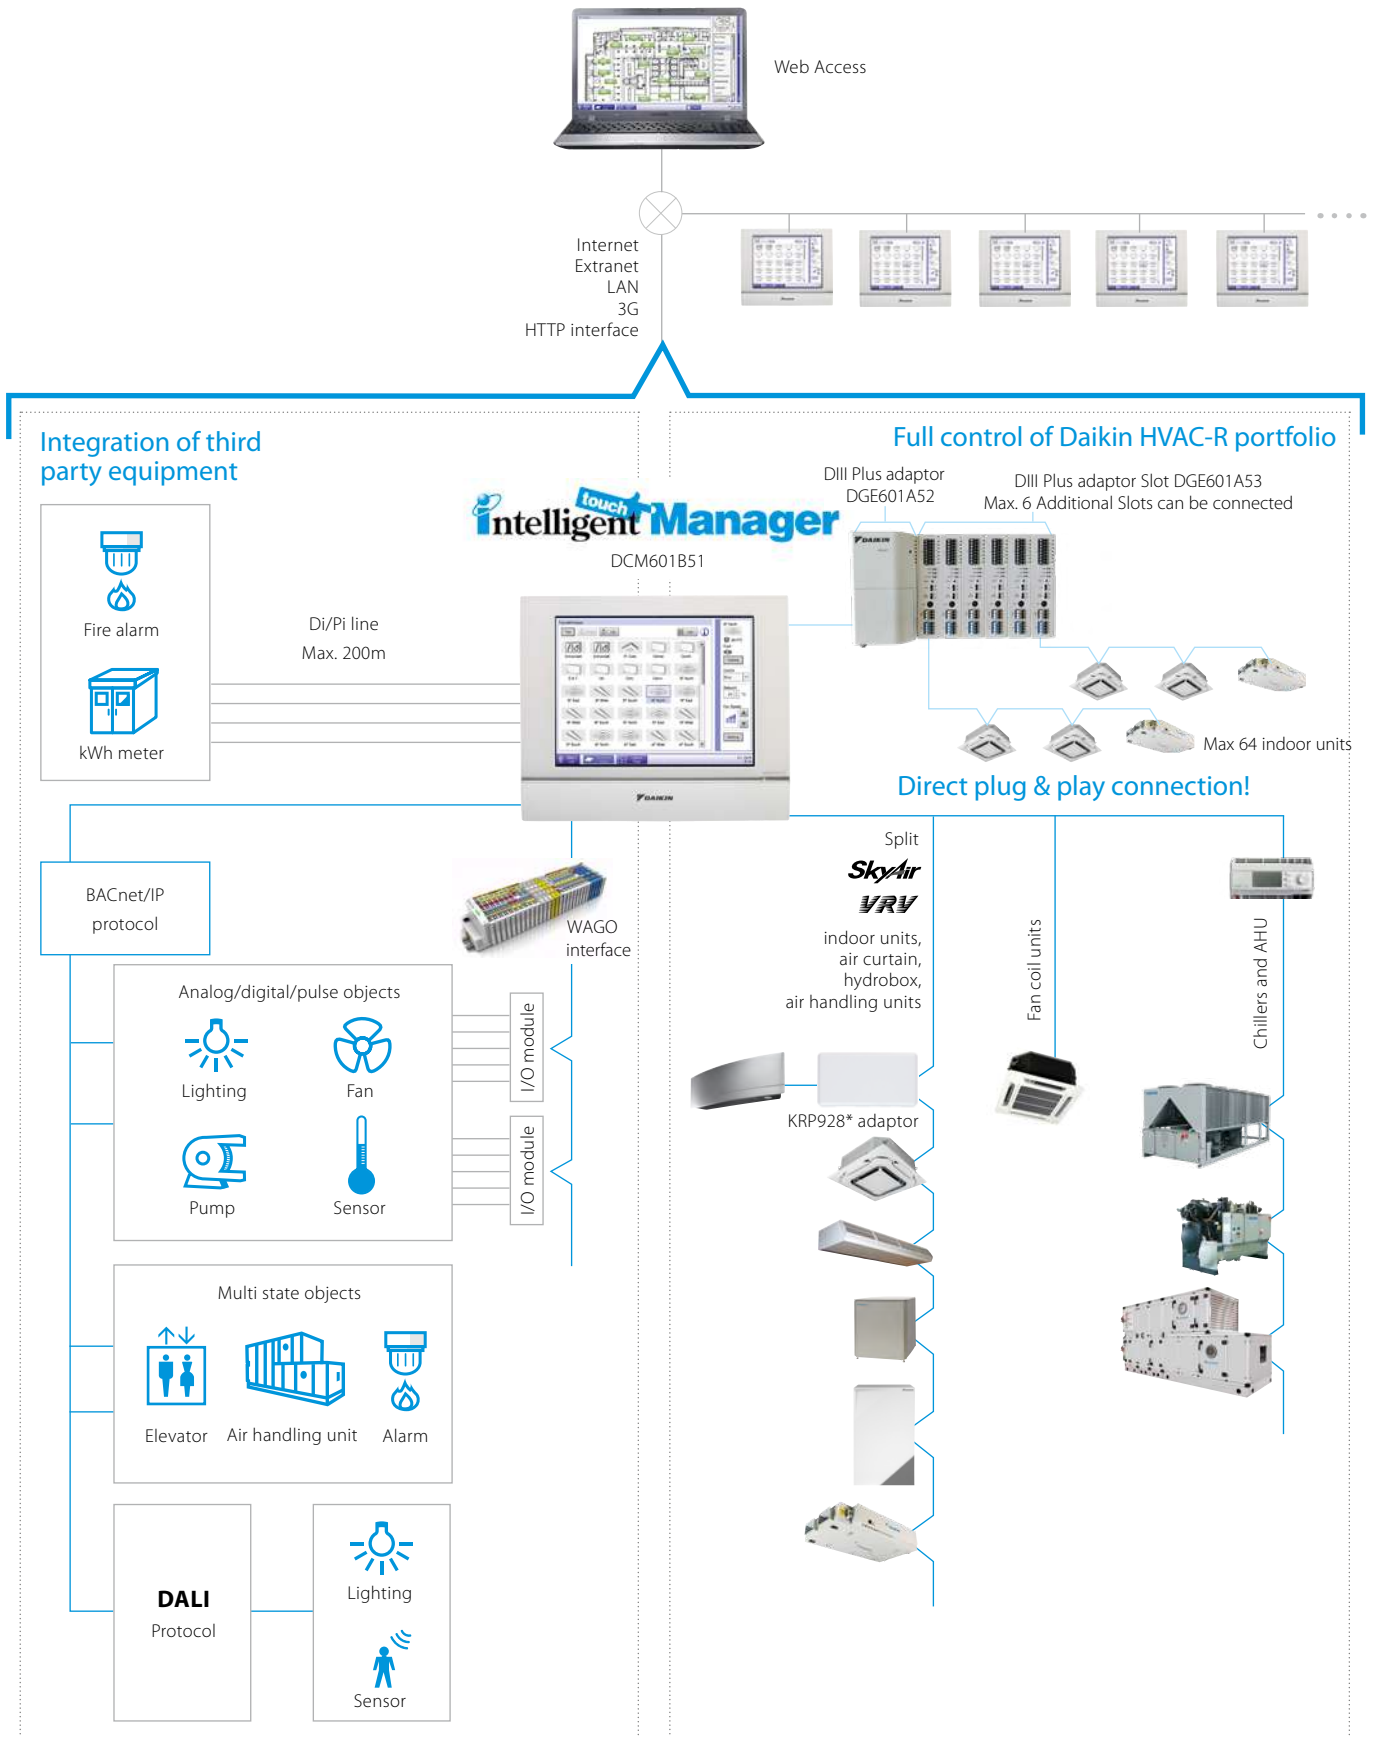

## Centralised control systems



### User friendliness

- › Intuitive user interface
- › Visual lay out view and direct access to indoor unit main functions
- › All functions direct accessible via touch screen or via web interface
- › Simplified electrical wiring, only one power supply & one connection wiring required

### Smart energy management


- › Monitoring if energy use is according to plan
- › Helps to detect origins of energy waste
- › Powerful schedules guarantee correct operation throughout the year
- › Save energy by interlocking A/C operation with other equipment such as heating
- › Peak Power Cut off Control: Activating this feature in schedule function allows users to operate the outdoor unit in 4 settings i.e. 100%,70%, 40% and 0%

### Flexibility


- › Cross-pillar integration (heating, air conditioning, applied systems, refrigeration, air handling units)
- › BACnet protocol for 3rd party products integration
- › I/O for integration of equipment such as lights, pumps... on WAGO modules
- › Modular concept for small to large applications
- › Control up to 512 indoor unit groups via one ITM and combine multiple ITM via web interface

### Easy servicing and commissioning

- › Remote refrigerant containment check reducing on site visit
- › Simplified troubleshooting
- › Save time on commissioning thanks to the pre-commissioning tool
- › Auto registration of indoor units

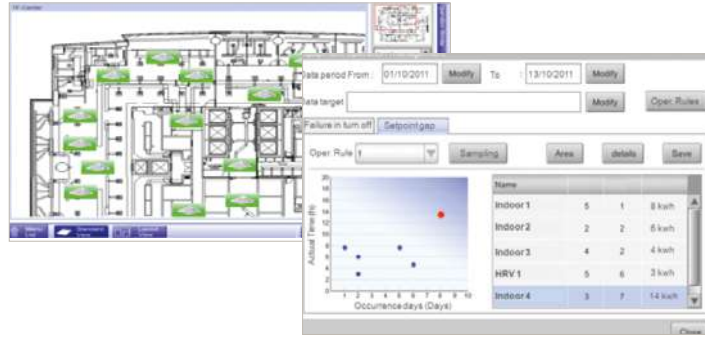

Flexibility in size  
64 up to 512 groups

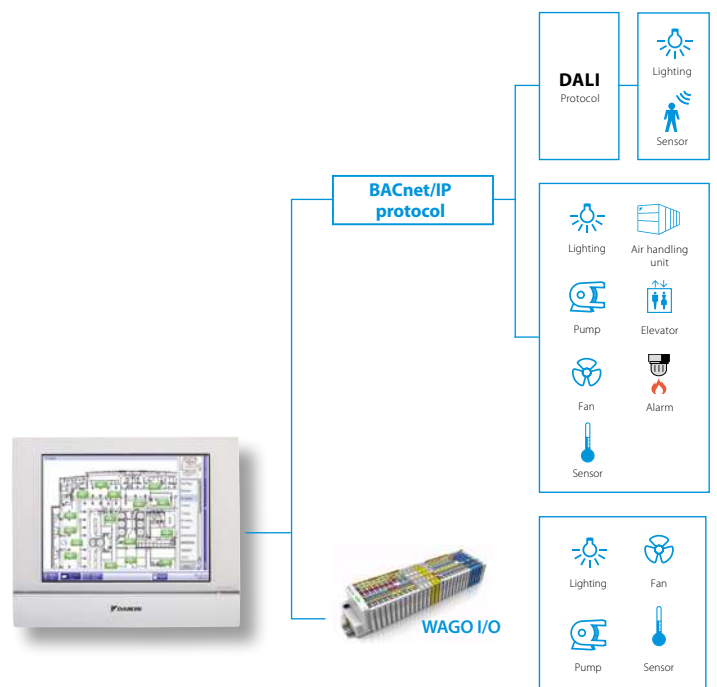

# Functions overview

## Languages

- › English
- › French
- › German
- › Italian
- › Spanish
- › Dutch
- › Portuguese

## Management

- › Web access via html 5
- › Power Proportional Distribution (option)
- › Operational history (malfunctions, ...)
- › Smart energy management
  - monitor if energy use is according to plan
  - detect origins of energy waste
- › Setback function
- › Sliding temperature

## WAGO Interface

- › Modular integration of 3rd party equipment
- › Large variety of input and outputs available. For more details refer to the options list

## Open http interface

- › Communication to any third party controller (domotics, BMS, etc.) is possible via http open interface (http option DCM007A51)

## System layout

- › Up to 512 unit groups can be controlled (ITM + 7 iTM Plus adapters)

## Control

- › Individual control (512 groups)
- › Schedule setting (Weekly schedule, yearly calendar, seasonal schedule)
- › Interlock control
- › Setpoint limitation
- › Temperature limit
- › Schedule function to activate quiet operation mode on outdoor unit

## DALI integration

- › Control and monitor the lights
- › Easier facility management: receive error signal when light or light controller has a malfunction
- › Flexible approach and less wiring needed, compared to classic light scheme
- › Easier to make groups and control scenes
- › Connection between intelligent Touch Manager and DALI through WAGO BACnet / IP interface

## Connectable to

- › DX Split, Sky Air, VRV
- › HRV
- › Chillers (via MT3-EKCBACIP controller)
- › Daikin AHU (via MT3-EKCBACIP controller)
- › Fan coils
- › LT and HT hydroboxes
- › Biddle Air curtains
- › WAGO I/O
- › BACnet/IP protocol
- › Daikin PMS interface (option DCM010A51)





Introduction to



# Daikin Cloud Plus

Daikin Cloud Plus is a cloud-based remote control and monitoring solution for Daikin commercial HVAC installations. Using enhanced control, monitoring and predictive logic, Daikin Cloud Plus provides real-time data and support from Daikin experts to help you identify cost-saving opportunities, increase the lifetime of your equipment and reduce the risk of unexpected issues.

The ultimate control over your indoor climate and air quality

- › Save energy & reduce costs
- › Enhance comfort & satisfaction
- › Smart control from anywhere
- › Ensure healthy indoor environment
- › Maximize uptime (remote prediction, monitor & diagnose)
- › Integrates easily with building systems

Supporting your business and helping you succeed

- › Maximize comfort and satisfaction of your staff, customers, tenants, ...
- › Save energy & reduce costs
- › Facilitate your sustainability goals
- › Cost effective control and energy monitoring of HVAC and other facility systems such as lighting
- › Limits the necessity for on-site interventions
- › Minimizes downtime and engineer call outs

# Benefits

## Easy control of multiple sites

- ✓ Remote control and manage sites remotely
- ✓ Floor plan control per site
- ✓ Multi-site access
- ✓ Permission based access

## Save energy & meet sustainability goals


- ✓ Monitor energy consumption trends
- ✓ Smart control of systems to save energy
- ✓ Insights to improve HVAC system performance
- ✓ Reduced costs
- ✓ Contribute to carbon neutrality

## Connectivity and integration possibilities

- ✓ Simple to advanced edge controllers
- ✓ Various interfaces
- ✓ Advanced security

## Manage, monitor and control indoor climate from anywhere

- ✓ Limits the necessity for on-site control
- ✓ Minimizes downtime and engineer call outs
- ✓ Optimized maintenance
- ✓ Monitoring of indoor air quality

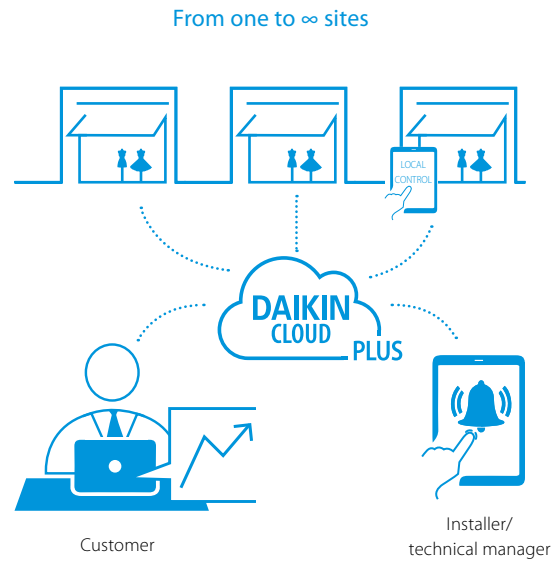

# Main applications

## Light commercial and commercial systems



Non-food  
retailers



Hotels



Offices



Schools



Healthcare


## Ranges

**VRV and Sky Air, air curtains. Integration through I/O. BACnet available in 2024.**


- › Direct integration with lights and other facility systems using Daikin Cloud Plus as master of the building
- › Integration with BMS, Daikin Cloud Plus as part of the system




# Cloud application interface

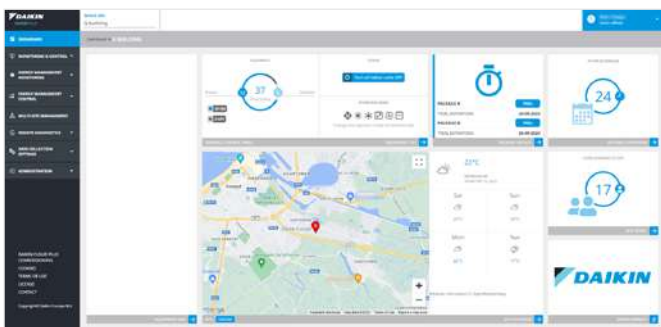

Dashboard

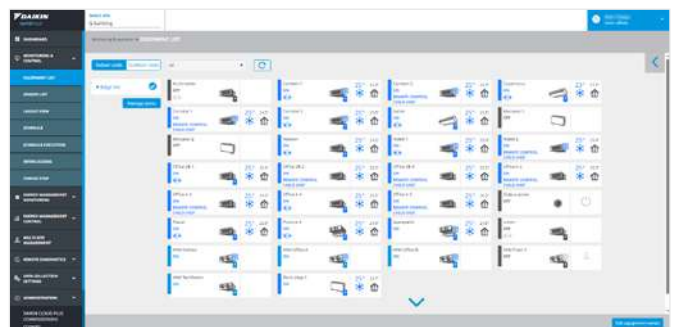

Equipment List

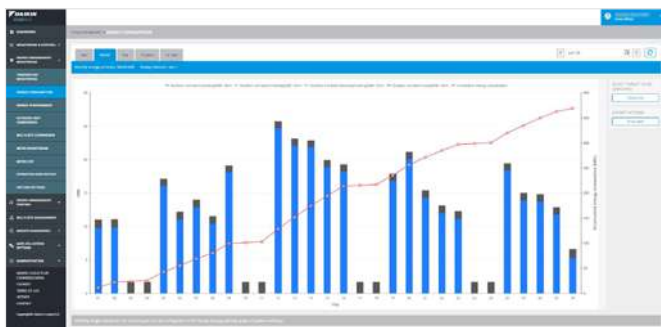

Energy Consumption



Layout View

\* Features depend on unit compatibility and region.  
Images are indicative and might change if the product evolves.



## What can Daikin Cloud Plus do for you?

### Were you aware that HVAC systems account for as much as 40% of the total energy consumption in buildings?

- › Daikin Cloud Plus logs historical data and allows you to monitor, compare HVAC consumption
- › Daikin Cloud Plus allows you to integrate with energy meters so you can monitor not only HVAC but also other energy consumers (facility, gas, water, ...)
- › Daikin Cloud Plus allows you to configure and control the system smarter to save energy with restrictions, "if this than that" rules, schedules, etc.

### Are you interested in tracking the progress of sustainability goals or the sustainability policies you put into action?

- › Daikin Cloud Plus allows you to monitor, analyse and compare HVAC energy consumption
- › Daikin Cloud Plus allows you to remote control and manage new cooling or heating related policies (e.g. heating setpoint of 1° lower)

### How do you ensure maximum comfort and minimal interruptions of cooling and heating?

- › Daikin Cloud Plus can predict failures to anticipate and prevent unplanned downtime of the heating or cooling
- › Daikin Cloud Plus real-time system error notifications to ensure a direct response in case something goes wrong
- › Daikin Cloud Plus logs all events in the system and visualized the temperature evolutions
- › Daikin Cloud Plus remote system access to indoor and outdoor unit operational data reduces engineering visits on site

### How to manage and remote control one or multi-site building estate and apply uniformization in climate control?

- › Daikin Cloud Plus allows you to monitor, manage and control multiple sites from anywhere
- › Daikin Cloud Plus allows to compare multiple sites


### How give peace of mind about indoor air quality?

- › Daikin Cloud Plus integrates with IAQ sensors and can take automated actions or provide warnings where needed
- › Daikin Cloud Plus allows to monitor and analyse the indoor air quality in order to take necessary actions

### How to control my other systems at the facility?

- › Daikin Cloud Plus provides possibilities to integrate with other facility systems as a stand-alone system, such as integration with lighting system
- › Daikin Cloud Plus provides possibilities to integrate with other facility management systems like BMS or BEMS

# Main features

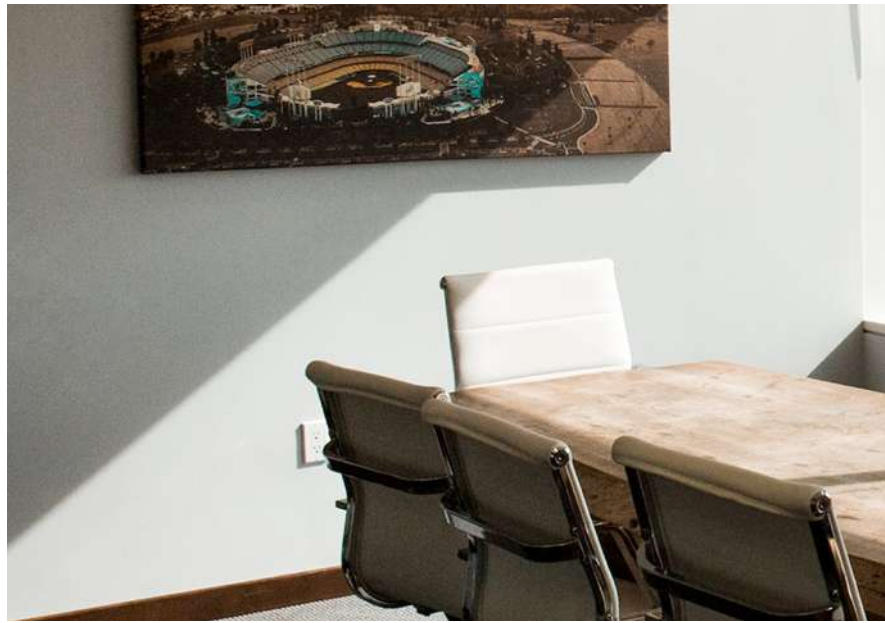

## Remote Control, Demand Control and Scheduling

Control and monitor the climate of your buildings at any time, from anywhere. From a web browser, it is possible to adjust your units' parameters, including temperature setpoints, fan speeds, heating or cooling operation modes and much more. All these parameters can be scheduled for maximum convenience during weekdays, weekends, holidays, office hours, opening hours, etc. Schedules are stored on the controller so the units are functioned as scheduled despite the internet connection. Additionally, units can be positioned in a visual floor plan to make it easier to locate an unit and change the setpoints remotely. Demand control reduces the peak consumption with minimal impact on comfort by predicting future needs and adjusting the operational capacity of the units accordingly.



## Energy Monitoring

Get detailed visualization and export energy data of your buildings. Powerful graphs, comparisons and visualisations are available to help you assess the performance and potential improvements to reduce excessive energy and lower your energy costs. Next to detailed energy data of HVAC systems, it is possible to add external meters to measure consumption of lighting and water systems.



## Interlocking

Smart rules can be integrated to optimize the operation of your units by setting specific triggers and scheduling necessary actions when these conditions happen. Through "if this, then that" principle, both the comfort of users and the efficiency of units can be optimized. For example, a rule can be: "If a window is open, then after 5 minutes, turn off the air-conditioner". Furthermore, the system enables setting restrictions remotely. For example, a user can only change the temperature between certain limits, which gives users control over their comfort while restricting extreme settings.



## Multi-site Management

Get a map view of all your sites with status alerts, benchmark and compare sites to one another. From the map view, you can get direct access to each site to monitor and control the site remotely. This helps to reduce site visits and get insights that lead to opportunities for reducing operational costs while maintaining great comfort levels.



## Building Integration

Not only HVAC but other facilities in the buildings can be controlled from the central platform. For example, the lighting system can be included in schedules and integrated with interlocking to have one single point of control and optimize energy efficiency for your buildings.



## Alarm History & Email Notification

Get detailed overview of alarms relating to your sites and real-time status of the alarms. Receive alarms notification email with access to alarm details on Daikin Cloud Plus platform.



## Power Consumption Distribution

Proportional distribution of power consumption allows you to calculate the consumption for specific areas in your buildings. For example, you can calculate how much power is used by a tenant on a certain floor. For this function, energy meters are required.



## Remote Field Settings

Field settings of outdoor units can be adjusted remotely. This allows technicians and building operators to adjust, configure and monitor outdoor units from a distance, reducing the need to be at the location, save time and costs associated with travel, labour and maintenance, increase efficiency and overall performance.





### Site History

Trace schedule trigger units or manual actions that were done on the units and sites. Past events, changes, and adjustments, enabling you to identify trends, gauge performance improvements, and strategize for the future. By drawing from historical data, you'll make informed decisions, adapt strategies, and drive continuous enhancements, revolutionizing your HVAC management approach.



### Prediction & Email Notification

Early fault predictive algorithms help to prevent major failures. Based on the alarm and operational data, unit-specific prediction logic allows you to preventively, see whether a unit could run into issues. Prediction logic alarms will be generated in this case, allowing early warnings and ensuring smooth operation.



### Operational Data Access

Effortlessly monitor, analyse, and fine-tune HVAC parameters remotely, enabling you to make informed decisions on the go. Real-time access to operational data, performance metrics, and energy usage empowers you to adjust settings, troubleshoot anomalies, and maintain peak efficiency, all while minimizing the need for physical intervention. Operational data can be downloaded for further analysis and periodical reporting.



### Indoor & Outdoor Unit Analysis

Dive into comprehensive insights into each unit's performance, energy consumption, and environmental impact. Seamlessly compare data across units, pinpointing inefficiencies and optimizing your system's overall effectiveness. With a holistic view of indoor and outdoor units, you'll achieve unprecedented levels of operational harmony and energy savings.

\* Features depend on unit compatibility and region.  
Images are indicative and might change if the product evolves.

## Use cases



### For retailers

- > Remote control and monitoring of all units in different shops from a centralized platform
- > Testing and validating parameters and standardizing settings for shops
- > Energy visualizations and exports
- > Remote control over lightings



### For hotels

- > Setting temperature ranges for rooms to avoid extreme settings by guests
- > Energy monitoring
- > Scalability made easier thanks to standardized system settings




### For offices

- > Setting temperature ranges for office areas to avoid extreme settings by staff
- > Detailed energy monitoring and export of data per tenant of different office areas
- > Estimation of energy consumption and setting the right pricing for each tenant
- > Scheduling and restrict controls to avoid energy waste and save energy costs



## Composition

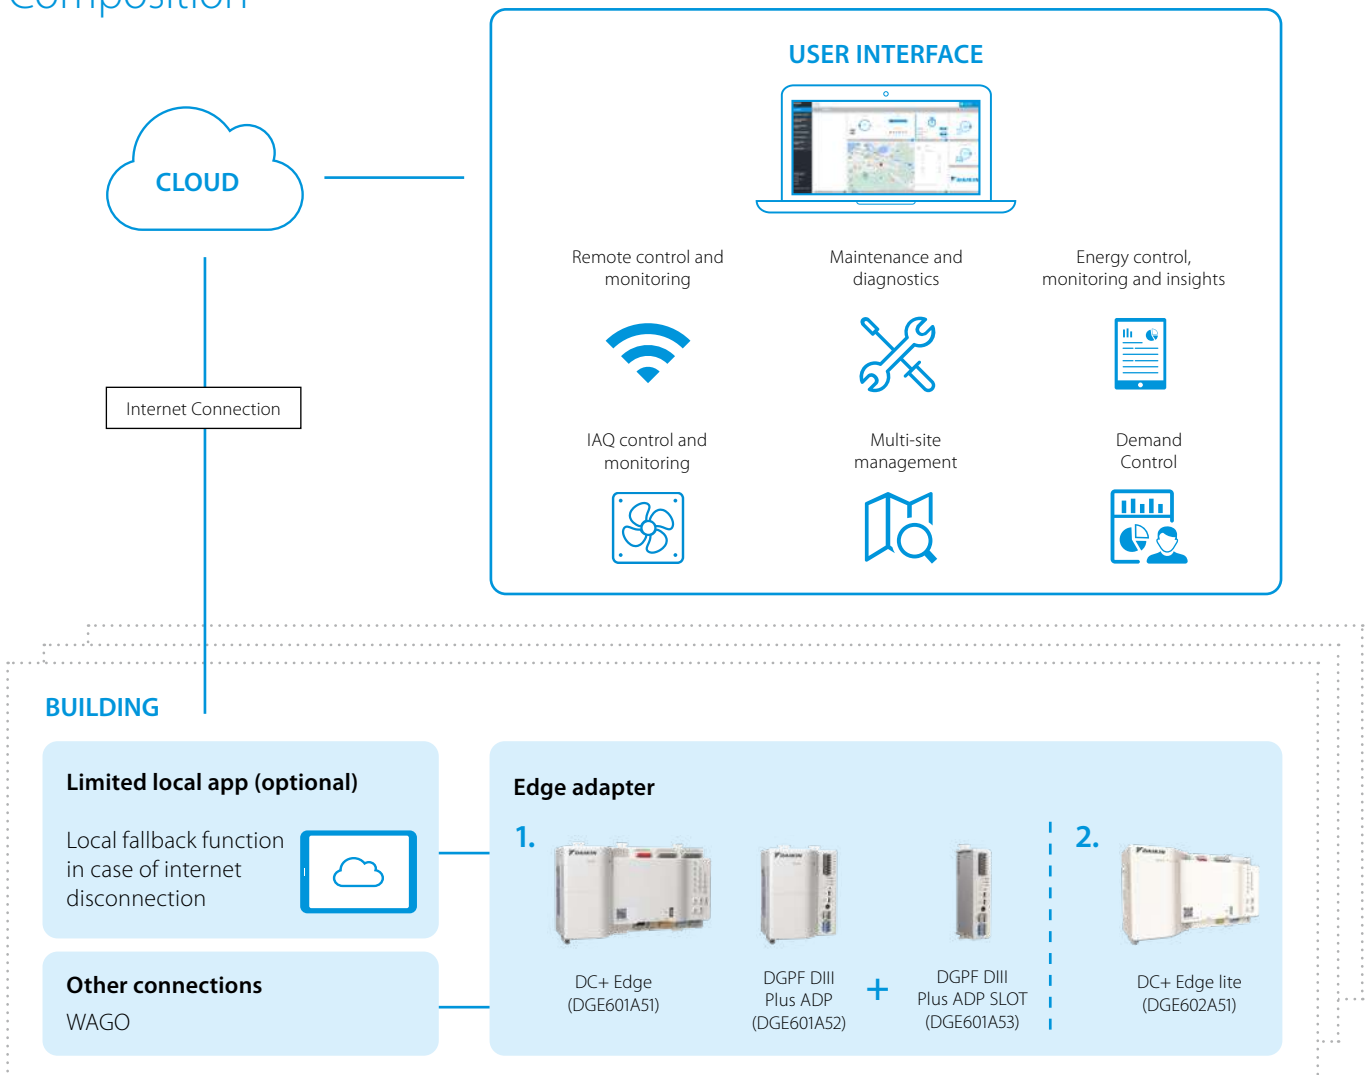



# Controllers & accessories

Controllers and their connections

## Controller Features

				DGE601A51 (Edge)	DGE602A51 (Edge lite)
<b>Controller specification</b>	I/F	DIII	port	2	1
			(Indoor unit connection / port)	64	64
		Ethernet	Internet	1	1
			2nd LAN port (BACnet)	1 (N.A. yet)	0
		RS485	WAGO	1	0
		ADP	For DIII NET Plus ADP	1	0
			(Maximum expansion)	6	
		Contact	Di/Pi	8	4
			Do	3	2
		Number of connection	DIII management points	Standard	128
	Maximum with ADP			512	-
	Total management points		Including AC and other facilities	1,000	76

# Daikin Applied Europe Control Solutions

## **Chiller Intelligent Manager**

The intelligent Chiller Manager is a factory-engineered control solution to manage a chiller plant room. It is responsible for the **optimal sequencing and staging** of Chillers, Heat Pumps and Multipurpose units even in a **mixed plant configuration** and in both Heating and Cooling modes.

The extended control solution integrated the management of Cooling Towers and manifolded Pumps for air and water cooled chiller plant.

By reaching higher plant performance and efficiency levels, the intelligent Chiller Manager is the best and qualified solution for your HVAC equipment in a wide range of **Applications**.

### Key Benefits

- > High performance
- > Lower energy & Maintenance Costs
- > Increase reliability & lifetime
- > Remote control and monitoring through Daikin on Site
- > **No additional installation required**

intelligent  
COOLING TOWER  
Management

intelligent  
SECONDARY CIRCUITS  
Management

### Microtech® 4 Unit Controller

The new **Microtech® 4 (MT4)** controller is **faster, smarter and connected**. With the hardware improvements introduced by the new controller on all air/water cooled chillers, **advanced logics and algorithms** development at unit level are possible.

Communication protocols like **Modbus** and **BACNet** are also available without any additional hardware required because the MT4 controller supports them natively.






## Daikin on Site

Daikin on Site is the unique solution for remote monitoring and smart maintenance. It allows a complete remote operation of every unit with different users and levels of access.

Daikin on site is fully compatible with All Daikin Applied Europe products and it can integrate **third-party products** like **IoT devices** (i.e. IAQ sensors).

Daikin has developed two offers called Daikin on Site: Partner and Daikin on Site: Premium.

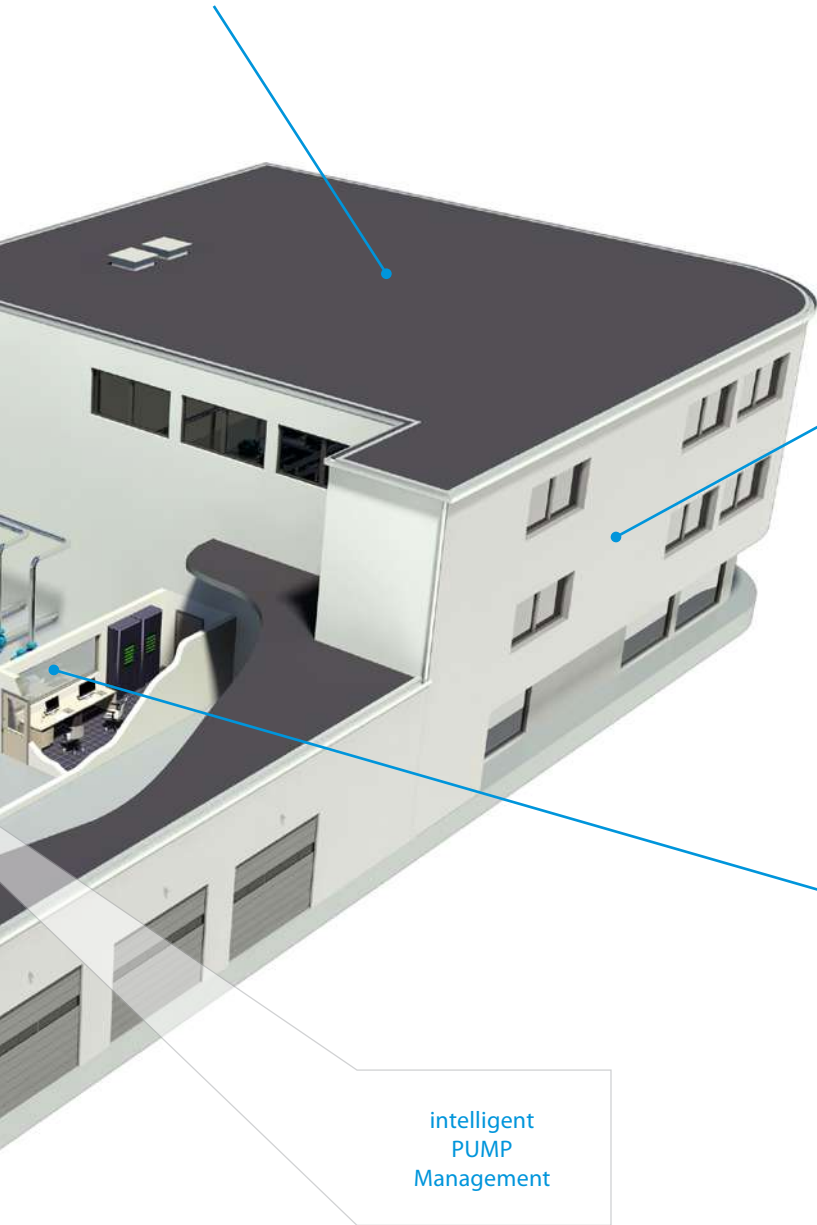

intelligent  
PUMP  
Management

- REMOTE MONITORING
- REPORTING
- ALARM TROUBLESHOOTING
- ENERGY ANALYSIS
- REFRIGERANT LEAKAGE DETECTION



### Building management system Integration

With MT4 unit the communication protocols such as **Modbus** and **BACNet** are available directly from the controller and activated from Factory when ordered or through the after-sales channel.



### Performance Monitoring

With MT4, advanced algorithms implementation in the unit controller are possible, such as the **Performance Monitoring** (Option 186). This **sensor-less algorithm** calculates the unit cooling capacity by using refrigerant pressure and temperature readings. Electrical power is calculated either from compressor VFD power and fan, or directly measured through optional energy meter. As a standard, **no extra-hardware is required.**



## Factory-engineered system control to manage a chiller plant room

Thus optimising its performance and increasing its reliability by:

- › Optimal start-up, sequencing & staging of chillers
- › Matching chiller capacity to load demand

### iCM's main functionalities:


#### Availability

Determines whether chillers are available or not, based on:

- › Inputs from the chiller unit controllers
- › Modbus communication status
- › Pump status

#### Sequencing

Optimises the order in which available chillers are turned on and off depending on operating hours, energy efficiency, etc.

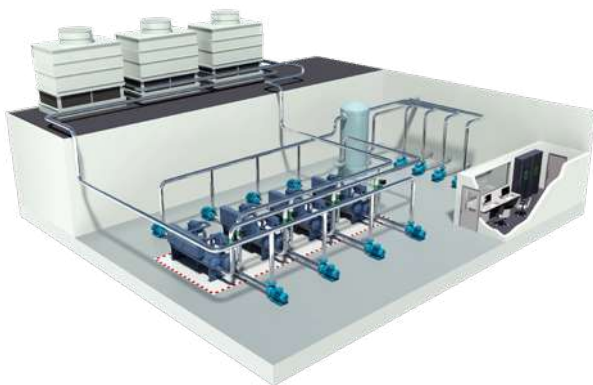

#### Staging

Calculates **energy-optimal stage-up/stage-down** of the chiller by determining the increased capacity demand by capacity control, compensation of temperature and rotation. This function aims at providing the most energy-efficient combination of chillers on a continuous basis.

#### Stopping Last Chiller/Recycling

Captures a rise in demand when the **last chiller is staged down**, by operating the pump dedicated to the next ON chiller at a minimum VFD frequency.

#### Min/Max Operating Chiller Setting

Ensures that the number of operating chillers always **stays within a certain range**, regardless of changes in demand.

#### Primary Pump control

Primary evaporator and condenser pump control for dedicated and manifolded pumps thanks to iPM panel

#### Secondary Pump Control

Control of up to 12 secondary circuits thanks to iSM panel extension

#### Cooling Tower Optimization

Control and Optimization of Cooling Tower systems thanks to iCT extension modules.

#### Remote Connection through Daikin on Site

24/7 monitoring and control of iCM plants through Daikin on Site cloud service.

## Why choose iCM?

- › Optimise performance
- › Increase reliability
- › Reduce energy costs
- › Reduce maintenance costs
- › Factory-engineered and tested
- › Remote control and monitoring. From one-time commissioning to real-time commissioning

**Daikin is the best qualified partner to optimise the operation of a Daikin chiller plant room.**

## Remote control and monitoring possibilities

(valid for both Standard and Customised versions)

- › **Connectivity to Daikin's remote monitoring and control system ([www.daikinonsite.com](http://www.daikinonsite.com))** for remote monitoring and service providing Internet connection to the main controller
- › **Integration with general BAS/BMS** offered through BACnet or Modbus Modules based on BACnet/IP or Modbus RTU/RS-485 protocols
- › **Built-in HMI, Remote HMI, Web HMI and [daikinonsite.com](http://daikinonsite.com)** are available for control and configuration

# Integrated logics for Plant Management



## Key Benefits

- › High performance
- › Lower energy & Maintenance Costs
- › Increase reliability & lifetime
- › Remote control and monitoring through Daikin on Site
- › **No additional installation required**

## Control strategies

Advanced control strategies can be chosen to optimise units life time and the energy efficiency of a chillers plant:

- › by sequencing it is decided which unit must start or stop
- › by staging the unit shares the load based on a threshold specified by the user

## Control options

iCM can manage:

- › Up to 16 units Heating/Cooling mode, with iCM expanded kit
- › Up to 8 units Heating/Cooling mode
- › Special control options such as: VPF, Demand Limit, Rapid Restart are managed by iCM in a multiple unit system
- › Heat recovery option management
- › Free cooling option management
- › Manifolded pumps management (evaporator/condenser) – iPM control panel is required
- › Cooling tower system management – iCT control panel is required
- › Secondary circuits management - iSM control panel is required

## What are the main differences between Master/Slave and iCM?

For Daikin unit equipped with MT4, iCM are set of functions embedded directly in the unit controller. In addition for those applications not covered by the embedded functions, iCM customized are also available.

While Master/Slave can manage systems composed by units model of the same type, iCM can manage cooling, heating and plants made of different kind of units

Feature	Master/Slave	New iCM
Number of chillers	UP TO 2	UP TO 16
Plants with All Chillers	same models	YES
Plants with all Heat Pumps	same models	YES
Plants with Multipurpose	YES	YES
Mix of Chillers (max 2 circuits) + Multipurpose	NO	YES
Mix of Chillers + Heat Pumps	NO	YES
Chillers with Heat Recovery	NO	YES
Chillers with free cooling	NO	YES
Units with modulable capacity control	YES	YES
Units with step capacity control	YES	YES

# Product line-up



**ICM as unit option 184 (up to 16 with iCM expanded kit):**

- › Up to 8 daikin chillers
- › Mixed systems (Chiller + heat pumps or chillers + multipurpose)
- › Heating/cooling operating modes
- › Heat recovery and Free cooling management
- › Units with modulable and step capacity control

**Intelligent Pump Manager:**



- › Up to 5 dedicated or manifolded pumps (evaporator or condenser)
- › Up to 10 dedicated or manifolded pumps (evaporator or condenser)

**Intelligent Cooling Tower Manager:**


- › Up to 10 manifolded cooling towers (available with Pump Manager at the condenser side)

**intelligent Secondary Circuits Manager:**

- › Up to 8 pumps divided in up to 4 pump groups (up to 3 ism can be connected for a total of 12 pump groups and 24 secondary pumps)

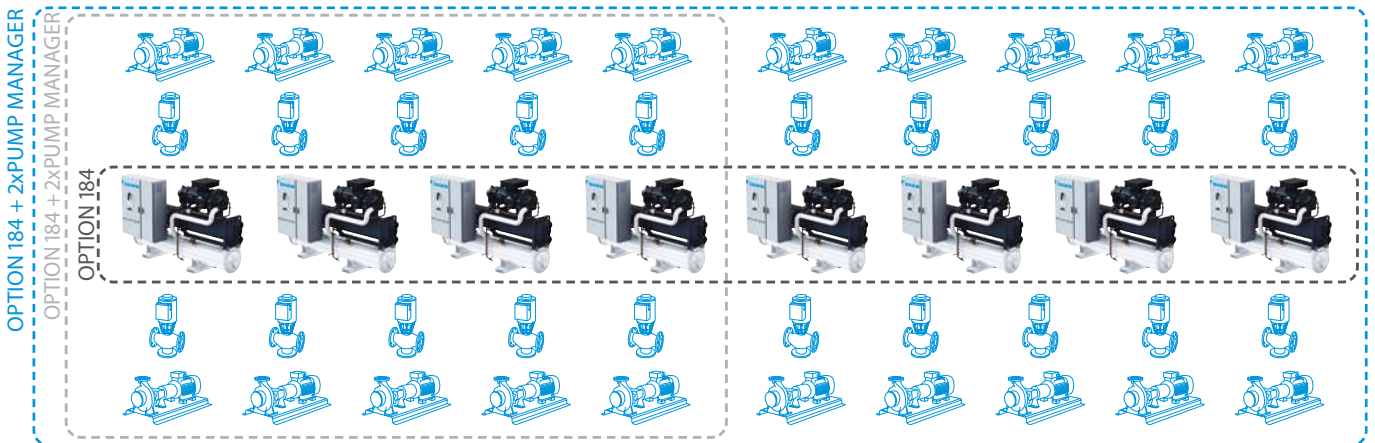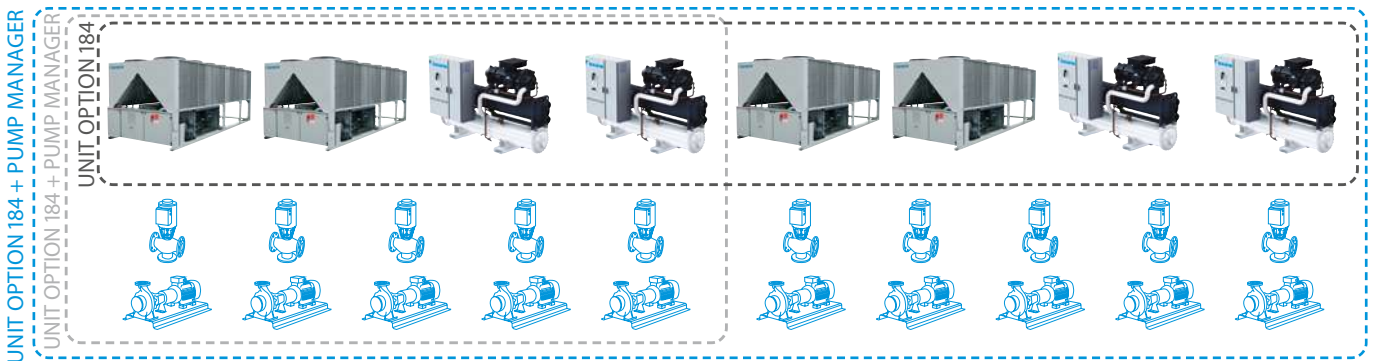


Up to 10 COOLING TOWER MANAGER (only available with PUMP MANAGER at the condensor side)

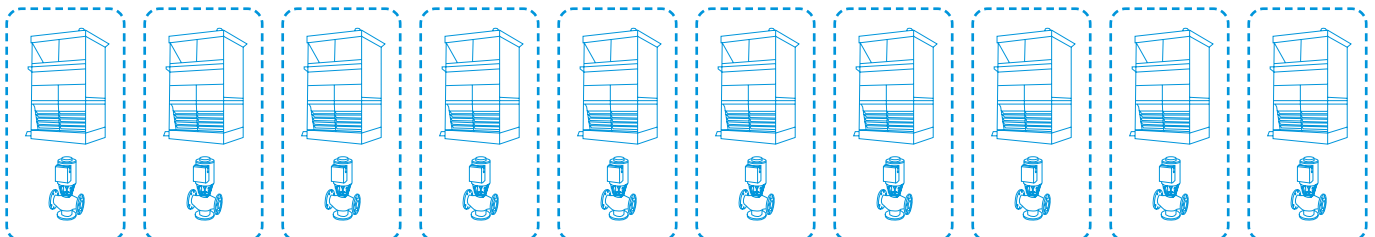

Up to 3 INTELLIGENT SECONDARY MANAGER (each iSM can control up to 4 pump groups and up to 8 pumps)





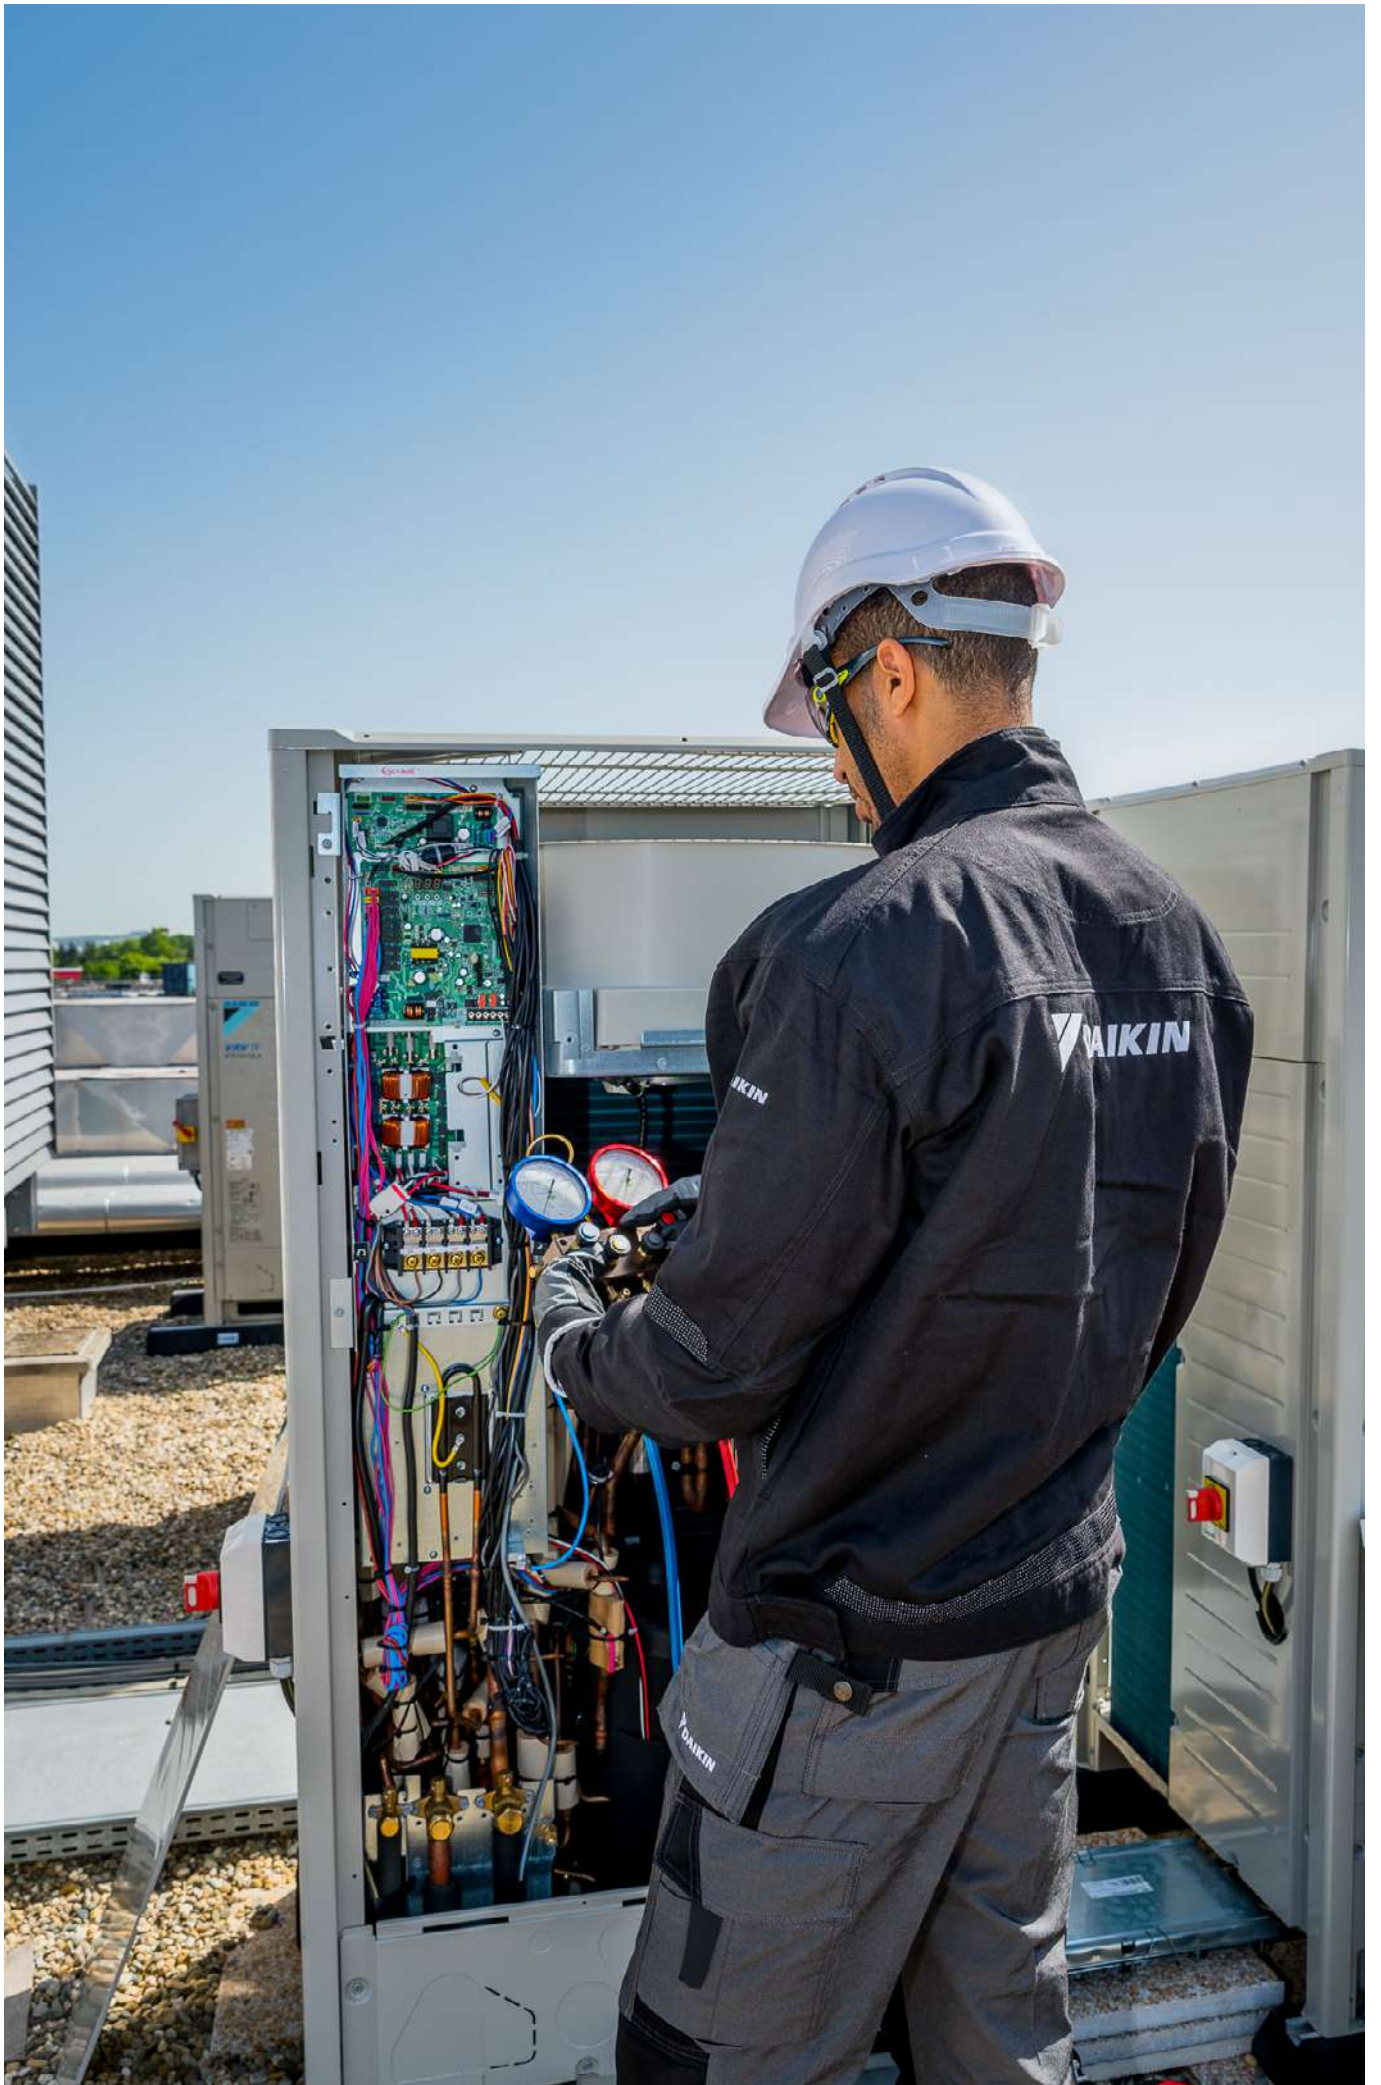

## Individual Modbus interfaces

### RTD-RA

- › Modbus interface for monitoring and control of residential indoor units

### **NEW** DAIKIN MODBUS ADAPTOR SIMPLE (EKMBPP1)

- › Modbus interface for monitoring & control of Sky air, VRV & ventilation units.
- › Smart grid control for Sky air indoor units.

### RTD-10

- › Advanced integration into BMS of Sky Air, VRV, VAM and VKM through either:
  - Modbus
  - Voltage (0-10V)
  - Resistance
- › Duty/standby function for server rooms

### RTD-20

- › Advanced control of Sky Air, VRV, VAM/VKM and air curtains
- › Clone or independent zone control
- › Increased comfort with integration of CO<sub>2</sub> sensor for fresh air volume control
- › Save on running costs via
  - pre/post and trade mode
  - set point limitation
  - overall shut down
  - PIR sensor for adaptive deadband

### RTD-HO

- › Modbus interface for monitoring and control of Sky Air, VRV, VAM and VKM
- › Intelligent hotel room controller

### RTD-W

- › Modbus interface for monitoring and control of Daikin Altherma Flex Type, VRV HT hydrobox and small inverter chiller

### **NEW** Daikin HomeHub EKRHH

- › Modbus RTU/IP interface for Daikin Altherma 3
- › Integrate the Daikin Altherma 3 air-to-water heat pump in a home automation or energy management system

### DCOM-LT/MB

- › Modbus interface of Daikin Altherma air-to-water heat pumps, hybrid heat pumps and ground source heat pumps

### DCOM/LT-IO

- › Voltage & resistance control in addition to Modbus



## Overview functions



Main functions	H x W x D	mm	RTD-RA	EKMBPP1	RTD-10	RTD-20	RTD-HO
Dimensions	H x W x D	mm	80 x 80 x 37.5	100 x 100 x 20		100 x 100 x 22	
Key card + window contact							✓
Set back function			✓				✓
Prohibit or restrict remote control functions (setpoint limitation, ...)			✓	✓	✓	✓**	✓
Modbus (RS485)			✓	✓	✓	✓	✓
Group control			✓(1)	✓	✓	✓	✓
0 - 10 V control					✓	✓	
Resistance control					✓	✓	
IT application			✓		✓		
Heating interlock					✓		
Output signal (on/defrost, error)					✓	✓****	✓
Retail application						✓	
Partitioned room control						✓	
Air curtain				✓***	✓***	✓	

(1): By combining RTD-RA devices

Control functions	RTD-RA	EKMBPP1	RTD-10	RTD-20	RTD-HO
On/Off	M,C	M	M,V,R	M	M*
Set point	M	M	M,V,R	M	M*
Mode	M	M	M,V,R	M	M*
Fan	M	M	M,V,R	M	M*
Louver	M	M	M,V,R	M	M*
HRV Damper control		M	M,V,R	M	
Prohibit/Restrict functions	M	M	M,V,R	M	M*
Forced thermo off	M				
Smart Grid Control		M			

Monitoring functions	RTD-RA	EKMBPP1	RTD-10	RTD-20	RTD-HO
On/Off	M	M	M	M	M
Set point	M	M	M	M	M
Mode	M	M	M	M	M
Fan	M	M	M	M	M
Louver	M	M	M	M	M
RC temperature		M	M	M	M
RC mode		M	M	M	M
N° of units		M	M	M	M
Fault	M	M	M	M	M
Fault code	M	M	M	M	M
Return air temperature (Average/Min/Max)	M	M	M	M	M
Filter alarm		M	M	M	M
Termo on	M	M	M	M	M
Defrost		M	M	M	M
Coil In/Out temperature	M	M	M	M	M



Main functions	RTD-W
Dimensions	H x W x D mm
On/off prohibition	✓
Modbus RS485	✓
Dry contact control	✓
Output signal (operation error)	✓
Space heating / cooling operation	✓
Domestic hot water control	✓
Smart Grid control	
<b>Control functions</b>	
On/Off Space heating/cooling	M,C
Set point leaving water temperature (heating / cooling)	M,V
Room temperature setpoint	M
Operation mode	M
Domestic Hot water ON	
Domestic Hot Water reheat	M,C
Domestic Hot Water reheat setpoint	
Domestic Hot Water storage	M
Domestic Hot Water Booster setpoint	
Quiet mode	M,C
Weather dependent setpoint enable	M
Weather dependent curve shift	M
Fault/pump info relay choice	
Control source prohibition	M
<b>Smart grid mode control</b>	
Prohibit Space heating/cooling	
Prohibit DHW	
Prohibit Electric heaters	
Prohibit All operation	
PV available for storage	
Powerful boost	
<b>Monitoring functions</b>	
› On/Off Space heating/cooling	M,C
› Set point leaving water temperature (H/C)	M
› Room temperature setpoint	M
› Operation mode	M
› Domestic Hot Water reheat	M
› Domestic Hot Water storage	M
› Number of units in the group	M
› Average leaving water temperature	M
› Remocon room temperature	M
› Fault	M,C
› Fault code	M
› Circulation pump operation	M
› Flow rate	
› Solar pump operation	
› Compressor status	M
› Desinfection operation	M
› Setback operation	M
› Defrost/ start up	M
› Hot start	
› Booster Heater operation	
› 3-Way valve status	
› Pump running hours accumulated	M
› Compressor running hours accumulated	
› Actual leaving water temperature	M
› Actual return water temperature	M
› Actual DHW tank temperature (*)	M
› Actual refrigerant temperature	
› Actual outdoor temperature	M

Control functions	EKRHH
Leaving water main heating or cooling setpoint	✓
Operation mode	✓
Space heating/cooling ON/OFF	✓
Room thermostat control heating or cooling setpoint	✓
Room thermostat ON/OFF	✓
Quiet mode ON/OFF	✓
DHW reheat set point	✓
DHW reheat ON/OFF	✓
DHW powerful mode ON/OFF	✓
Weather dependent mode and offset	✓
SG operation mode	✓
Power limit during recommended on / buffering	✓
General power limit	✓
<b>Monitoring functions</b>	
Error code	✓
Circulation pump running	✓
Compressor running	✓
Backup heater running	✓
Disinfection operation	✓
Defrost/startup/hot start	✓
Operation mode	✓
Leaving water temperature PHE/BUH	✓
Return water temperature	✓
Domestic hot water temperature	✓
Ambient temperature	✓
Liquid refrigerant temperature	✓
Flowrate	✓
Room temperature	✓
Heat pump power consumption	✓
DHW operation / space heating operation	✓
Leaving water temperature lower and upper limit	✓

M: Modbus / R: Resistance / V: Voltage / C: control | \* : only when room is occupied / \*\* : setpoint limitation / (\*) if available | \*\*\* : no fan speed control on the CVV air curtain / \*\*\*\* : run & fault


EKMBDXB

# DIII-net Modbus interface



Integrated control system for seamless connection between Split, Sky Air, VRV and small inverter chillers and BMS systems


- › Communication via Modbus RS485 protocol
- › Detailed monitoring and control of the VRV total solution
- › Easy and fast installation via DIII-net protocol
- › As the Daikin DIII-net protocol is being used, only one modbus interface is needed for a group of Daikin systems (up to 10 outdoor units systems).

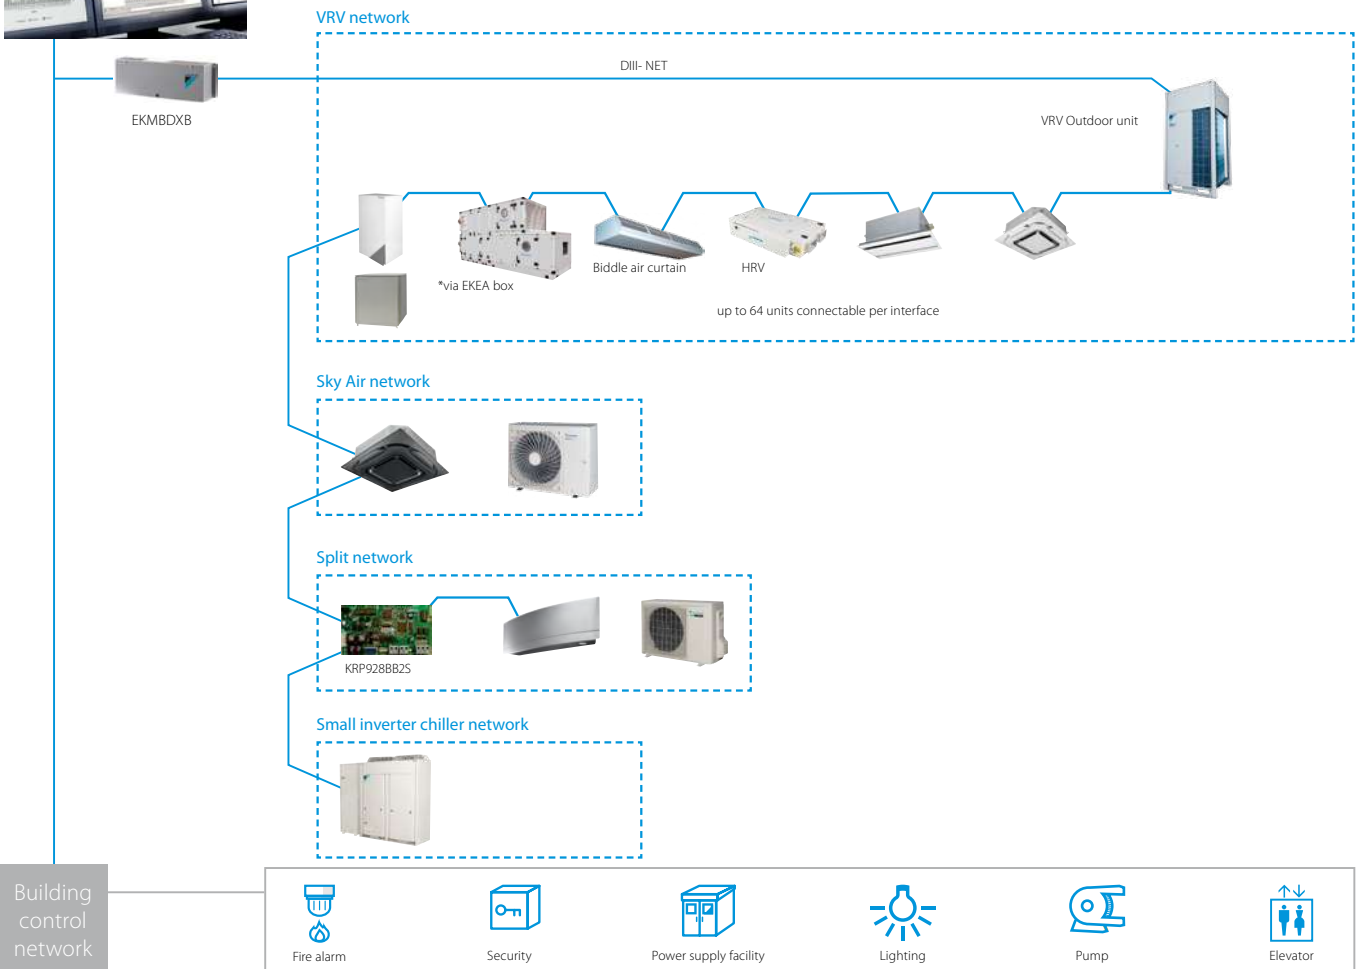

			EKMBDXB7V1
Maximum number of connectable indoor units			64
Maximum number of connectable outdoor units			10
Communication	DIII-NET - Remark		DIII-NET (F1F2)
	Protocol - Remark		2 wire; communication speed: 9,600 bps or 19,200 bps
	Protocol - Type		RS485 (modbus)
	Protocol - Max. Wiring length	m	500
Dimensions	HeightxWidthxDepth	mm	124x379x87
Weight		kg	2.1
Ambient temperature - operation	Max.	°C	60
	Min.	°C	0
Installation			Indoor installation
Power supply	Frequency	Hz	50
	Voltage	V	220-240

# Modbus interface

Integrate chillers, fan coil units and air handling units in BMS systems via modbus protocol

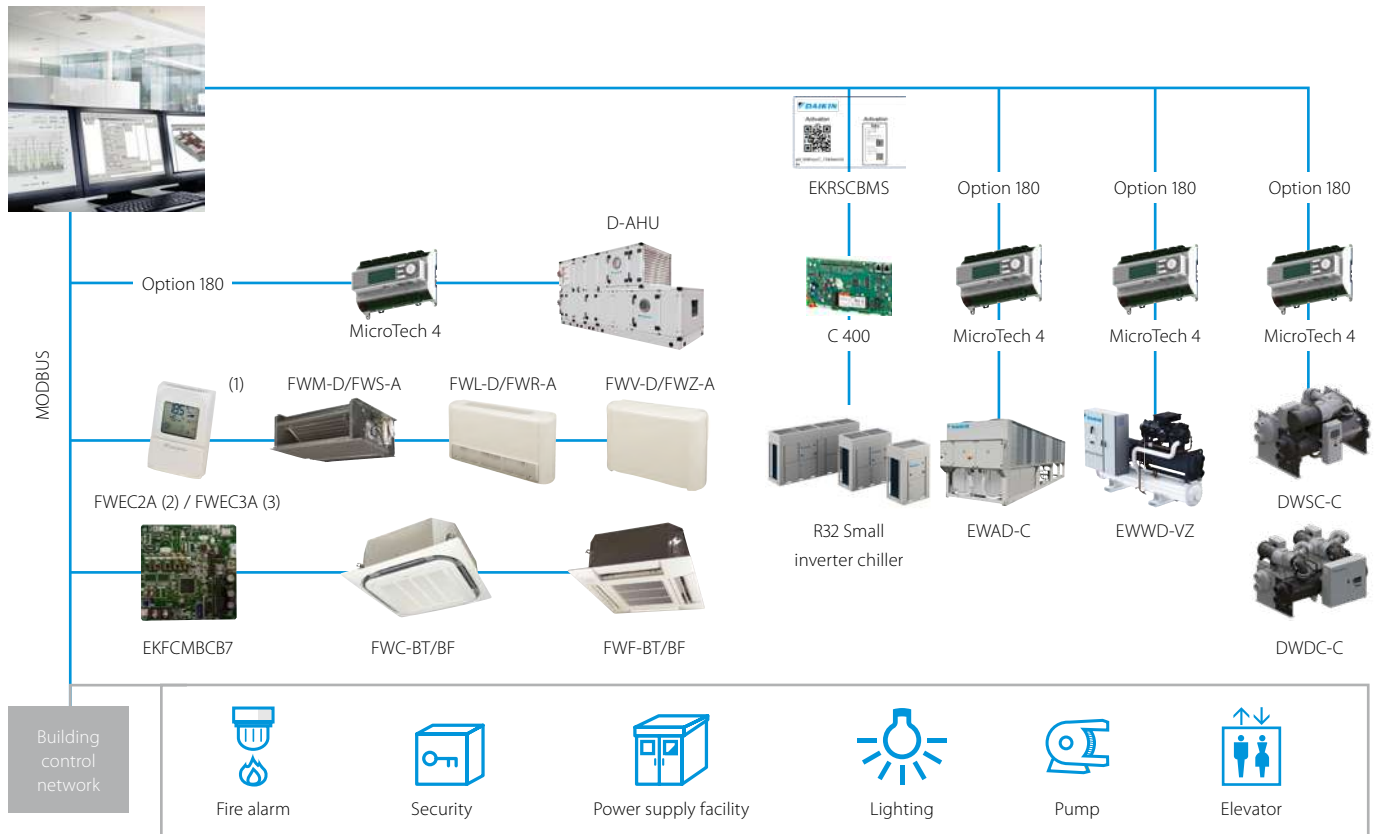

(1) The communication module is integrated in the controller (2) Connection to FWV-D, FWL-D & FWM-D (3) Connection to FWV-D, FWL-D, FWM-D and to FWZ-A, FWR-A, FWS-A

Integrate Refrigeration units in BMS systems via modbus protocol

## BRR9A1V1



\* For all connectable indoor units and Biddle air curtains please refer to the Conveni-pack pages in this catalogue


## Standard protocol interfaces

KLIC-DDV3  
KLIC-DI\_V2


# KNX interface

### Integration of Split, Sky Air and VRV in HA/BMS systems

#### Connect split indoor units to KNX interface for Home Automation system

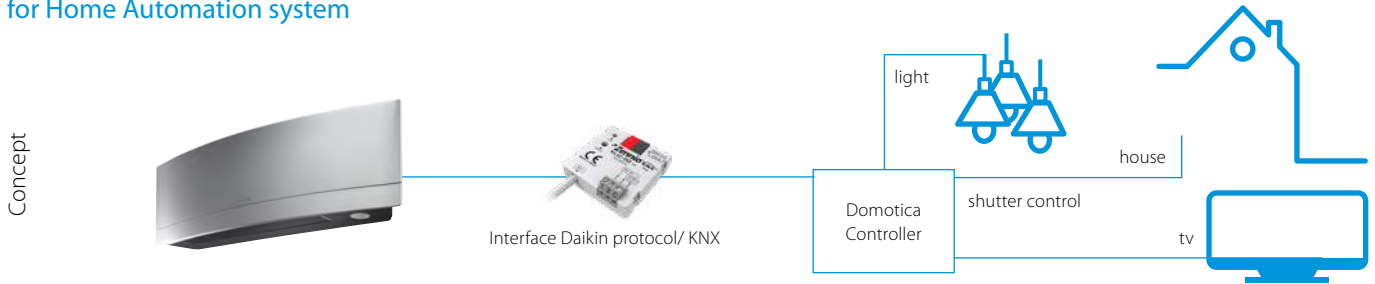

#### Connect Sky Air / VRV indoor units to KNX interface for BMS integration

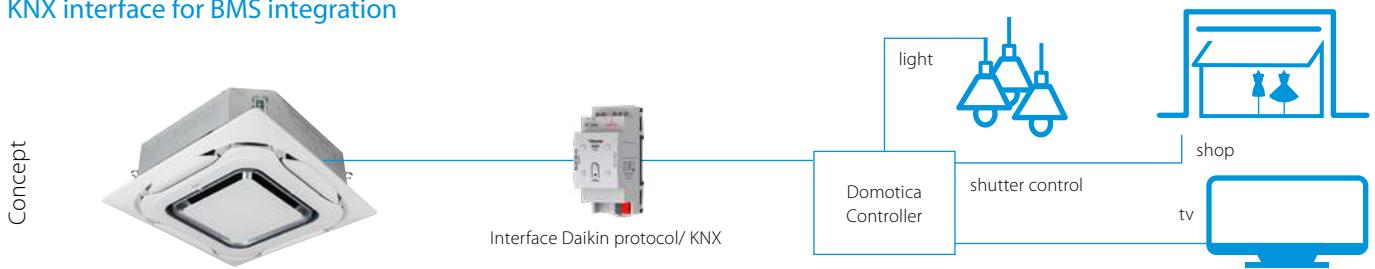



### KNX interface line-up

The integration of Daikin indoor units through the KNX interface allows monitoring and control of several devices, such as lights and shutters, from one central controller. One particularly important feature is the ability to programme a 'scene'

- such as "Home leave" - in which the end-user selects a range of commands to be executed simultaneously once the scenario is selected. For instance in "Home leave", the air conditioner is off, the lights are turned off, the shutters are closed and the alarm is on.

### KNX interface for

	 <b>KLIC-DDV3 size 45x45x15mm</b> Split	 <b>KLIC-DI_V2 size 90x60x35mm</b> Sky Air	<b>VRV</b>
<b>Basic control</b>			
On/Off	●	●	●
Mode	Auto, heat, dry, fan, cool	Auto, heat, dry, fan, cool	Auto, heat, dry, fan, cool
Temperature	●	●	●
Fan speed levels	3 or 5 + auto	2 or 3	2 or 3
Swing	Stop or movement	Stop or movement	Swing or fixed positions (5)
<b>Advanced functionalities</b>			
Error management	Communication errors, Daikin unit errors		
Scenes	●	●	●
Auto switch off	●	●	●
Temperature limitation	●	●	●
Initial configuration	●	●	●
Master and slave configuration		●	●

DCM010A51

# PMS Interface

# Hotel interface connecting Daikin HVAC Property Management Systems



Room view showing room status: check-in, check-out, pre-heating / cooling status, room temperature and A/C status

HVAC settings can be easily observed and changed by the reception desk

Multiple room types (bed-room, meeting room, ...) can be defined with customized A/C settings for each type


## Features

- User-friendly interface for easy front desk support in hotels, conference centers, ...
- Compatible with Oracle Opera PMS (formerly known as Micros Fidelio)
- Automated push of indoor unit settings based on the Opera PMS Check-In and Check-Out commands
- Energy saving thanks to the possibility to limit temperature setpoint
- Up to 5 customized operation profiles based on weather conditions
- Available in 23 languages
- Up to 2,500 units / rooms can be managed
- The Daikin PMS is using the FIAS protocol, designed by Oracle, to interface with the Property Management System.


### Hotel case example:

- › On check-in the HVAC for the room is automatically switched on
- › On check-out the HVAC for the room is automatically switched off.
- › Increased hotel customer experience by pre-heating / cooling of booked rooms

Hotel front desk

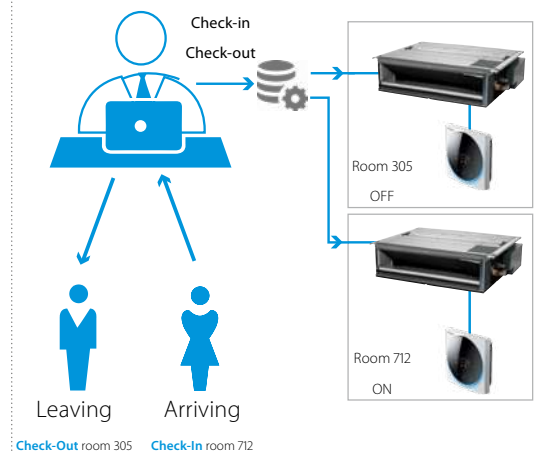

### Simplified configuration of Daikin PMS interface

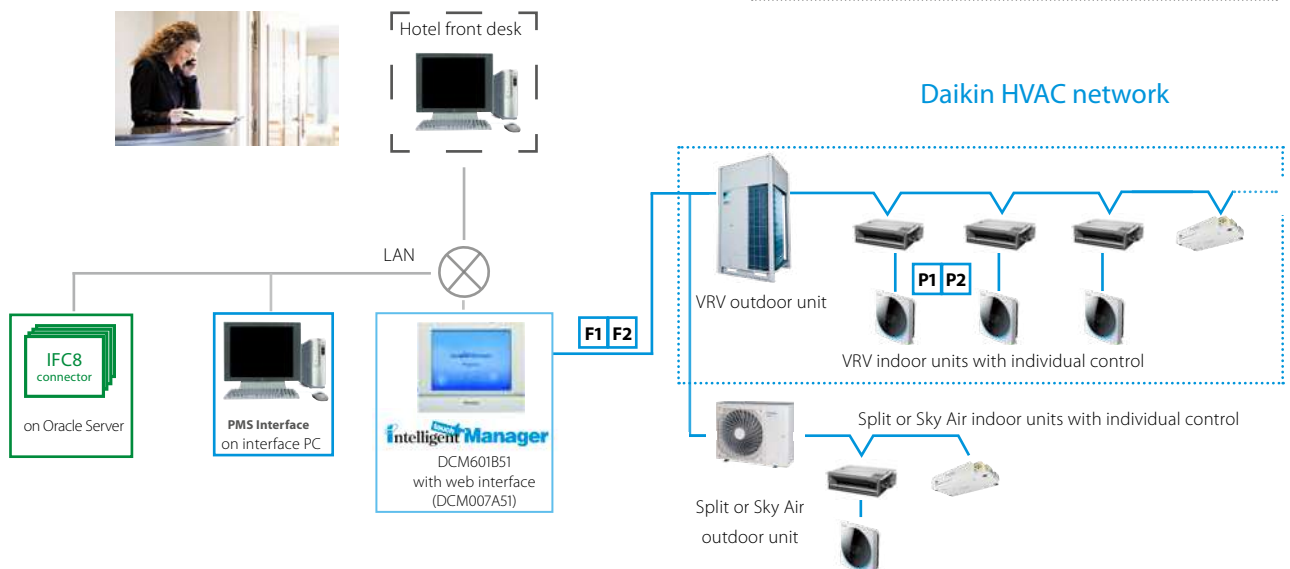

DMS502A51 / EKACBACMSTP / EKCMBACIP / EKCMBACMSTP




# BACnet Interface

Integrated control system for seamless connection between VRV, applied systems, air handling units and BMS systems

- › Interface for BMS system
- › Communication via BACnet protocol (connection via Ethernet)
- › Unlimited site size
- › Easy and fast installation
- › PPD data is available on BMS system (only for VRV)



BMS  
BACNET / ETHERNET

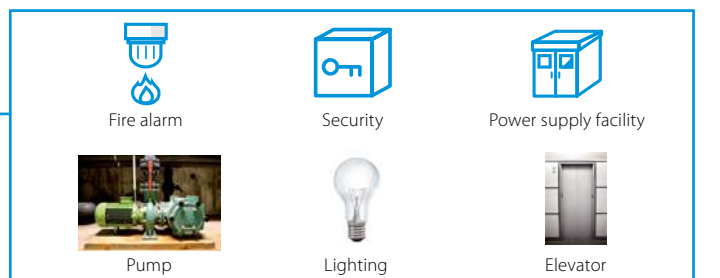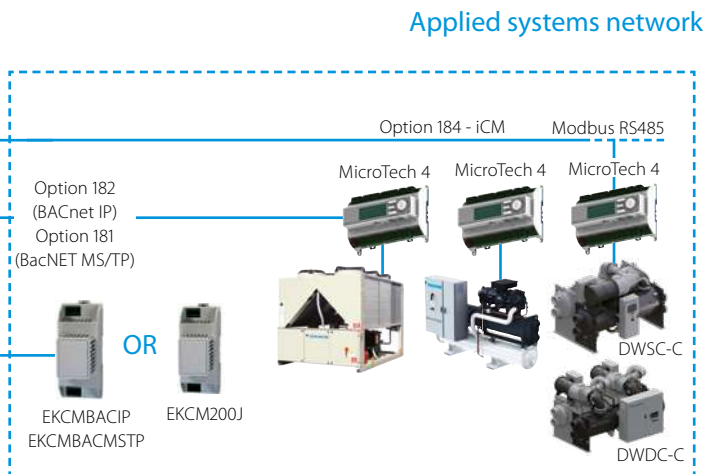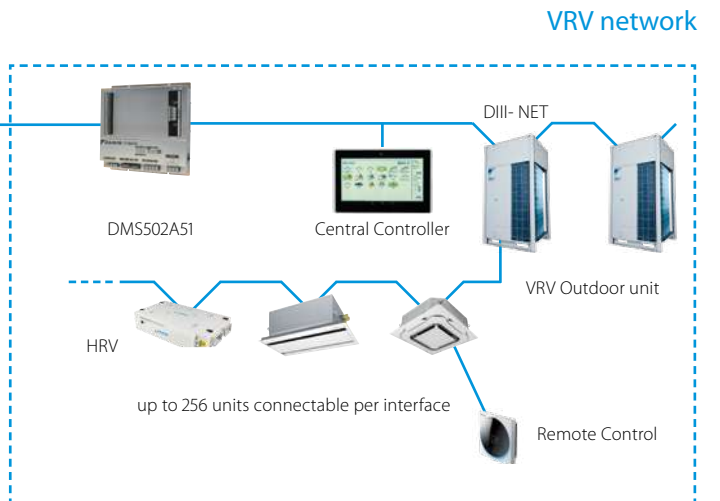




DMS504B51

# LonWorks Interface

Open network integration of VRV monitoring and control functions into LonWorks networks

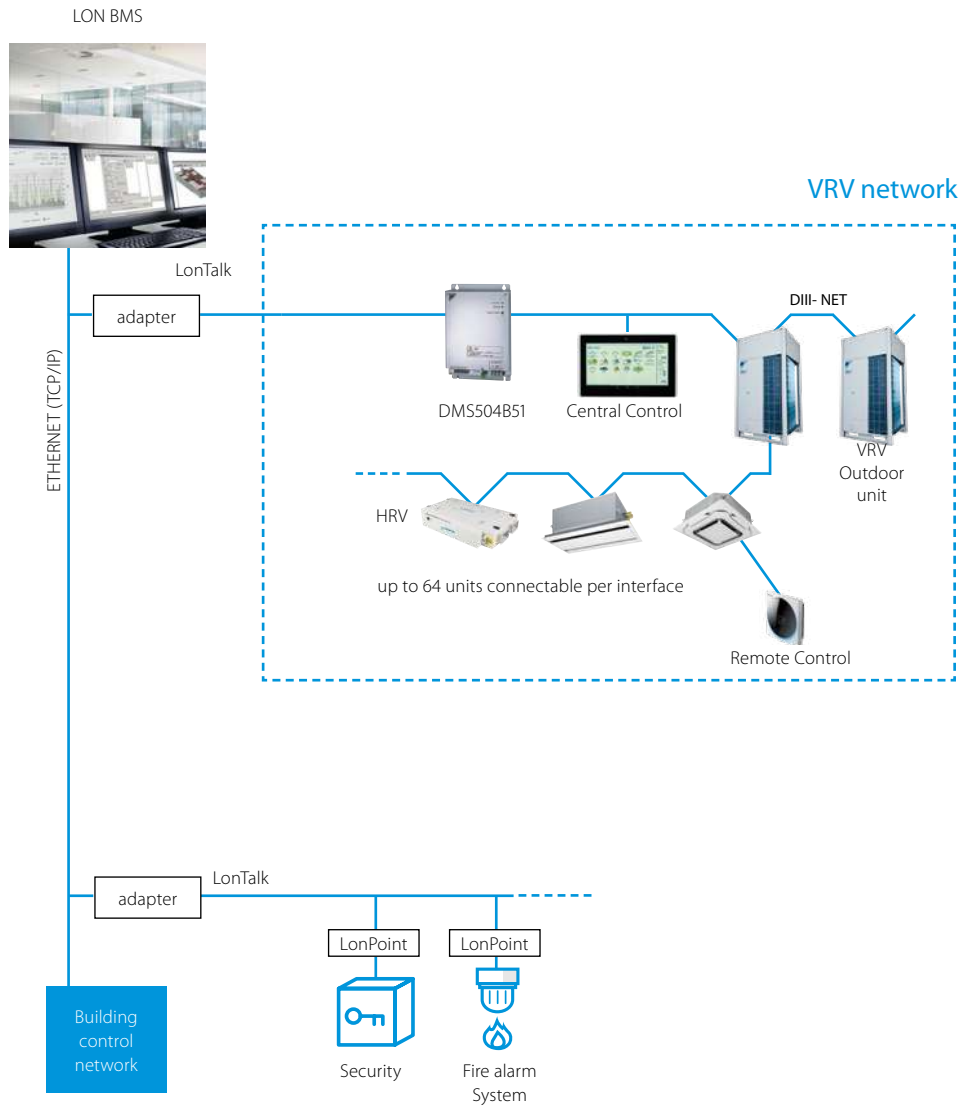

- > Interface for Lon connection to LonWorks networks
- > Communication via Lon protocol (twisted pair wire)
- > Unlimited sitesize
- > Quick and easy installation



# Daikin on Site (DoS)

✔ Remote service levels

Level	Delivery
Alerts and web application	<ul style="list-style-type: none"> <li>• 24/7/365 automated alarm and event monitoring by customer themselves</li> <li>• Automated notification via email to customers</li> <li>• Access to Daikin on Site web application</li> </ul>
Active monitoring	<ul style="list-style-type: none"> <li>• Remote alarm analysis and diagnostics by Daikin Affiliate Experts</li> <li>• Smart mobilization of authorized service personnel</li> </ul>
Connected Service Plan	<ul style="list-style-type: none"> <li>• Remote alarm analysis and diagnostics by Daikin Affiliate Experts</li> <li>• Smart mobilization of authorized service personnel</li> <li>• Complemented with a Daikin Service Plan</li> </ul>

	DoS PREMIUM 	DoS PARTNER 
Access to unit parameters	FULL PARAMETERS	MAIN PARAMETERS
Dashboard and Web graphics	DETAILED UNIT'S WEB GRAPHICS	DASHBOARD INCLUDED
Core features	INCLUDED	INCLUDED
Advanced features	INCLUDED	NOT INCLUDED
Target Market	Daikin Affiliates	Service Companies

✔ Features & Compatibilities

Main Feature List	PARTNER	PREMIUM
Datapoints	up to 200	up to 500
History	1-year	10-years
Reporting	✔	✔
API access	Internal Use	Internal Use
<b>Core Features</b>		
Map & KPI		✔
Remote Alarm Notification	✔	✔
Alarm Dashboard	✔	✔
Datapoint List	✔	✔
Web Graphics		✔
Dashboard	✔	✔
Trend Viewer	✔	✔
Scheduler	✔	✔
Web Access	✔	✔
<b>Advanced features</b>		
Leak Detection		✔
Trend Analysis		✔
Predictive maintenance		✔
Optimization		✔

✔ Quotation and order process

- › An monthly access fee is invoiced to affiliates for each connection. For additional info, contact DENV [fqs.servicebusiness@daikineurope.com](mailto:fqs.servicebusiness@daikineurope.com)
- › Invoicing starts as of activation of a connection by the affiliate DoS key-user.
- › Dos Partner is based on yearly fee.
- › Dos Premium is based on monthly fee.
- › Affiliates offer local annual contracts into the market, based on the above proposed levels.
- › To access the DEMO PLANT, please contact [fqs.servicebusiness@daikineurope.com](mailto:fqs.servicebusiness@daikineurope.com)

✔ For whom

- › Daikin on Site is a multi-feature platform. It has the ambition to be a collaborative platform for all people managing the operation and maintenance of the chiller plants and/or AHUs.
- › DoS Premium → Direct Service Business for Affiliates
- › Include advanced features
- › DoS Maint → Service partners or Facility managers
- › Specific products for Service Partners







✔ Benefits

- › Peace of mind, with control over operation and maintenance budgets.
- › Control and measuring: remote site assessment, relevant dashboards, access to real-time and historical data from anywhere, whenever needed.
- › Optimal performance: team-up with Daikin's expertise, quick alarm resolution, remote service and software updates.
- › Energy efficiency: enhanced control (remote control and master-slave), energy metering
- › Available as standalone (access only) or fully integrated in Daikin's Service Plans.

✔ Practicals

- › No hardware investment required.
- › Easy commissioning.
- › Annual access fee per connection (pay per use).
- › Unlimited users per connection allowed.
- › Different access roles for operators, trained service and Daikin.
- › Internet and data privacy secure.

✓ Connectivity









Chillers MT3 & MT4 controlled chillers		
	<ul style="list-style-type: none"> <li>› Chiller software is 'DoS ready'.</li> <li>› No extra hardware required.</li> </ul>	<p>Find the overall DoS software release planning in the compatibility list on <a href="http://www.mydaikin.eu">www.mydaikin.eu</a></p>
AHU – MT3 controlled		
	<ul style="list-style-type: none"> <li>› Uses IP port of controller to connect to LAN or modem.</li> </ul>	<ul style="list-style-type: none"> <li>› New chillers: delivered from factory 'DoS ready'.</li> </ul> <p>Installed base:</p> <ul style="list-style-type: none"> <li>› Chiller software update is required; see compatibility list on <a href="http://www.mydaikin.eu">www.mydaikin.eu</a>.</li> </ul>
Chillers MT2 controlled		
	<ul style="list-style-type: none"> <li>› Unique device for any MTII controlled Unit.</li> <li>› New features, as the possibility to control additional sensors.</li> <li>› Possibility to connect the unit with BMS of the customer.</li> </ul>	<p>ALC DC8 EU.SB.5000081</p> <p>Unified version of Gateway to connect chillers controlled by MTII (Carel pCO<sub>2</sub>-pCO<sub>3</sub>-pCO<sub>5</sub>) to DoS.</p> <p>Supersede existing models:                      EU.SB.5000052                      EU.SB.5000001                      EU.SB.5000004</p>
	<p>ALC DC8</p>	
iCM embedded – Chiller plant manager		
	<ul style="list-style-type: none"> <li>› ICM is DoS-ready.</li> <li>› No extra hardware required.</li> <li>› Uses IP port of controller to connect to LAN or modem.</li> </ul>	<p>Look for iCM documentation on <a href="http://my.daikin.eu">my.daikin.eu</a></p>
Measurement and Monitoring kit for targeted energy audit		
	<ul style="list-style-type: none"> <li>› M&amp;M is DoS-ready.</li> <li>› No extra hardware required.</li> <li>› Uses IP port of controller to connect to LAN or modem.</li> </ul>	<p>Look for sales index 'target energy audit'.</p>

A compatibility table is available on Daikin Extranet.


If you do not find it, then [fqs.servicebusiness@daikineurope.com](mailto:fqs.servicebusiness@daikineurope.com) and [fqs.technicalsupport@daikineurope.com](mailto:fqs.technicalsupport@daikineurope.com) will assist you.

The table provides information of required hardware, software and monitoring features for each chiller model.


✓ Roles and access levels

			
Plant Dashboard	Plant Dashboard	Plant Dashboard	Plant Dashboard
Data points 	Data points 	Data points 	Data points 
Alarms	Alarms	Alarms	Alarms
Web graphic	Web access	Web access	Web access
History	Web graphic	Web graphic	Web graphic
Schedulers	History	History	Upgrade
Documentation	Schedulers	Schedulers	Schedulers
	Documentation	Documentation	Tasks
			Documentation
			Plant settings

✓ Few screenshot examples (more on Daikin on Site)

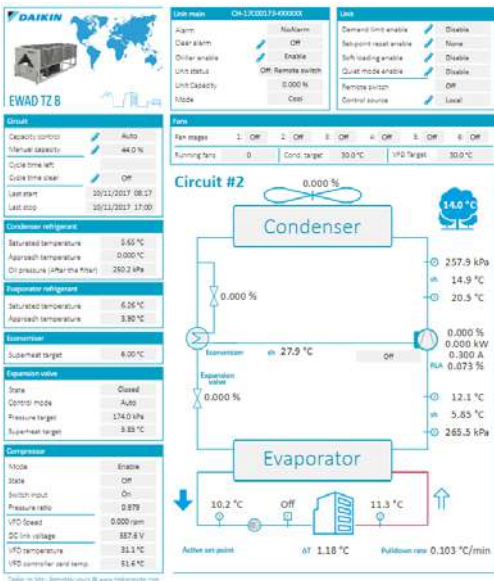

Circuit overview – real-time data  
For maintenance check and diagnostics.

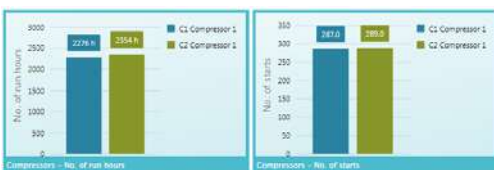

Pre-engineered dashboards for each user role.  
Easy customizable by each user.



Plant overview, with real-time data  
Full insight in the plant operation for commissioning and optimization.



Historical data: select parameters, select period, zoom, ...  
Full insight in the equipment operation for diagnostics and optimization.






✓ Periodic reports



Heat recovery ventilation unit Modular L – ALB\*  
1.04 STORAGE

- Install with pre-heater ALD07LEPH01 (left) or ALD07REPH01 (right).
- Install with CO2 sensor ALC00UC2S01

Left connection: [ALB-RA](#)

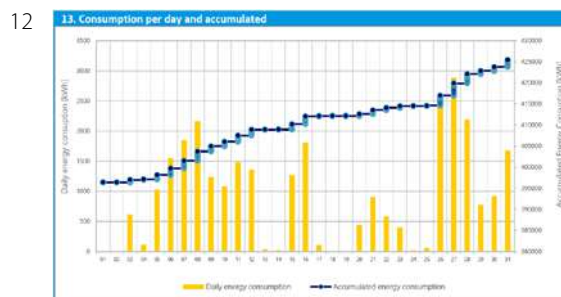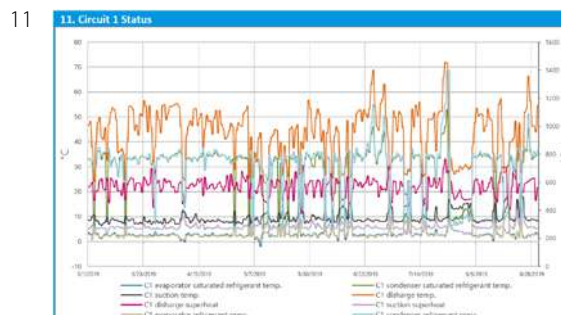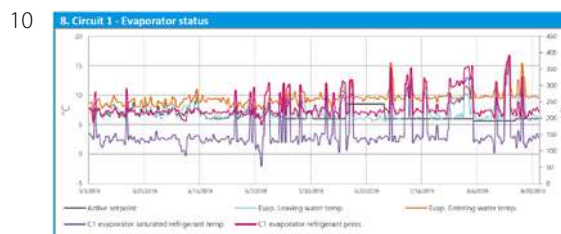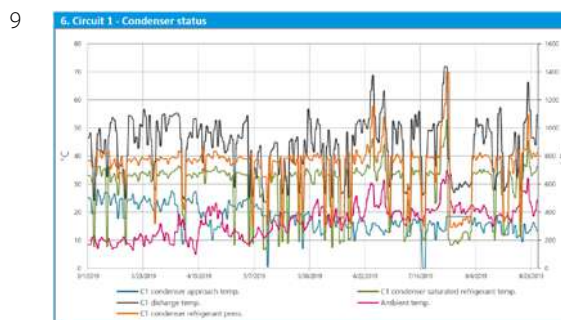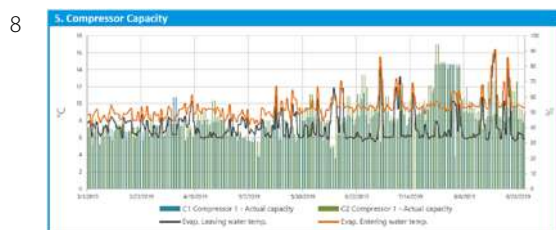

Measured energy			
Energy consumption period	Show all energy consumption	Max peak demand	Co2 gh/t
29136 kWh	425538 kWh	290,622 kW	0,3845417

Periodic reports on the unit for the last 1 and 6 months.

- Data displayed:
1. Overall unit status
  2. Component status and recommendations
  3. Unit status
  4. Compressor running hours
  5. Compressor starts
  6. Compressor starts and working hours
  7. Compressor capacity
  8. Condenser status (per circuit)
  9. Evaporator status (per circuit)
  10. Evaporator pump - Run hours
  11. Circuit status
  12. Alarm history
  13. Energy consumption per day and accumulated

More info on: [https://my.daikin.eu/denv/en\\_US/home/service-and-solutions.html](https://my.daikin.eu/denv/en_US/home/service-and-solutions.html)  
Sharepoint for Reports download: <https://denv.sharepoint.com/sites/DaikinonSiteReporting>

# Leak detection function on DoS


## ✓ Description

Through an extensive analysis of working data of the unit, a Machine Learning algorithm will detect potential gas losses by notifying the Operator. The algorithm can detect losses that are in a range of 0-15% of the total amount of gas.

Automatically available on DoS PREMIUM plants → Tz units equipped with liquid temperature sensor.


In case of potential slow leakages, it notifies the operator raising an Alarm.

Through a dedicated section the Operator can see the status of the Unit and if the probability of a gas leakage.

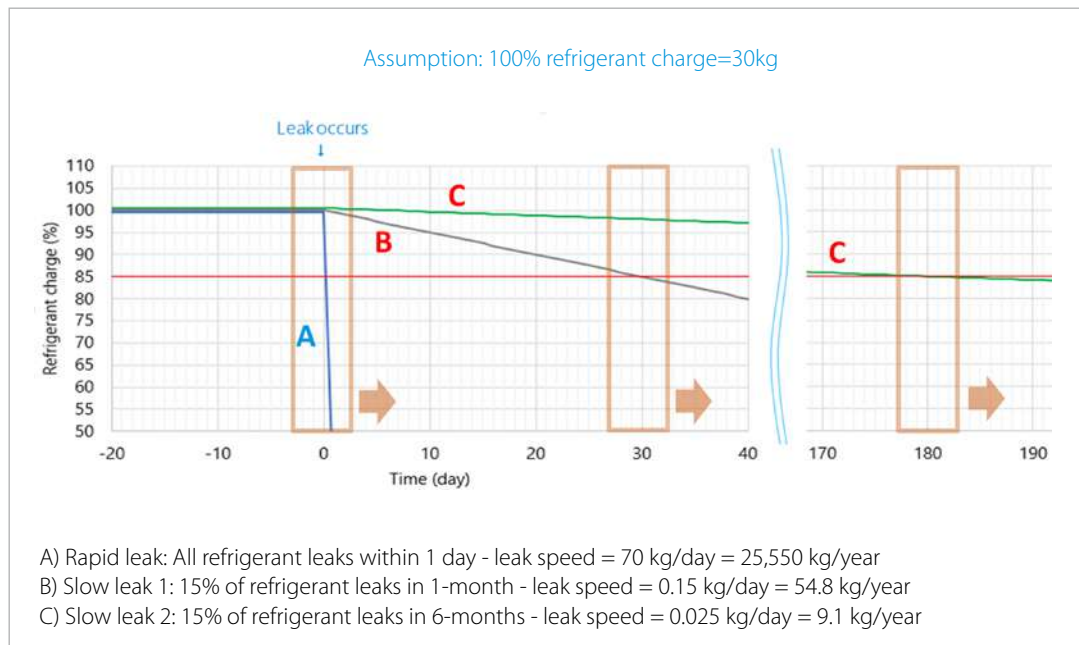

## ✓ Available informations on dashboard

- › Last Check: indicates when the algorithm performed for the last time.
- › Cx Status: indicates if there are leakages or not in the circuit.
- › Cx Leak occurrences: indicates how many times the algorithm detected a possible leakage
- › Cx Avg prob of Leakage: indicates the probability to have leakages
- › Cx Messages: indicates in case of no data availability if the algorithm performed or not

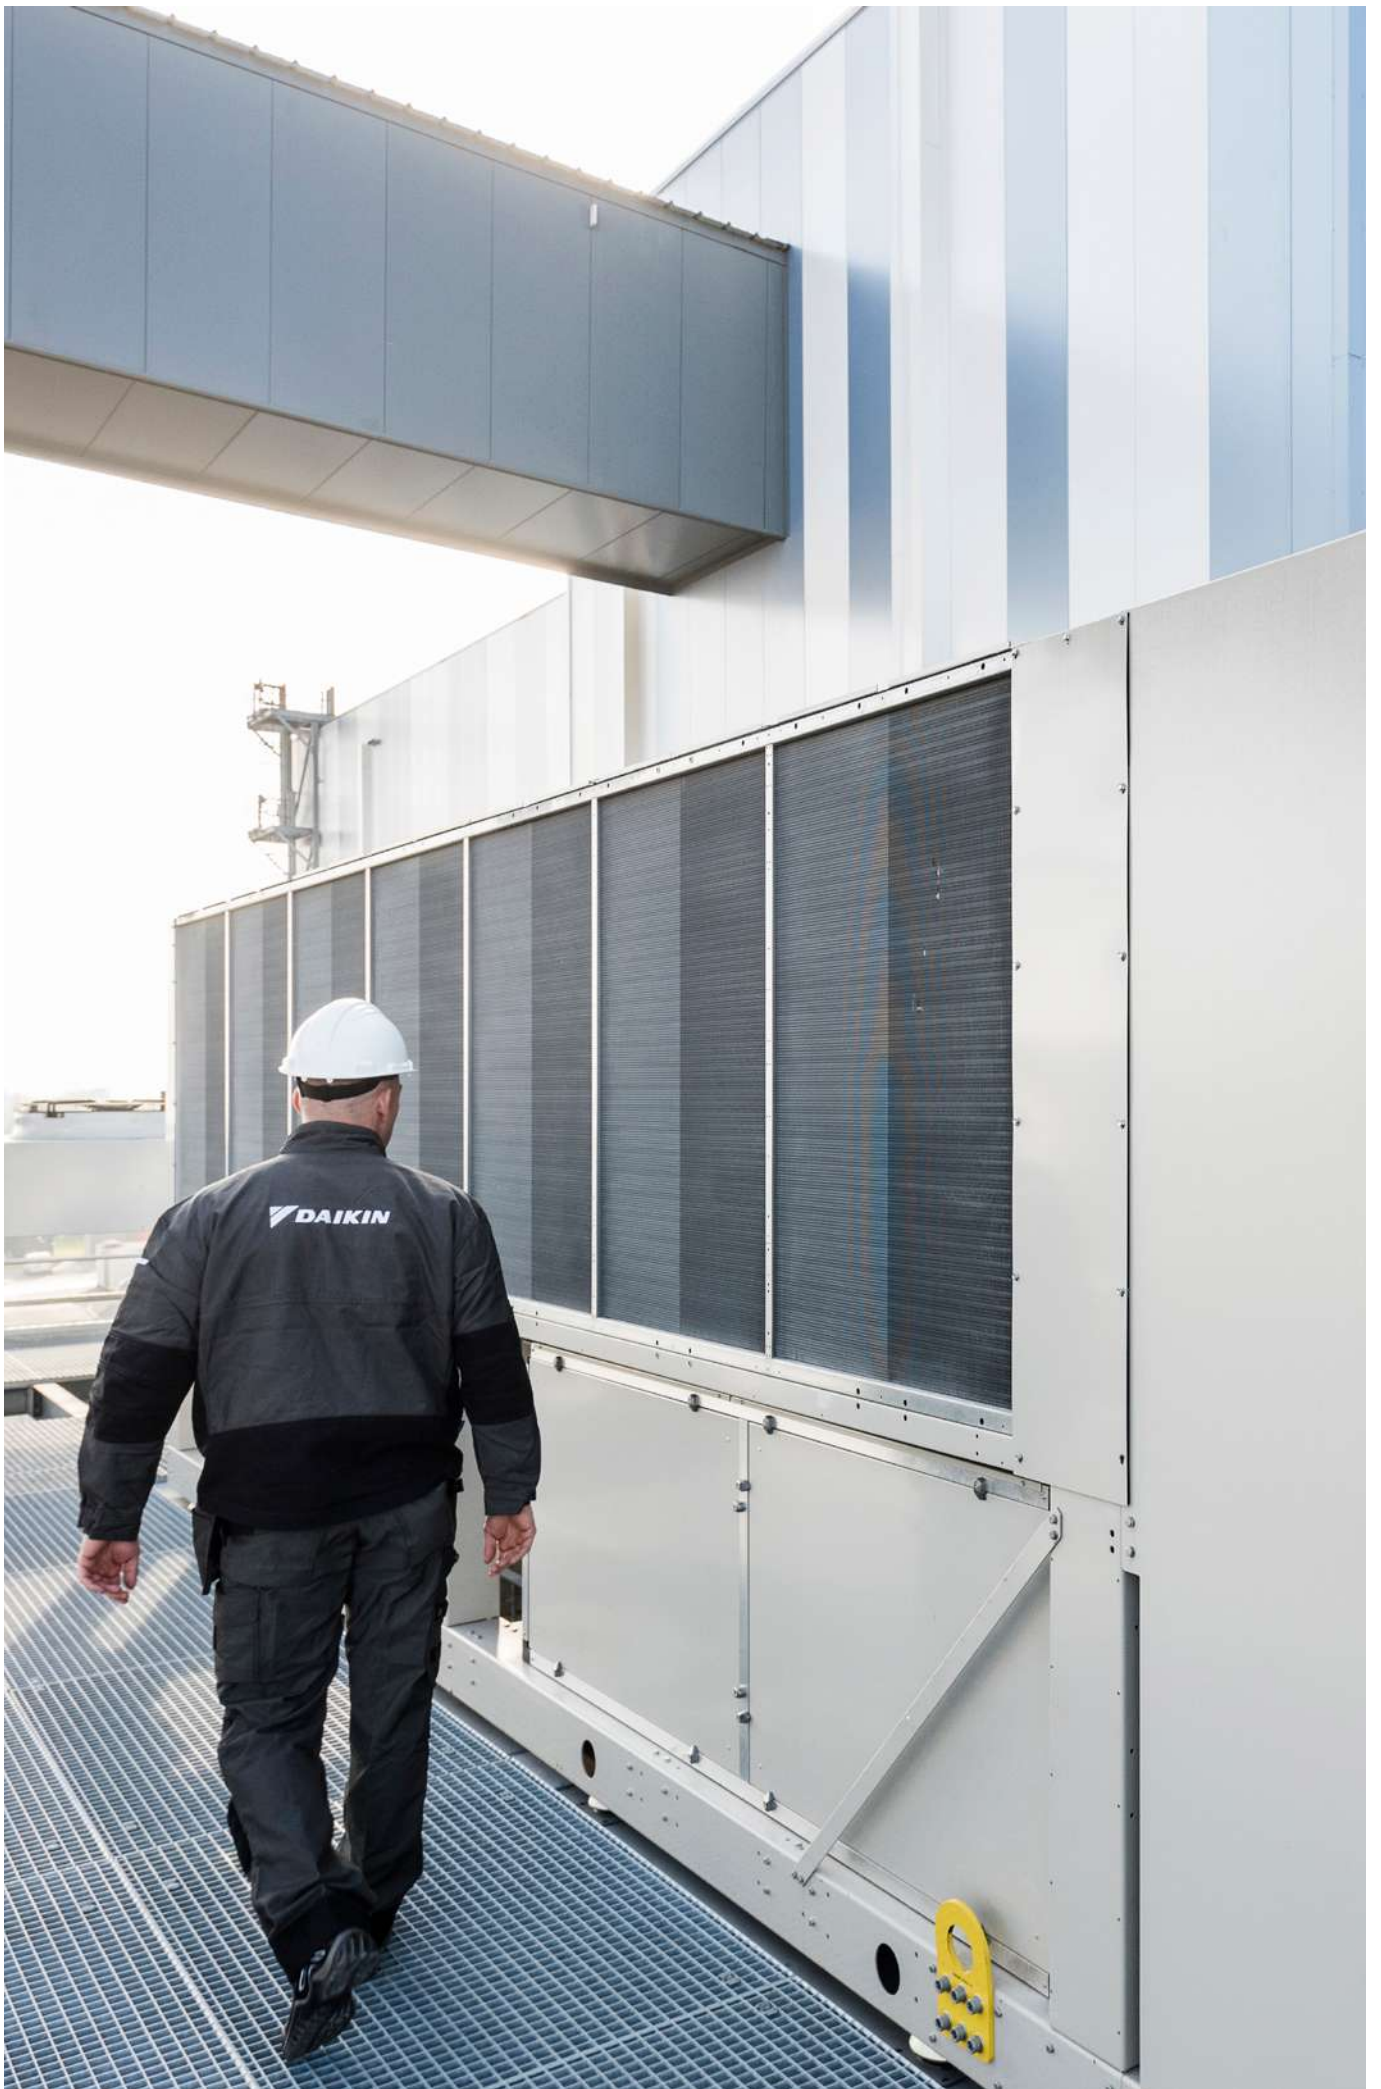

# IEQ Sensor

Our New Indoor Environmental  
Quality Sensor



Daikin's newest device  
measures and analyzes your  
indoor environment to  
improve your well-being





# Why Indoor Air Quality Matters

## ✓ Indoor Air Quality

Indoor Air Quality (IAQ) refers to the quality of the air in indoor environments, which affects building's occupants during their everyday lives. When designing HVAC systems for residential buildings, schools, offices, or light commercial buildings, many things must be considered. While it is important to meet the cooling and heating demand, we should also consider aspects such as ventilation, air filtration, and indoor air quality.

Did you know that breathing indoor air, whether it is at home, at the office, or in a hotel room, can be much more polluted than outdoor air? Remember that 90% of our life is spent indoors, and indoor air quality can be 2 to 5 times worse than outdoor air.

## ✓ Ventilation

Ventilation systems ensure optimal climate conditions by providing a fresh, healthy, and comfortable environment for buildings of all sizes, as well as for different applications.

In a completely closed room, air cannot easily enter or leave, causing air pollutants to accumulate which could affect the health of the people who use the room. Ventilation is essential for diluting and removing these air pollutants.

A well-maintained ventilation system with an adequate air-exchange rate have been demonstrated to be an effective solution to protect people from contaminants, including viruses.

## ✓ Indoor Air Quality components

Indoor Environment Quality (IEQ) is broader than IAQ, and includes lighting, noise, and electromagnetic fields.

### 1. Ventilation

Ensures the provision of fresh and clean air

### 2. Energy recovery

Delivers energy savings by transferring heat and moisture between airflows

### 3. Air processing

Ensures clean and healthy air by filtering out pollen, dust, and odours that are harmful to our health

### 4. Humidification

Ensures the desired moisture level in the conditioned space

## ✓ Monitoring Indoor Air Quality

Nowadays, most things that surround us can be monitored and tracked, even Indoor Air Quality (IAQ). Monitoring and tracking IAQ values can help us to understand how our surrounding environment affects our well-being, and then take action to improve the quality of the environment in which we live, whether this is our homes, the office, a restaurant, schools, or shops.

# Features

The Daikin IEQ Sensor measures your well-being by tracking indoor air quality values, environmental comfort, and electromagnetic pollution. It is available with 12 sensors and 15 parameter measures, and connects through your Wi-Fi network or via NB-IoT technology.

✔ Complete Standalone Installation

The Daikin IEQ Sensor does not have to be paired with another product, for an extremely easy and completely standalone installation that takes about a minute. The device can be powered up with microUSB power supply (included). The material code is AIRSENSEPROPLUS.

✔ Caelum Monitoring Platform

The device connects to Caelum, Daikin’s monitoring platform, at [www.daikiniaq.com](http://www.daikiniaq.com). This enables you to easily monitor Indoor Air Quality levels and create regular reports based on the data detected by the sensor. You can even use the platform to show your indoor air quality levels to your visitors.

✔ Mobile App

The configuration app is available as Daikin AirSense on both the App Store and Play Store. Once installed on your mobile device and logged in, scan the QR code on the IEQ sensor and the app will guide you through the entire configuration process. Once your sensor is configured, you will have access to the entire set of functions from your mobile.

✔ Connectivity

The IEQ sensor ensures perfect integration with Daikin on Site and Daikin Cloud Service, Daikin’s remote monitoring and smart maintenance platform. It gives you perfect control over the entire heating, ventilation and air conditioning system installed in your building. You can use interlock function between IAQ sensor and AHUs.

✔ Available ReFilter tools

**Product Hierarchy**

- › Material – Product hierarchy: Accessory
- › Material name: AIRSENSEPROPLUS
- › Business Pillar: SERVICES

✔ Green Building Certification

Installing the Daikin IEQ sensor can help you achieve better sustainability ratings and green building projects certified with LEED and WELL certification thanks to Indoor Environmental Quality credits.

✔ Video wall

The video wall is a great tool to have a general overview of the measurements conducted by the device. This screen can be shared with the occupants of the buildings to show in each moment the Indoor Air Quality status.

✔ Communication capability

**NB-IoT:** This technology can reach devices in areas where reception is poor or difficult to reach. Complete standalone installation. This is a perfect solution for service purposes where access to local Wi-Fi is not allowed or not available.

**Wi-Fi:** Easy and complete standalone installation.

## Daikin IEQ Sensor kit


The IEQ sensor kit comes in a carton box containing the following items:

- › Power Supply plug
- › USB - Micro USB Cables
- › Wall fixing kit
- › Quick installation guides



## NB-IoT or WiFi?

Communication is either Wifi or NB-IoT network (mobile network). The NB-IoT services is available in the following 18 countries: Austria, Belgium, Czech Republic, Denmark, Estonia, Germany, Greece, Hungary, Ireland, Italy, the Netherlands, Norway, Portugal, Romania, Spain, Switzerland, United Kingdom. NB-IoT services carry a fee (invoiced after the first year of usage).

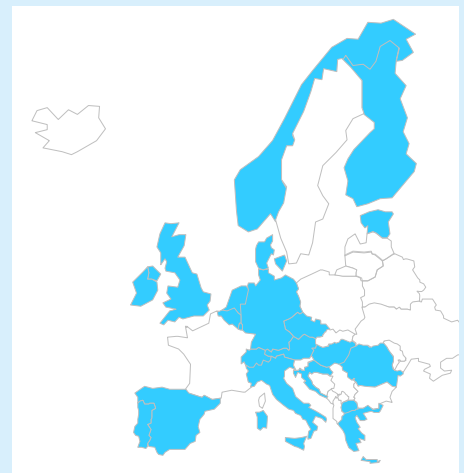

✓ Sensor characteristics

**Fine Dust (PM10/PM2.5)**

Range: 0 to 1,000 µg/m<sup>3</sup>  
 Precision: (from 0 µg/m<sup>3</sup> to 100 µg/m<sup>3</sup>): ±15 µg/m<sup>3</sup>  
 Precision: (from 100 µg/m<sup>3</sup> to 1,000 µg/m<sup>3</sup>): ±15%  
 Resolution: 1 µg/m<sup>3</sup>

**Temperature**

Range: -40 °C to 85 °C  
 Precision: ±1 °C (between 0 °C and 65 °C)  
 Resolution: 0.1 °C

**Humidity**

Range: 0 to 100% RH  
 Precision: ±3% RH  
 Resolution: 0.1% RH

**Ambient Light**

Range: 0 lux to 120,000 lux  
 Precision: ±10%  
 Resolution: 0.1 lux

**Air Pressure hPa**

Range: 300 to 1,100 mbar (hPa)  
 Precision: 0.1 mbar (hPa)  
 Resolution: 0.1 mbar (hPa)

**Electrosmog**

LF Range: 0 - 20,000 nT - Range: 5 Hz - 120 Hz  
 Precision: ±5% - Resolution: 25nT  
 HF Range: 0 to -10 V/m - Range: 50 MHz - 300 GHz  
 Precision: ±10% - Resolution: 0.1 V/m  
 Measurements performed on 3 axes

**CO<sub>2</sub>**

Range: 0 to 5,000 ppm  
 Precision: ±30 ppm (between 0 and 1,000 ppm)  
 ±3% (over 1,000 ppm)  
 Resolution: 1 ppm

**TVOC**

Range: 0 ppb to 1,187 ppb  
 Resolution: 1 ppb  
 Precision: ±10%

**Air quality**

Range: 0 to 500  
 Precision: ±15%  
 Resolution: 0.1

**Sound Pressure**


Range: 28 to 120 dBspl  
 Frequency: from 50 Hz to 20 KHz  
 Precision: ±1 dBspl  
 Resolution: 0.1 dBspl

**CO<sub>2</sub>e**

Range: 400 to 6,000 ppm  
 Precision: 20%  
 Resolution: 1 ppm

**Wi-Fi networks & signal intensity (2.4GHz band)/(PM10-PM2.5)**

Detects Access Point n° in band 2.4Ghz and overall signal level (from 0 to -100 dBm)

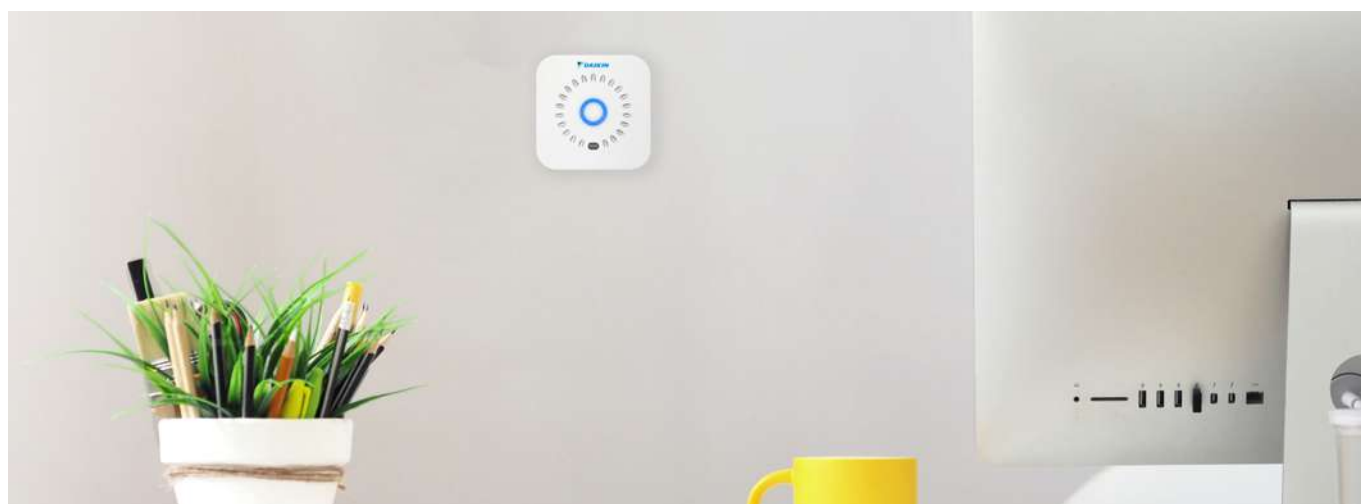

EKPCCAB4

## Daikin Configurator Tool + Software

Simplified commissioning:  
graphical interface to configure, commission  
and upload system settings

### Simplified commissioning

The Daikin configurator for VRV is an advanced software solution that allows for easy system configuration and commissioning:

- › Less time is required on the roof configuring the outdoor unit
- › Multiple systems at different sites can be managed in exactly the same way, thus offering simplified commissioning for key accounts
- › Initial settings on the outdoor unit can be easily retrieved



Simplified  
commissioning



Retrieve initial  
system settings



K.RSS


# Wireless room temperature sensor for Sky Air and VRV

## Flexible and easy installation

- › Accurate temperature measurement thanks to flexible placement of the sensor
- › No need for wiring
- › No need to drill holes
- › Ideal for refurbishment



## Connection diagram Daikin indoor unit PCB (FXSQ example)

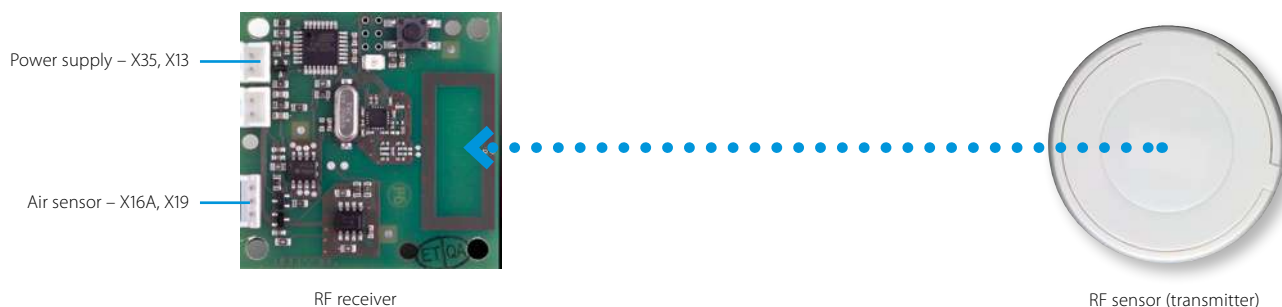

## Specifications

		Wireless room temperature sensor kit (K.RSS)	
		Wireless room temperature receiver	Wireless room temperature sensor
Dimensions	mm	50 x 50	ø 75
Weight	g	40	60
Power supply		16VDC, max. 20 mA	N/A
Battery life		N/A	+/- 3 years
Battery type		N/A	3 Volt Lithium battery
Maximum range	m		10
Operation range	°C		0~50
Communication	Type		RF
	Frequency	MHz	868.3

- › Room temperature is sent to the indoor unit every 90 seconds or if the temperature difference is 0.2°C or larger.

KRCS\*

# Wired room temperature sensor for Sky Air and VRV

- › Accurate temperature measurement, thanks to flexible placement of the sensor
- › Specific model code for each indoor unit can be found in the option tables












## Specifications

Dimensions (HxW)	mm	60 x 50
Weight	g	300
Length of branch wiring	m	12

# ADAPTER PCBs





## Simple solutions for unique requirements Concept and benefits

- › Low cost option to satisfy simple control requirements
- › Deployed on single or multiple units

			Connectable to:		
			Split	Sky Air	VRV
	<b>(E)KRP1B*</b> adapter for wiring	<ul style="list-style-type: none"> <li>› Facilitates integration of auxiliary heating apparatus, humidifiers, fans, damper</li> <li>› Powered by and installed at the indoor unit</li> </ul>		●	●
	<b>KRP2A*/KRP4A*</b> Wiring adapter for electrical appendices	<ul style="list-style-type: none"> <li>› Remotely start and stop up to 16 indoor units (1 group) (KRP4A* via F1 F2)</li> <li>› Remotely start and stop up to 128 indoor units (64 groups) (KRP2A* via P1 P2)</li> <li>› Alarm indication/ fire shut down</li> <li>› Remote temperature setpoint adjustment</li> <li>› Cannot be used in combination with a central controller</li> </ul>		●	●
	<b>SB.KRP58M2</b>	<ul style="list-style-type: none"> <li>› Low noise and demand control option for RZAG-N* and RZASG-M* series.</li> <li>› Obligatory mounted plate EKMKSA2 needs to be ordered separately</li> </ul>		●	
	<b>KRP58M51</b>	<ul style="list-style-type: none"> <li>› Low noise and demand control option for RZA-D series.</li> <li>› Includes obligatory mounted plate EKMKSA3</li> <li>› Obligatory mounting plate EKMKSA3 needs to be ordered separately</li> </ul>		●	
	<b>DTA104A*</b> Outdoor Unit External Control Adapter	<ul style="list-style-type: none"> <li>› Individual or simultaneous control of VRV system operating mode</li> <li>› Demand control of individual or multiple systems</li> <li>› Low noise option for individual or multiple systems</li> </ul>			●
	<b>DCS302A52-9</b> Unification adapter for computerized control	<ul style="list-style-type: none"> <li>› Enables unified display (operation/malfunction) and unified control (ON/OFF) from BMS system</li> <li>› Must be used together with Intelligent Touch Controller or intelligent Touch Manager</li> <li>› Cannot be combined with KRP2/4*</li> <li>› Can be used for all VRV indoor models</li> </ul>			●
	<b>KRP928*</b> Interface adapter for DIII-net	<ul style="list-style-type: none"> <li>› Allows integration of split units to Daikin central controls</li> </ul>	●		
	<b>KRP980*</b> Adapter for split units without an S21 port	<ul style="list-style-type: none"> <li>› Connect a wired remote control</li> <li>› Connect to Daikin central controls</li> <li>› Allow external contact</li> </ul>	●		
	<b>KRP413*</b> Wiring adapter normal open contact / normal open pulse contact	<ul style="list-style-type: none"> <li>› Switch off auto restart after power failure</li> <li>› Indication of operation mode / error</li> <li>› Remotely start / stop</li> <li>› Remotely change operation mode</li> <li>› Remotely change fan speed</li> </ul>	●		

Some adapters require an installation box, refer to the option lists for more information

## Accessories


<b>EKRORO</b>		<ul style="list-style-type: none"> <li>› External ON/OFF or forced off</li> <li>› Example: door or window contact</li> </ul>
<b>EKRORO 3</b>		<ul style="list-style-type: none"> <li>› External ON/OFF or forced off</li> <li>› F1/F2 contact</li> <li>› Example: door or window contact</li> </ul>
<b>KRC19-26A</b>		<ul style="list-style-type: none"> <li>› Mechanical cool/heat selector</li> <li>› Allows switching over an entire system between cooling/heating/fan only</li> <li>› Connects to the A/B/C terminals of the unit</li> </ul>
<b>BRP2A81</b>		<ul style="list-style-type: none"> <li>› Cool/heat selector PCB</li> <li>› Required to connect KRC19-26A to a VRV IV outdoor unit</li> </ul>

## Individual and centralised controls

	BRC1D*	BRC1E*	BRC1H*	DCS301B51	DST301B51	DCS302C51	DCS601C51
Madoka Assistant app for advanced settings			•				
Electrical box KJB111A	•	•	•				
Electrical box KJB212A(A) (1)	•	•		•	•		
Electrical box KJB311A(A)						•	
Electrical box KJB411AA							•

(1) recommended as wider (more stable mounting)


## Intelligent Tablet Controller - DCC601A51

		
		Options for local control
Wired screen for local control	AL-CCD07-VESA-1	•
Commissioning tool		•
Software update tool		•

## Standard protocol interfaces - DMS502A51

		BACnet Interface
DIII-net expansion board (2 ports), connects up to 128 additional indoor units	DAM411B51	•
Digital pulse inputs (12) for PPD functionality	DAM412B51	•

## Intelligent Chiller Manager

		
Differential Pressure Sensor 4-20 mA 0-160 kPa	EKQDP2M016	•
Differential Pressure Sensor 4-20 mA 0-250 kPa	EKQDP2M020	•
Differential Pressure Sensor 4-20 mA 0-400 kPa	EKQDP2M040	•
Differential Pressure Sensor 4-20 mA 0-600 kPa	EKQDP2M060	•
ModBus RTU communication module	EKCM200J	•
BACnet IP communication module	EKCMBACIP	•

# Intelligent Touch Manager - DCM601B51



DIII Plus Adaptor - Allows connection of additional 64 indoor units/groups. Only one adaptor can be connected (for more units, use DIII Plus Adaptor Slots)	DGE601A52	•
DIII Plus Adaptor - Allows connection of additional 64 indoor units/groups. Up to 6 Adaptor Slots can be added to a DIII Plus Adaptor	DGE601A53	
iTM plus adapter – Allows connection of an additional 64 indoor units/groups. Up to 7 adapters can be connected	DCM601A52	•
iTM PPD software – Allows distribution of used kWh by indoor units connected to the iTM	DCM002A51	•
iTM HTTP interface - Allows communication to any third party controller via http interface	DCM007A51	•
iTM Energy navigator – Energy management option	DCM008A51	•
iTM BACnet Client option – Enables integration of third party devices to the iTM via the BACnet/IP protocol. (This is not a gateway and cannot replace DMS502A51)	DCM009A51	•
Property Management System (PMS) interface option - Enables to connect to third party PMS systems	DCM010A51	• Oracle Opera PMS

## WAGO interface options for intelligent Touch Manager

### Required or optional WAGO base modules

Module type	Model code	Specifications	
24 V DC power supply	787-712	100 to 240 V AC → 24 V DC, 2.5 A	Required
Communications unit (Bus coupler)	WGDCMCPLR2	RS-485, Max:115.2kbps, not programmable	Required
Connector (1)	750-960		Required
Terminator module	750-600		Required
Power supply module	750-613	IN: 24 V DC, OUT: 5 V DC	Optional

### Supported WAGO I/O modules

I/O module type	Model code	Specifications	N° of contacts
Di	750-400	No-voltage contact input	2
	750-432	Contact rating: 24 V DC / 4.5 mA*	4
	750-430	No-voltage contact input Contact rating: 24 V DC / 2.8 mA	8
Do	750-513/000-001	No-voltage contact output Contact rating: 230 V AC / 30 V DC, 2 A	2
	750-504	No-voltage contact output Contact rating: 24 V DC / 0.5 A	4
Ai	750-454	Rated at 4 to 20 mA: 12-bit resolution	2
	750-455		4
	750-479	Rated at -10 to 10 V: 13-bit resolution	2
	750-459	Rated at 0 to 10 V: 12-bit resolution	4
Ao	750-554	Rated at 4 to 20 mA: 12-bit resolution	2
	750-555		4
	750-560	Rated at -10 to 10 V: 10-bit resolution	2
	750-559	Rated at 0 to 10 V: 12-bit resolution	4
Thermistor	750-461/020-000	NTC20K thermistor	2
	750-461	Pt 100/RTD	2
	750-460		4
	750-461/000-003	Pt 1000/RTD	2
	750-460/000-003		4
	50-461/000-004	Ni 100/RTD	2
	750-461/000-005	Ni1000 TK6180/RTD	2
750-460/000-005	4		
Pi	750-638	Minimum pulse width: 1 ms	2

(1) This connector must be attached to a communications unit that is connected to the RS485 port (2-pin) of the iTM unit.

(2) To connect intelligent Touch Manager to the Daikin Cloud Service, the IoT gateway (EU.SB.5000072) and AC/DC converter (999175A) is needed.



# Power supply

- T1 = 3~, 220V, 50Hz
- V1 = 1~, 220-240V, 50Hz
- VE = 1~, 220-240V/220V, 50Hz/60Hz\*
- V3 = 1~, 230V, 50Hz
- VM = 1~, 220~240V/220~230V, 50Hz/60Hz
- W1 = 3N~, 400V, 50Hz
- Y1 = 3~, 400V, 50Hz

\* For VE power supply only 1~, 220-240V, 50Hz data is displayed in this catalogue.

# Conversion table refrigerant piping

inch	mm
1/4"	6.4 mm
3/8"	9.5 mm
1/2"	12.7 mm
5/8"	15.9 mm
3/4"	19.1 mm
7/8"	22.2 mm
1 1/8"	28.5 mm
1 3/8"	34.9 mm
1 5/8"	41.3 mm
1 3/4"	44.5 mm
2"	50.8 mm
2 1/8"	54 mm
2 5/8"	66.7 mm

# F-gas regulation

Any refrigeration system that contains fluorinated greenhouse gases is in scope of the F-gas regulations. For fully/partially pre-charged equipment: contains fluorinated greenhouse gases. Actual refrigerant charge depends on the final unit construction, details can be found on the unit labels and in the notes underneath the specification tables in this catalogue. For non pre-charged equipment (including, but not limited to racks): its functioning relies on fluorinated greenhouse gases. The F-gas regulations do not apply to systems that contain only natural refrigerants such as propane or carbon dioxide.

# Measuring conditions

## Air conditioning

1) Nominal cooling capacities are based on:	
Indoor temperature	27°CDB/19°CWB
Outdoor temperature	35°CDB
Refrigerant piping length	7.5m - 8/5m VRV
Level difference	0m
2) Nominal heating capacities are based on:	
Indoor temperature	20°CDB
Outdoor temperature	7°CDB/6°CWB
Refrigerant piping length	7.5m - 8/5m VRV
Level difference	0m

## Refrigeration

ZEAS	Chilling	Evaporating temp. -10°C; outdoor temp. 32°C; Suction SH10°C	
	Freezing	Evaporating temp. -35°C; outdoor temp. 32°C; Suction SH10°C	
Conveni-Pack	Mix Air conditioning and refrigeration operating mode	Indoor temp. 27°CDB/19°CWB; outdoor temp. 32°CDB; piping length:7.5m; level difference: 0m; refrigeration side: Evaporating temp. -10°C; outdoor temp. 32°CDB; Suction SH: 10°C	
	Mix heating and refrigeration operating mode (Heating recovery 100% mode)	Indoor temp. 20°C; outdoor temp. 7°CDB,6°CWB; advertised refrigerant load (Evaporating temp. -10°C; Suction SH: 10°C); piping length:7.5m; level difference: 0m	
Booster unit		Evaporating temp. -35°C; outdoor temp. 32°C; suction SH 10K; saturated temp. to discharge pressure of booster unit -10°C	
CCU/SCU	Medium temperature application	Medium temperature application: Outside ambient temp. 32°C; Evaporating temp. = -10°C and 10K superheat;	
	Low temperature application	Low temperature application: Outside ambient temp. 32°C; Evaporating temp. = -35°C and 20°C suction gas temperature	
Zanotti	Uni-Block, Bi-Block, Wineblock	High temperature	When normally running: +10°C / +30°C
		Medium temperature	When normally running: 0°C / 30°C
		Low temperature	When normally running: -20°C / +30°C
	CU (one, twin, and more compressor(s))	Medium temperature	Outside ambient temp. 32°C; Evaporating temp. = -10°C and 20°C suction gas temperature
		Low temperature	Outside ambient temp. 32°C; Evaporating temp. = -35°C and 20°C suction gas temperature

## Applied systems

Air cooled	Cooling only	Evaporator: 12°C/7°C	Ambient: 35°CDB
	Heat pump	Evaporator: 12°C/7°C Condenser: 40°C/45°C	Ambient: 35°C Ambient: 7°CDB/6°CWB
Water cooled	Cooling only		Evaporator: 12°C/7°C Condenser: 30°C/35°C
	Heating only		Evaporator: 12°C/7°C Condenser: 40°C/45°C
Condenserless chiller			Evaporator: 12°C/7°C Condensing temperature: 45°C / liquid temperature: 40°C
Fan coil units	Cooling		Indoor temperature 27°CDB, 19°CWB; entering water temperature 7°C, water temperature rise 5K
	Heating	2-pipe	Indoor temperature 20°CDB, 15°CWB; entering water temperature 45°C, water temperature drop 5K
		4-pipe	Indoor temperature 20°CDB, 15°CWB; entering water temperature 65°C, water temperature drop 10K
Air Handling Units	Temperature and humidity conditions: Extract air 22°C / 50%; Fresh air -10°C / 90%		

The sound pressure level is measured via a microphone at a certain distance from the unit. It is a relative value, depending on the distance and acoustic environment (for measuring conditions: please refer to the technical databooks). The sound power level is an absolute value indicating the "power" which a sound source generates. For more detailed information please consult our technical databooks.

# Benefits

## We care icons



### Auto-cleaning filter

The filter automatically cleans itself. Simplicity of upkeep means optimum energy efficiency and maximum comfort without the need for expensive or time-consuming maintenance.



### Inverter technology

Inverter compressors continuously adjust compressor speed to actual demand. Fewer power-consuming starts and stops result in decreased energy consumption (up to 30%) and more stable temperatures.



### 2 area motion detection sensor

Air flow is sent to a zone other than where the person is located at that moment. Detection is done in 2 directions: left and right. If no people are detected, the unit will automatically switch over to the energy-efficient setting.



### 3 area motion detection sensor

Air flow is sent to a zone other than where the person is located at that moment. Detection is done in 3 directions: left, front and right. If no people are detected, the unit will automatically switch over to the energy-efficient setting and eventually switch off.



### Energy saving during operation standby

Current consumption is reduced by about 80 % when operating on standby.



### Night set mode

Saves energy, by preventing overcooling or overheating during night time.



### Econo mode

This function decreases the power consumption so that other appliances that need large power consumption can be used. This function is also energy saving.



### Movement sensor

Saves power consumption in unoccupied rooms: when the room is empty, the unit switches to economy mode after 20 minutes and restarts when a person enters the room.



### Home leave operation

Maintains the indoor temperature at your specified comfort level during absence, thus saving energy.



### Fan only

The unit can be used as fan, blowing air without heating or cooling.



### Free cooling

By exploiting the low external air temperatures to cool the water, free cooling reduces the load on the compressors and decreases considerably the annual operating costs during the cold season.



### Presence and floor sensor

The presence sensor directs the air away from any person detected in the room, when the air flow control is on. The floor sensor detects the average floor temperature and ensures an even temperature distribution between ceiling and floor.



### Solar panel

Take advantage of solar power. Easily connect your hot water storage to solar collectors on your roof.

## Comfort



### Comfort mode

The unit automatically changes the angle of the air discharge louvre depending on the mode. In cooling operation the air will be directed rather upwards to avoid cold draught, while in heating operation the air will be directed rather downwards to avoid cold feet.



### Powerful mode

If the temperature in the room is too high/low, it can be cooled down/heated quickly by selecting the 'powerful mode'. After the powerful mode is turned off, the unit returns to the preset mode.



### Practically inaudible

Practically inaudible: the unit runs so quietly, you will almost forget it is there.



### Whisper quiet

Daikin indoor units are whisper quiet. Also the outdoor units are guaranteed not to disturb the quiet of the neighbourhood. (with sound levels as low as 19dB(A))



### Outdoor unit silent operation

To ensure a quiet environment for the neighbourhood the user can lower the operation sound of the outdoor unit by 3 dB(A) via remote control.



### Comfortable sleeping mode

Increased comfort function that follows a specific temperature fluctuation rhythm.



### Draught prevention

When starting to warm up or when the thermostat is off, the air discharge direction is set horizontally and the fan to low speed, to prevent draught. After warming up, air discharge and fan speed are set as desired.



### Auto cooling-heating changeover

Automatically selects cooling or heating mode to achieve the set temperature.



### Indoor unit silent operation

To ensure a quiet environment for studying or sleeping the user can lower the operation sound of the indoor unit by 3 dB(A) via remote control.



### Night quiet mode (multi outdoor units in cooling mode only)

Lowers the operation sound of the outdoor unit automatically at night. Installer has to make special setting on outdoor unit or wired remote controller, depending on model.



### Fresh hot water

The structure of thermal store ensures optimal water hygiene and eliminates the risk of bacteria and legionella. Rest assured that your hot water is fresh and safe.



### Heat boost

Quickly heats up your home when starting up your air conditioner. Set temperature is reached 20% faster than a regular air conditioner (pair only).



### Heat plus

The heat plus function provides cosy heating by stimulating radiant heat for 30 minutes. Afterwards, the previous settings are again activated.



### Floor warming

Optimises convection by distributing hot air from the bottom of the unit.



### Weather compensation function

The weather compensation function automatically compensates the heat loss of your home in heating mode when outdoor temperature suddenly drops.

## Air flow



### Ceiling soiling prevention

A special function prevents air blowing out too long in horizontal position, to prevent ceiling stains.



### Vertical auto swing

Possibility to select automatic vertical moving of the air discharge louvre, for uniform air flow and temperature distribution.



### Auto fan speed

Automatically selects the necessary fan speed to reach or maintain the set temperature.



### Individual flap control

Individual flap control via the wired remote controller enables you to easily fix the position of each flap individually, to suit any new room configuration. Optional closure kits are available as well.



### Coanda effect - cooling

The Coanda effect optimises the airflow in cooling mode. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room.



### Coanda effect - heating

The Coanda effect optimises the airflow in heating mode. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room.



### 3-D Air flow

This function combines Vertical and Horizontal auto-swing to circulate a stream of cool/warm air right to the corners of even large spaces.



### Horizontal auto swing

Possibility to select automatic horizontal moving of the air discharge louvre, for uniform air flow and temperature distribution.



### Fan speed steps

Allows to select up to the given number of fan speed.



### Fireplace logic

When installed close to a heating device (e.g. fireplace or oven) and the set temperature is reached, the fan keeps on running to have an even temperature throughout the whole house.



### Intelligent thermal sensor

The intelligent thermal sensor determines the current room temperature and distributes air evenly throughout the room before switching to an airflow pattern that directs warm or cool air to areas that need it.

# Benefits

## Humidity control



### Ururu - humidification

Moisture is absorbed from the outdoor air and evenly distributed throughout the indoor areas.



### Dry programme

Allows humidity levels to be reduced without variations in room temperature.



### Sarara - dehumidification

Reduces indoor humidity, without affecting the room temperature, by mixing cool, dry air with warm air.

## Air treatment



### Flash Streamer\*

Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air.



### Silver allergen removal and air purifying filter

Captures allergens such as pollen to ensure a steady supply of clean air.



### Titanium apatite deodorizing filter

Decomposes bothersome odours of for example tobacco and pets.



### Air filter

Removes airborne dust particles to ensure a steady supply of clean air.

## Remote control & timer



### Weekly timer

Can be set to start heating or cooling anytime on a daily or weekly basis.



### Timer

Allows to preset the air conditioner to start/stop at a specified time.



### Wired remote control

Wired remote control to start, stop and regulate the air conditioner from a distance.



### Multi zoning

Allows up to 6 individual climate zones with one indoor unit.



### 24 Hour timer

Timer can be set to start cooling/heating anytime during a 24-hour period.



### Infrared remote control

Infrared remote control with LCD to start, stop and regulate your indoor unit from a distance.



### Centralised control

Centralised control to start, stop and regulate several indoor units from one central point.



### onecta app

Control your indoor climate from any location via smartphone or tablet.



### Voice control

Control your unit with your voice.

## Other functions



### Auto-restart

The unit restarts automatically at the original settings after power failure.



### Twin/triple/double twin application

2, 3 or 4 indoor units can be connected to only a single outdoor unit even if they have different capacities. All indoor units operate within the same heating or cooling mode from one remote control.



### VRV for residential application

Up to 9 indoor units (even different capacities and up to 71 class) can be connected to a single outdoor unit. All indoor units can individually be operated within the same mode.



### Self-diagnosis

Simplifies maintenance by indicating system faults or operating anomalies.



### Multi tenant

The indoor unit's main power supply can be turned off when leaving the hotel or office building.



### Scroll compressor

Scroll compressors consist of two scrolls, one is fixed while the other orbits eccentrically without rotating. Designed for small and medium capacities, they provide constant reliability and high efficiency throughout its service life.



### Centrifugal compressor

Centrifugal compressors use an impeller and volute section to convert the velocity energy into pressure energy. Centrifugal compressors are designed with either optional variable speed drives (VFD) for superior part-load performance for single or dual compressor units, or with magnetic bearings and totally oil-free operation.



### Infrastructure cooling

Remove in a reliable, efficient and flexible way the heat constantly generated by the IT and server equipment to ensure maximum uptime while offering the best return on investment.



### Multi model application

Up to 3 indoor units can be connected to a single outdoor unit, even if they have different capacities. All indoor units can individually be operated within the same heating or cooling mode.



### Multi model application

Up to 5 indoor units (even different capacities) can be connected to a single outdoor unit. All indoor units can individually be operated within the same mode.



### Drain pump kit

Facilitates condensation draining from the indoor unit.



### Swing compressor

Swing type compressors have a unified vane and roller with fewer moving parts producing low vibration and friction, achieve higher reliability and efficiency compared to conventionally rotary compressors.



### Screw compressor

Single screw compressors consist of a main single screw and two gate rotors. Optimal performance through step less capacity control, they are designed for high capacities and optimal performances.



### Reciprocating compressor

The reciprocating type compressor consists of a cylinder, pistons and valves. The compression is accomplished by reciprocating movements of the piston in the cylinder.



### Guaranteed operation down to -20°C

Daikin heat pumps are suitable for all climates, even withstanding severe winter conditions with an operation range down to -20°C.



### Guaranteed operation down to -25°C

Daikin heat pumps are suitable for all climates, even withstanding severe winter conditions with an operation range down to -25°C.



### Guaranteed operation down to -28°C

Daikin units are suitable for all climates, even withstanding severe winter conditions with an operation range down to -28°C.



### Guaranteed operation down to -30°C

Daikin units are suitable for all climates, even withstanding severe winter conditions with an operation range down to -30°C.

\* The Flash Streamer technology is not meant to be used for medical purposes

# Launching VRV 5 heat pumps

Continuing our path to lower CO<sub>2</sub> equivalent solutions



**VRV 5** S-series

**VRV 5** Heat Recovery

**VRV 5** Heat Pump

## Decarbonisation of buildings made easy: Benefit from leading VRV 5 technology!

### Adapts to any building

- › Extensive piping lengths & heights
- › 5 low sound steps down to 41 dB(A)

### Reduces the CO<sub>2</sub> footprint significantly

- › High, real life seasonal efficiency
- › Lower GWP refrigerant R-32

### Shirudo Technology provides peace of mind

- › Easy installation of R-32 VRV in any size of room
- › Factory-integrated refrigerant control measures avoids time-consuming studies
- › 3<sup>rd</sup> party certification according to the product standard IEC60335-2-40

### Widest R-32 portfolio to match any application

- › 11 indoor unit models in 96 variations
- › Plug & Play ventilation solutions from 150 up to 140,000 m<sup>3</sup>/h
- › Strong range of intuitive, cloud based controls

### Specialised advice and support

- › Maximise BREEAM, LEED, ... scores thanks to VRV 5 and our expert support
- › Online support software to ensure compliance with product standards

Learn more by visiting [www.daikin.eu/vrv5](http://www.daikin.eu/vrv5)



Daikin Europe NV participates in the Eurovent Certified Performance programme for Fan Coil Units and Variable Refrigerant Flow systems. Daikin Applied Europe S.p.A participates in the Eurovent Certified Performance programme for Liquid Chilling Packages, Hydronic Heat Pumps and Air Handling Units. Check ongoing validity of certificate: [www.eurovent-certification.com](http://www.eurovent-certification.com)

ECPEN24-500A



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.